


GNSS observation file monitoring for 0511


Last RINEX file: 05111711.22O
RINEX version: 3.02
Marker: 1115
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


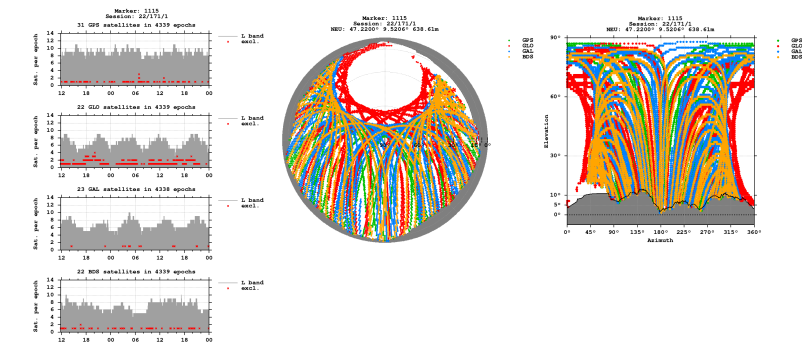


Bands

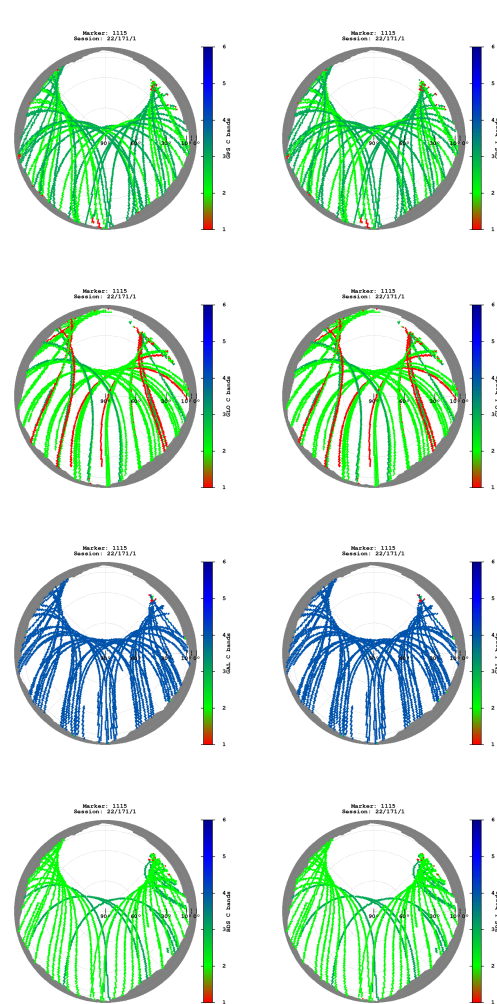

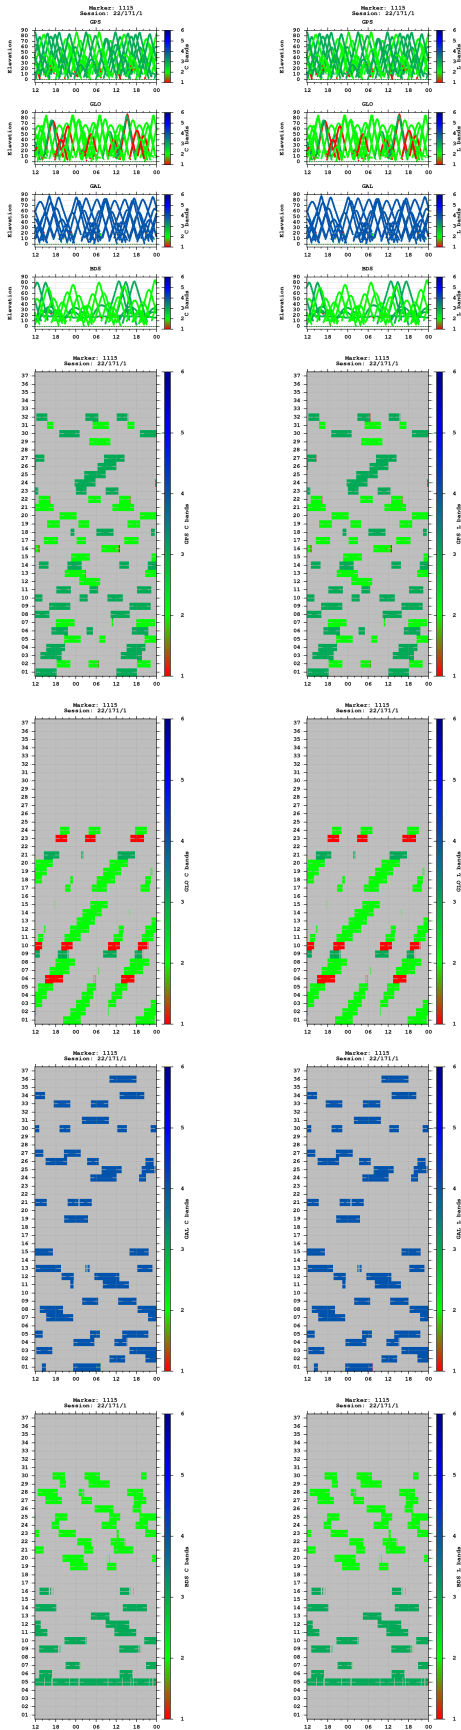



Multipath

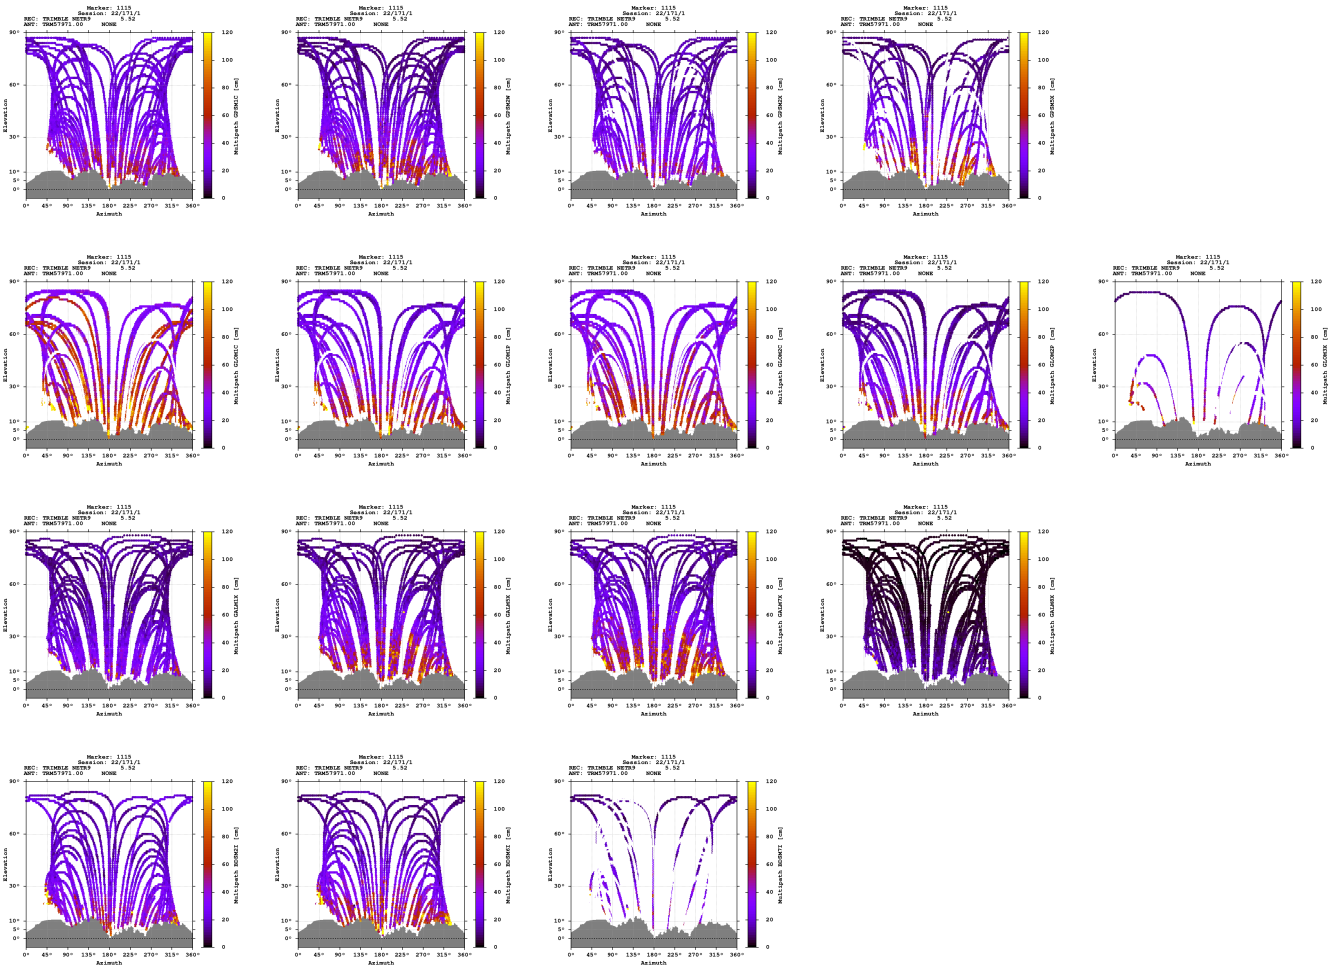

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

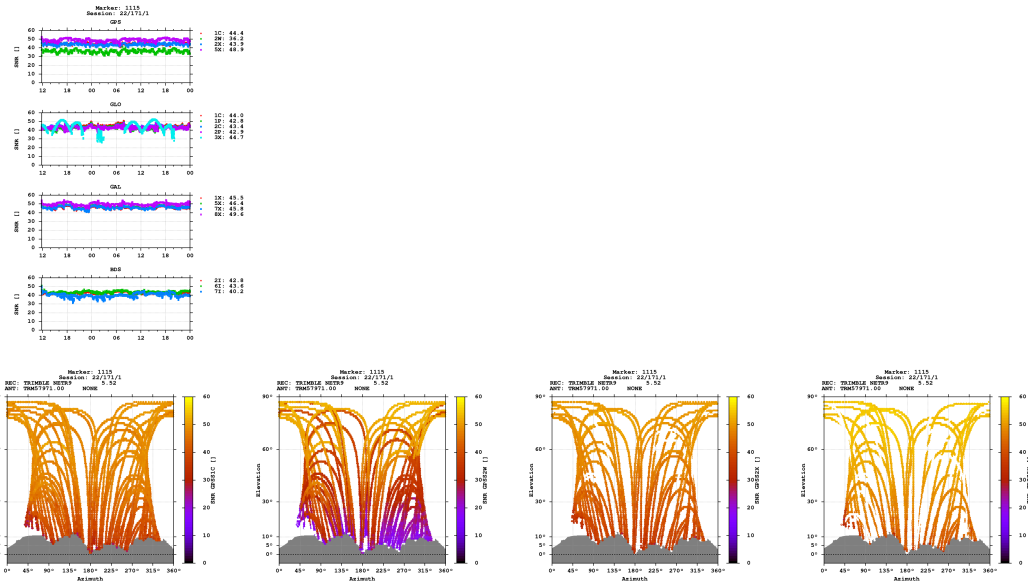

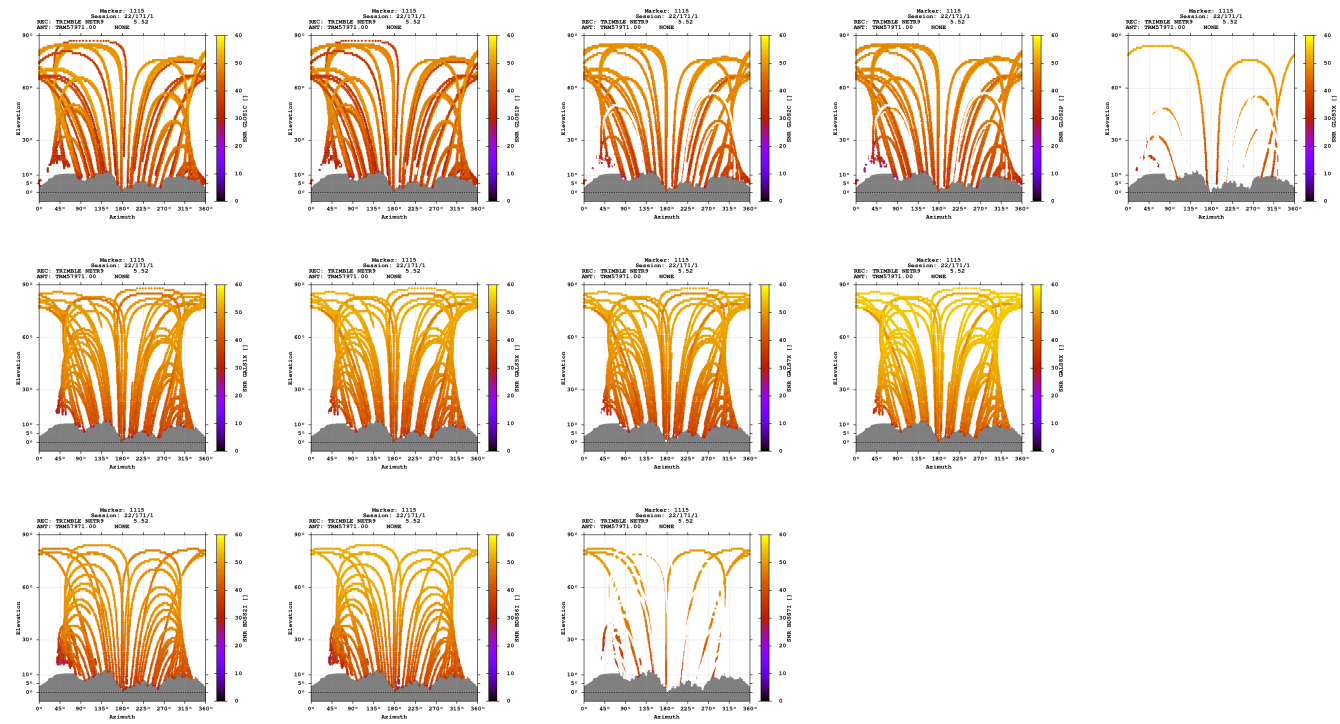

Estimates

2022-06-20 11:47:30	GPS	4280417.1381	717877.4358	4658883.1308	47.220048370	9.520588284	638.6079
2022-06-20 11:47:30	GLO	4280418.2765	717877.0089	4658883.6021	47.220044304	9.520580241	639.6684
2022-06-20 11:47:30	GAL	4280417.0609	717877.3785	4658882.8689	47.220047335	9.520587707	638.3575
2022-06-20 11:47:30	BDS	4280417.6235	717876.7539	4658885.4321	47.220060012	9.520578346	640.5455

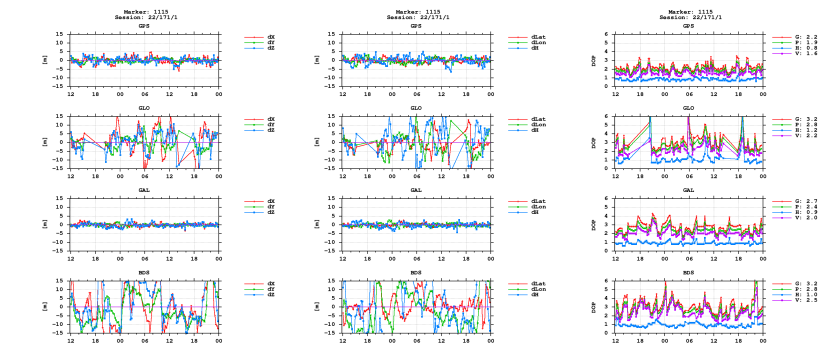

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)