


GNSS observation file monitoring for 0511


Last RINEX file: 05111731.220
RINEX version: 3.02
Marker: 1133
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

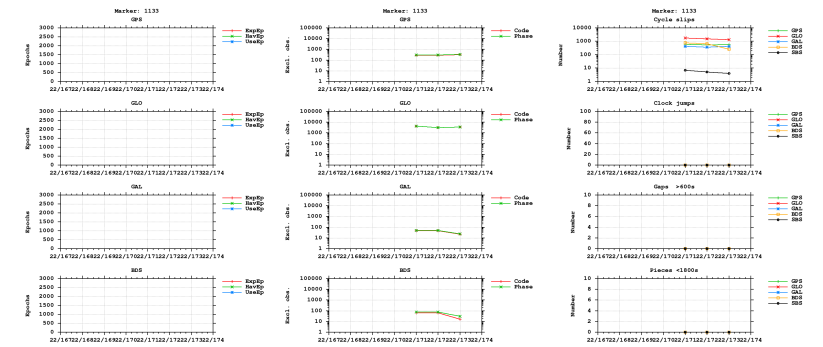



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

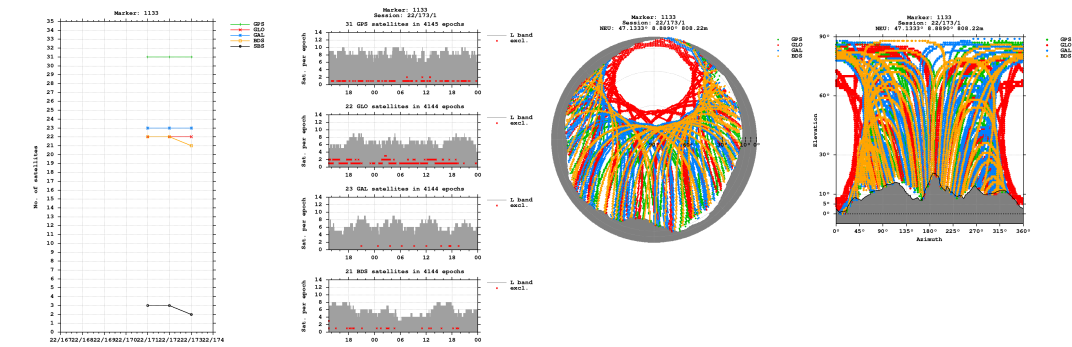


Bands

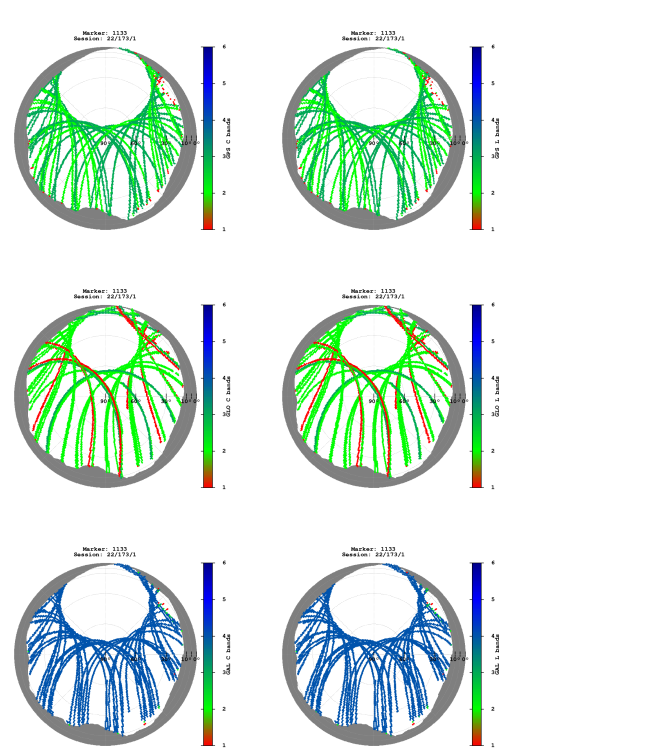


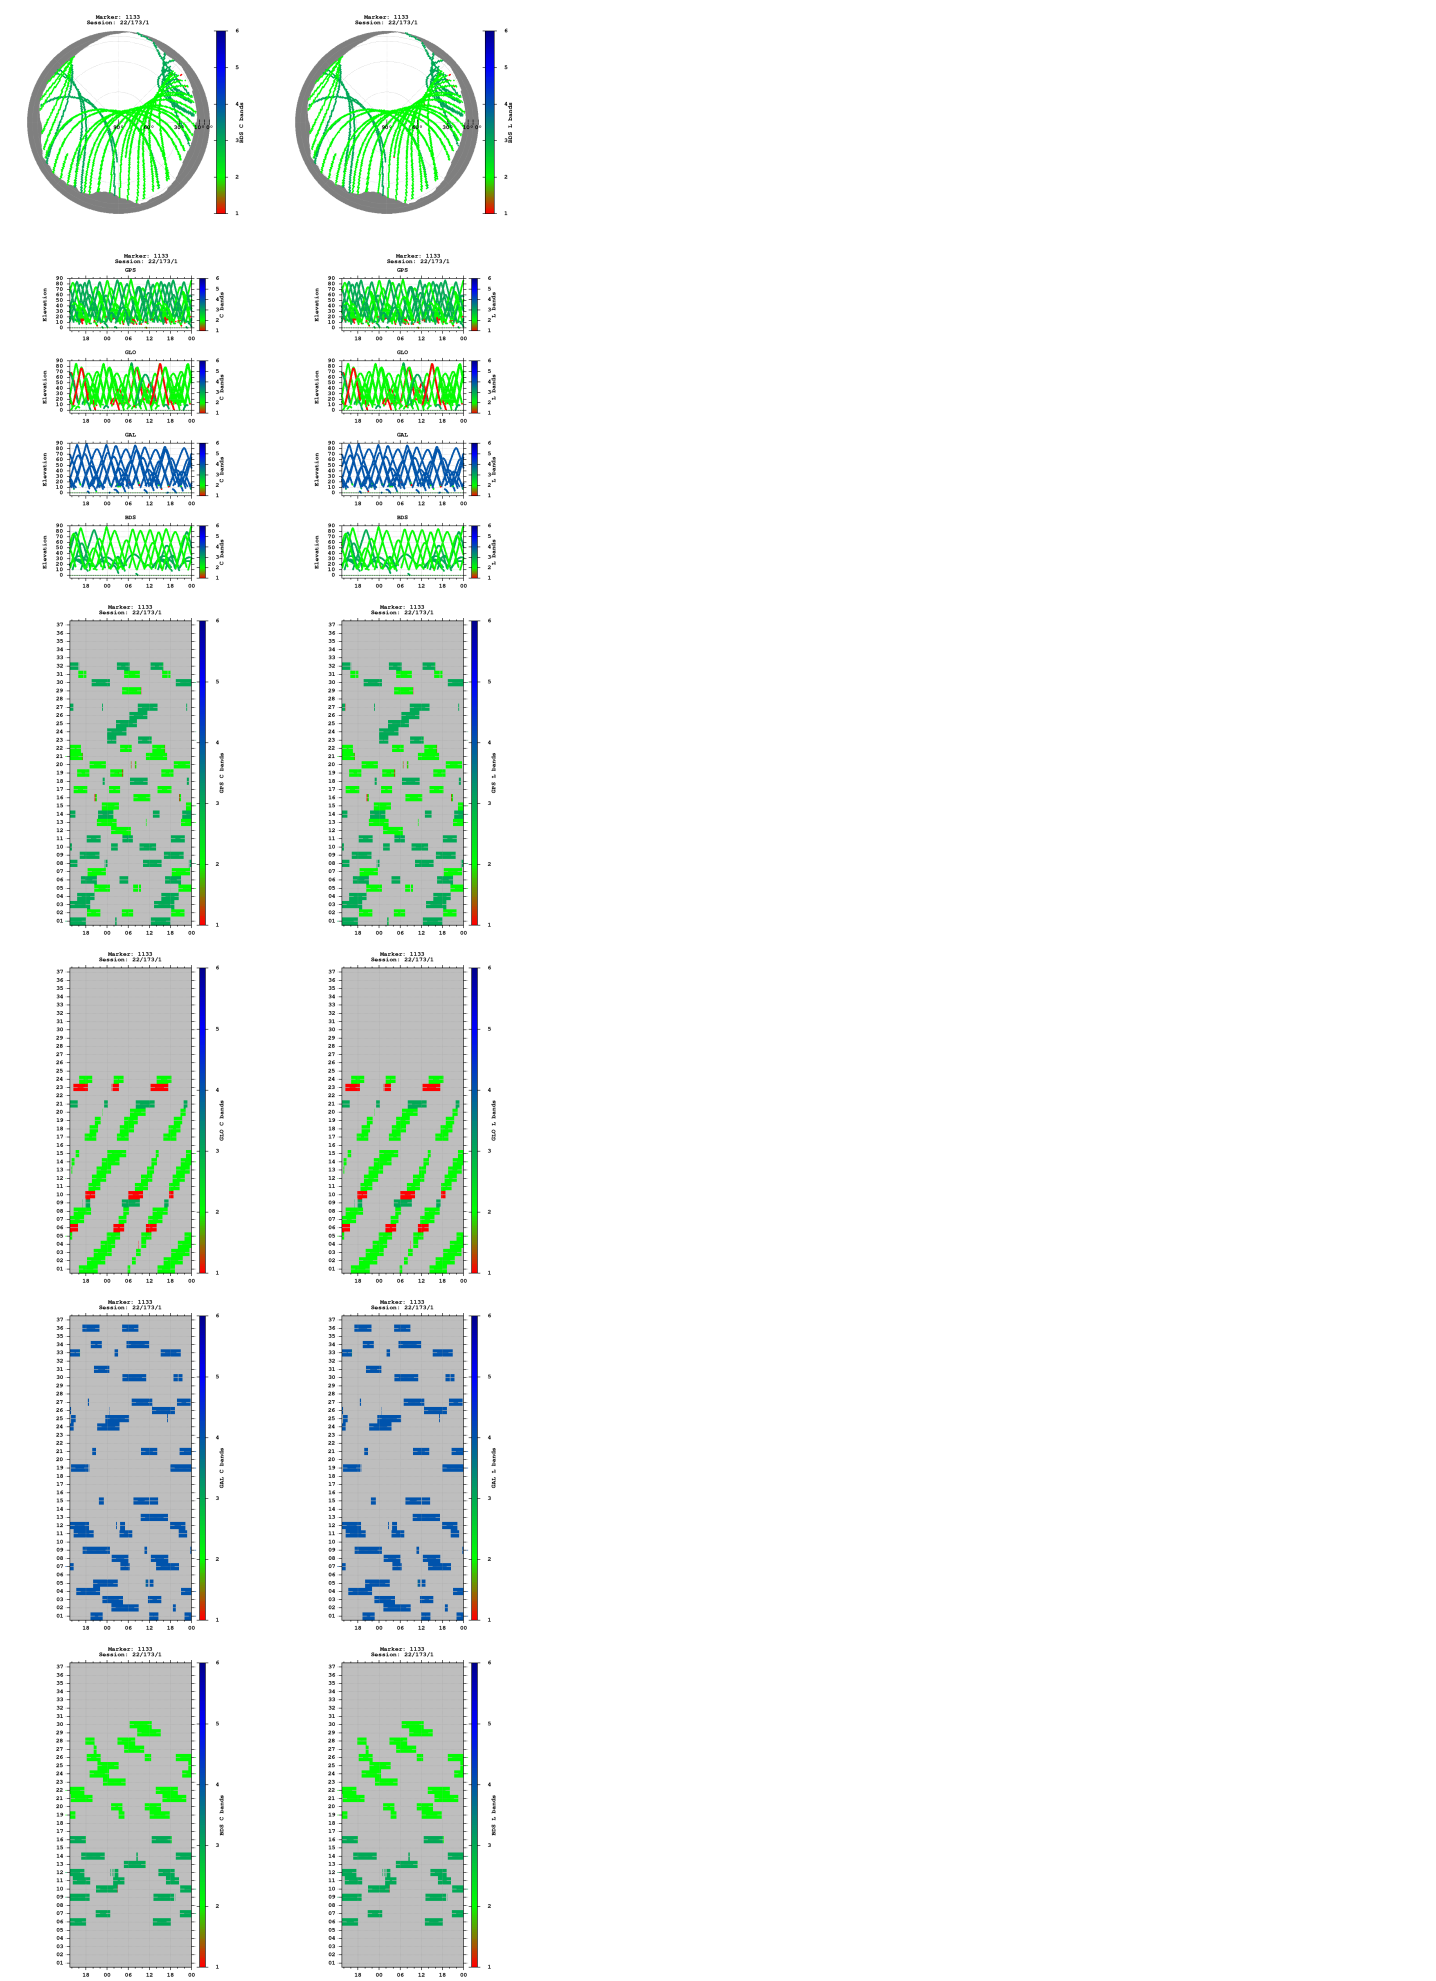

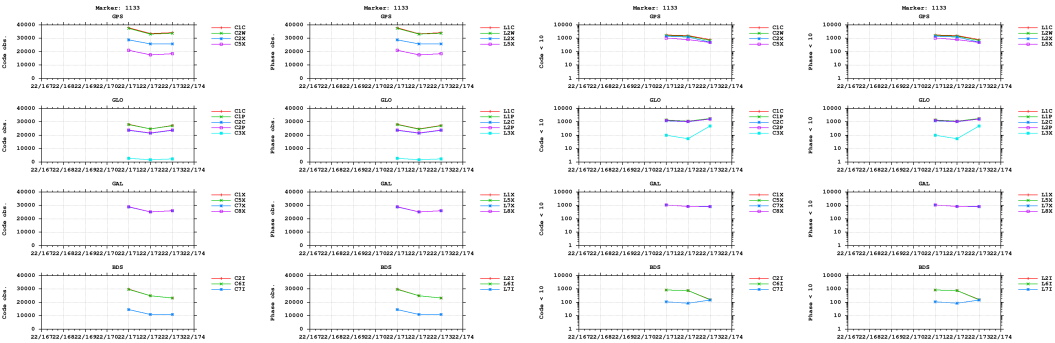



Multipath

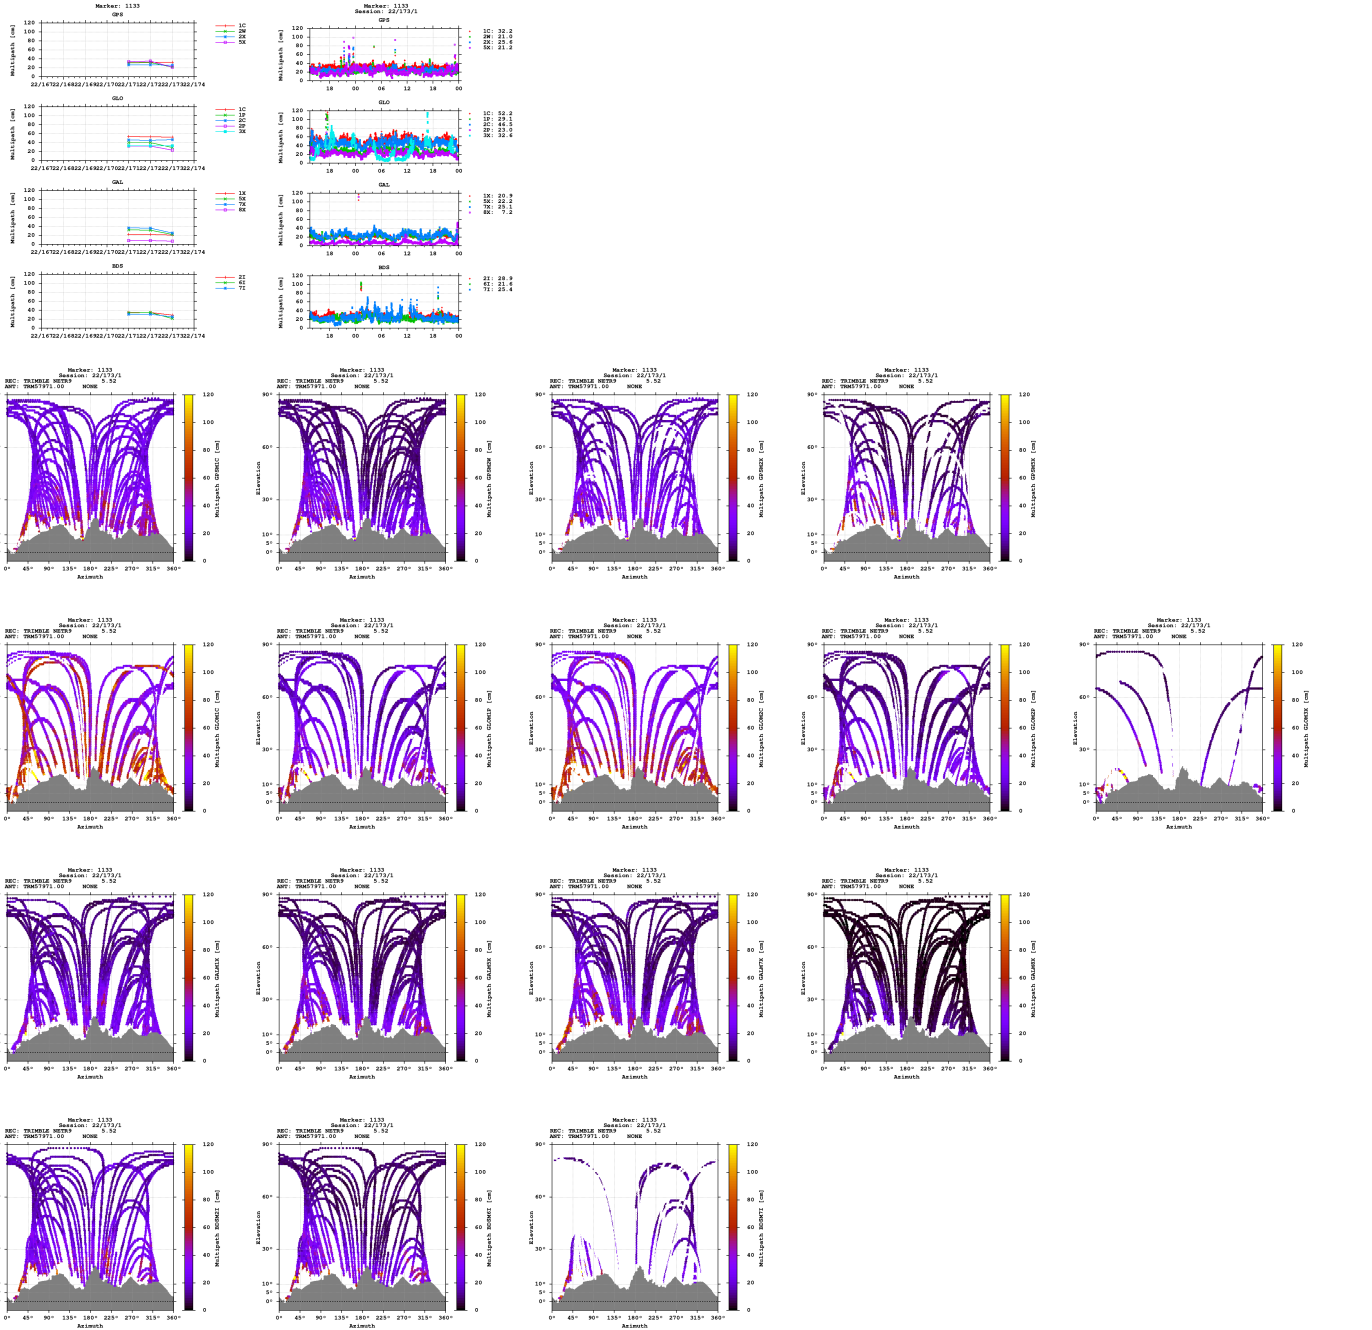


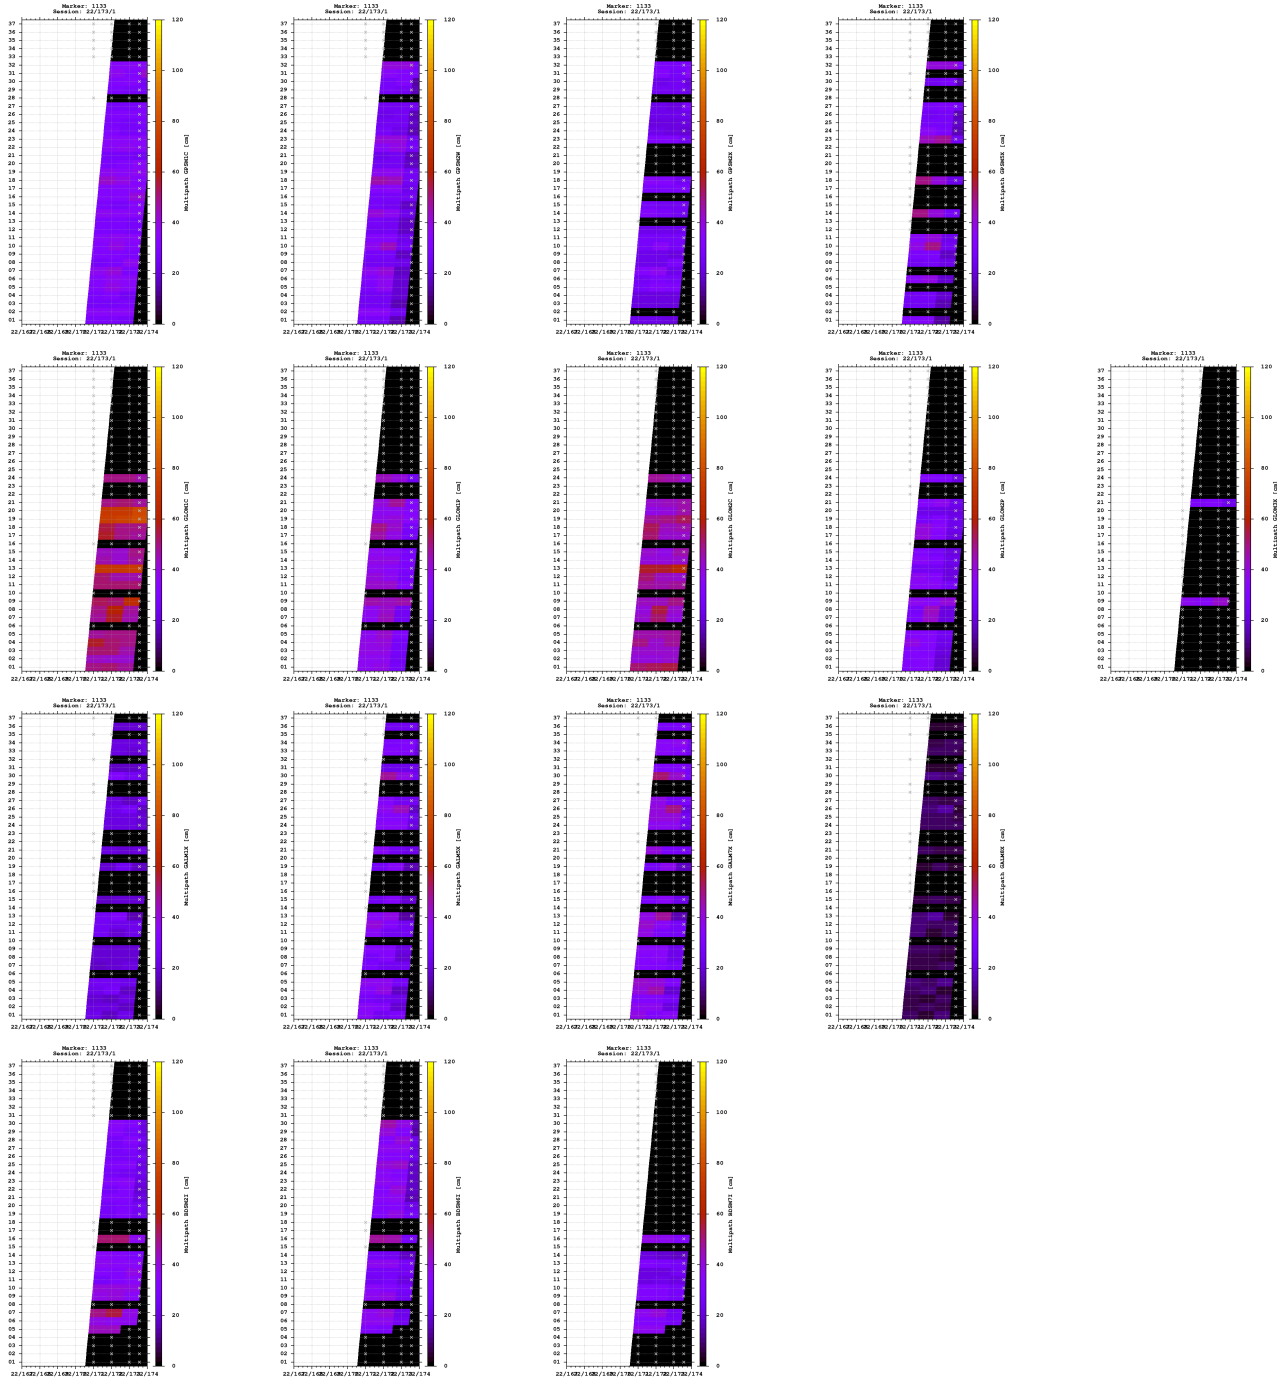


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

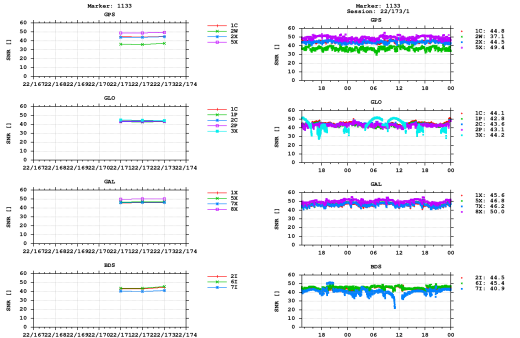


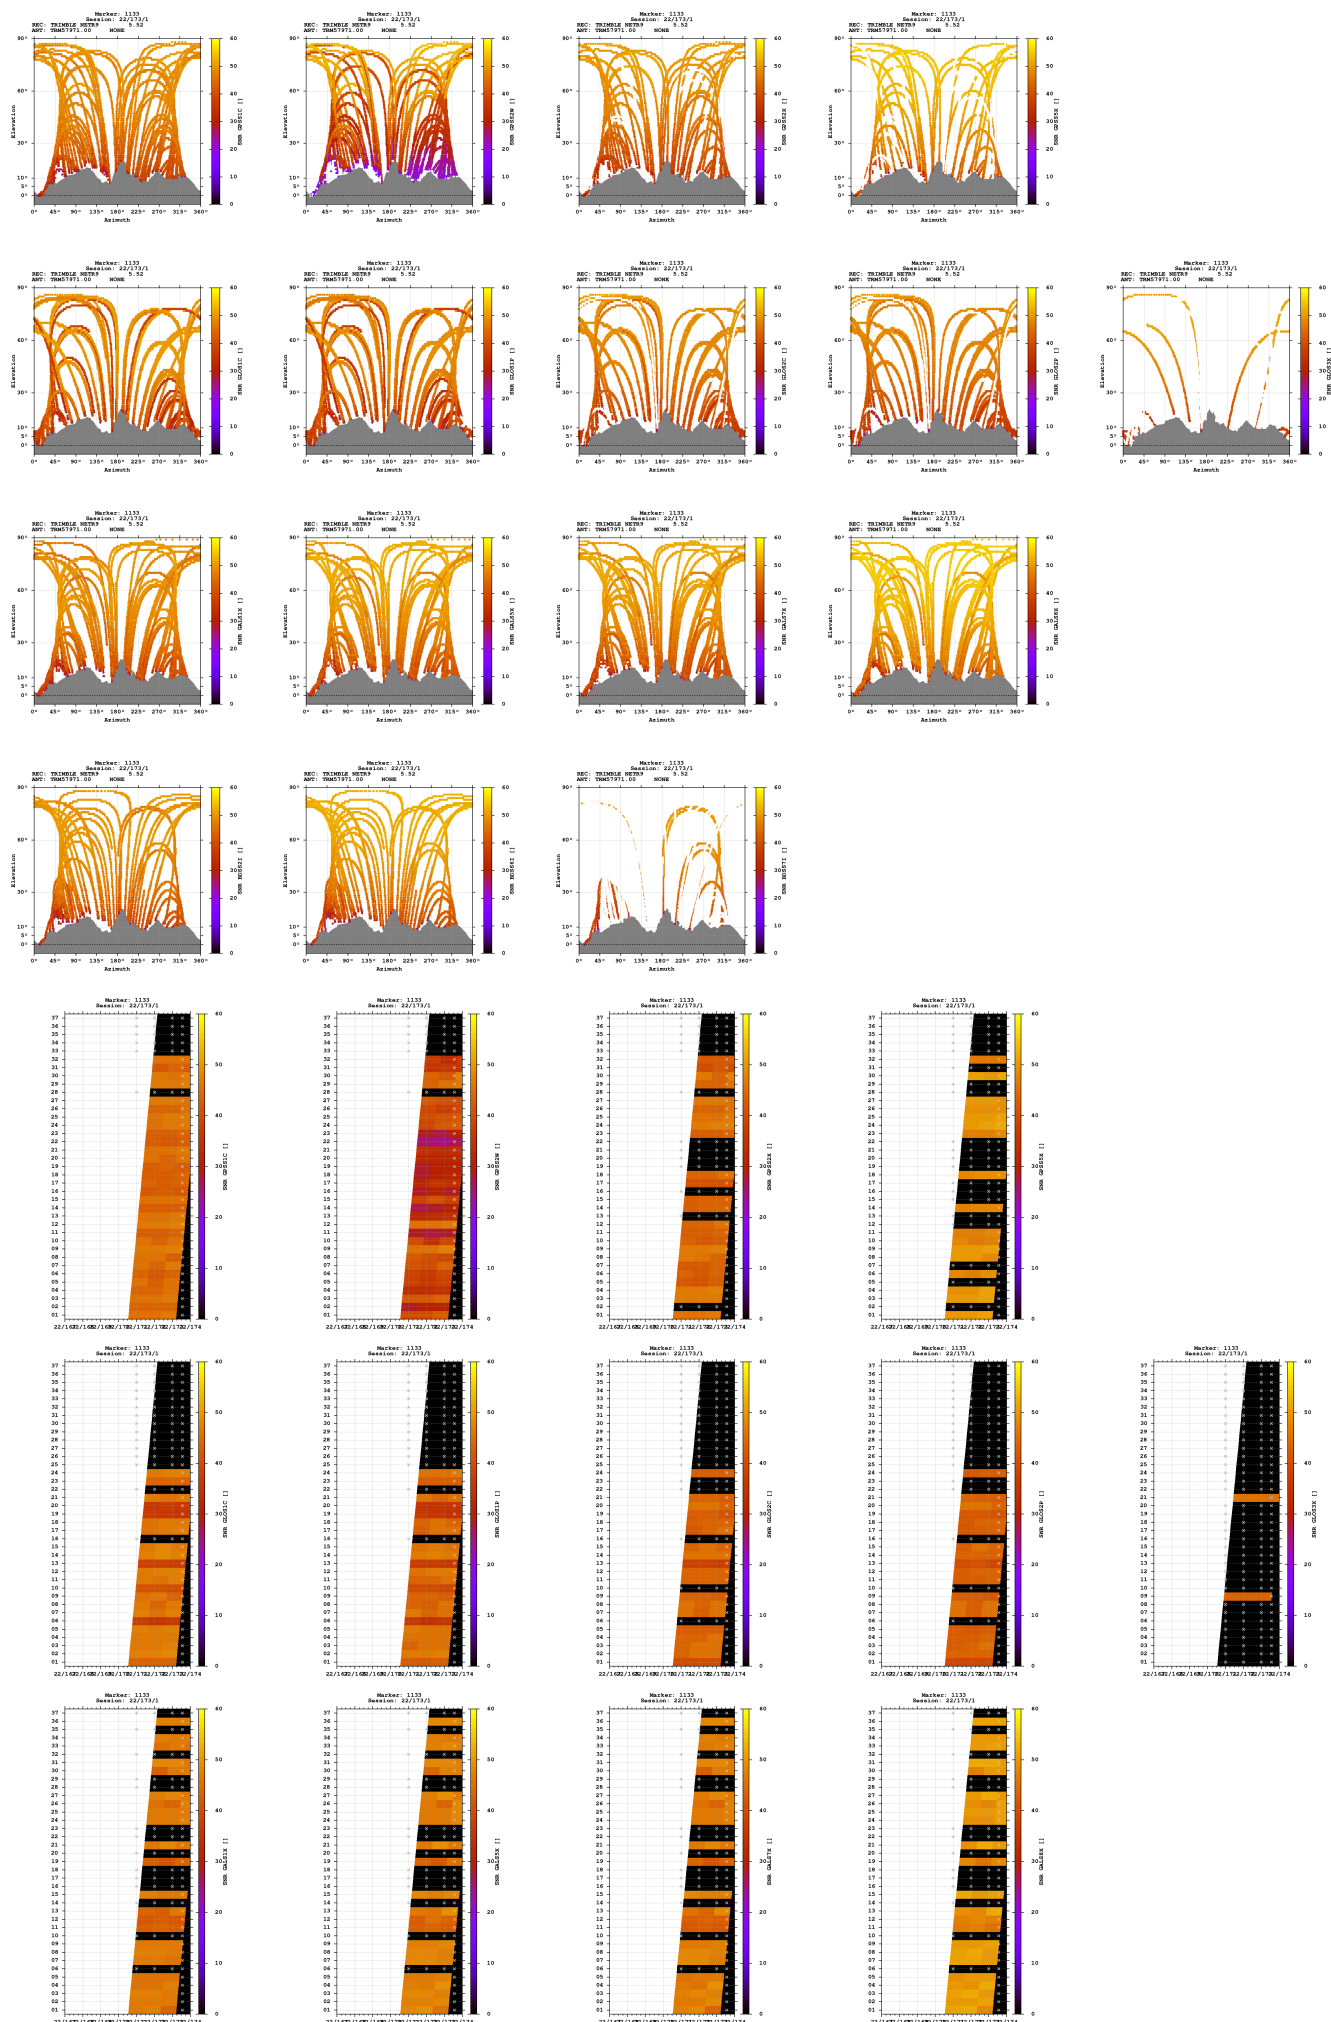

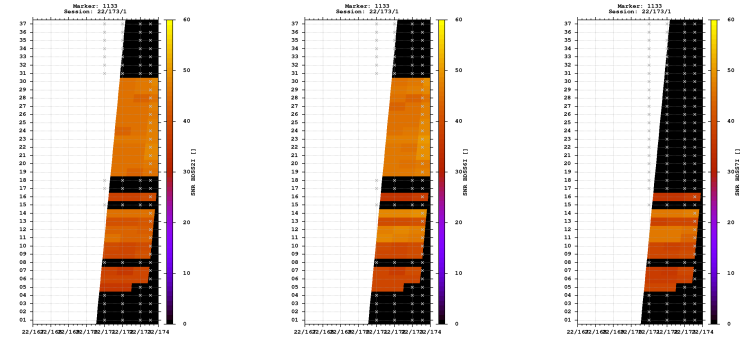







Estimates

2022-06-22 13:25:30	GPS	4295173.1792	671758.1872	4652452.0928	47.133311177	8.888958684	808.2173
2022-06-22 13:25:30	GLO	4295173.1203	671757.7169	4652452.1725	47.133312527	8.888952679	808.1867
2022-06-22 13:25:30	GAL	4295173.4791	671758.1509	4652452.0813	47.133309190	8.888957599	808.4067
2022-06-22 13:25:30	BDS	4295172.1454	671759.3428	4652450.4204	47.133306499	8.888975835	806.4183

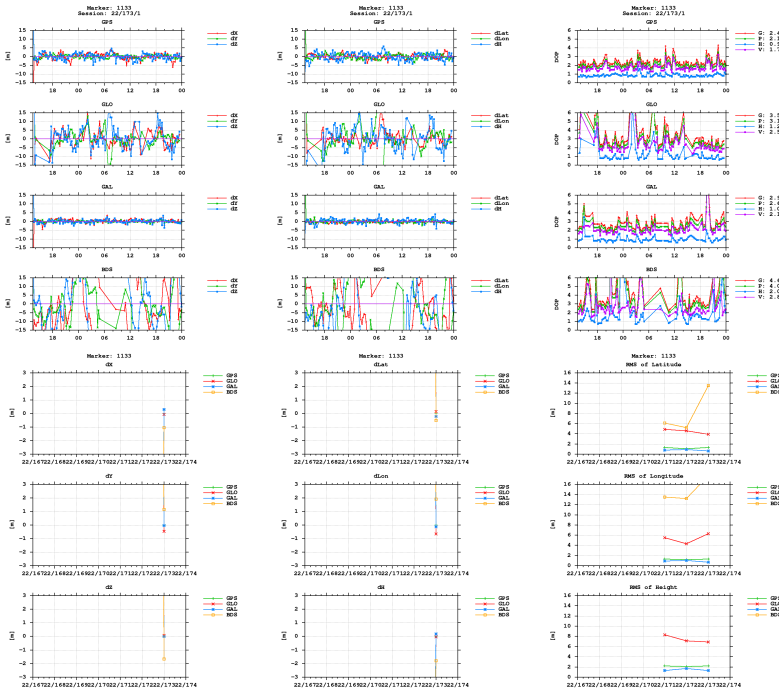

BNC

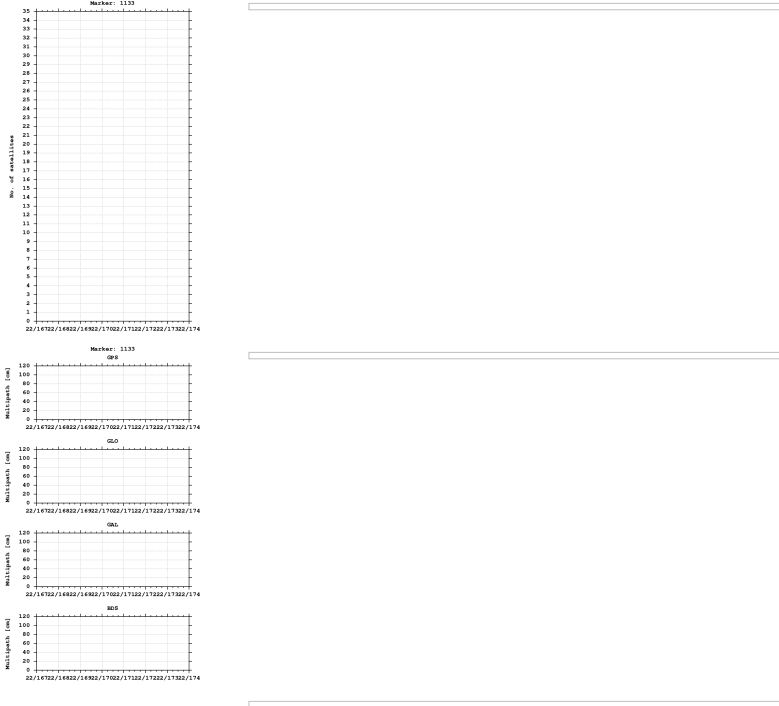



Equipment

2022-06-20 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)