


GNSS observation file monitoring for 0511


Last RINEX file: 05111741.220
RINEX version: 3.02
Marker: 1133
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

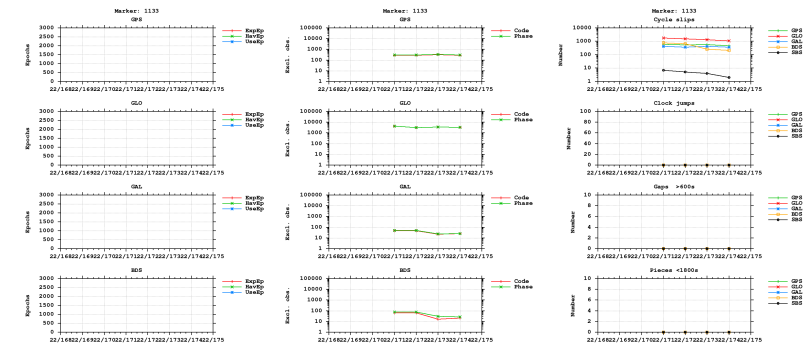



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

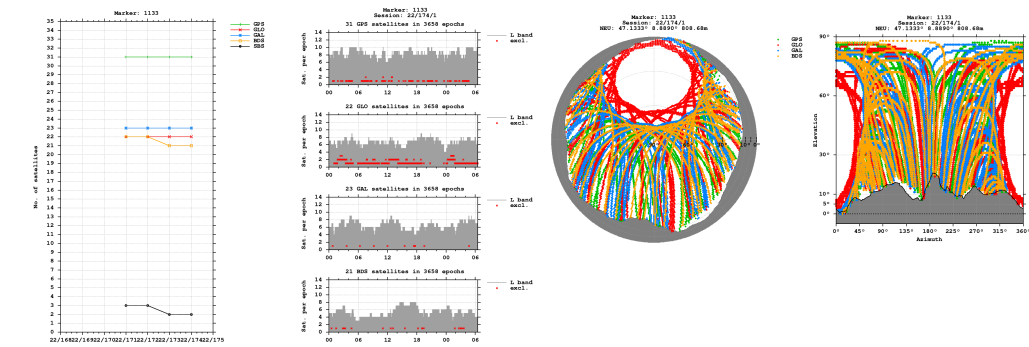


Bands

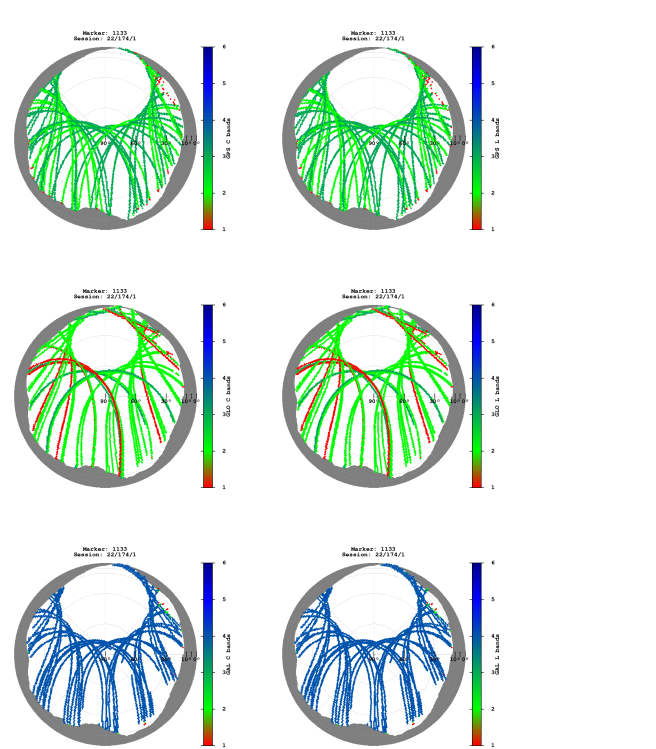


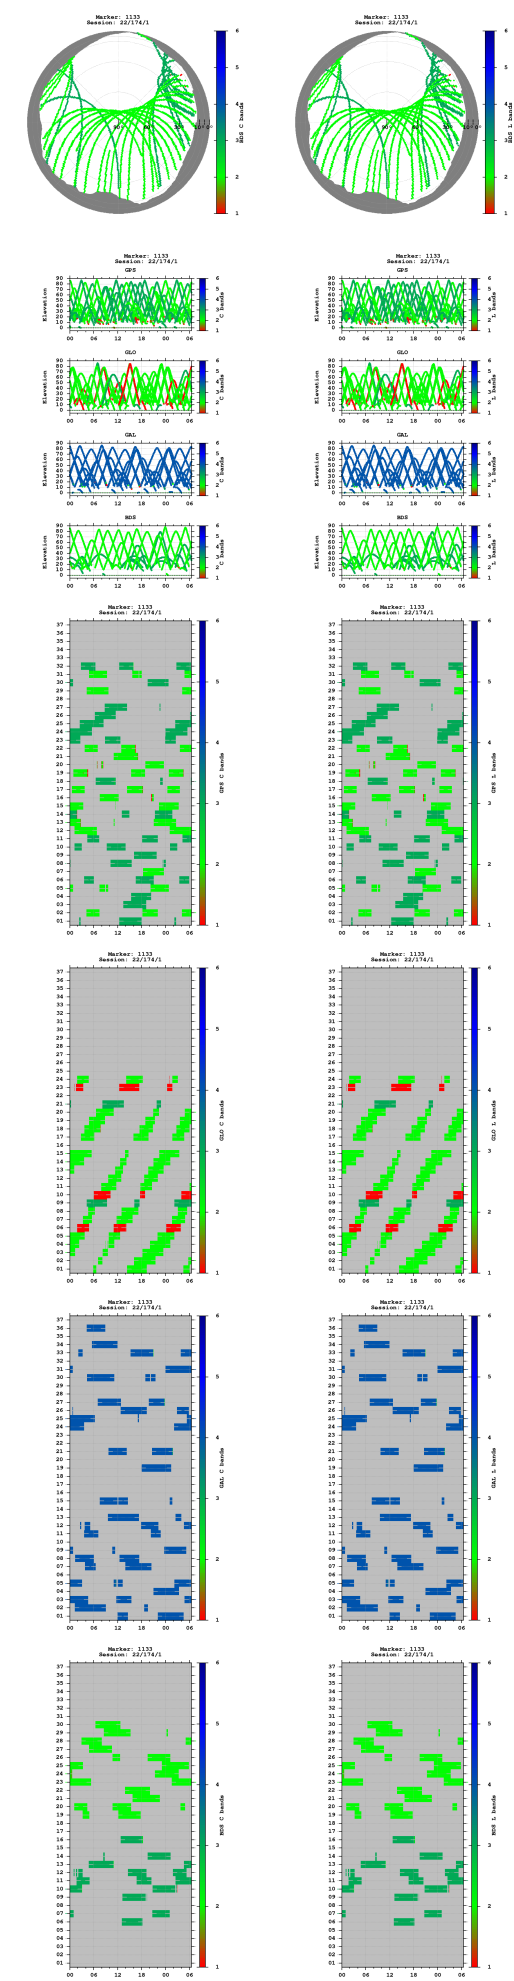


Observations

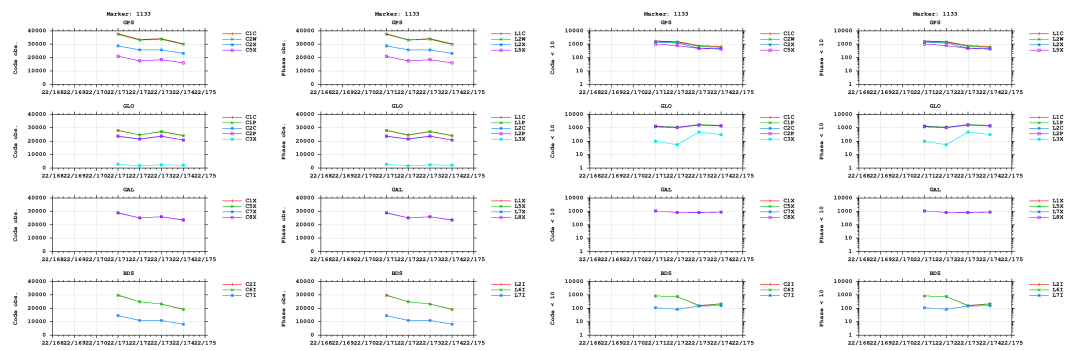


Multipath

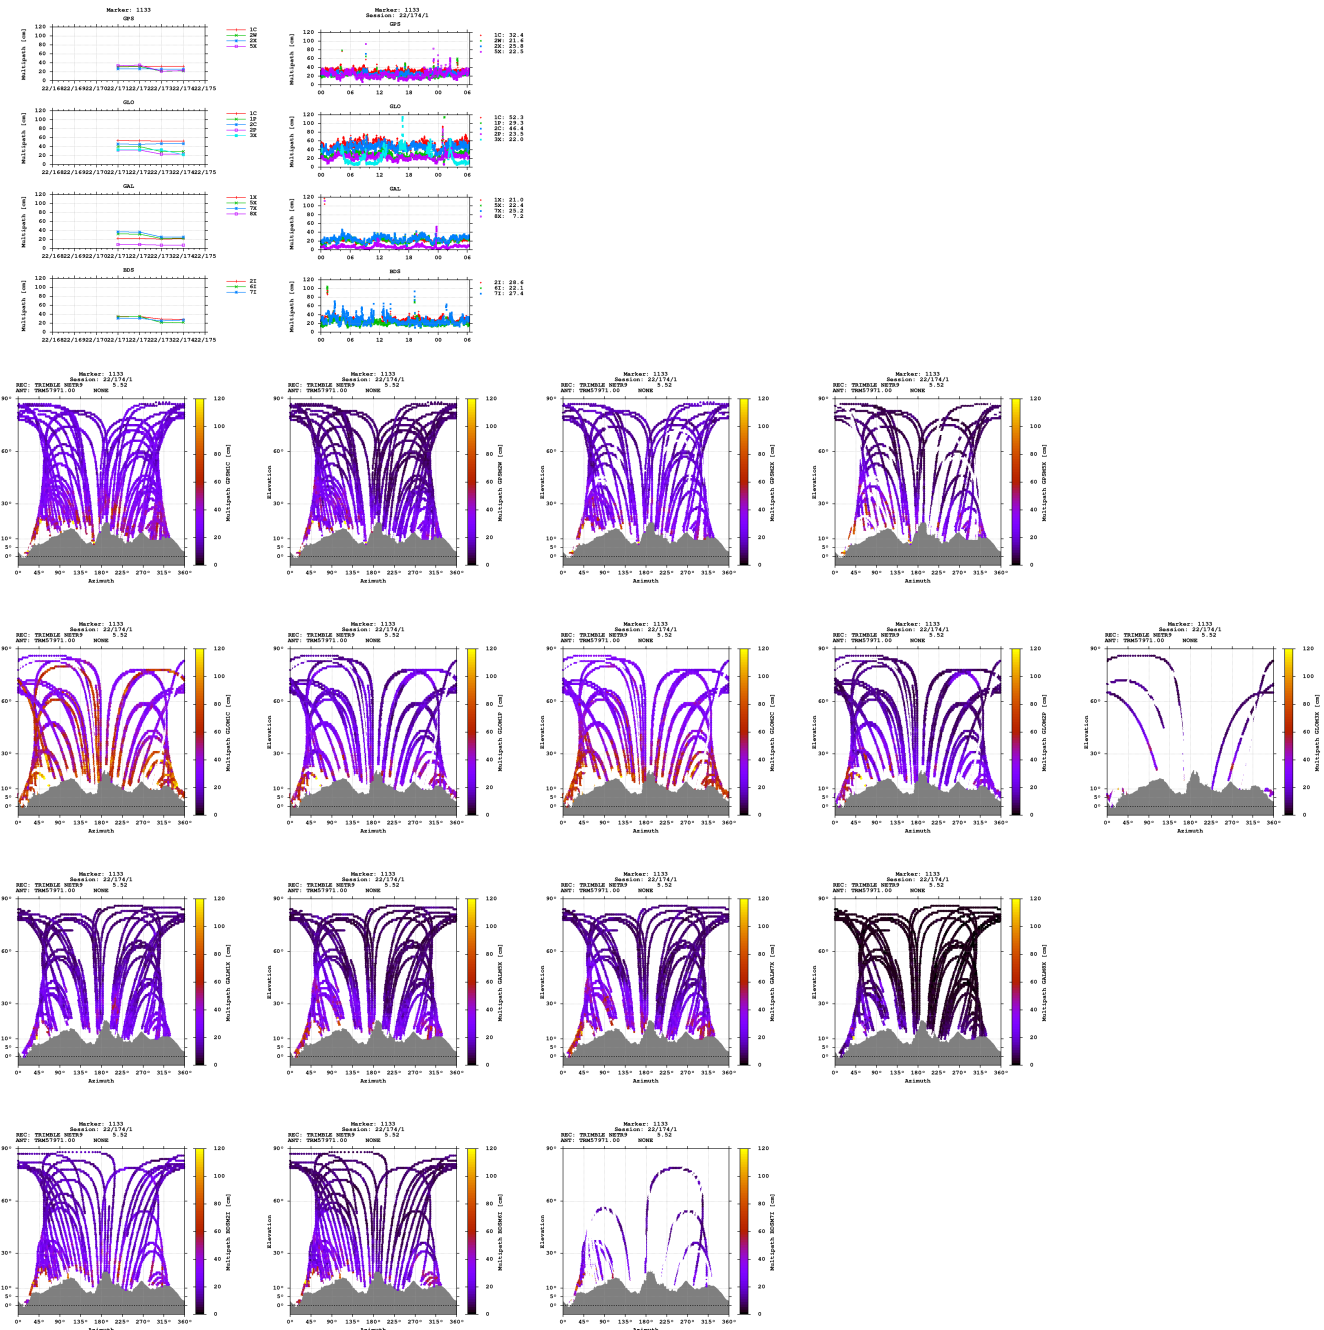


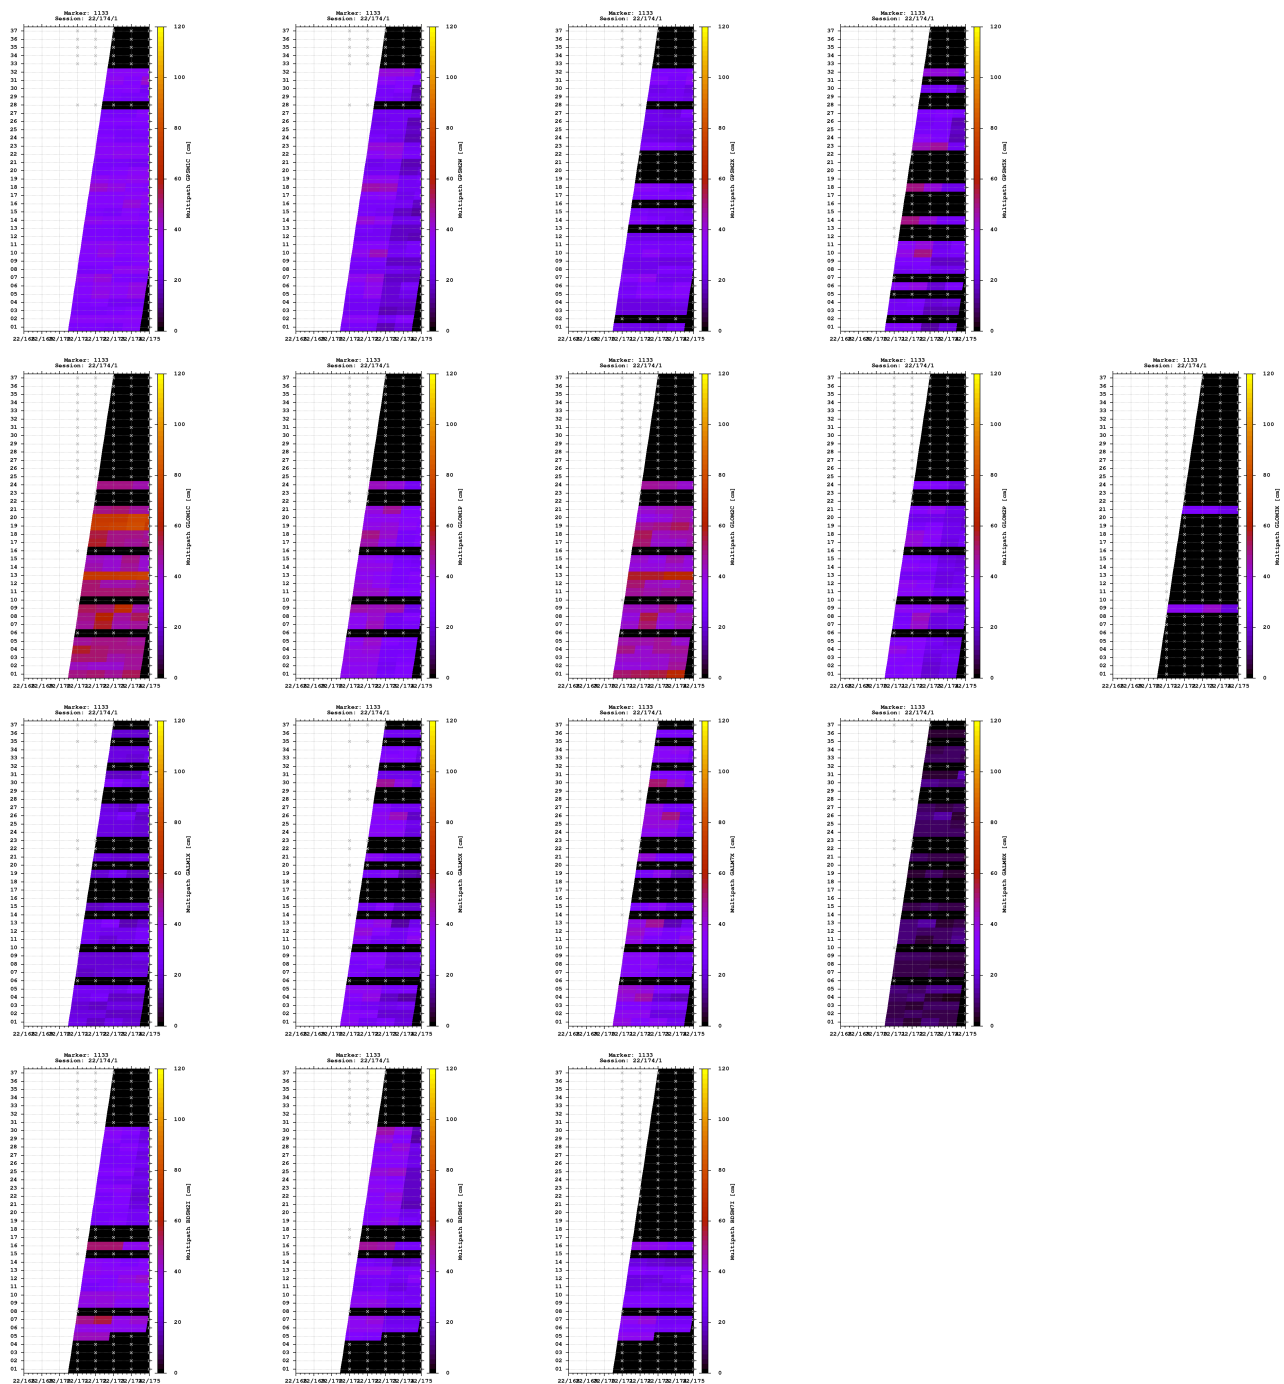


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

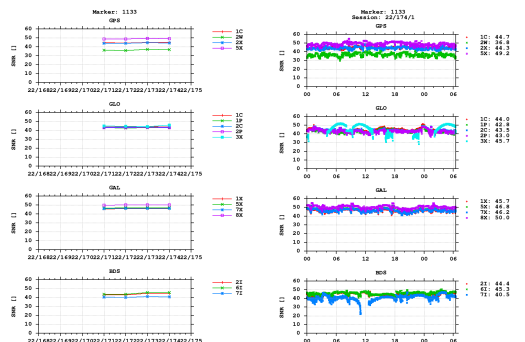


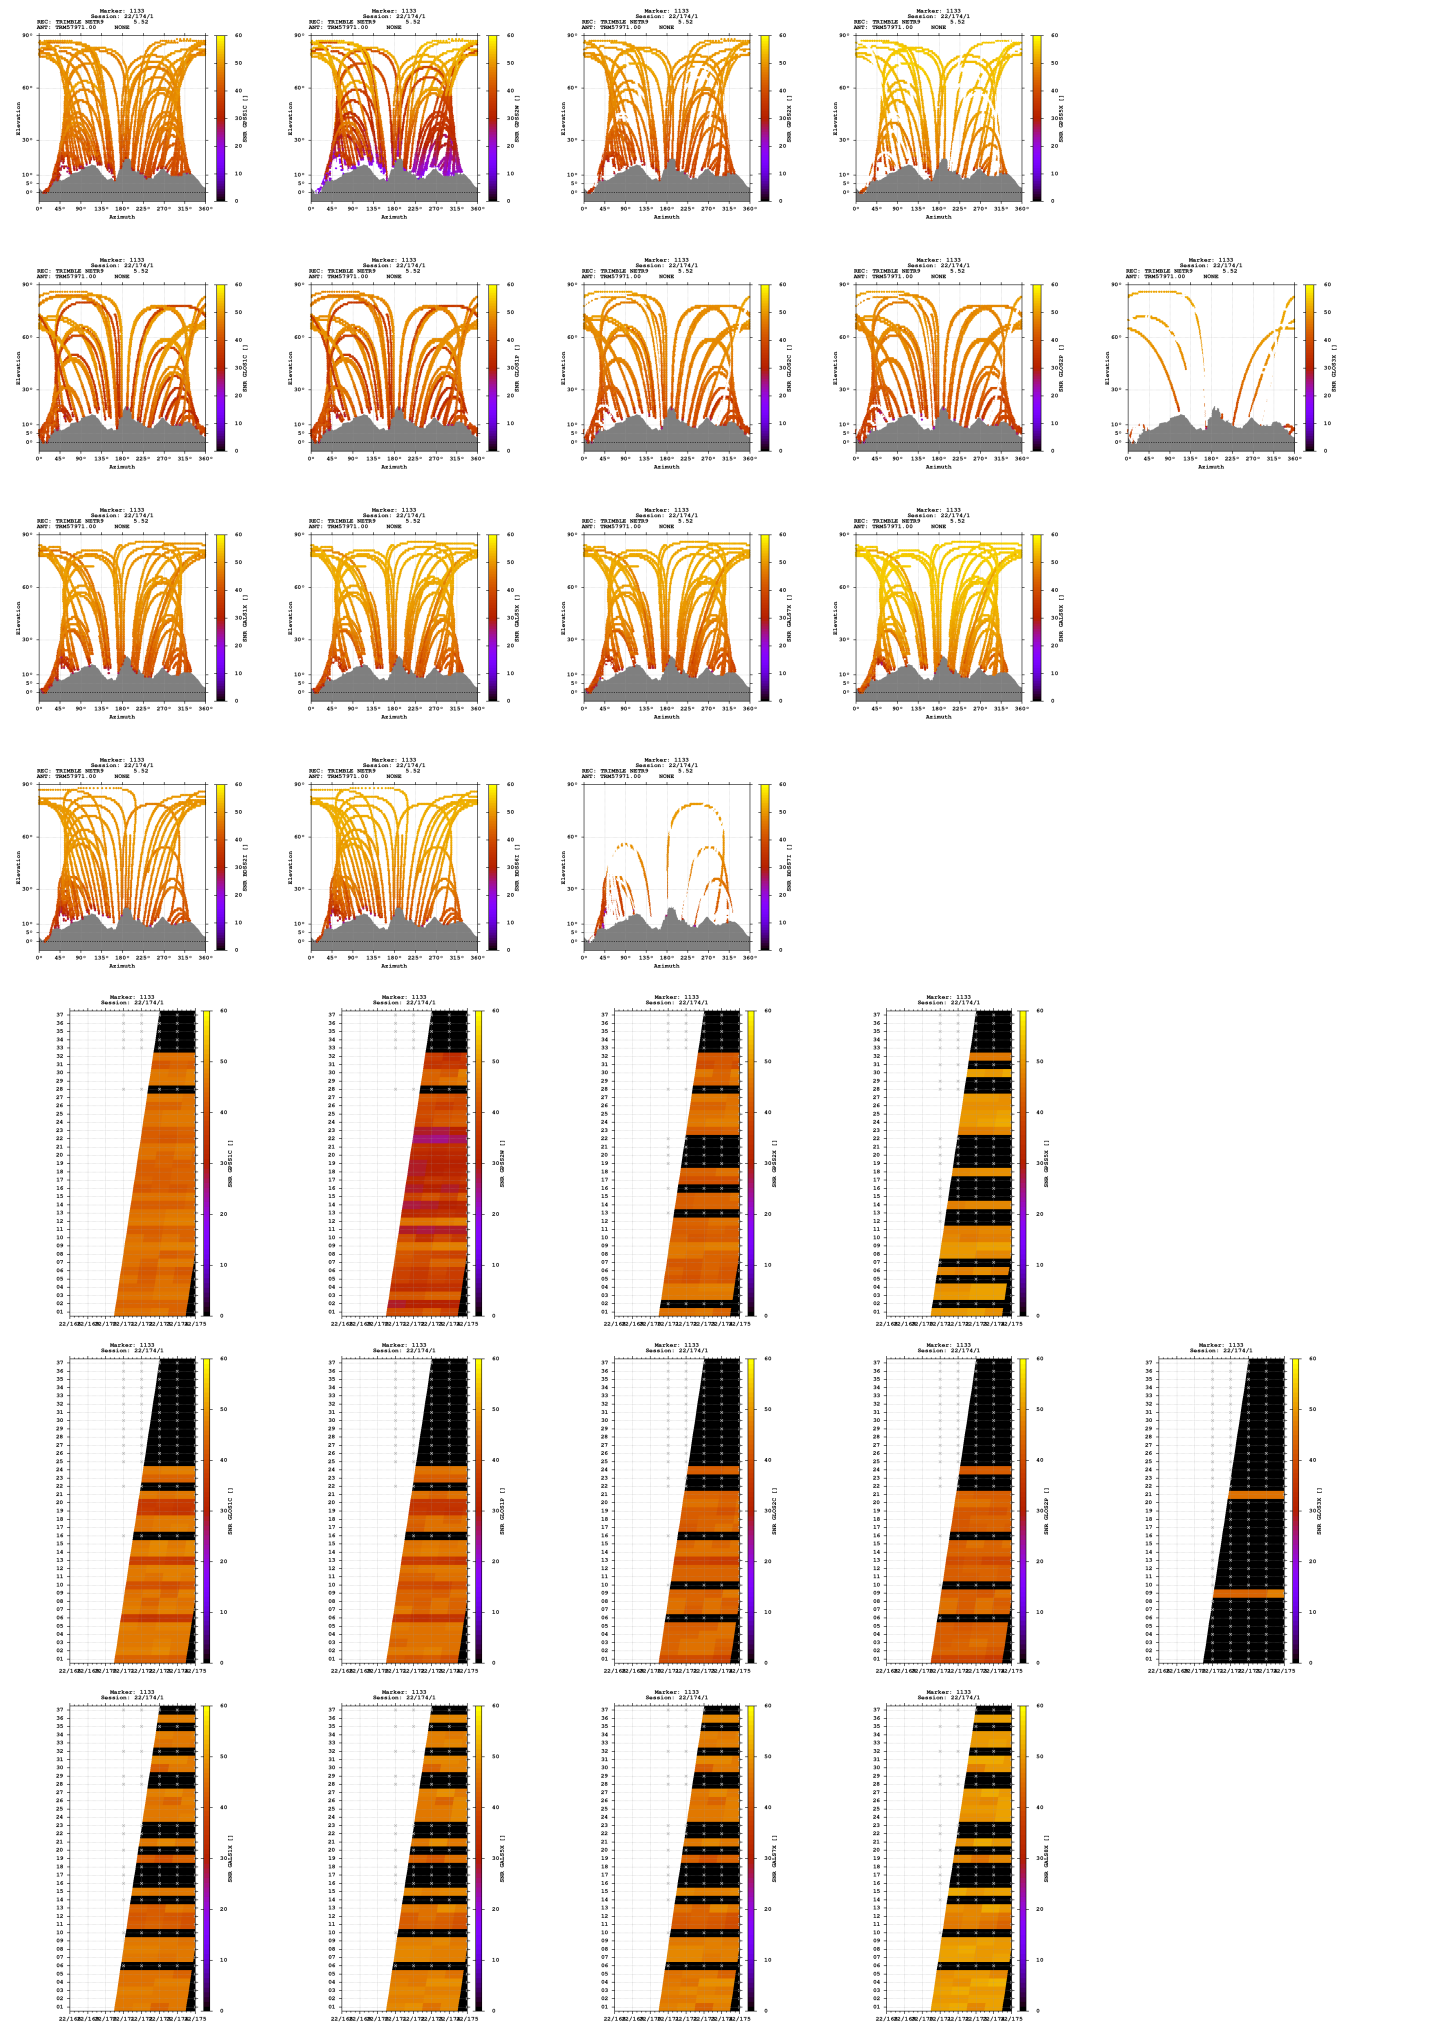

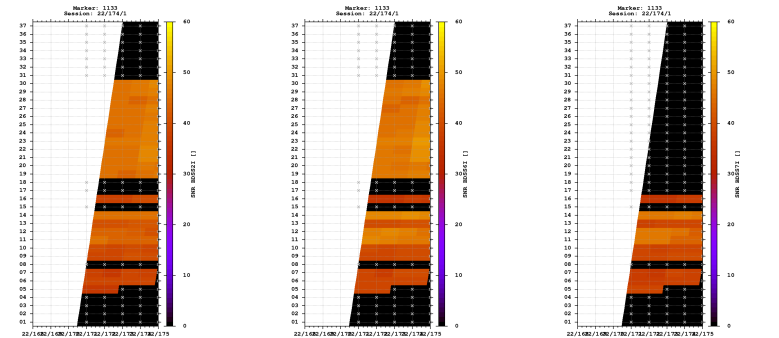



Estimates

2022-06-22 13:25:30	GPS	4295173.5243	671758.1836	4652452.4093	47.133310869	8.888957934	808.6809
2022-06-22 13:25:30	GLO	4295174.0788	671757.9607	4652453.0140	47.133311185	8.888953901	809.4734
2022-06-22 13:25:30	GAL	4295173.4781	671758.1844	4652452.2770	47.133310360	8.888958038	808.5529
2022-06-22 13:25:30	BDS	4295173.2357	671762.0638	4652451.1426	47.133301046	8.889009045	807.9665

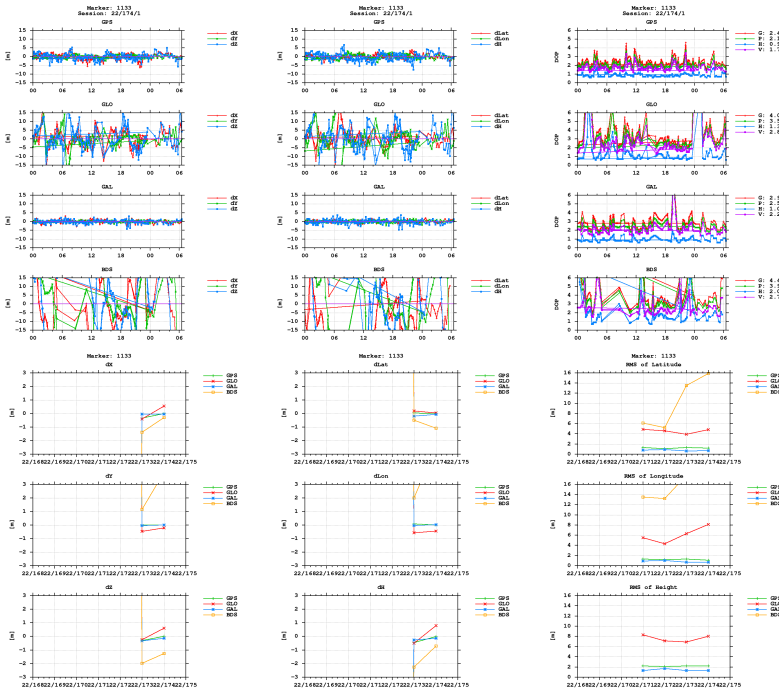

BNC

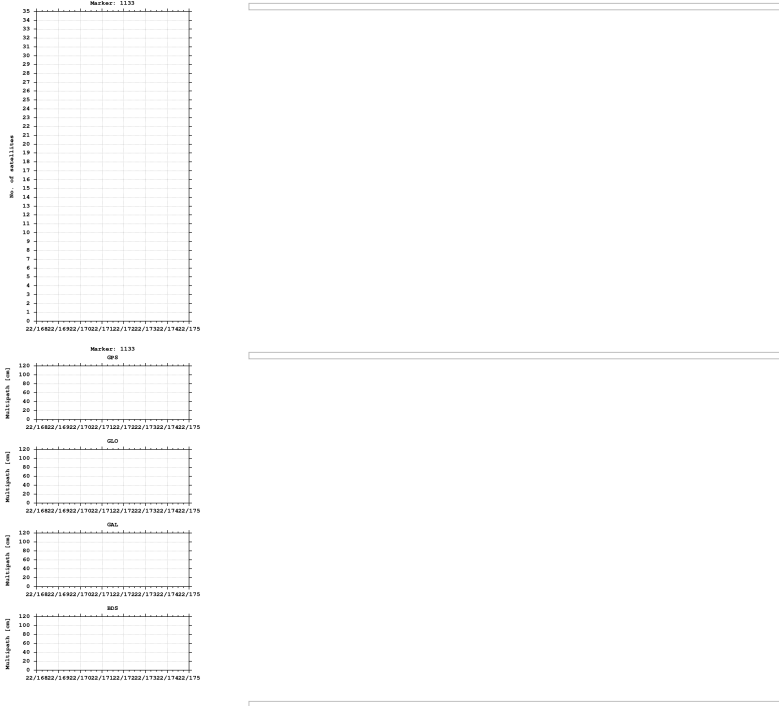

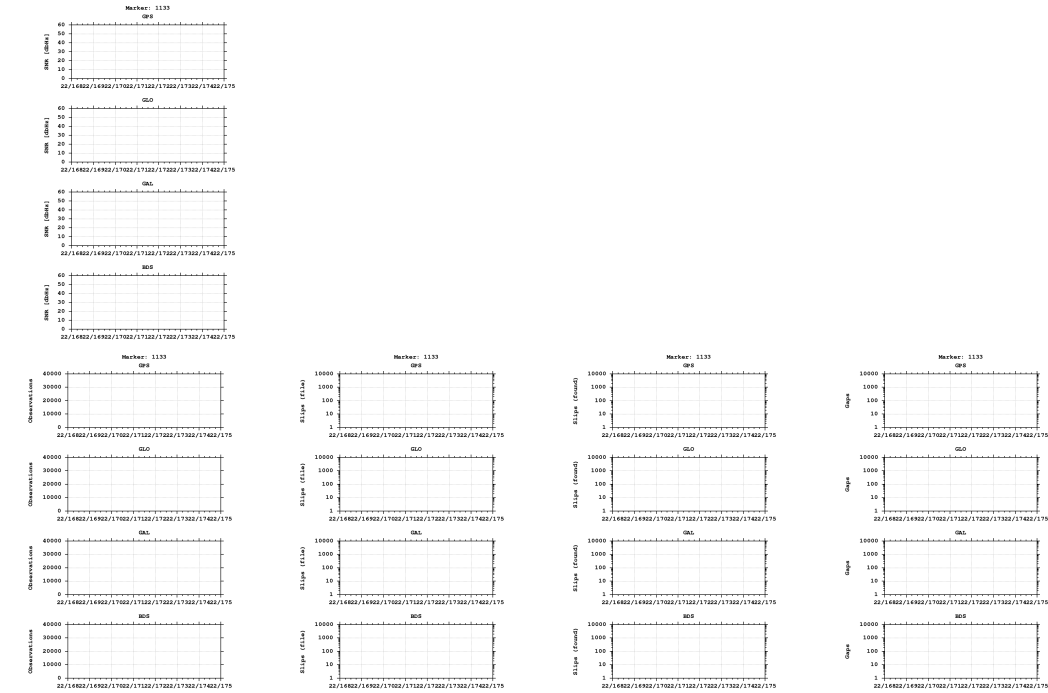

Equipment

2022-06-20 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)