


GNSS observation file monitoring for 0512


Last RINEX file: 05121711.22O
RINEX version: 3.02
Marker: 1155
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


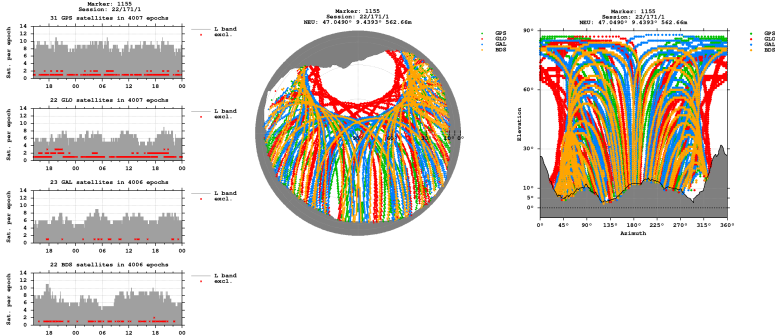


Bands

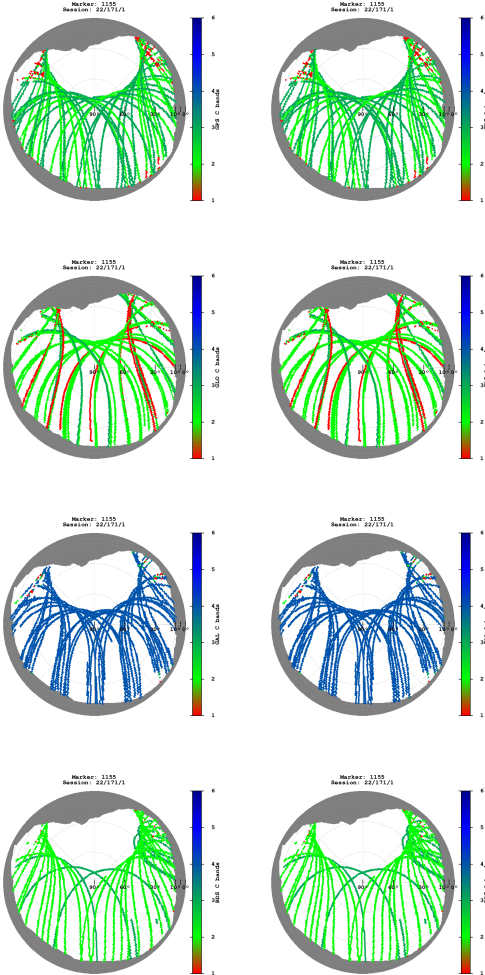

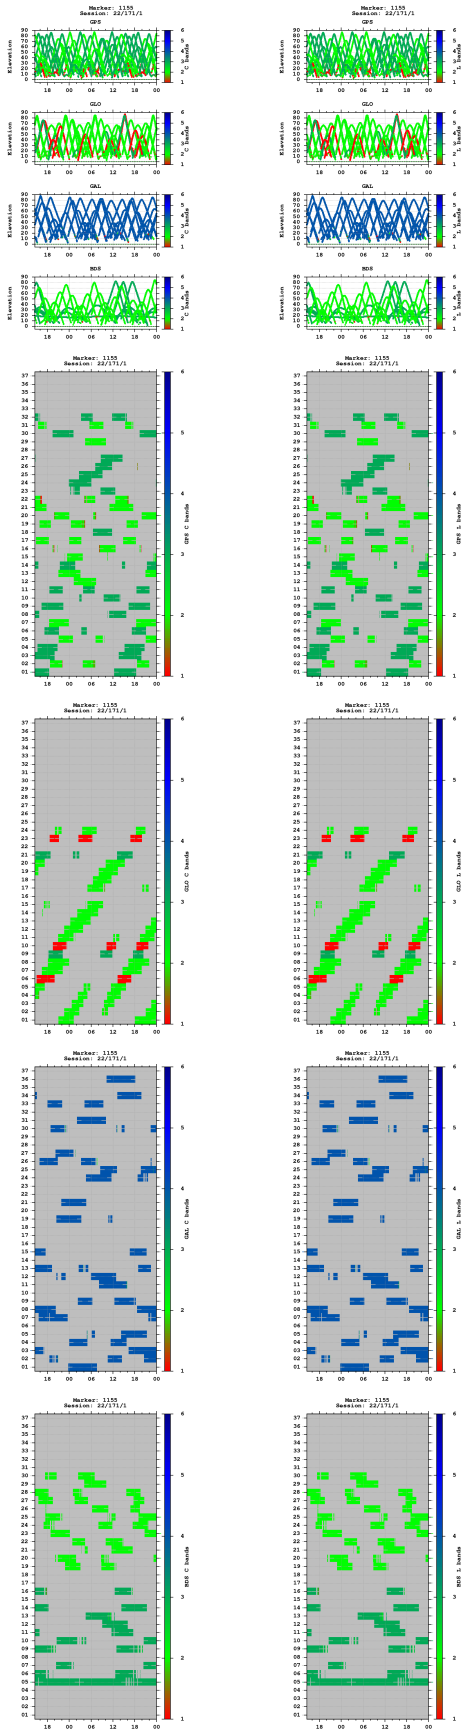



Multipath

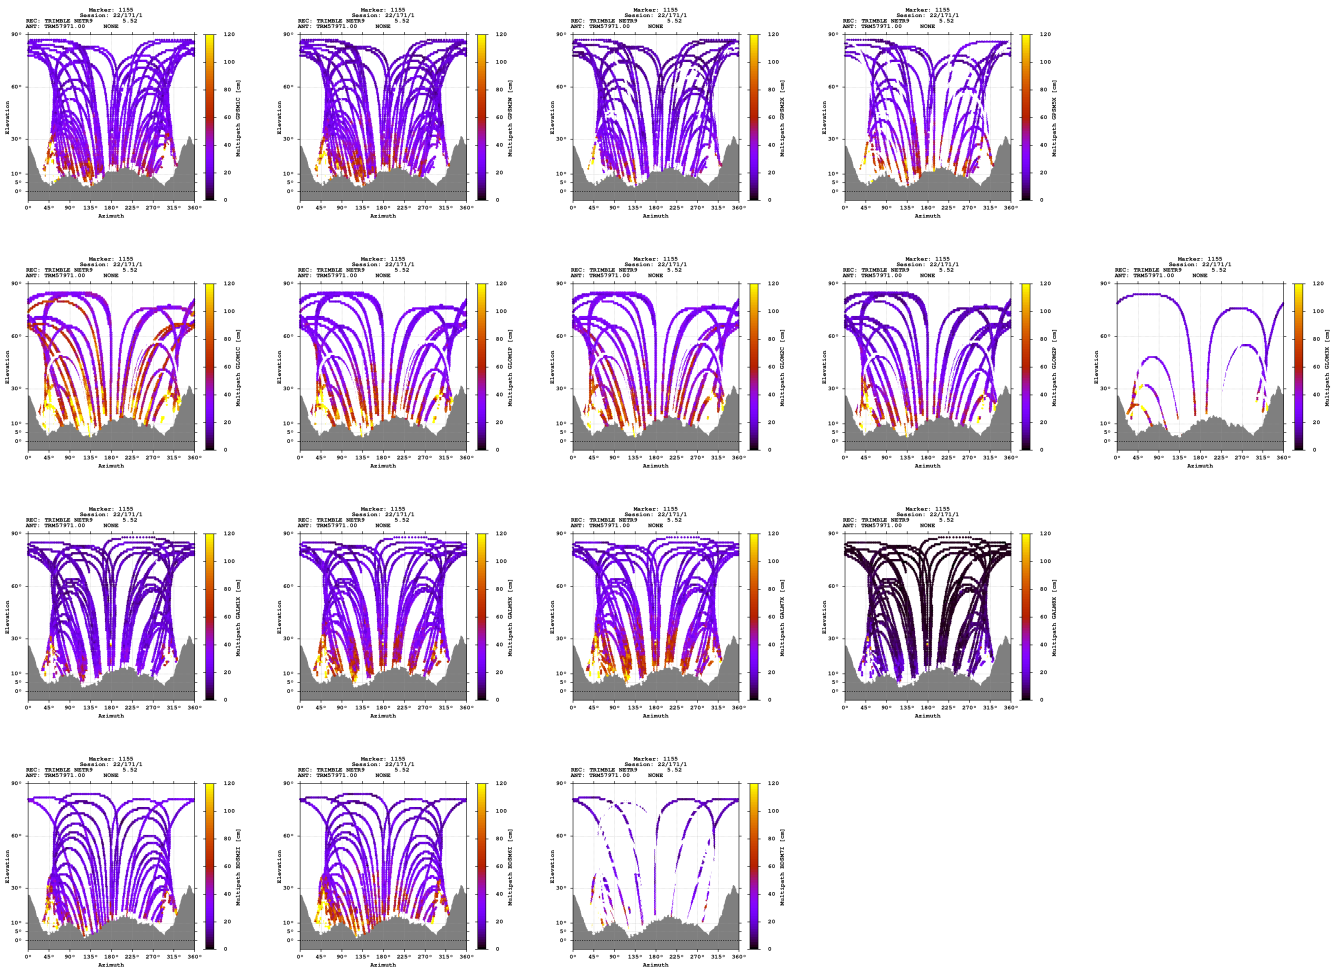

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

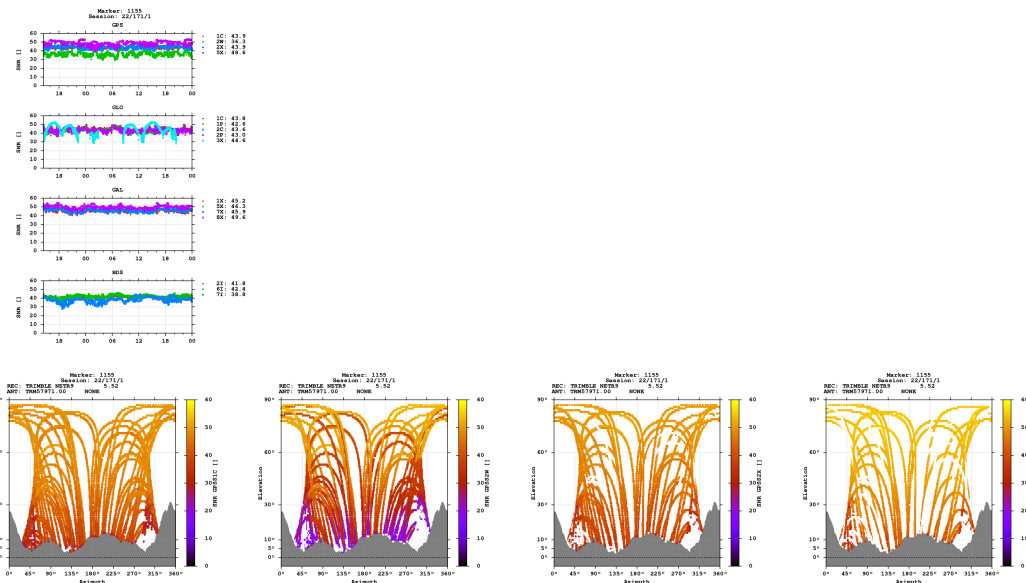

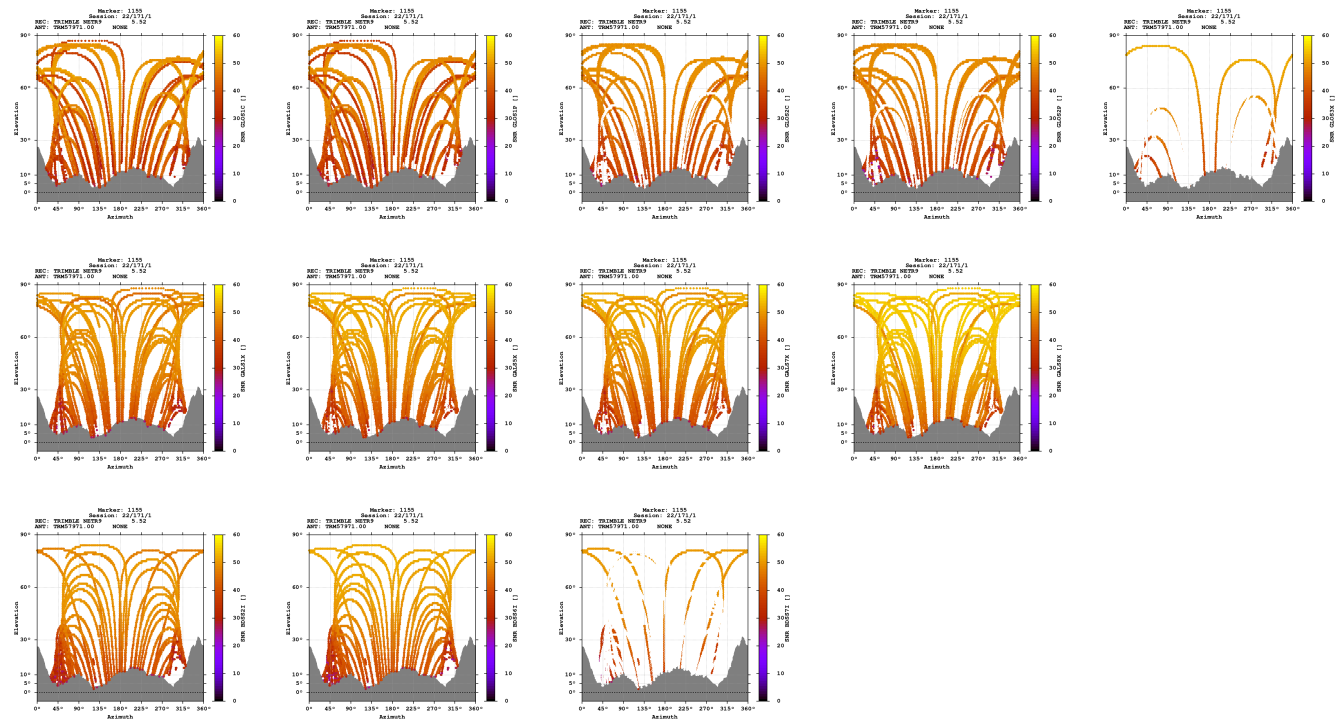

Estimates

2022-06-20 14:33:00	GPS	4295130.9839	714080.2131	4645890.0350	47.049000090	9.439283273	562.6568
2022-06-20 14:33:00	GLO	4295133.0471	714079.6621	4645891.4419	47.048995909	9.439271666	565.0117
2022-06-20 14:33:00	GAL	4295131.1134	714079.9694	4645889.7777	47.048997936	9.439279830	562.5282
2022-06-20 14:33:00	BDS	4295131.8917	714080.6706	4645893.1467	47.049012772	9.439287251	565.5956

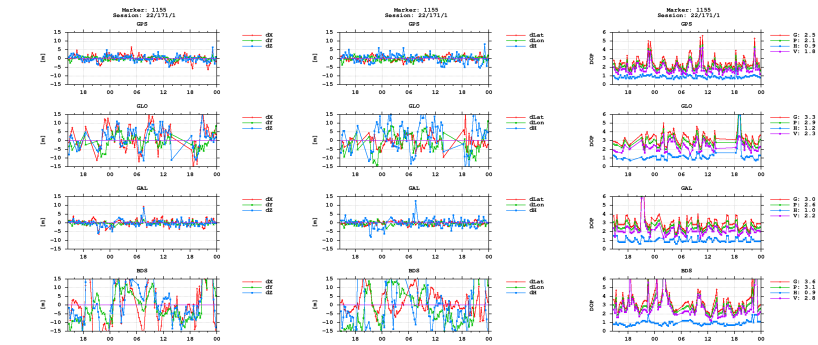

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)