


GNSS observation file monitoring for 0514


Last RINEX file: 05141721.22O
RINEX version: 3.02
Marker: 1133
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

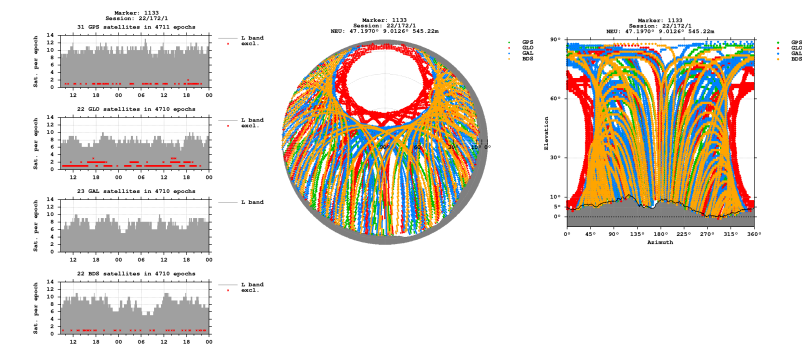


Bands

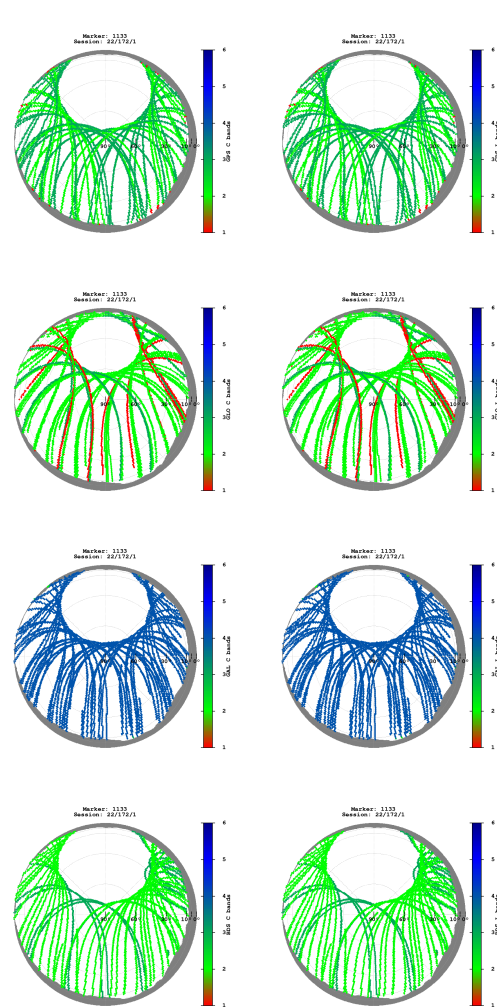

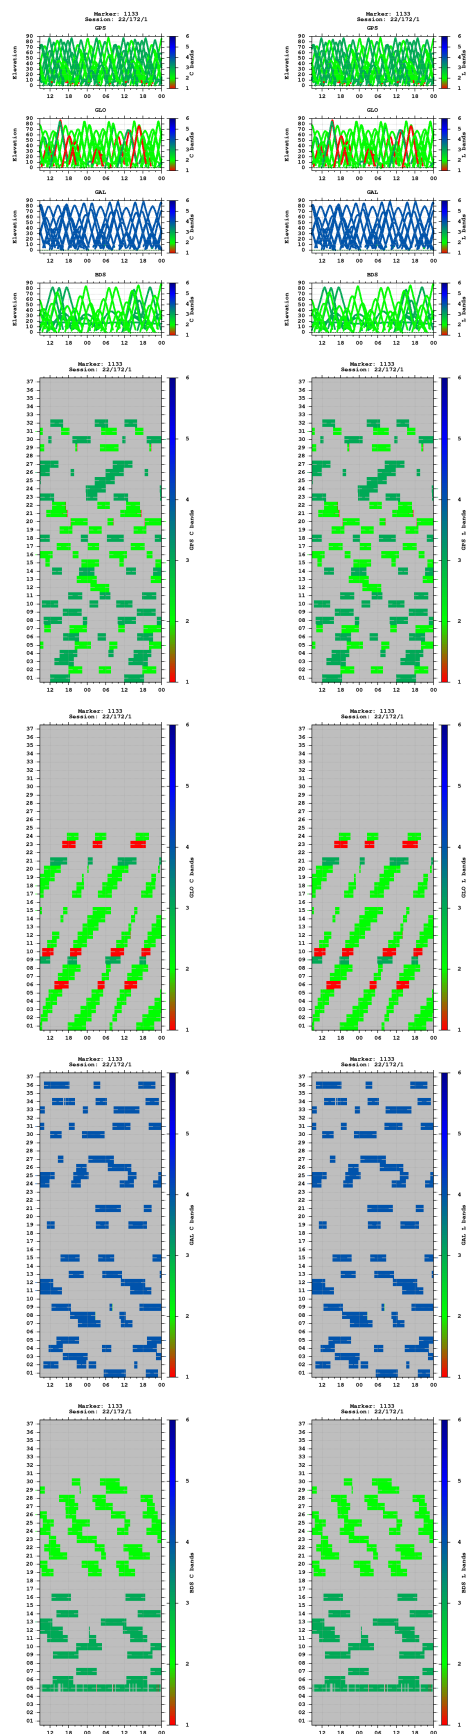


Multipath

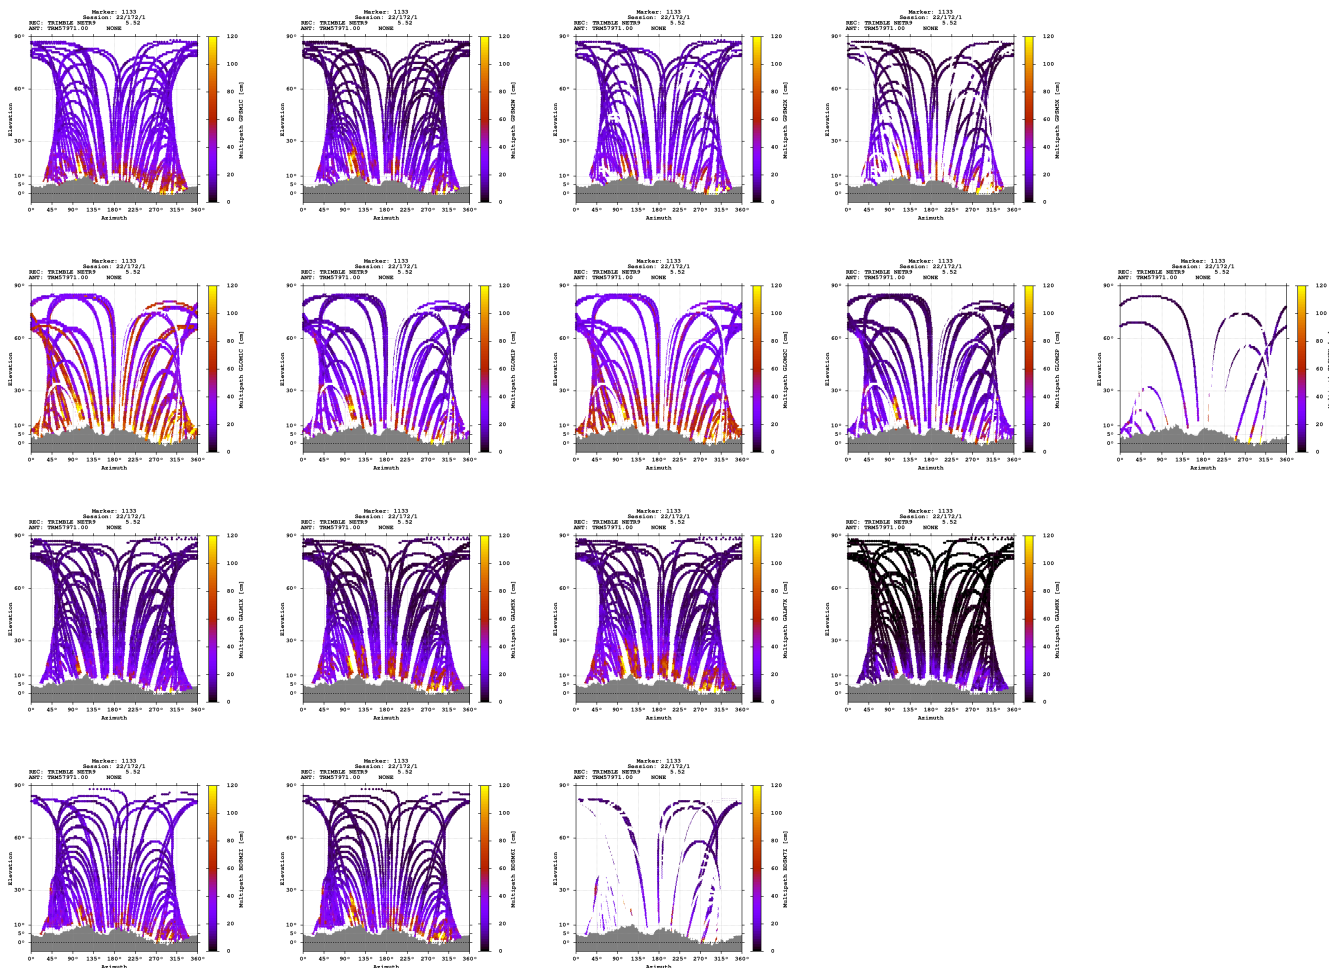


Signal-to-noise ratio



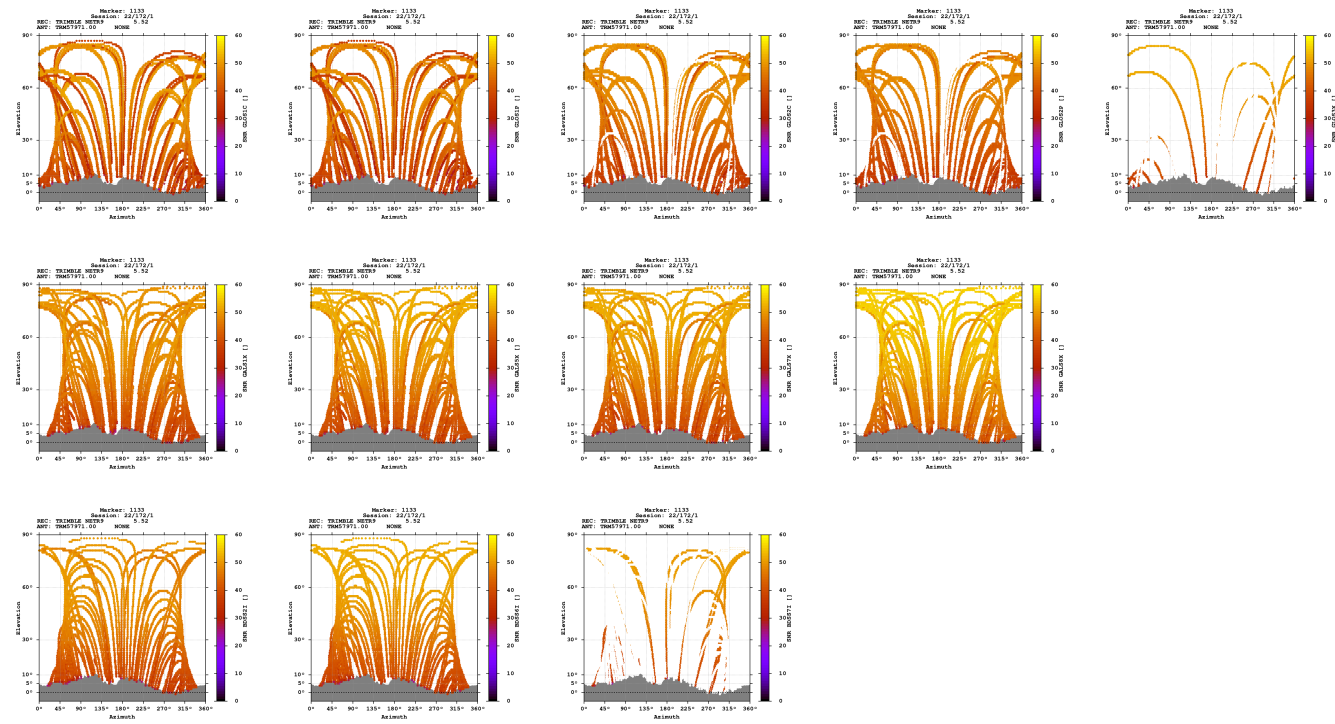

Estimates

2022-06-21 08:41:00	GPS	4288410.9672	680187.1489	4657070.7471	47.196960705	9.012636700	545.2180
2022-06-21 08:41:00	GLO	4288411.2573	680186.9864	4657070.6463	47.196958367	9.012633982	545.3215
2022-06-21 08:41:00	GAL	4288411.4596	680187.1133	4657070.9233	47.196958609	9.012635217	545.6740
2022-06-21 08:41:00	BDS	4288410.4880	680186.0168	4657072.4321	47.196975296	9.012622936	546.0122

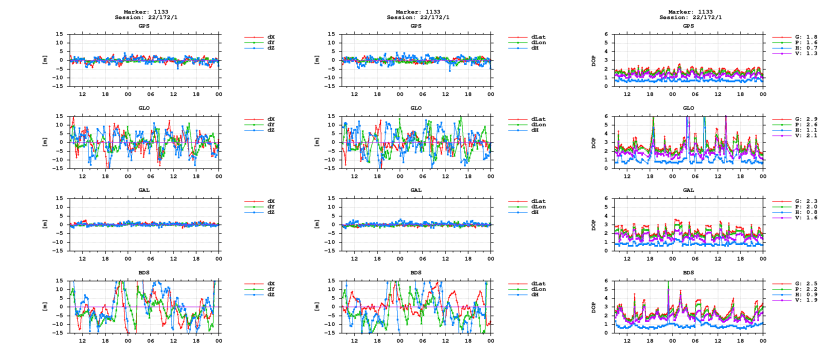

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)