

GNSS observation file monitoring for 0514

Last RINEX file: 05141731.220

RINEX version: 3.02

Marker: 1133

Receiver: 514

Antenna: 514


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

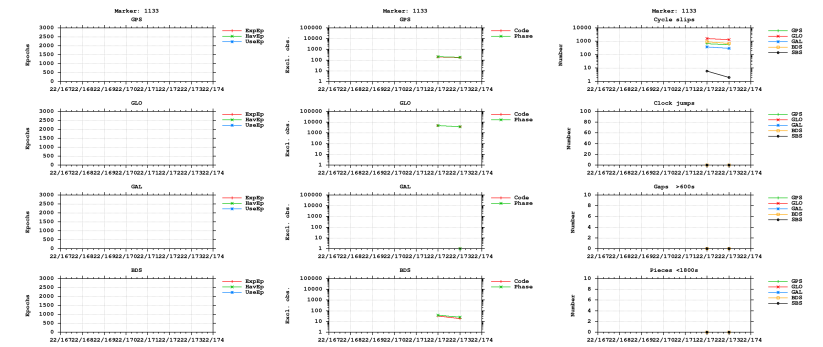



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

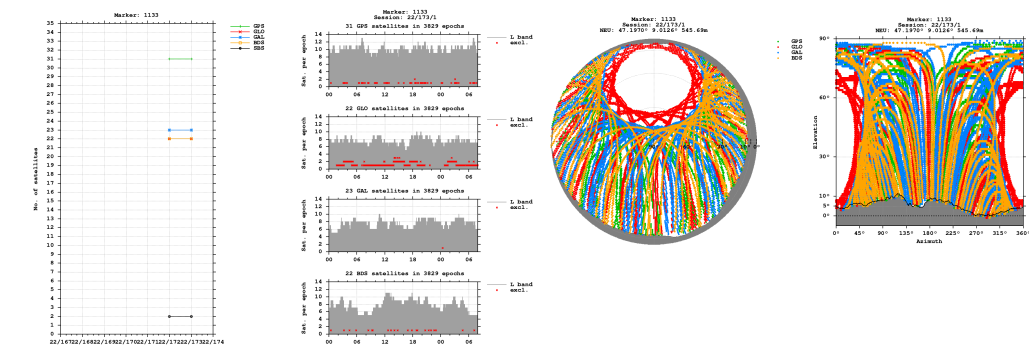


Bands

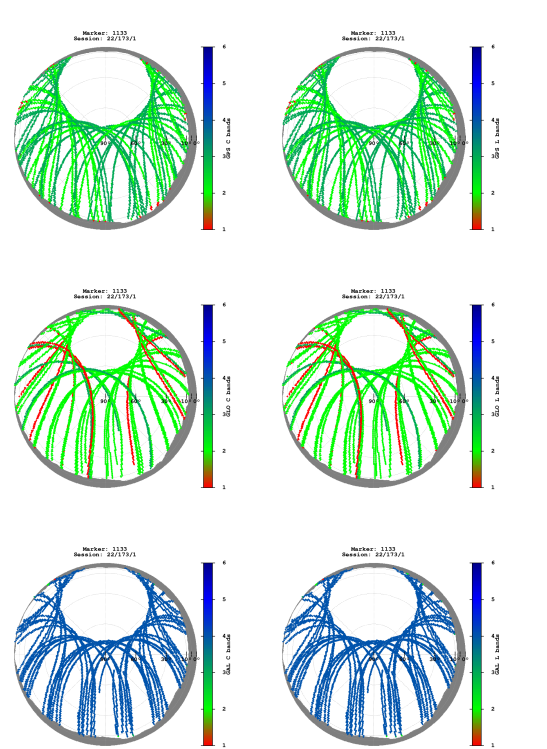


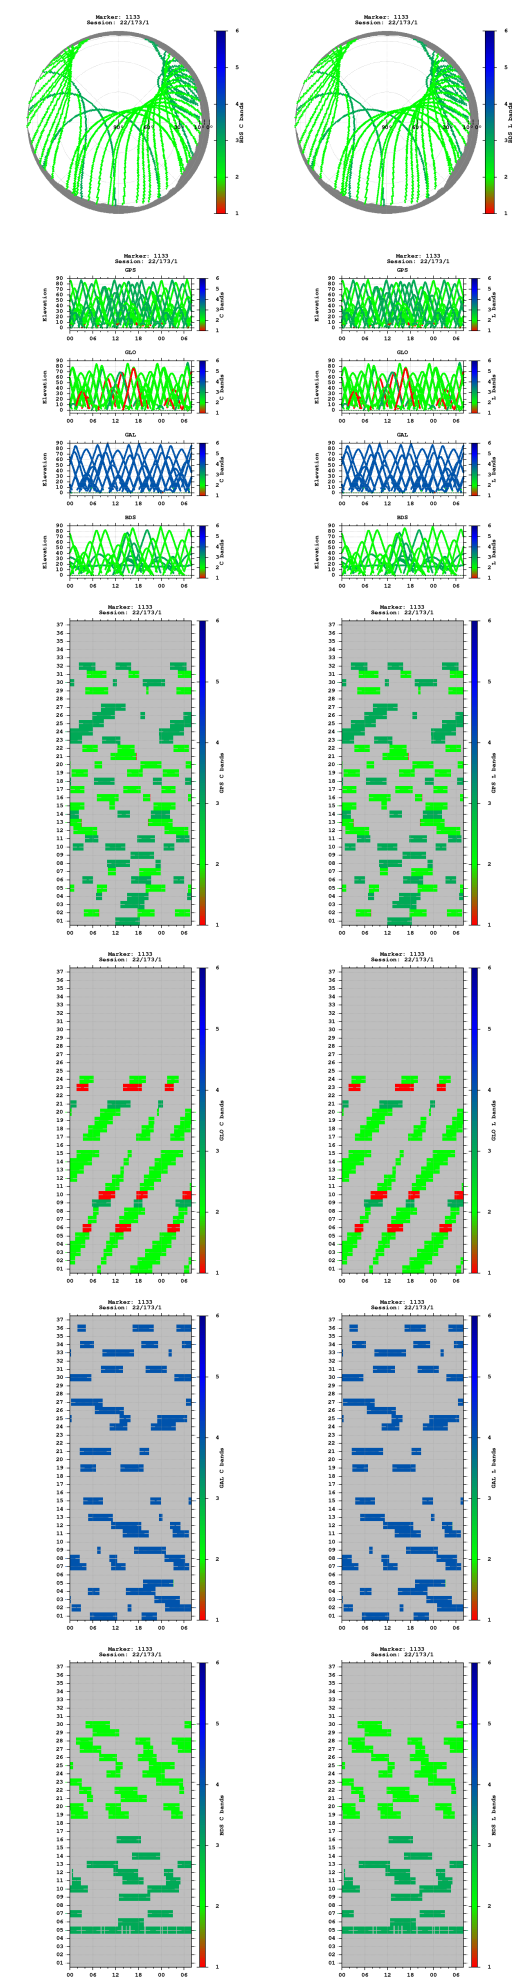


Observations

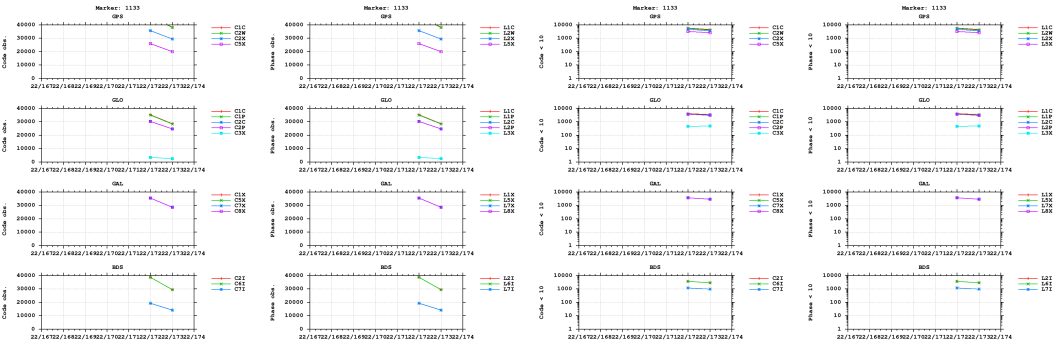


Multipath

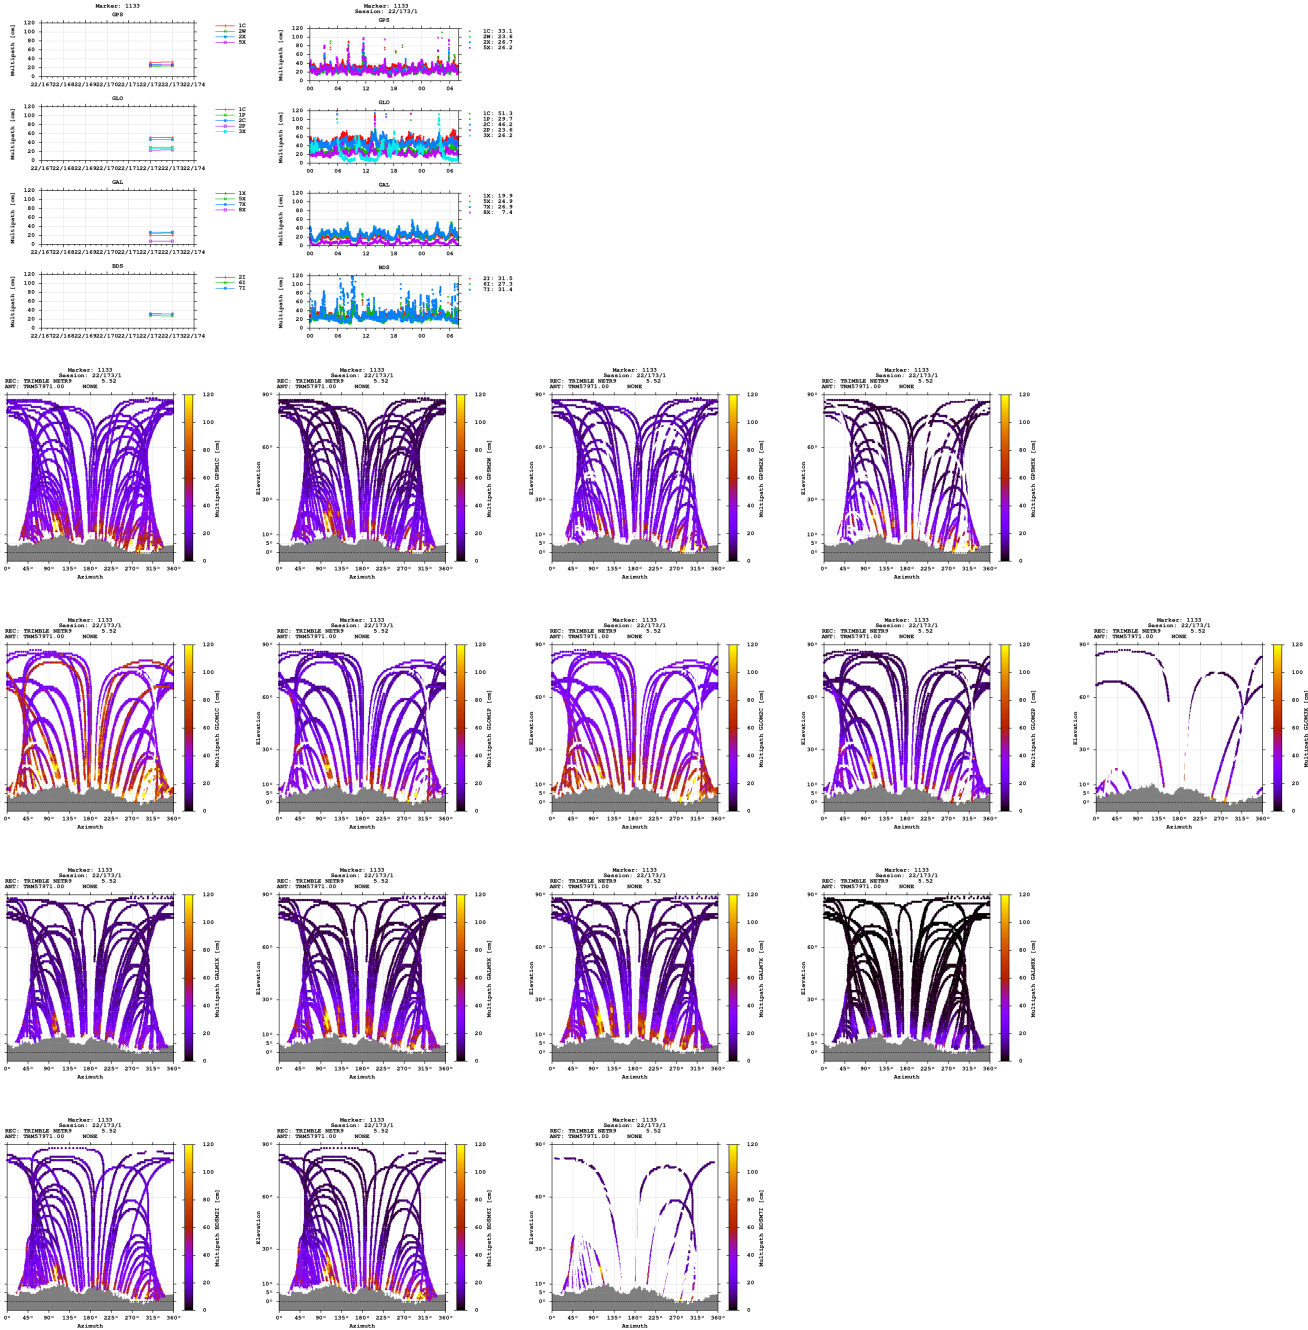


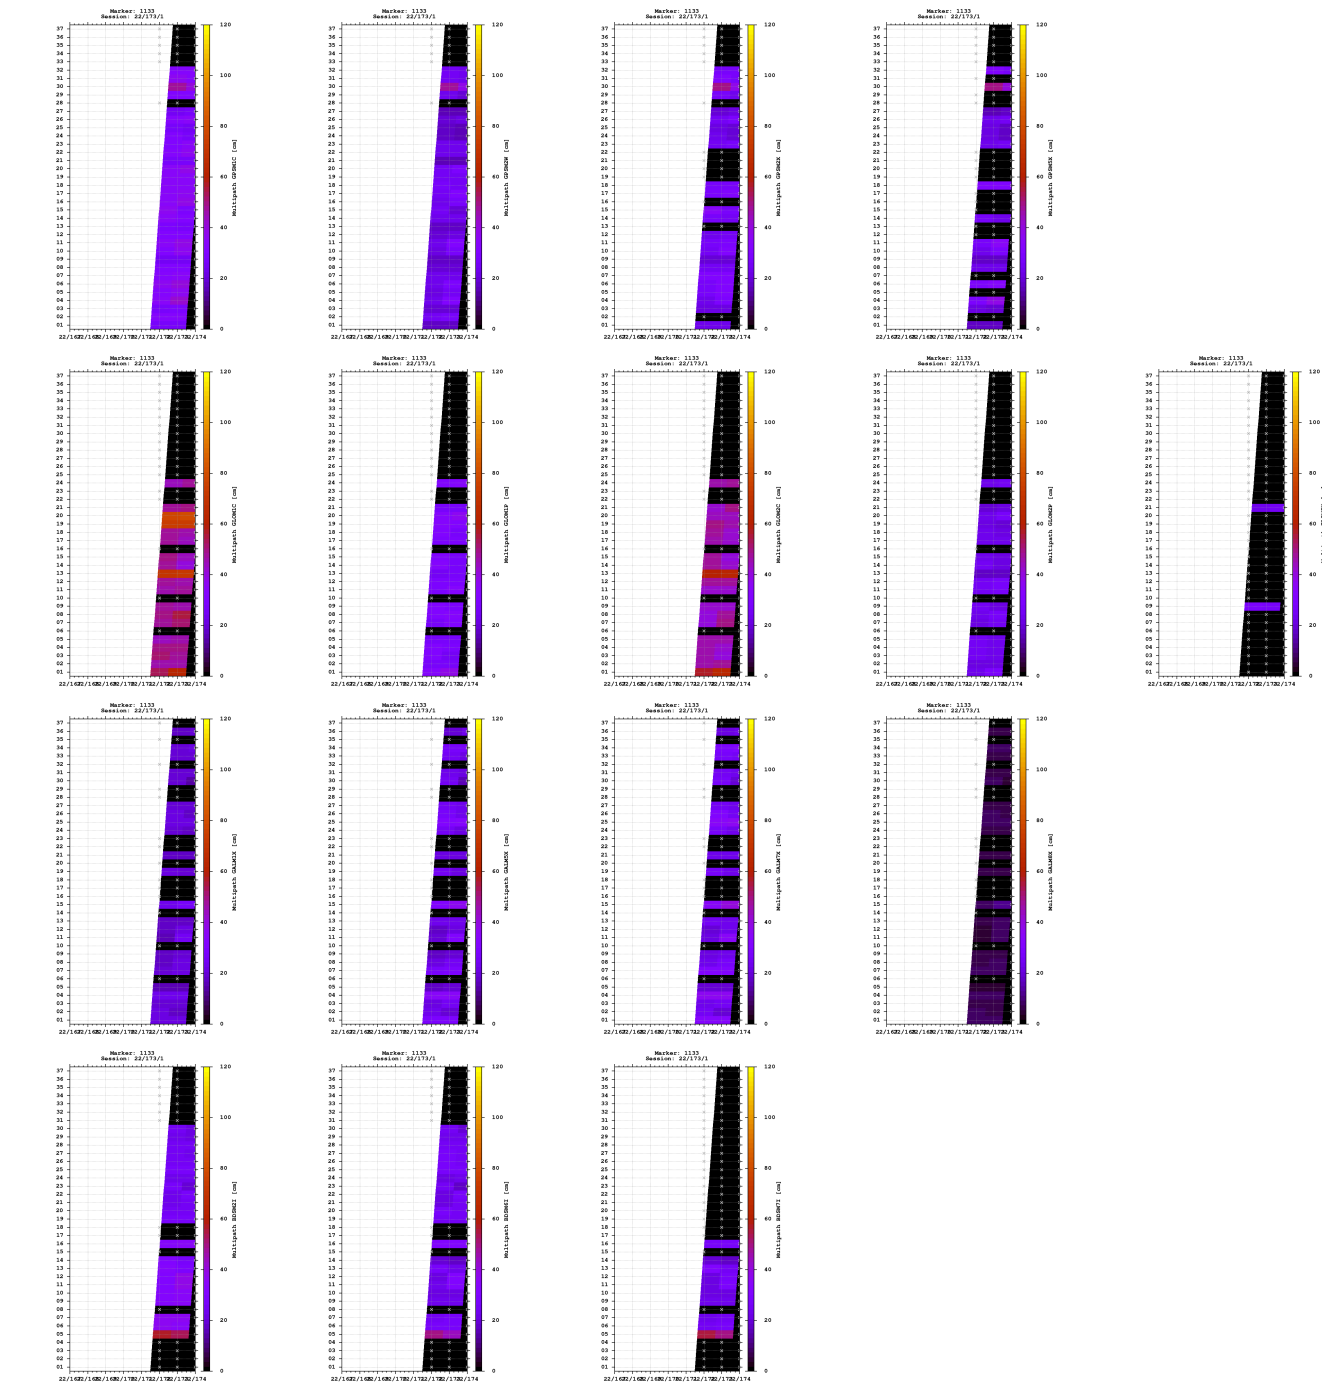


- The multiphase is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

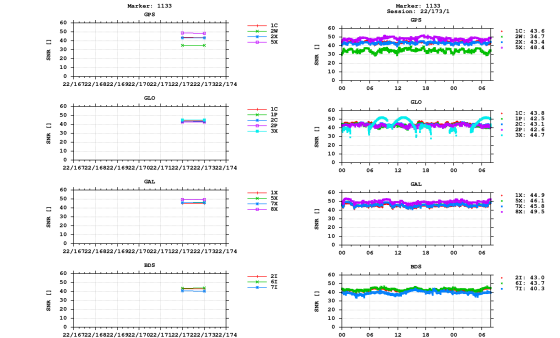


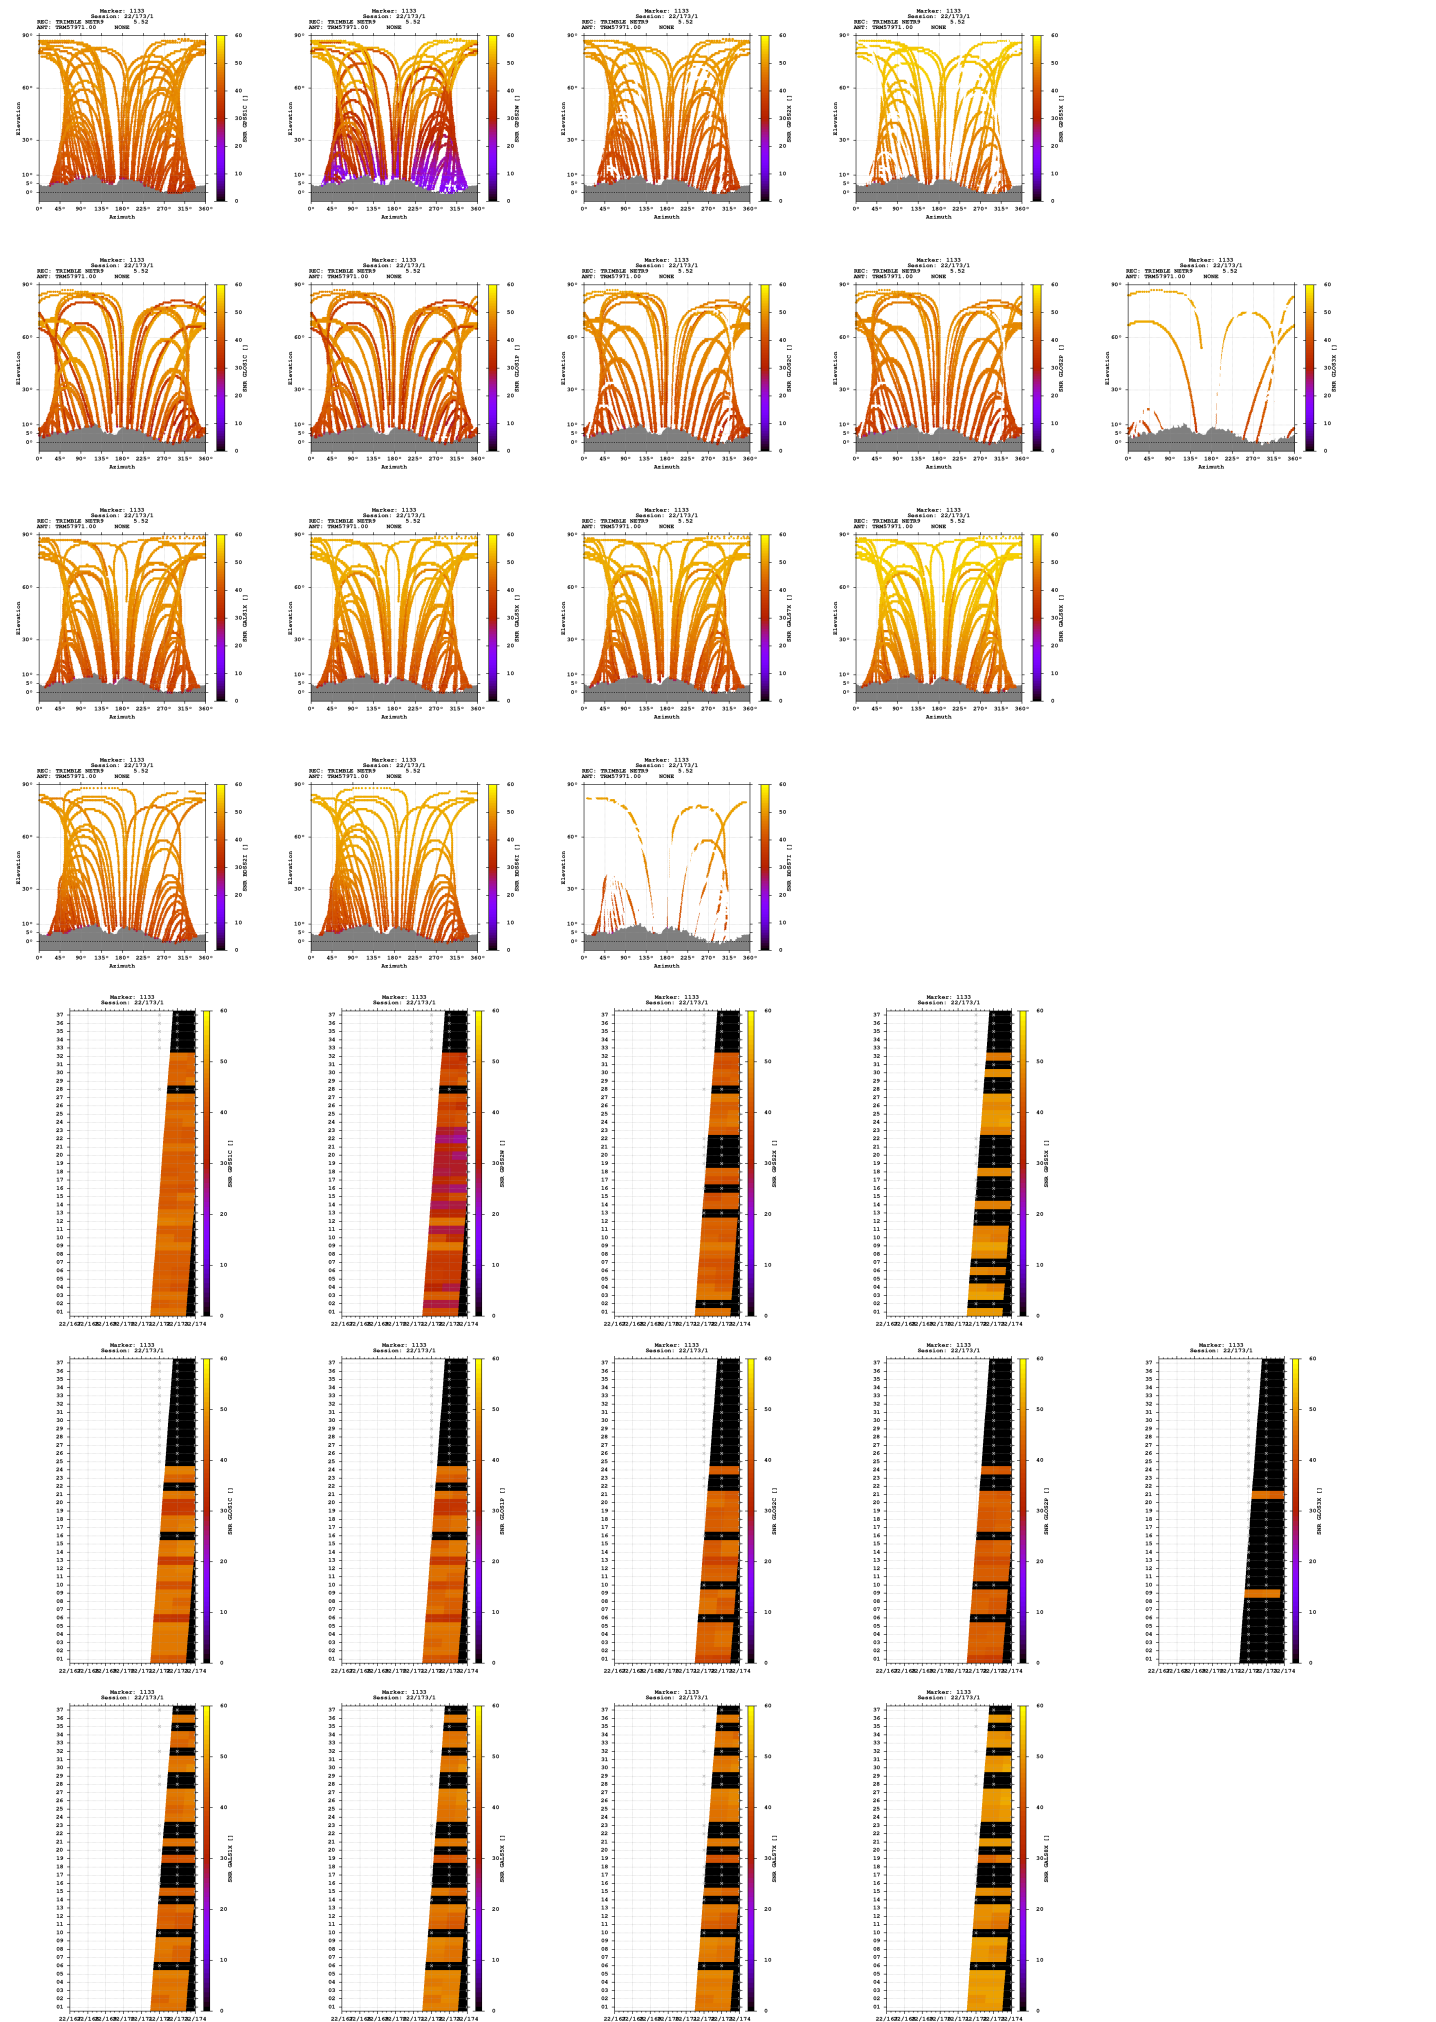

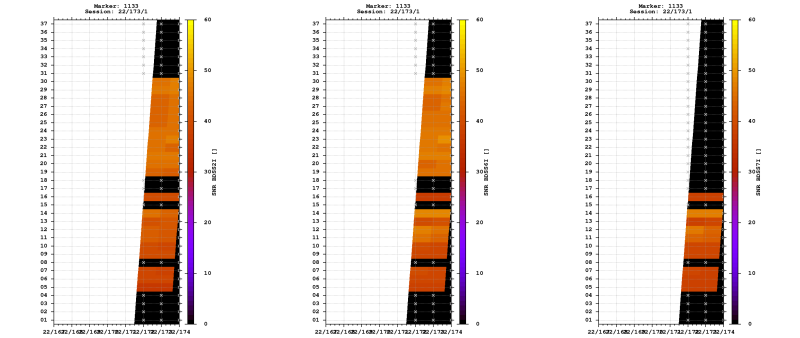


Estimates

2022-06-21 08:41:00	GPS	4288411.5282	680186.9626	4657070.9059	47.196958211	9.012633112	545.6912
2022-06-21 08:41:00	GLO	4288410.9661	680187.5693	4657070.9992	47.196961818	9.012642180	545.4470
2022-06-21 08:41:00	GAL	4288411.3446	680187.0869	4657070.9436	47.196959510	9.012635112	545.6089
2022-06-21 08:41:00	BDS	4288409.7413	680187.3192	4657071.1810	47.196971170	9.012641453	544.7319

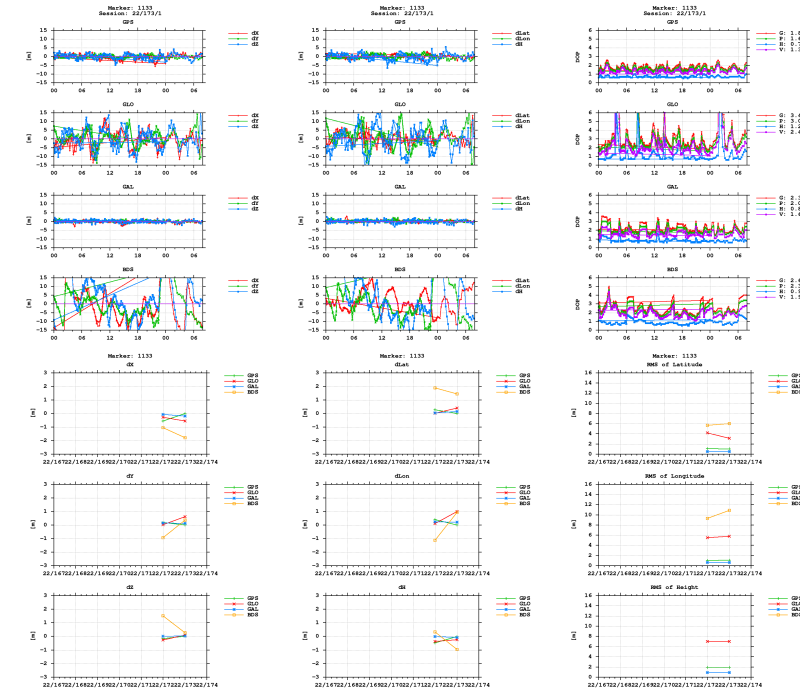

BNC



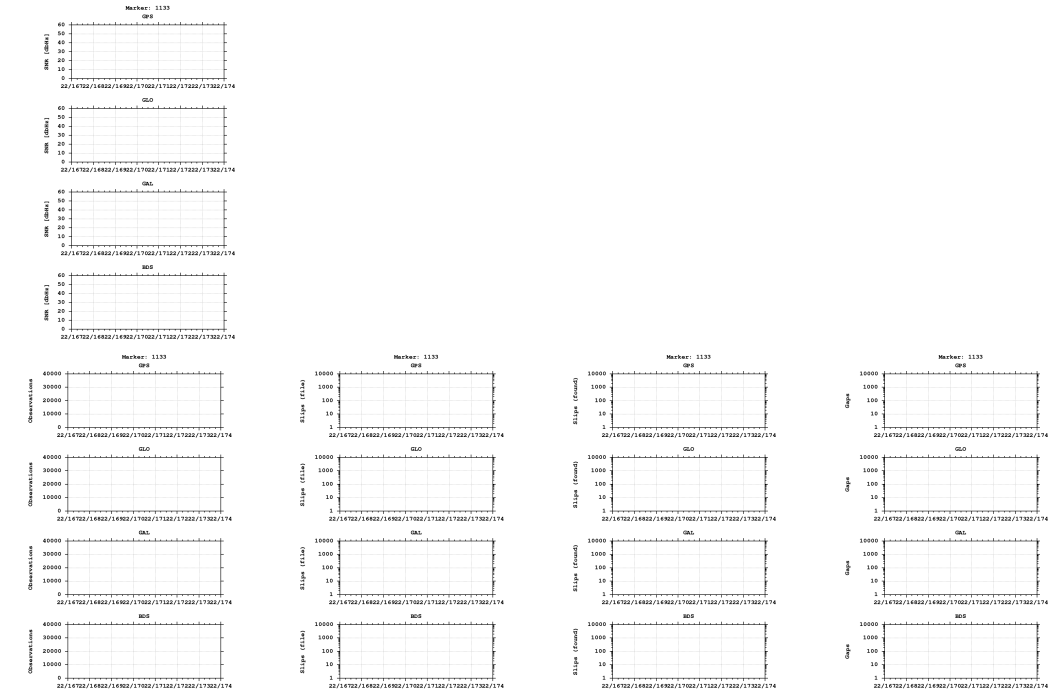

Equipment

2022-06-21 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)