

GNSS observation file monitoring for 0514

Last RINEX file: 05141741.220

RINEX version: 3.02

Marker: 1132

Receiver: 514

Antenna: 514


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

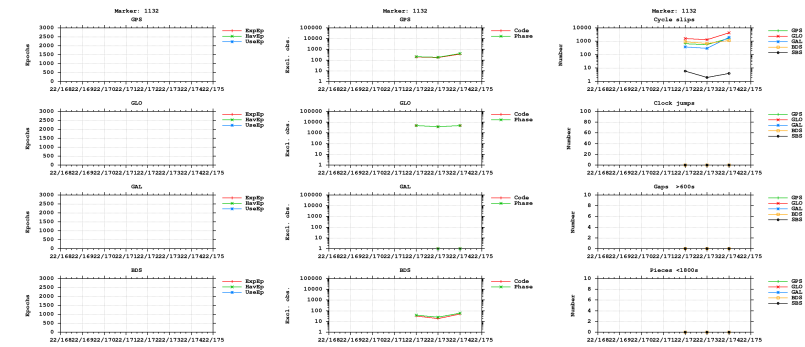



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

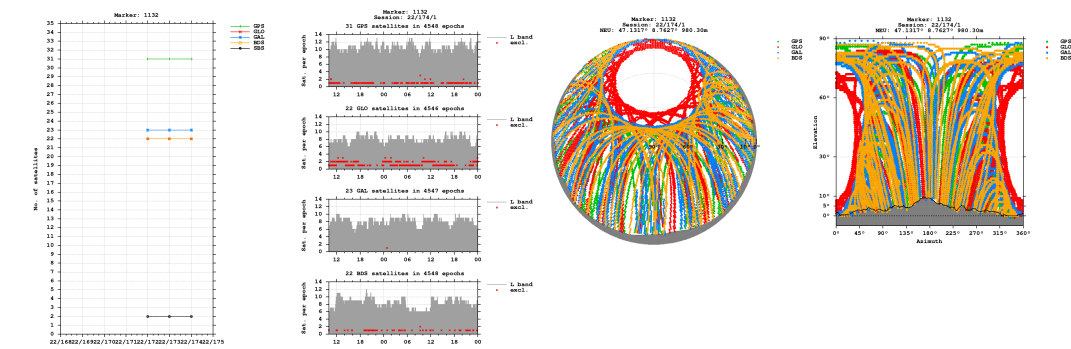


Bands

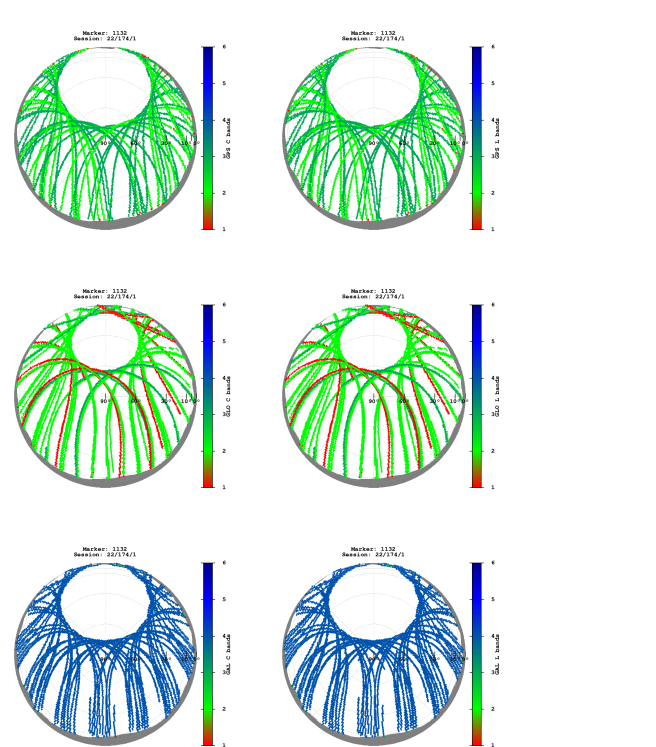


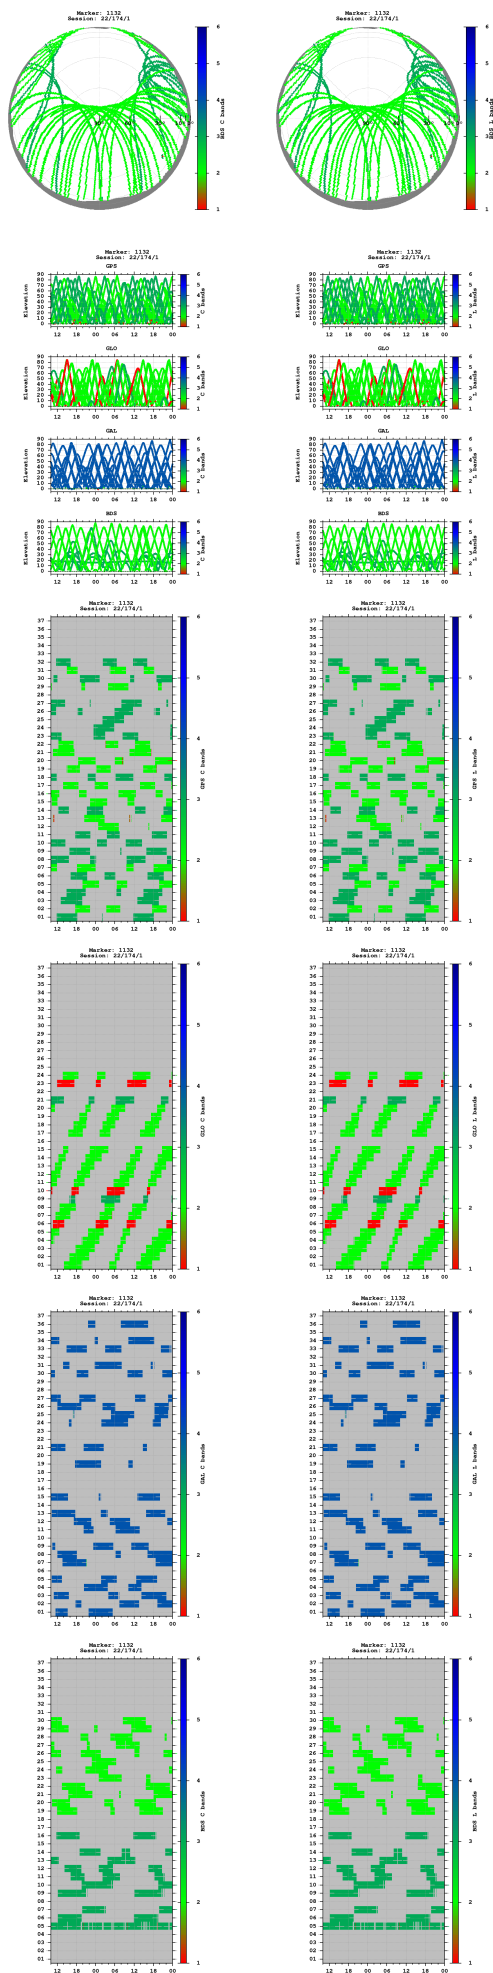


Observations

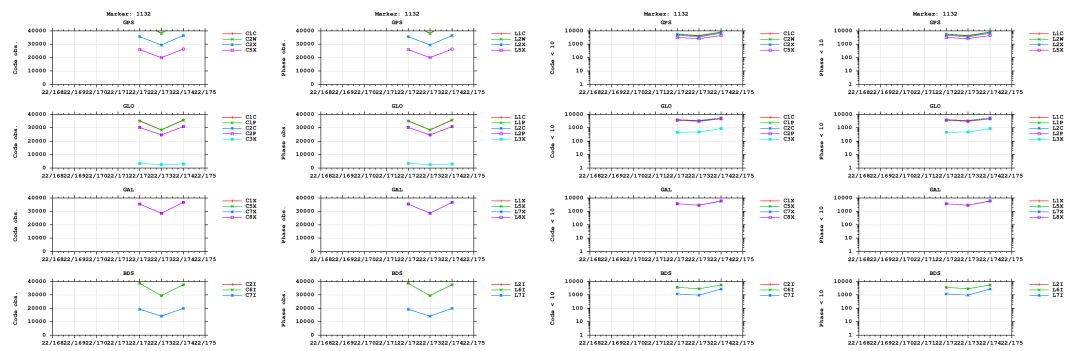



Multipath

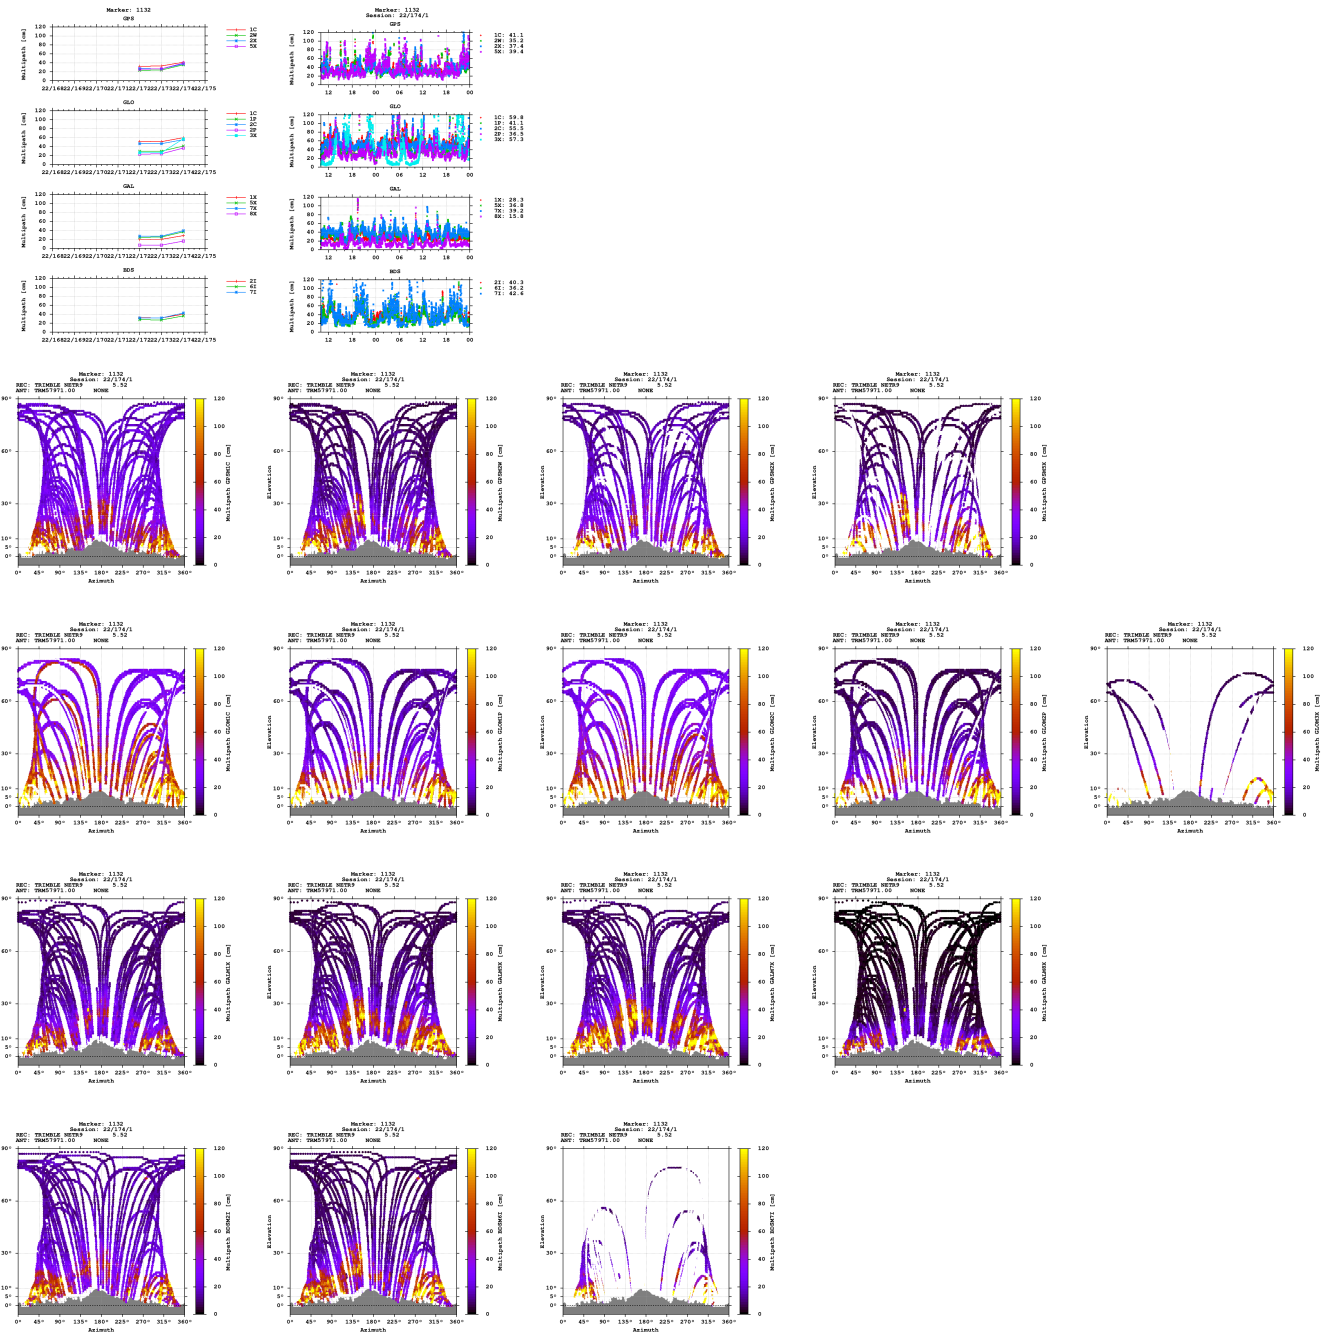


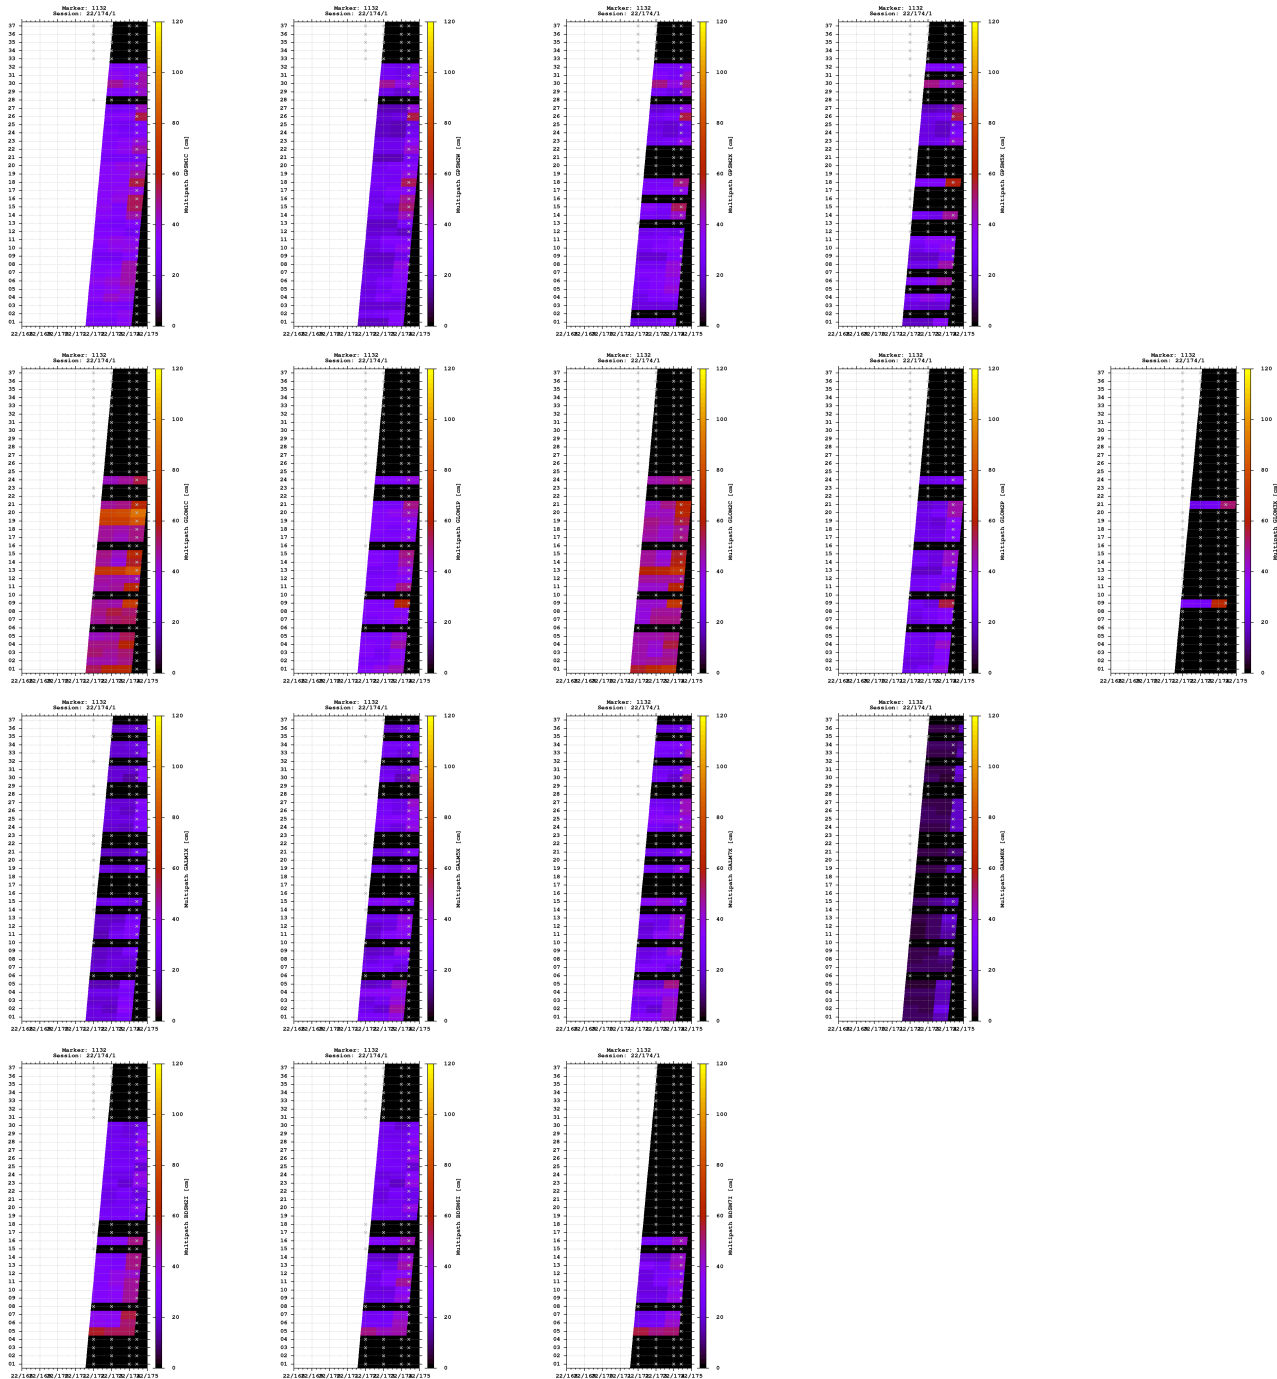


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

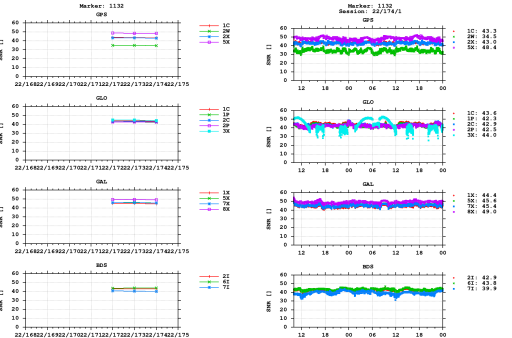


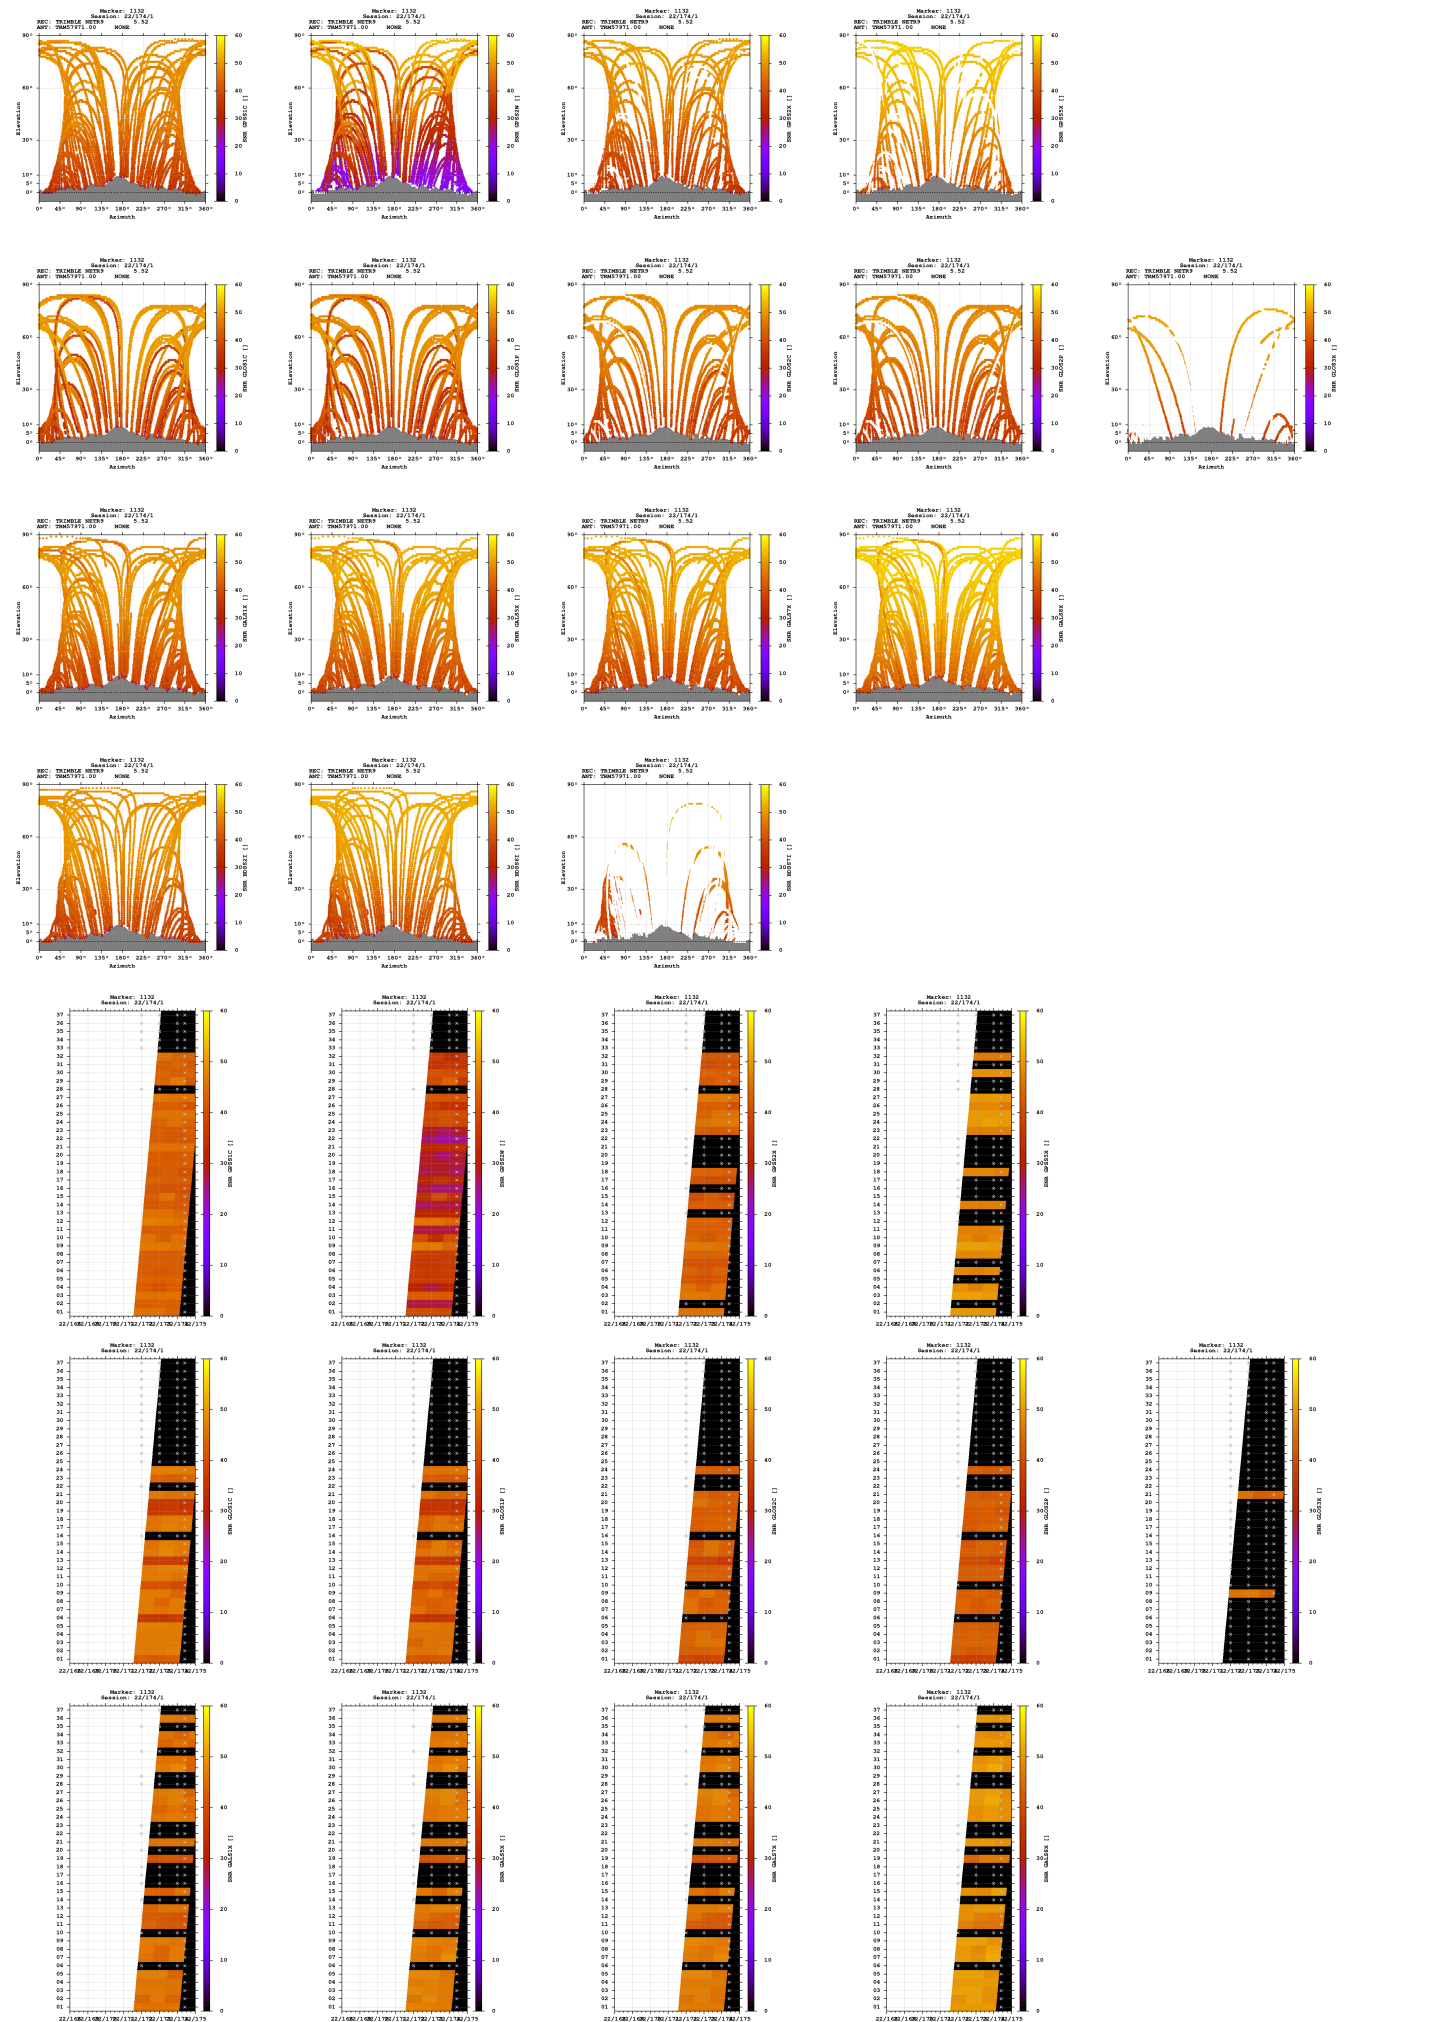

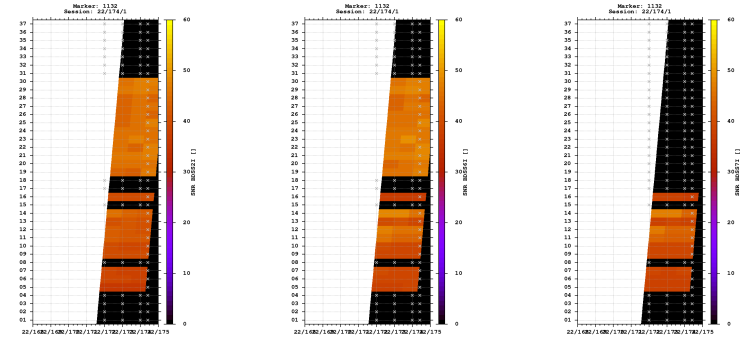



Estimates

2022-06-23 10:02:30	GPS	4296885.6236	662330.5562	4652458.8494	47.131733107	8.762720498	980.3016
2022-06-23 10:02:30	GLO	4296885.2726	662330.5913	4652458.1582	47.131731130	8.762721661	979.5627
2022-06-23 10:02:30	GAL	4296885.4733	662330.4782	4652458.6907	47.131733194	8.762719784	980.0762
2022-06-23 10:02:30	BDS	4296884.3578	662330.7167	4652459.7949	47.131746978	8.762725131	980.1601

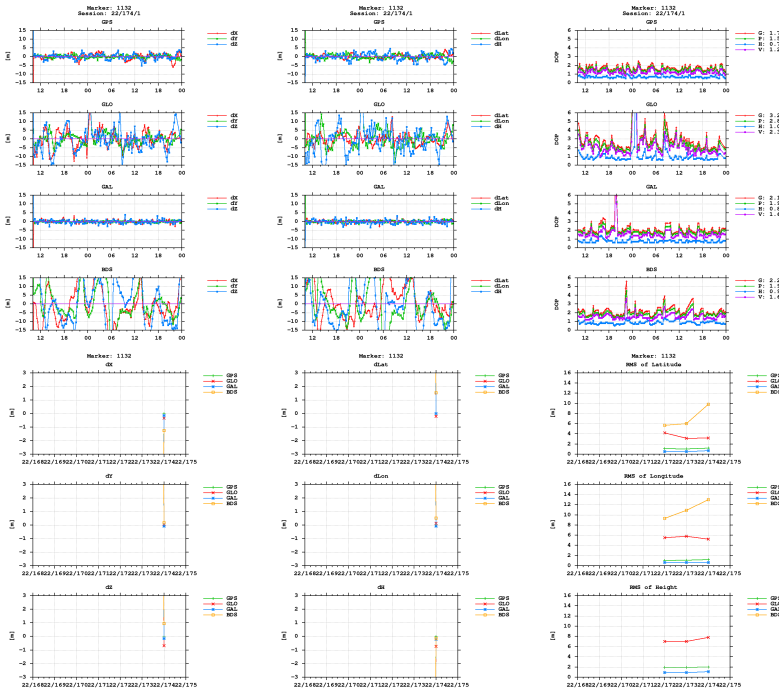

BNC

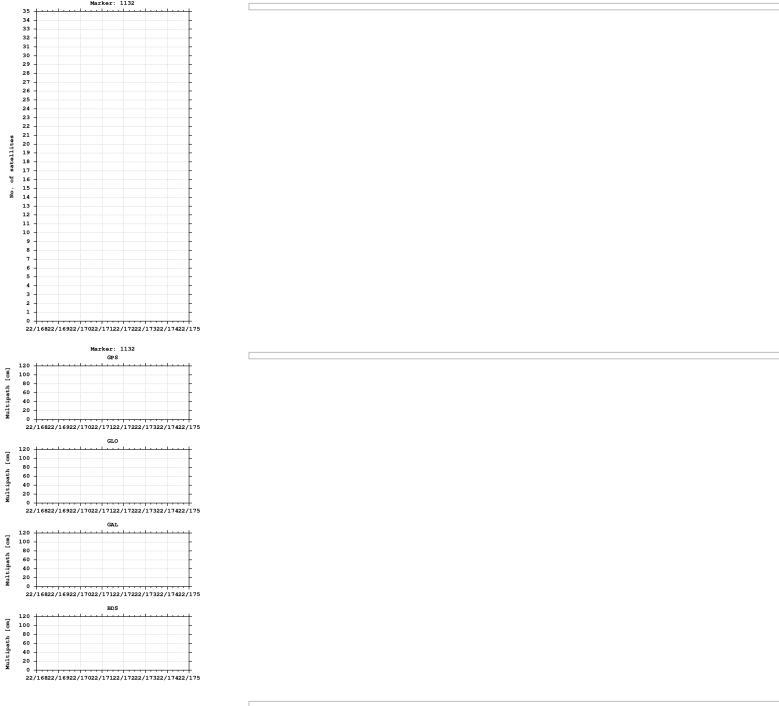

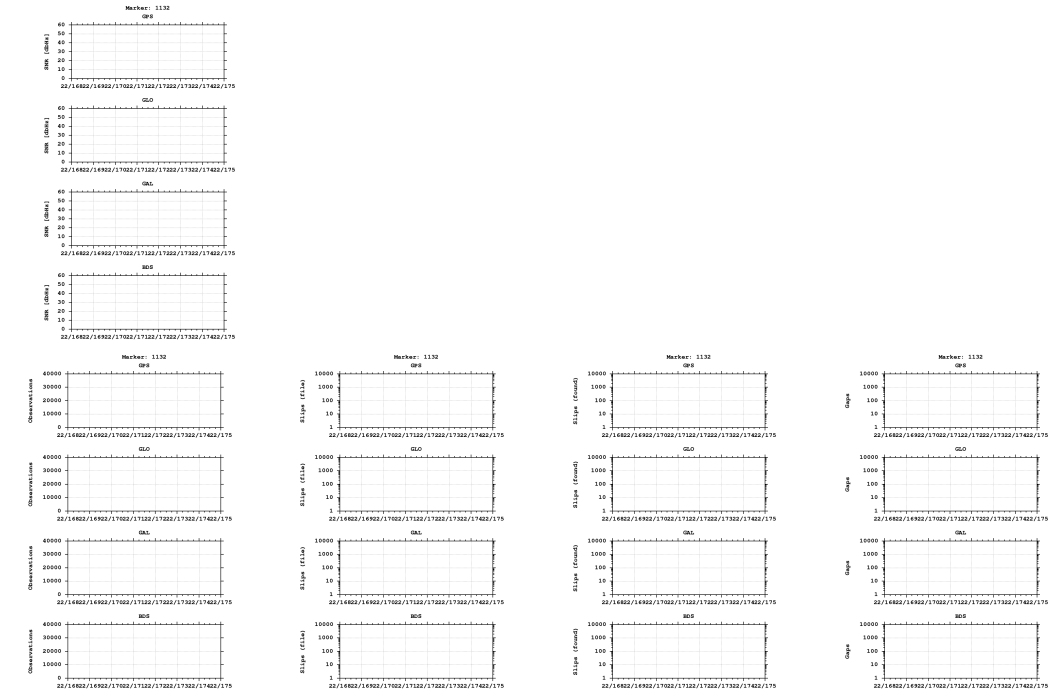

Equipment

2022-06-21 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)