

GNSS observation file monitoring for 0514

Last RINEX file: 05141751.220

RINEX version: 3.02

Marker: 1132

Receiver: 514

Antenna: 514


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

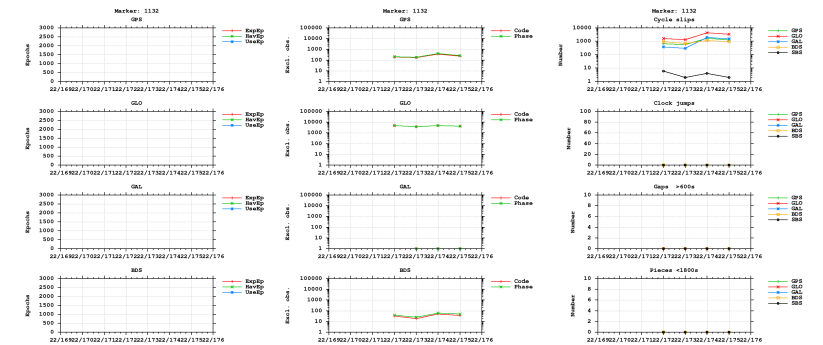



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

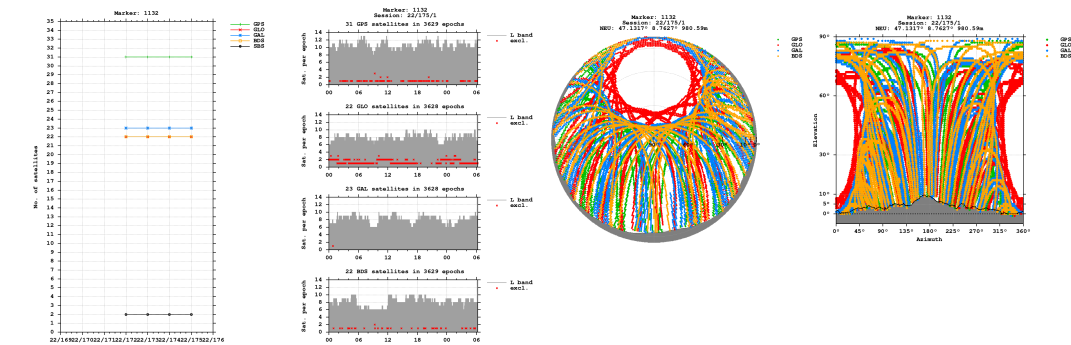


Bands

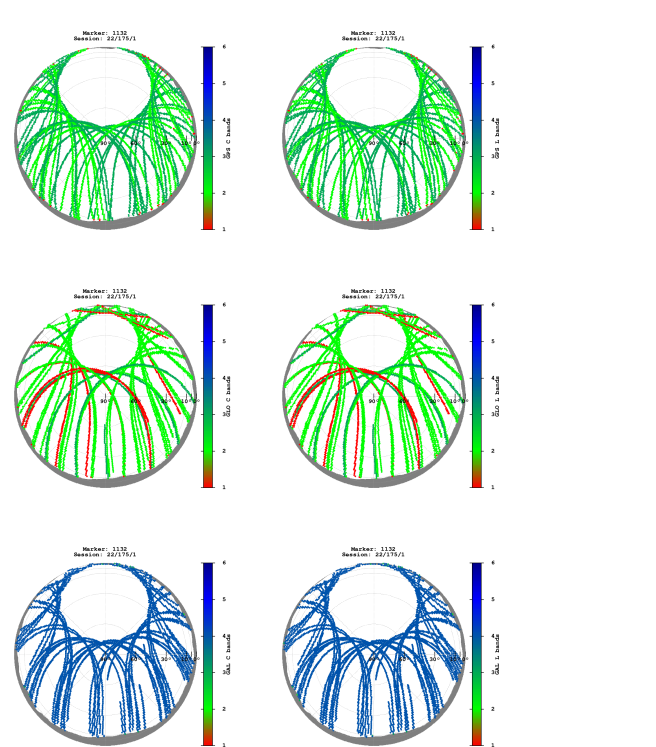


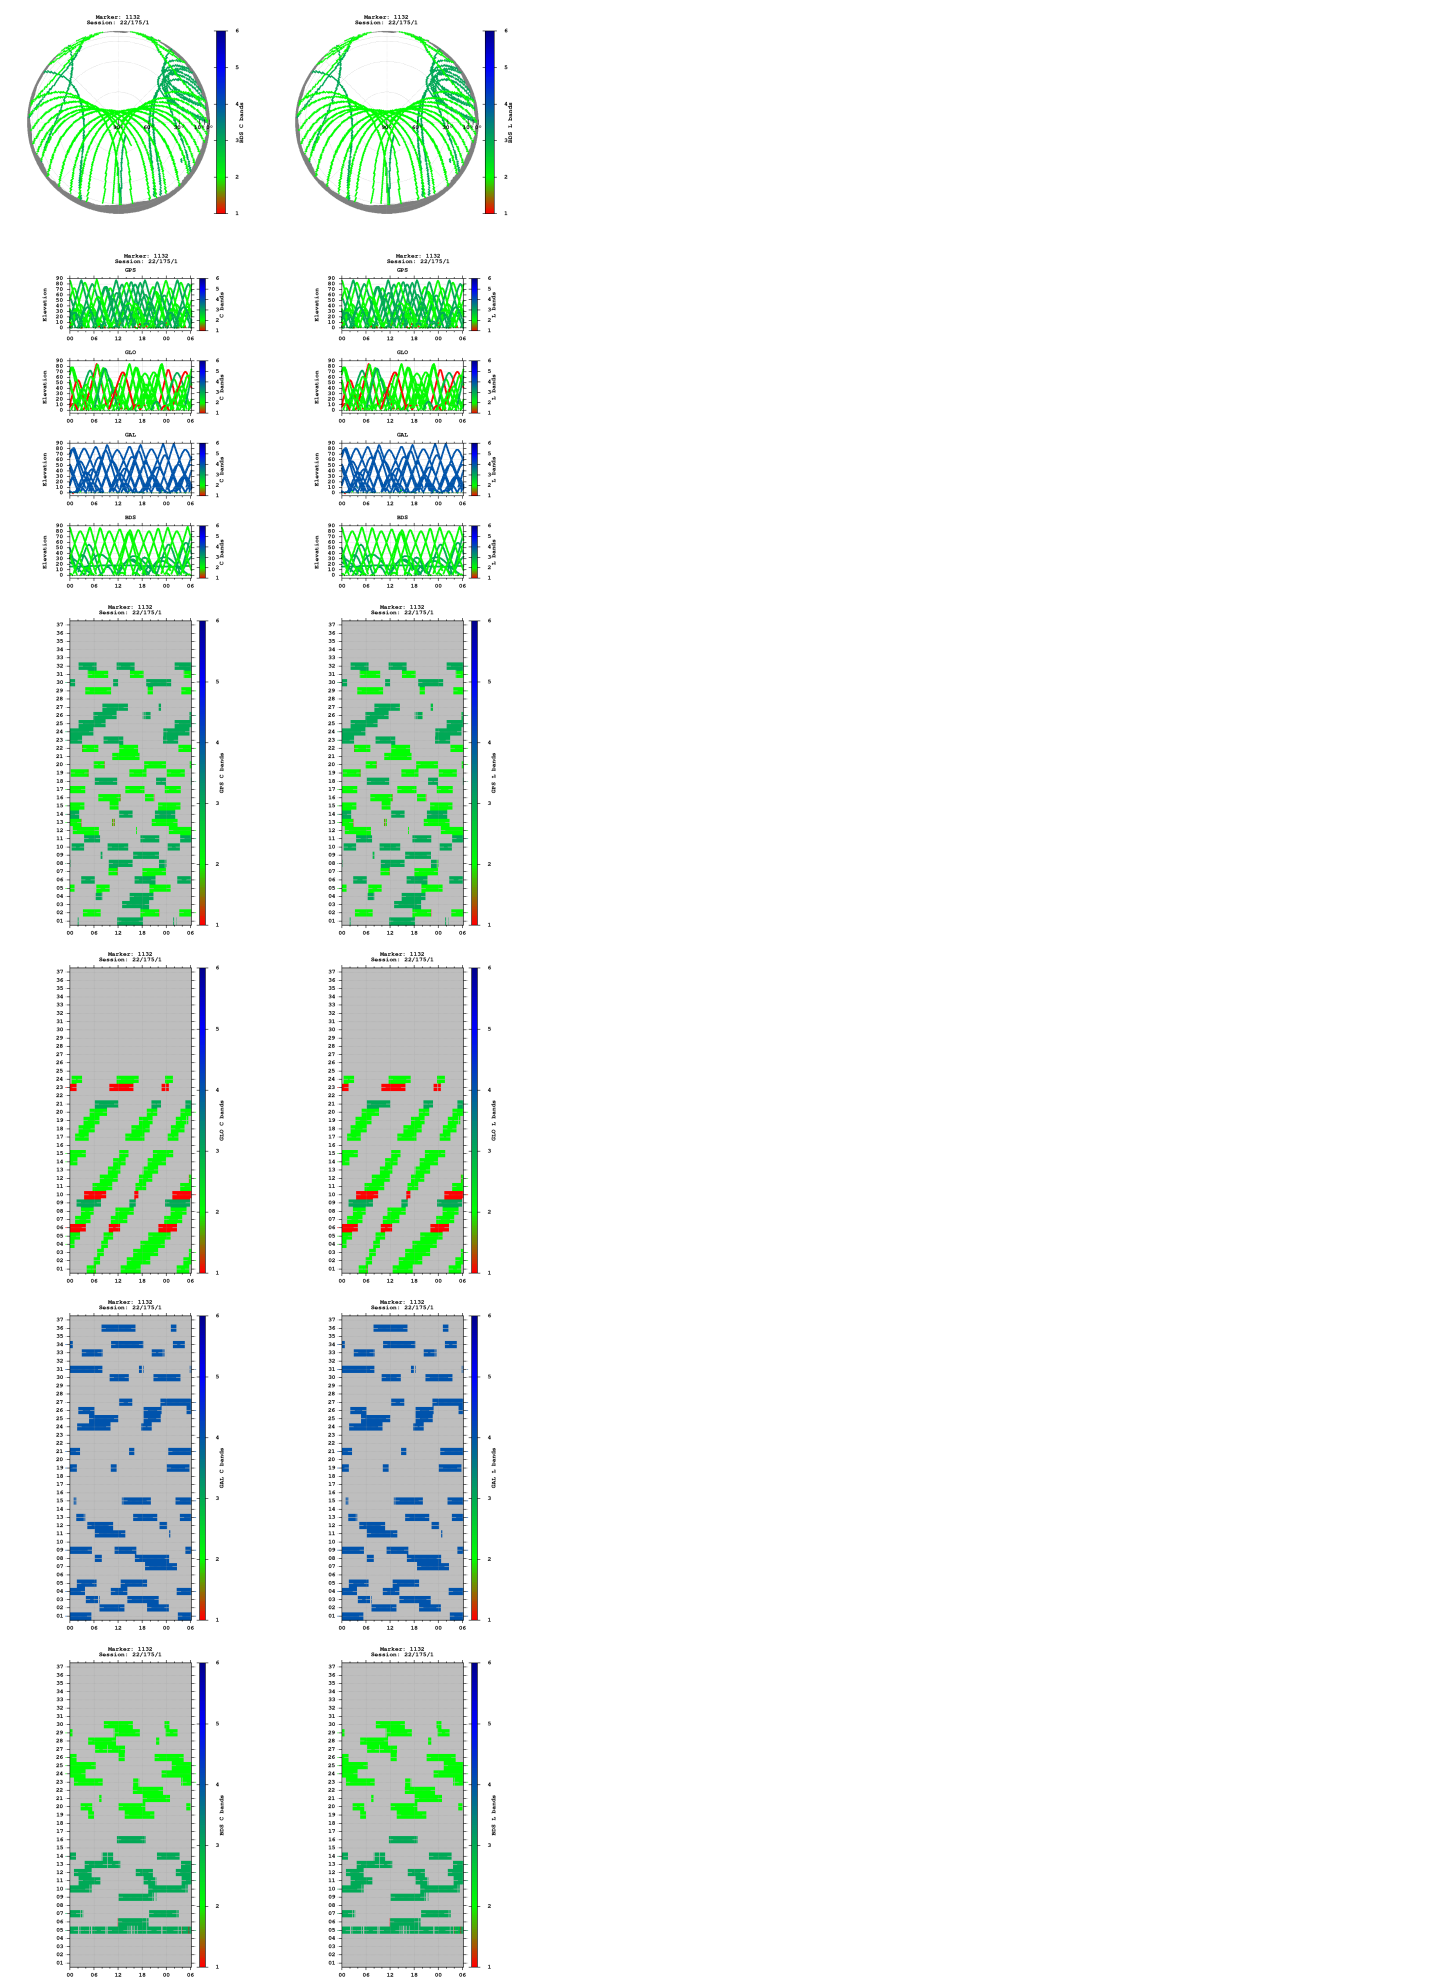

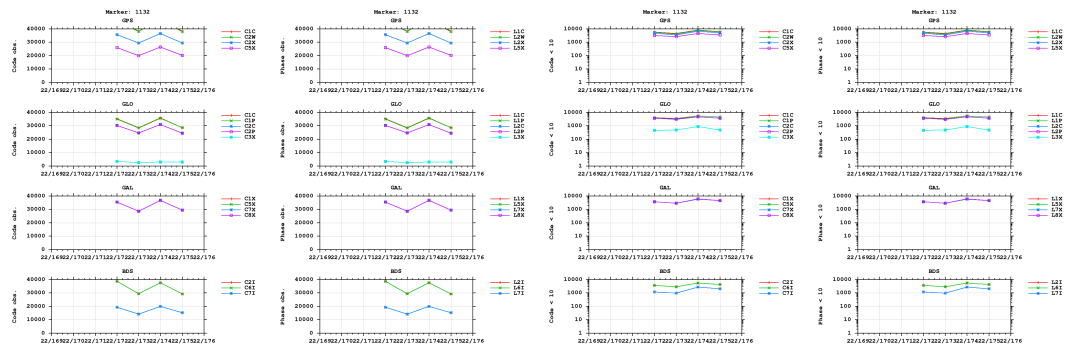


Multipath

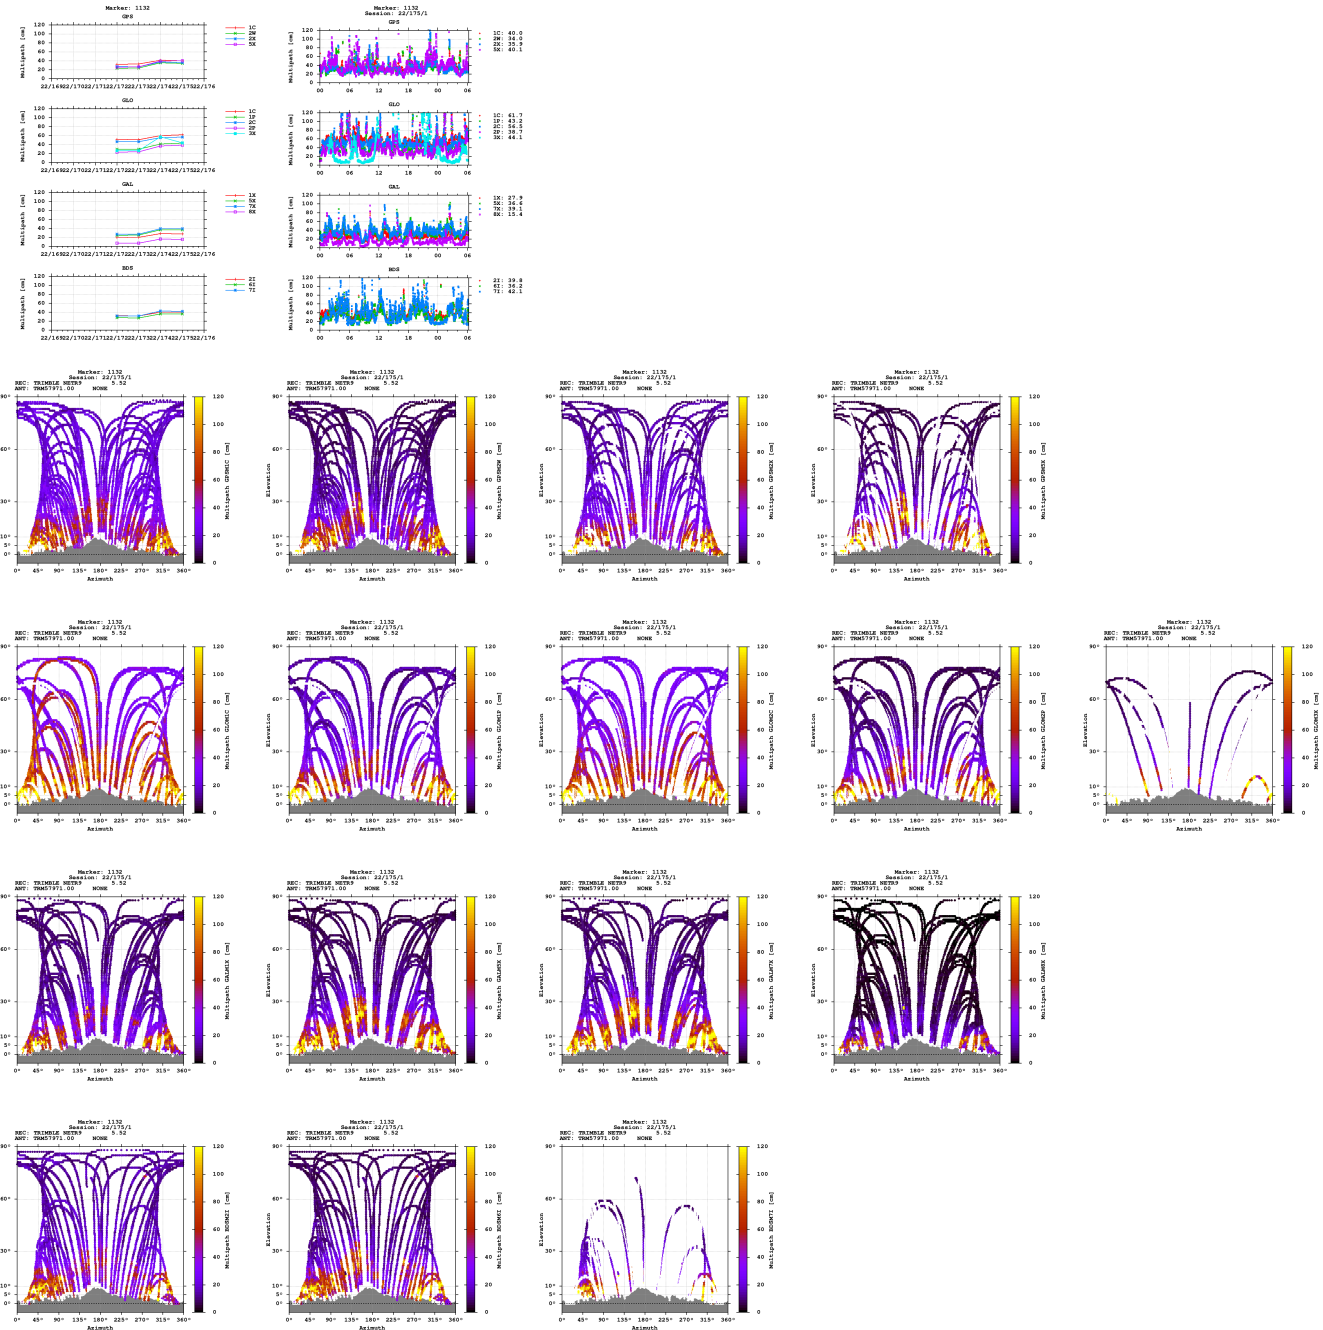


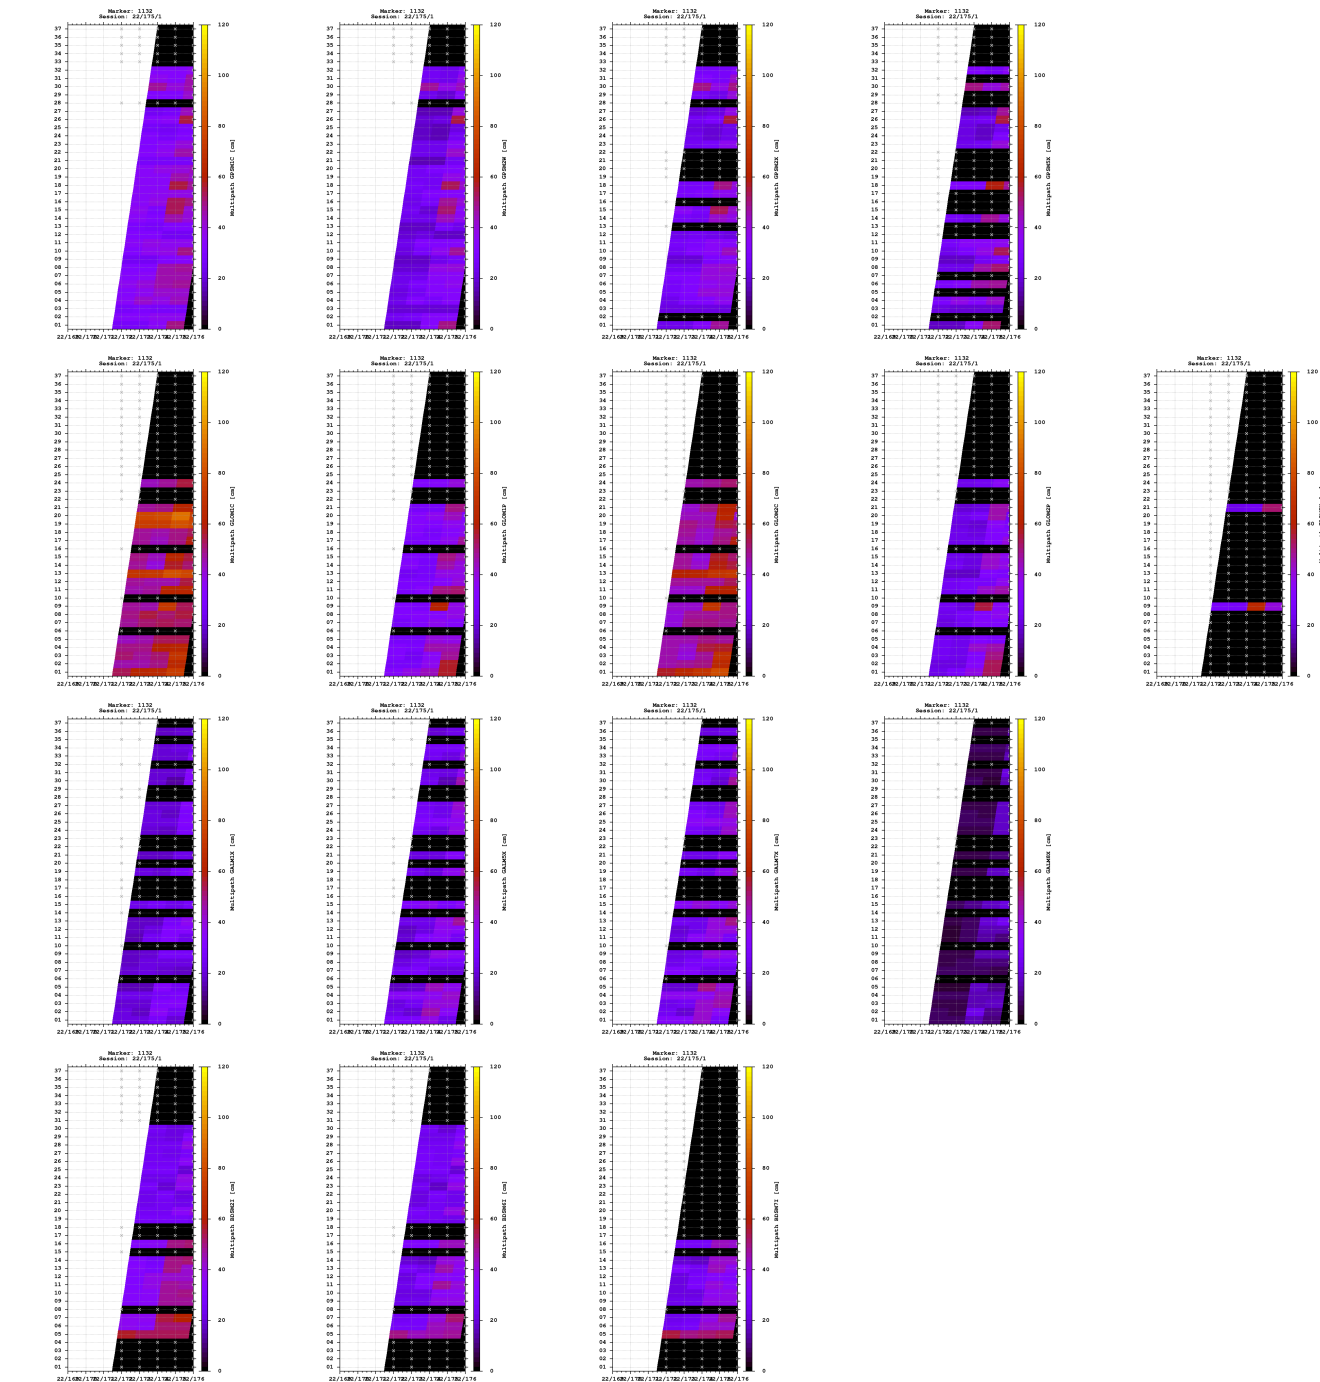


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

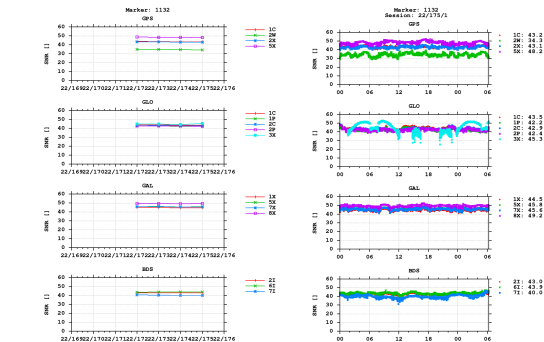


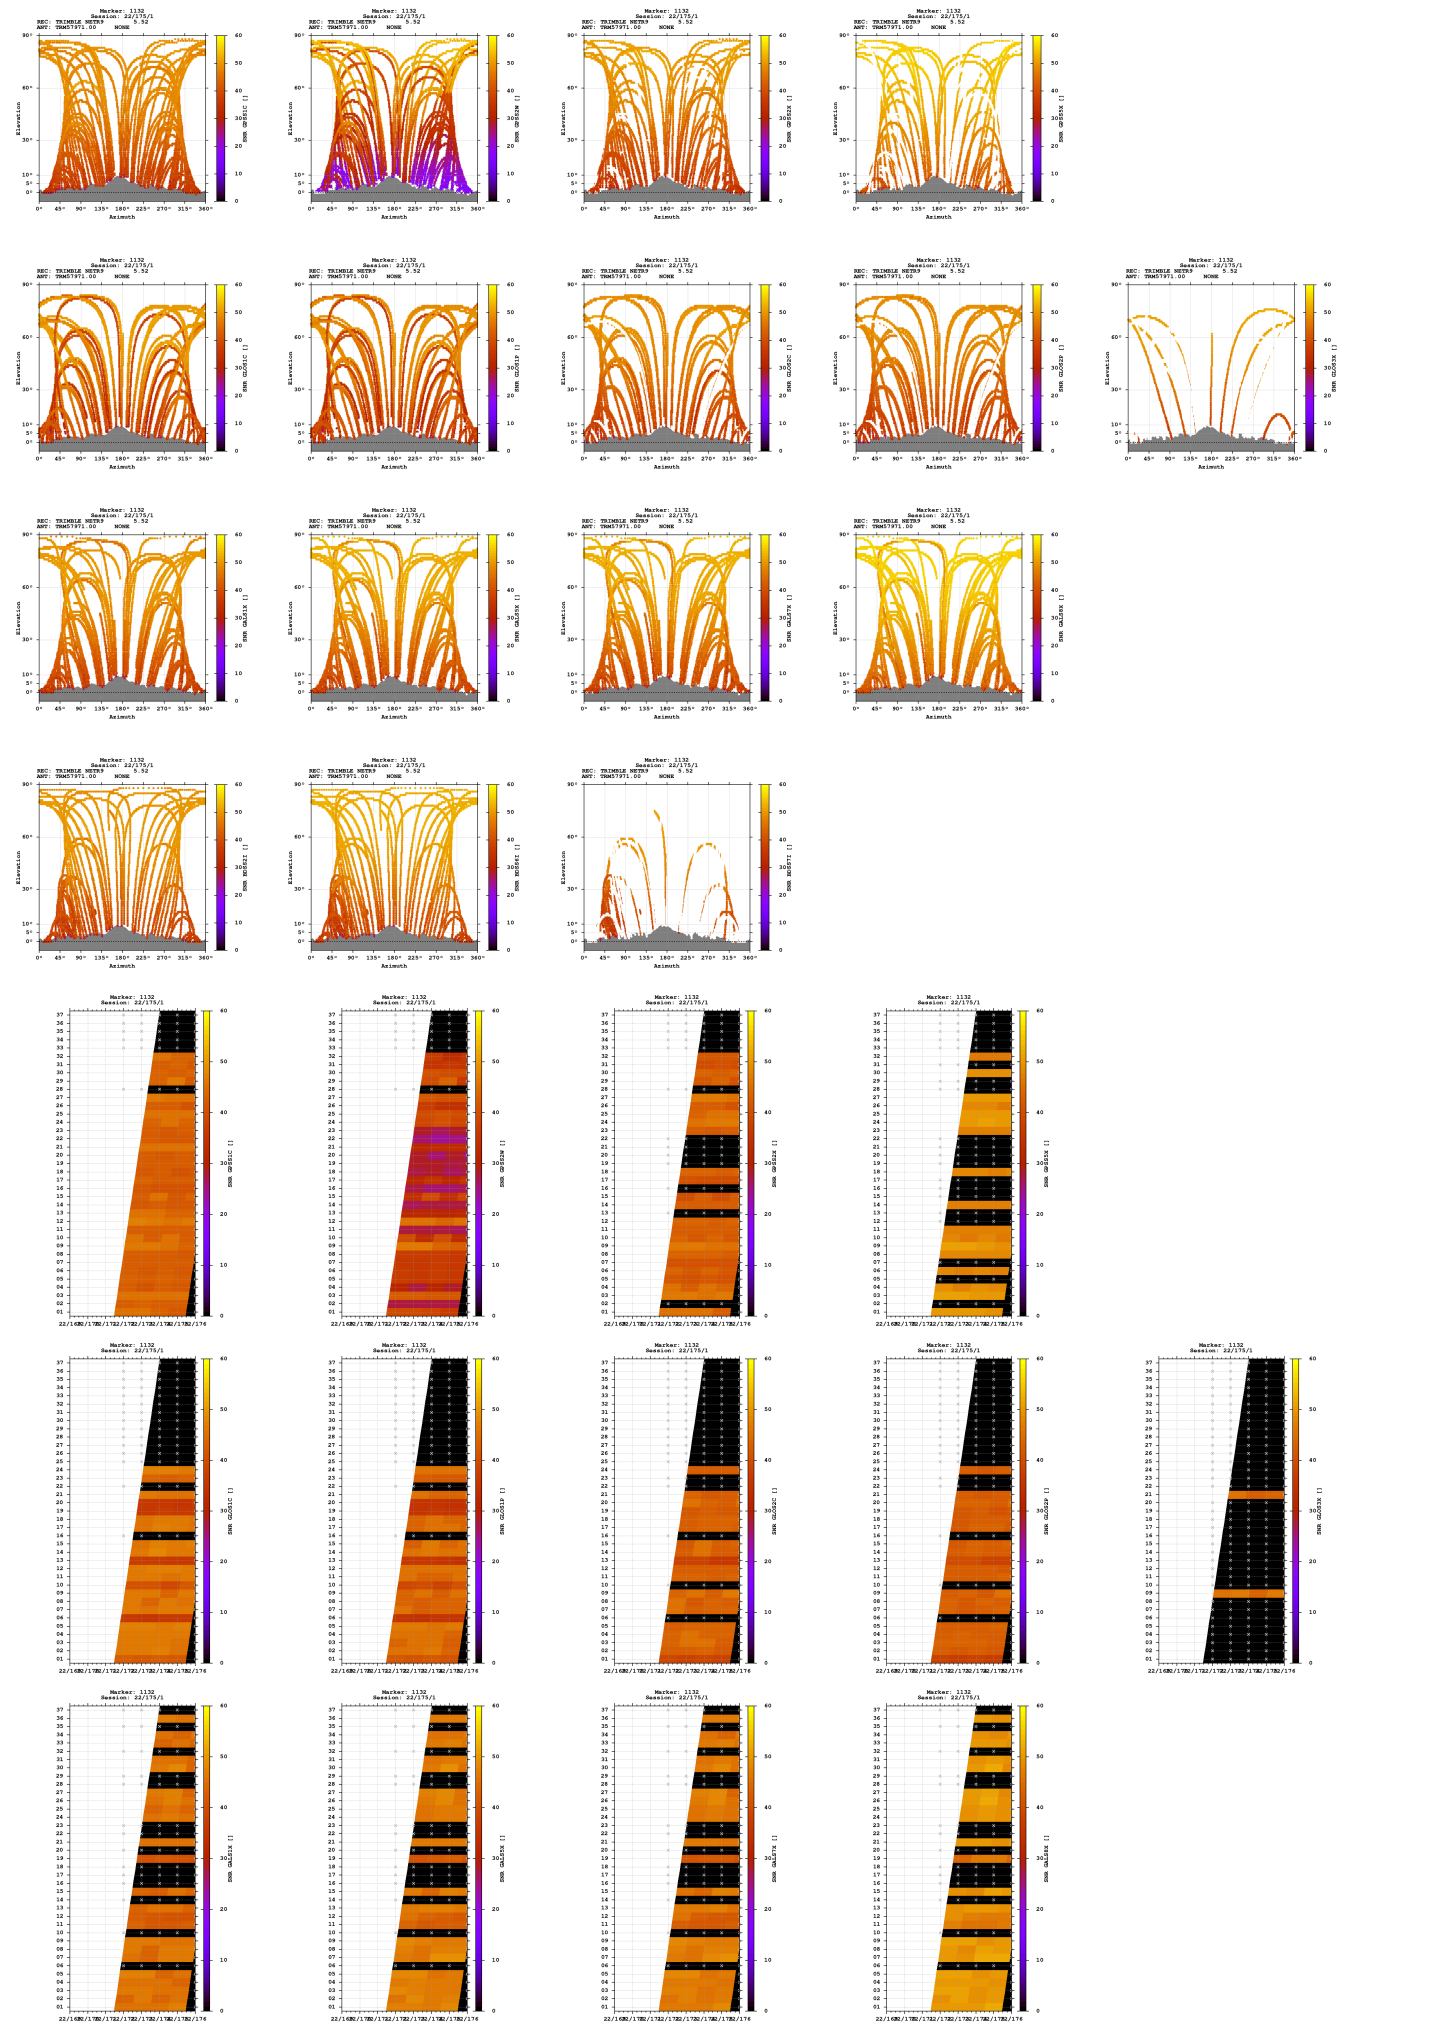

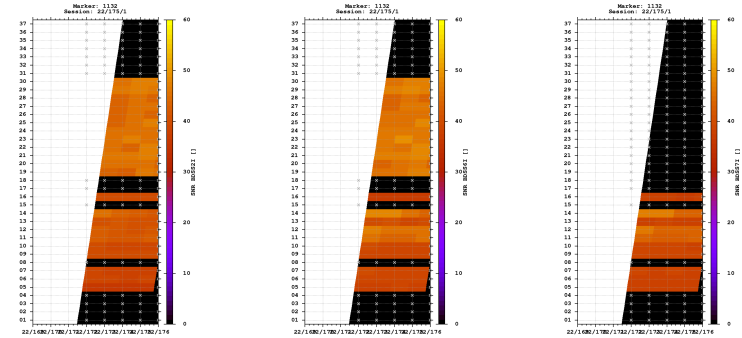



Estimates

2022-06-23 10:02:30	GPS	4296885.9504	662330.4079	4652458.9594	47.131731801	8.762717912	980.5866
2022-06-23 10:02:30	GLO	4296885.6292	662330.8475	4652458.5314	47.131730833	8.762724282	980.1025
2022-06-23 10:02:30	GAL	4296885.2801	662330.5249	4652458.5754	47.131733700	8.762720781	979.8666
2022-06-23 10:02:30	BDS	4296885.0100	662331.1039	4652461.1419	47.131750582	8.762728864	981.6261

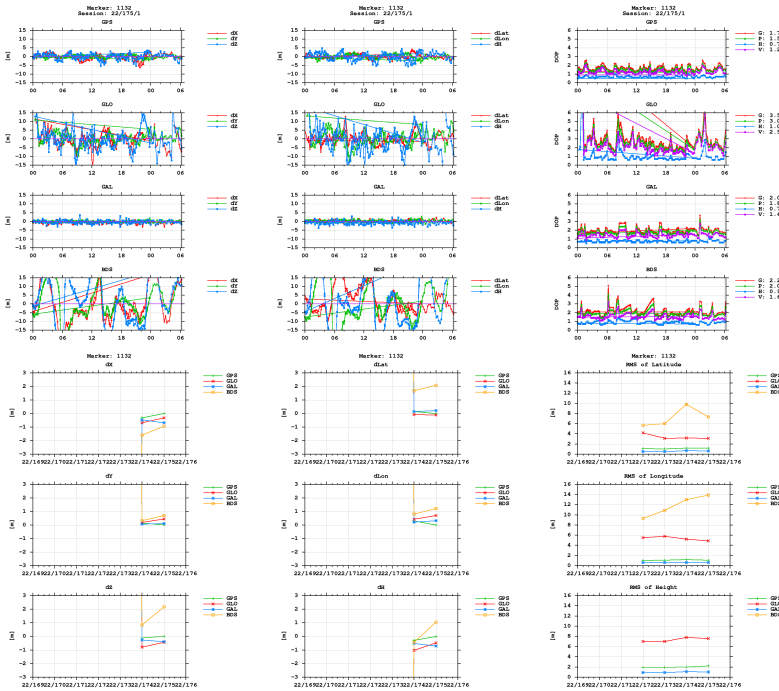

BNC

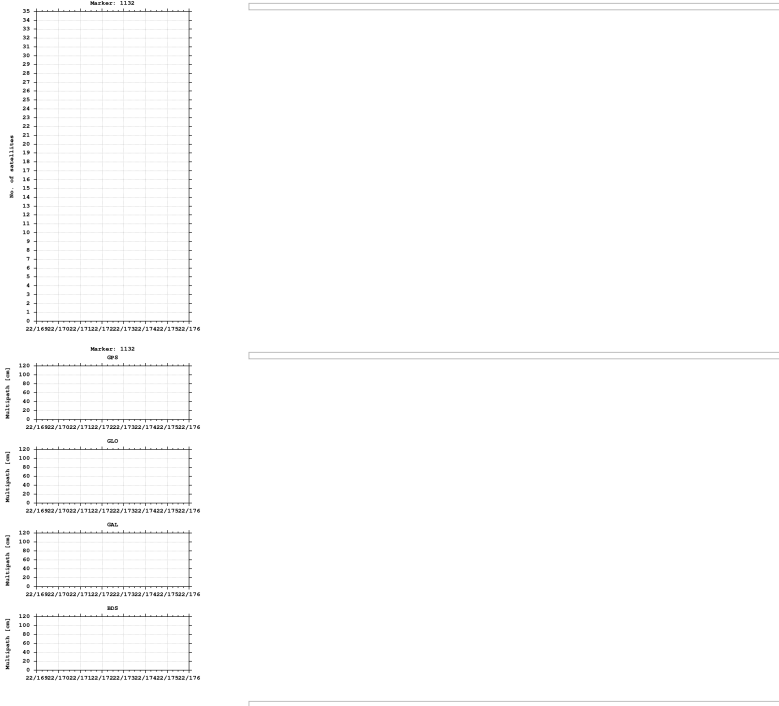

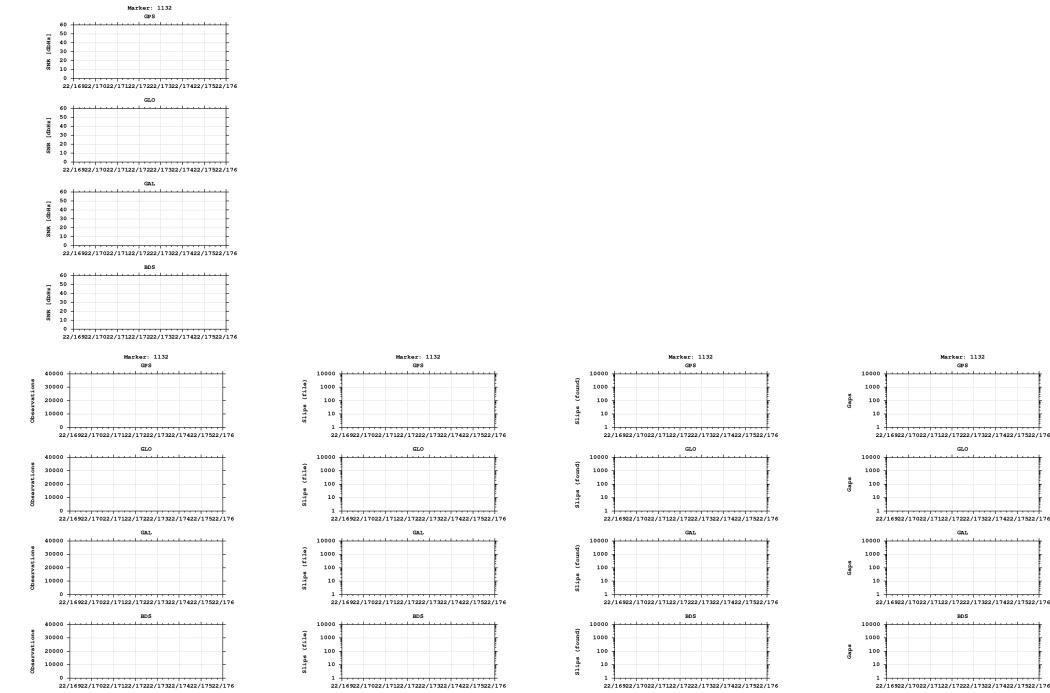

Equipment

2022-06-21 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)