

GNSS observation file monitoring for 0515

Last RINEX file: 05151721.220

RINEX version: 3.02

Marker: 1211

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

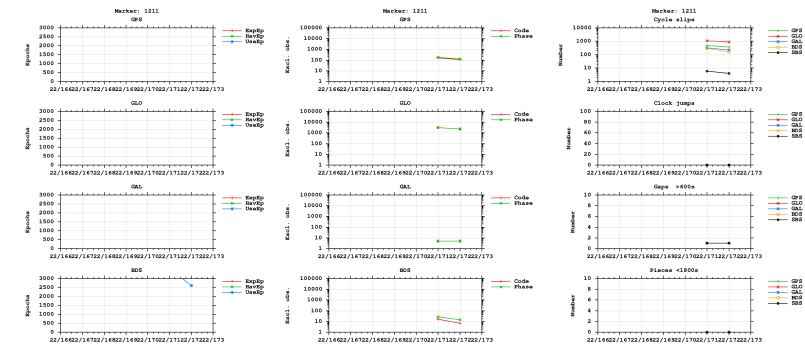



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

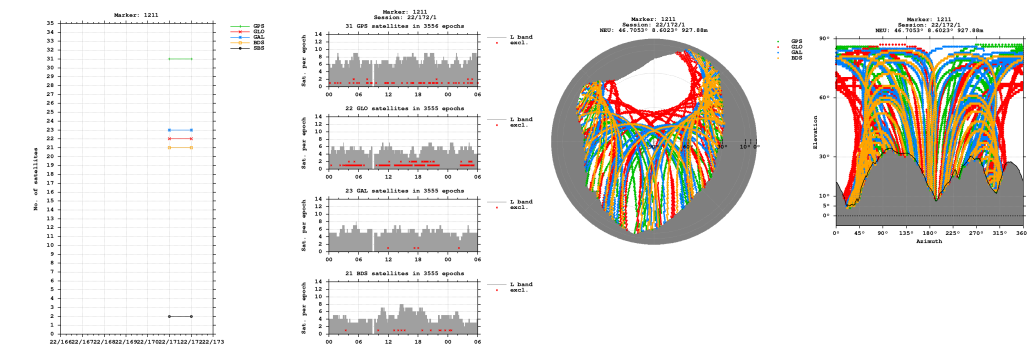


Bands

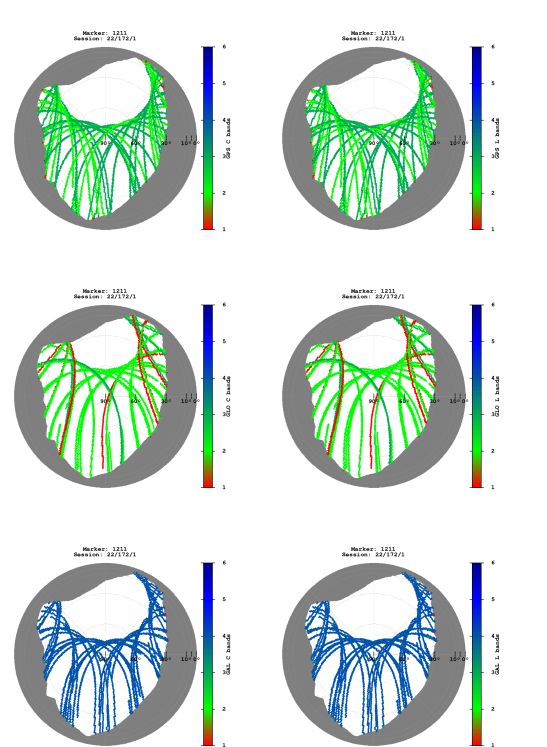


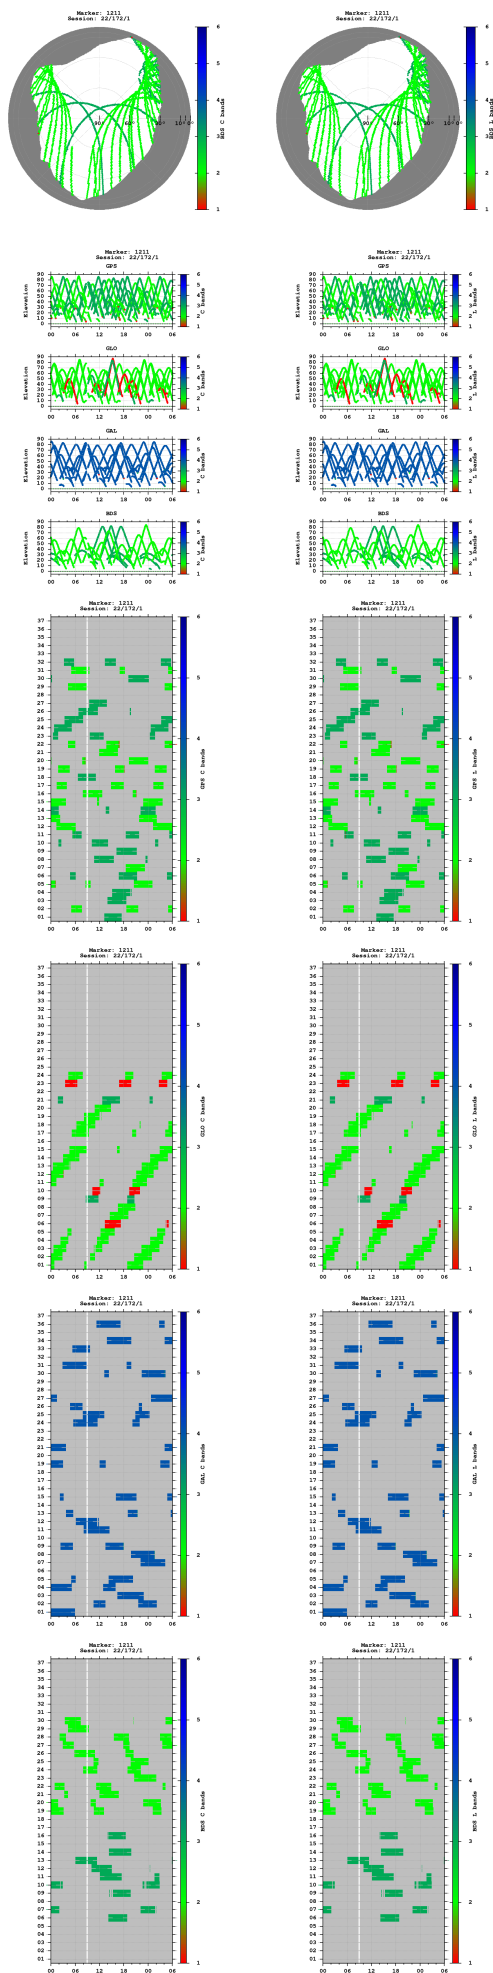


Observations

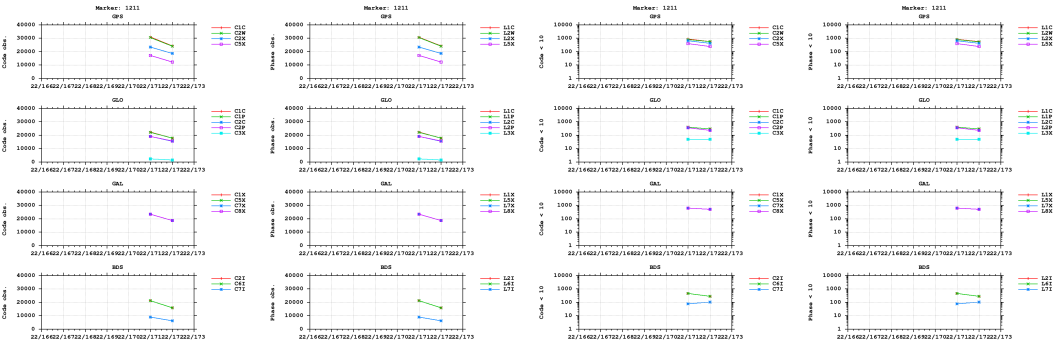



Multipath

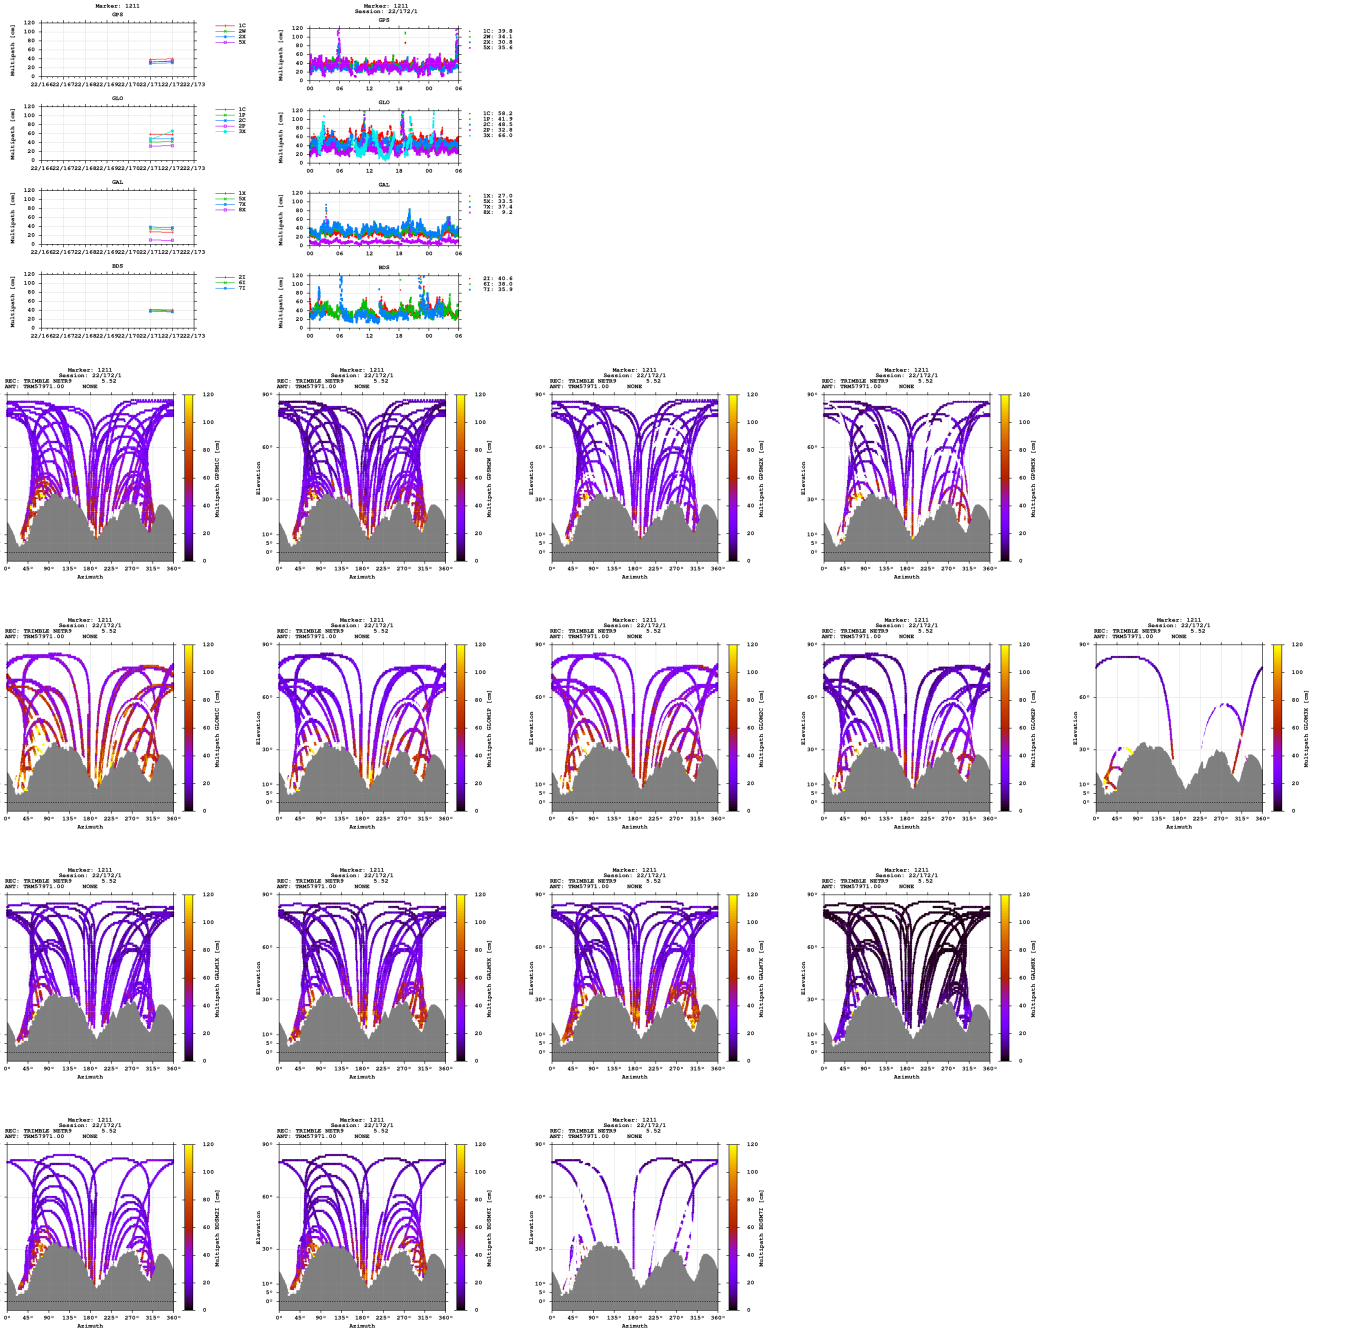


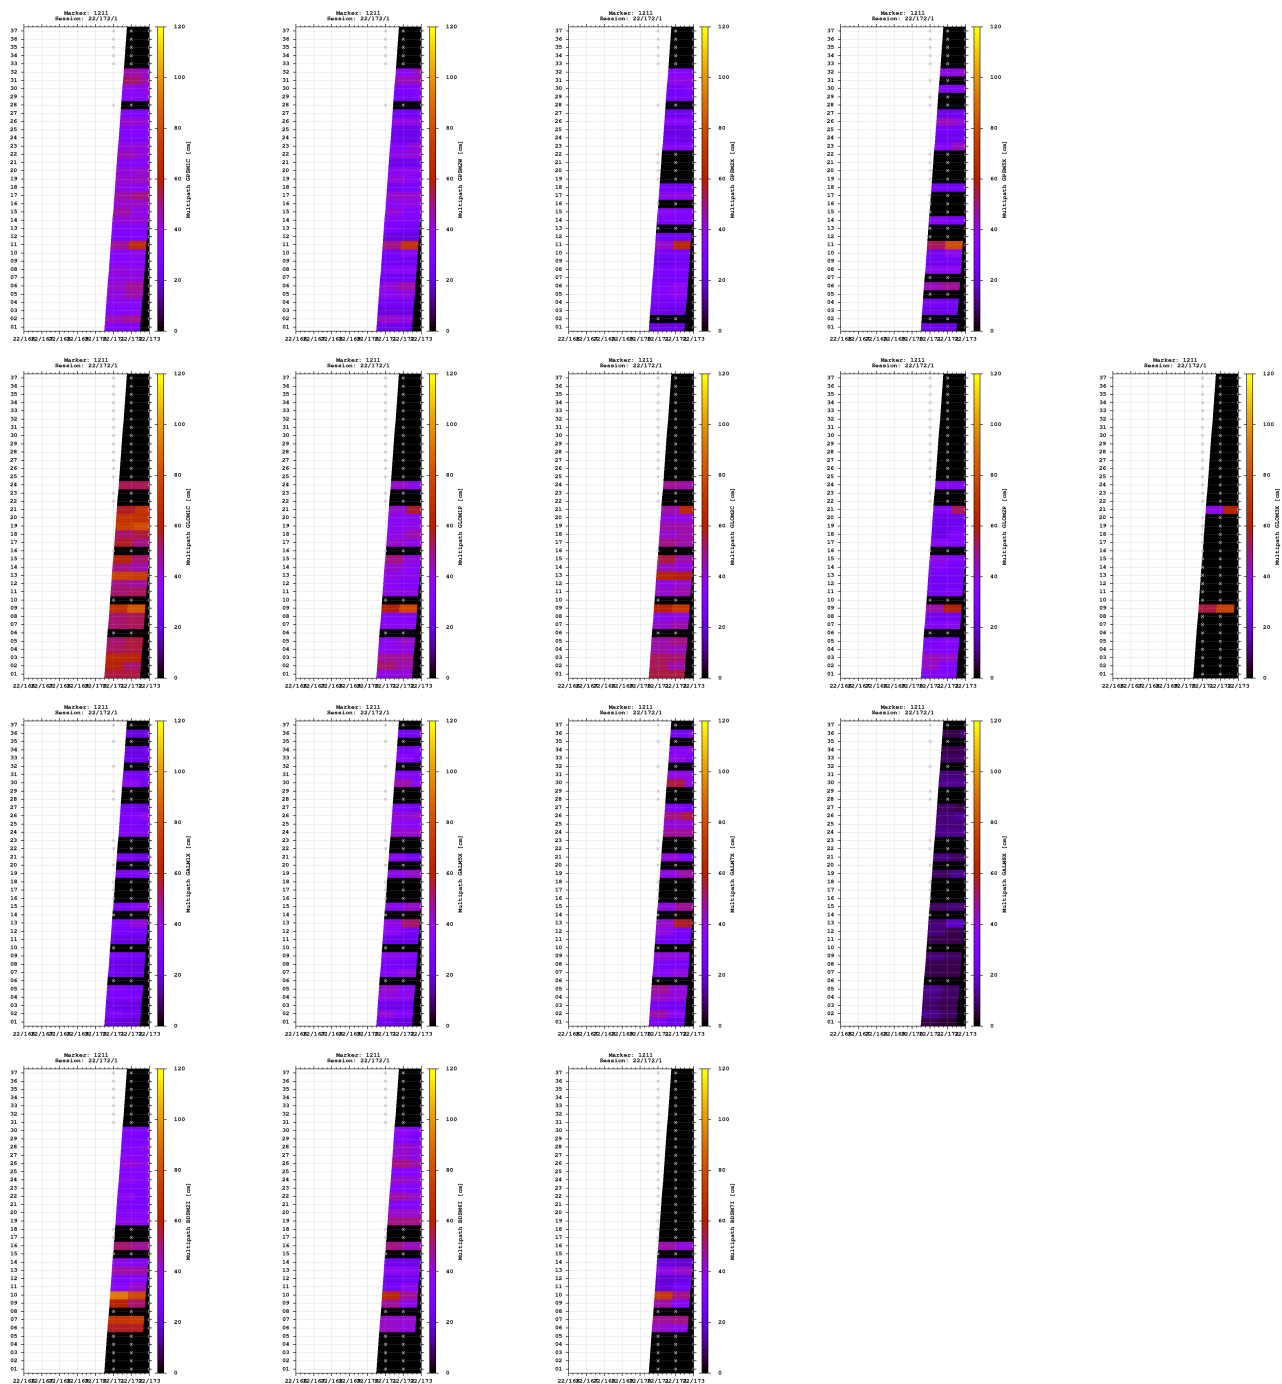


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

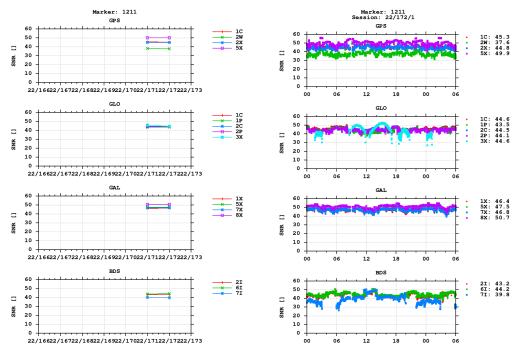


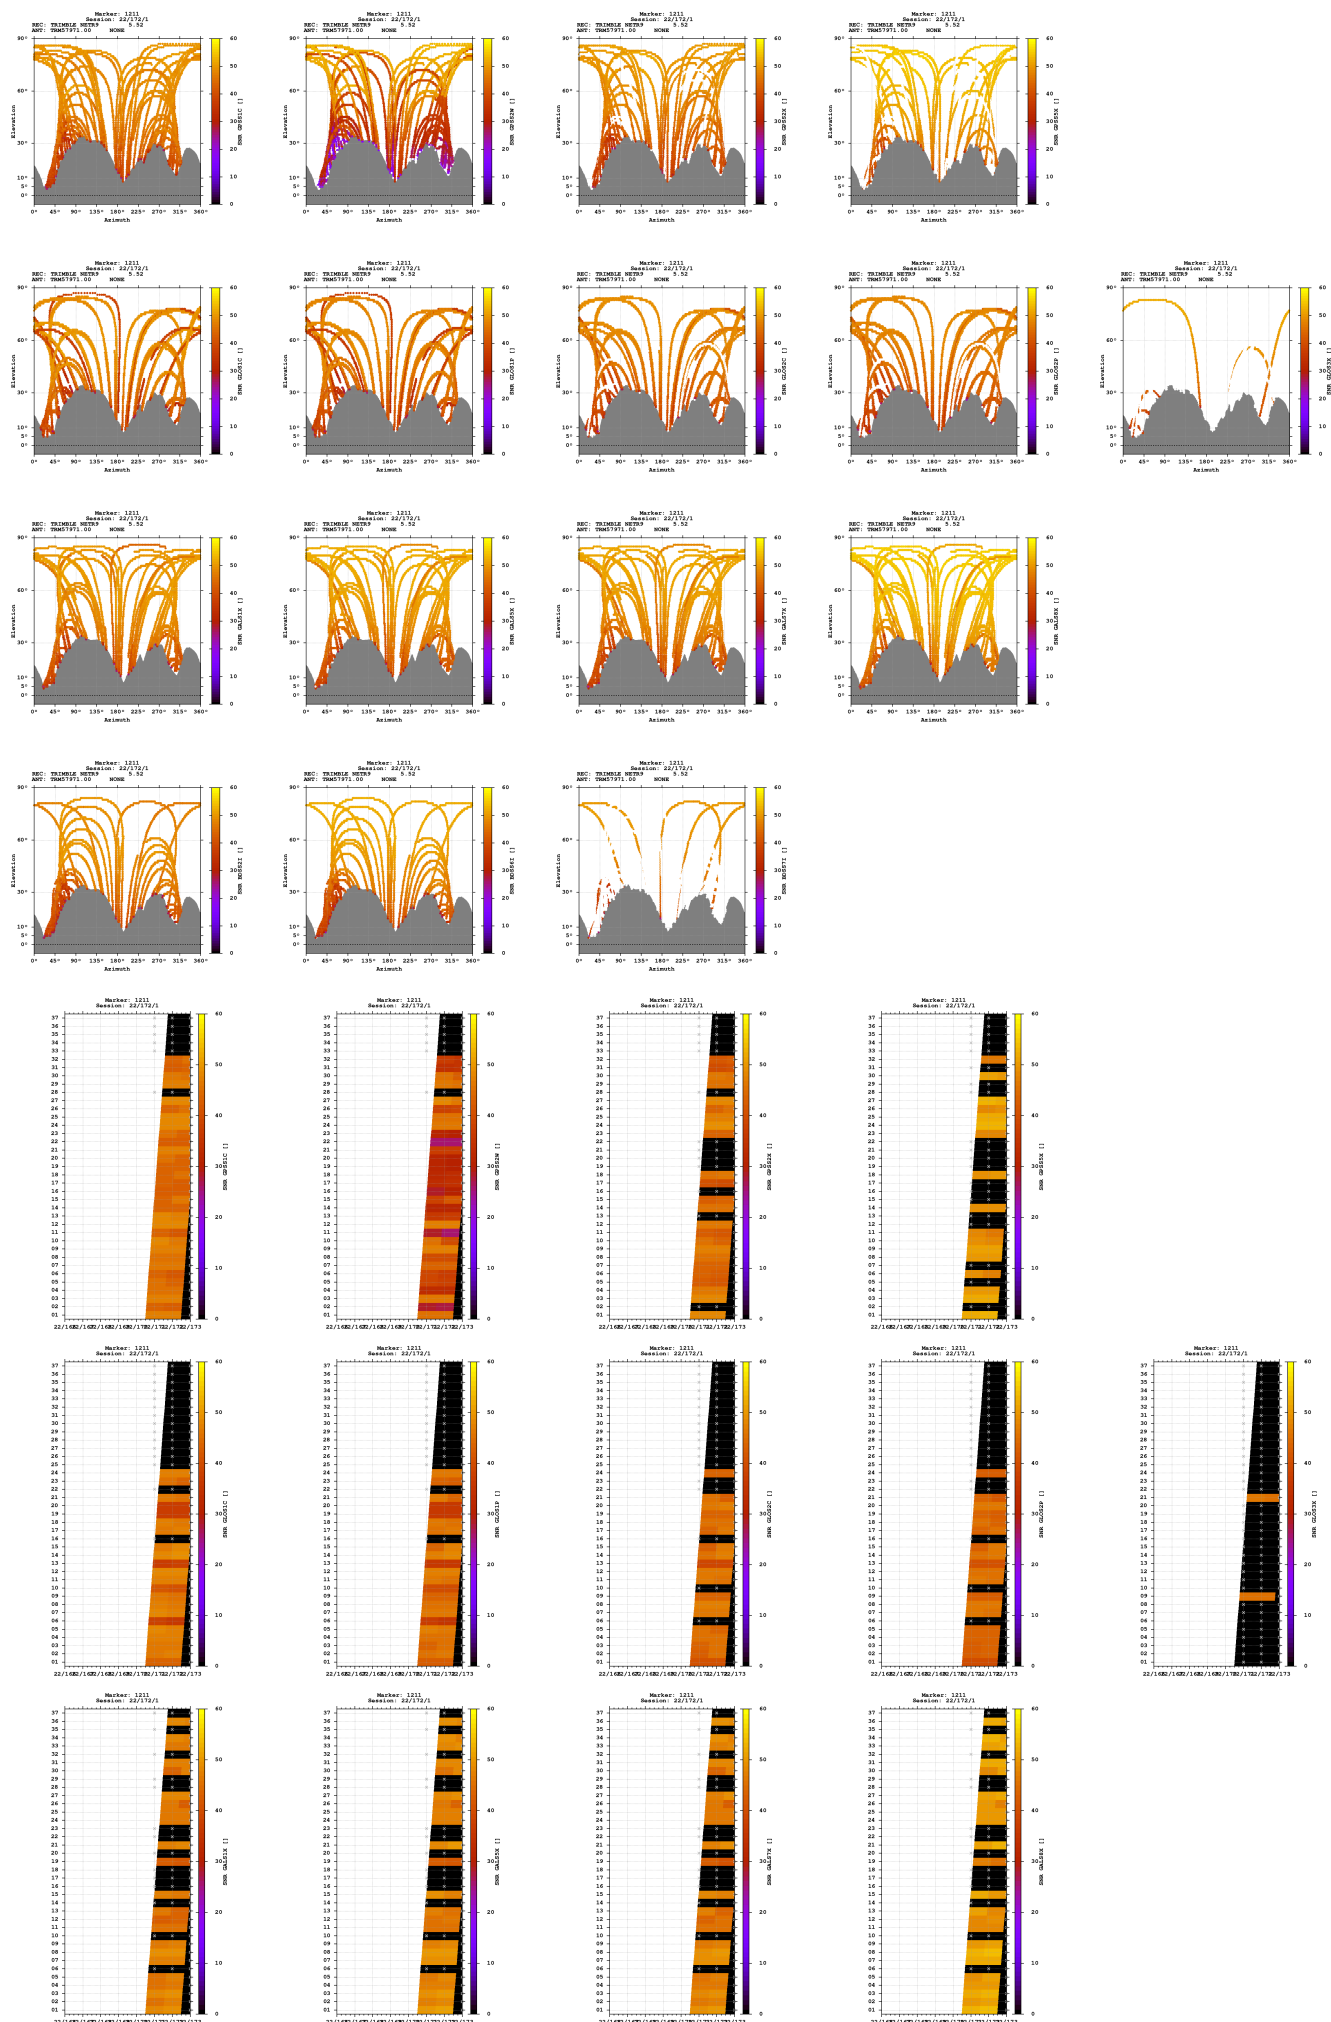

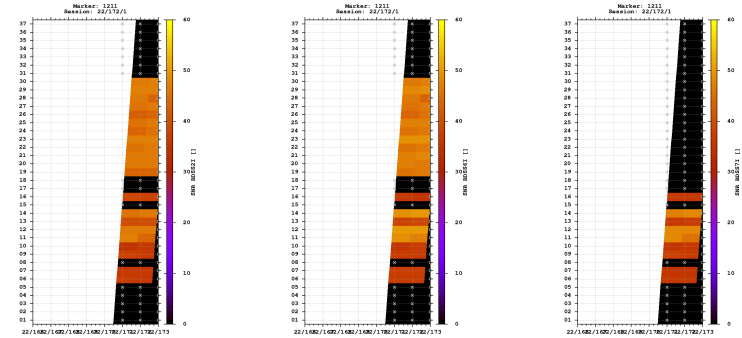



Estimates

2022-06-20 10:21:00	GPS	4332929.8949	655473.4577	4620033.5821	46.705274430	8.602319481	927.8834
2022-06-20 10:21:00	GLO	4332931.8993	655474.5126	4620036.5198	46.705278543	8.602329199	931.4888
2022-06-20 10:21:00	GAL	4332929.9584	655473.4586	4620034.0076	46.705276643	8.602319369	928.2362
2022-06-20 10:21:00	BDS	4332926.7740	655470.1910	4620034.5947	46.705304076	8.602283354	926.1693

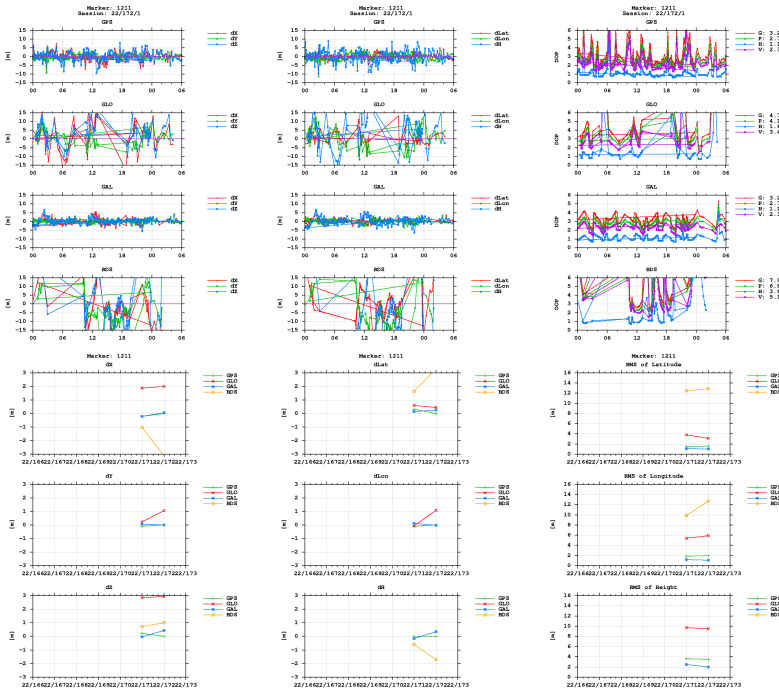

BNC

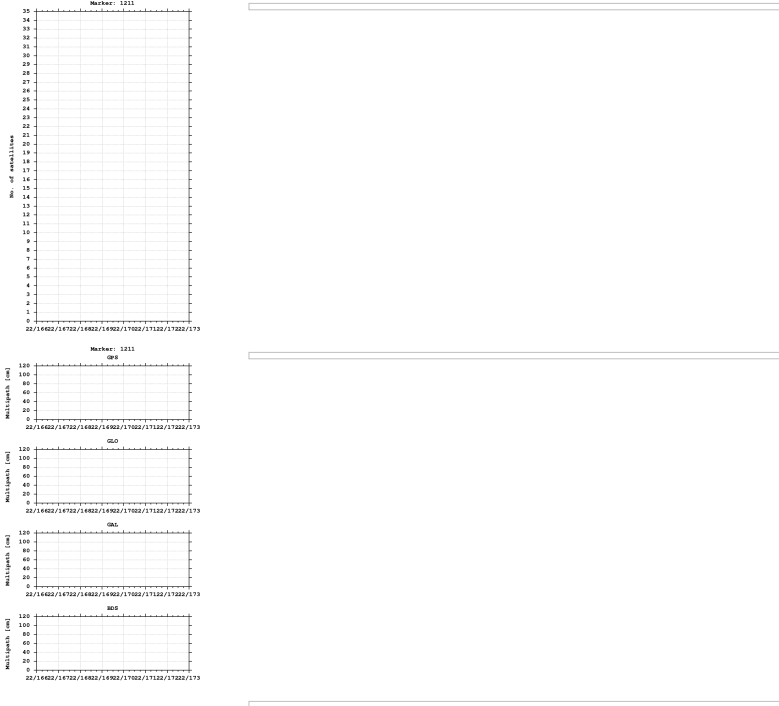

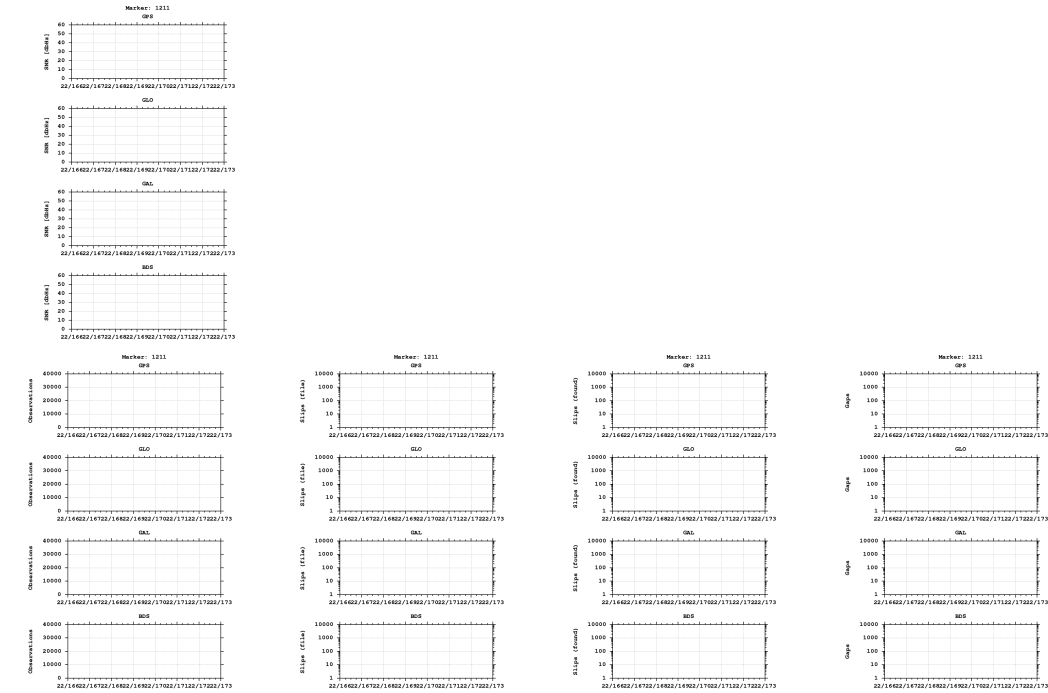

Equipment

2022-06-20 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)