


GNSS observation file monitoring for 0515


Last RINEX file: 05151741.220
RINEX version: 3.02
Marker: 1173
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

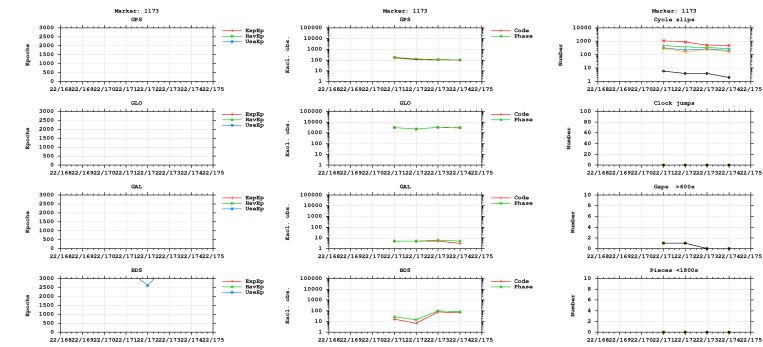



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

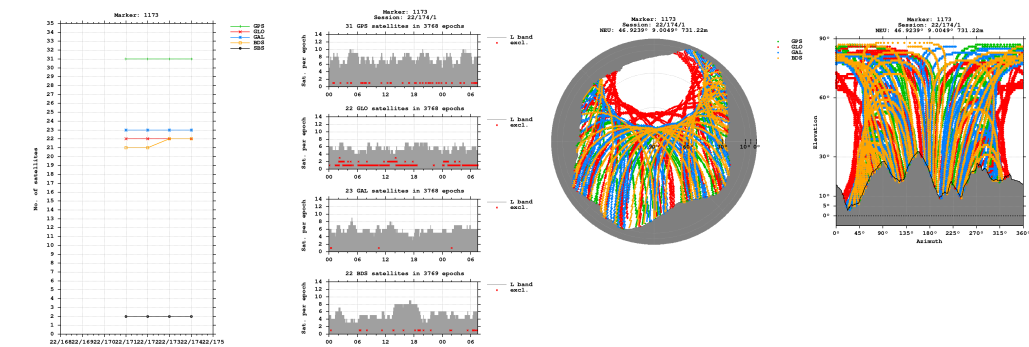


Bands

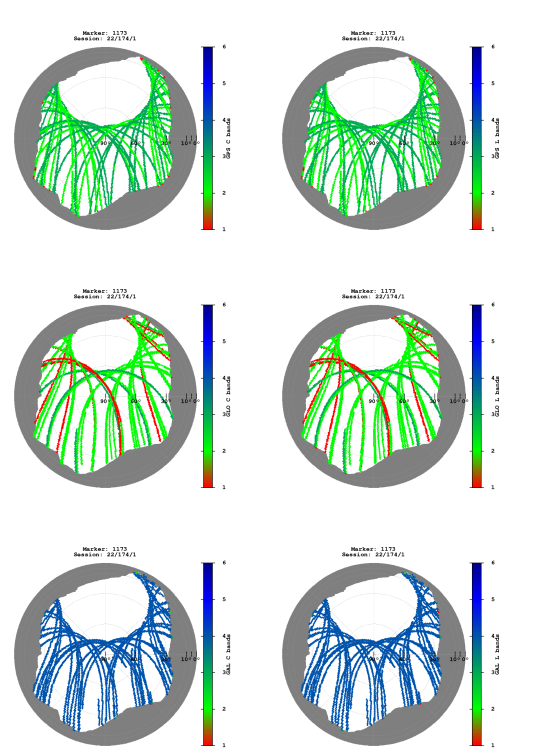


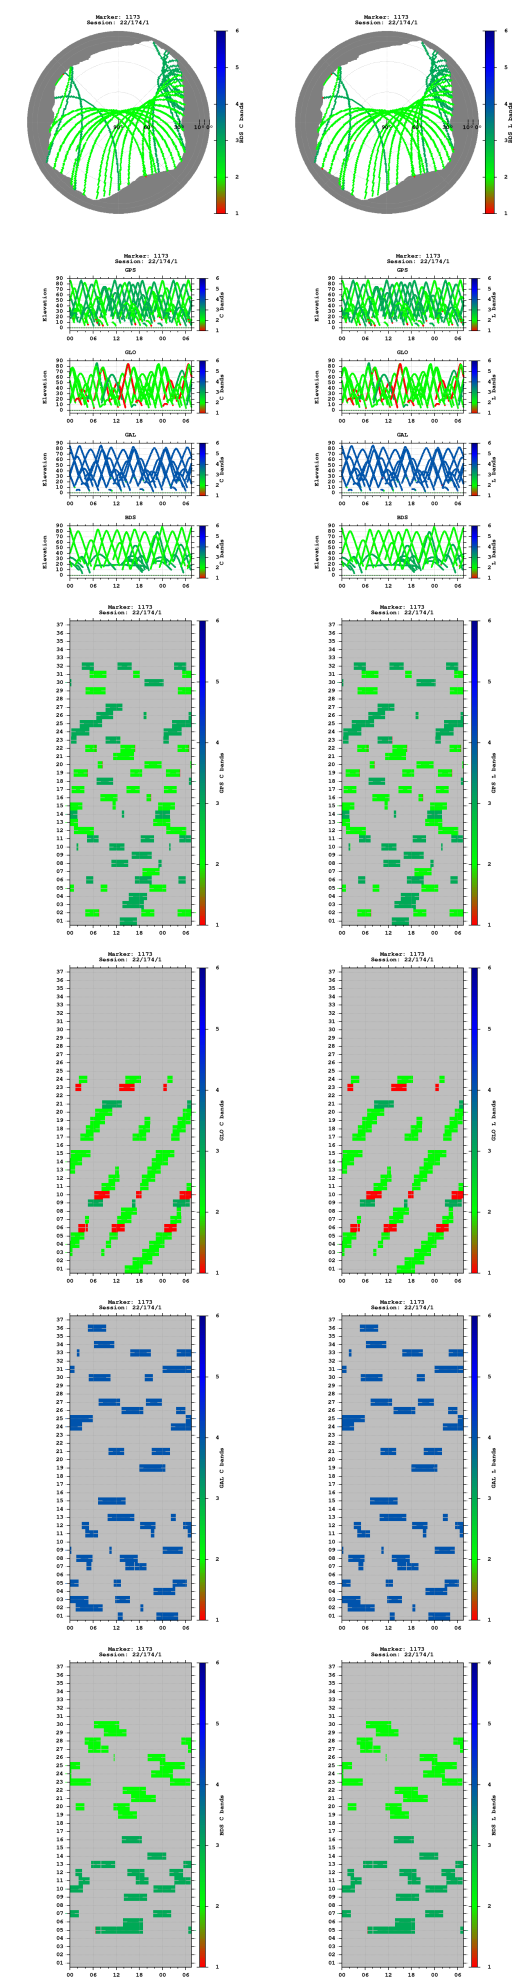


Observations

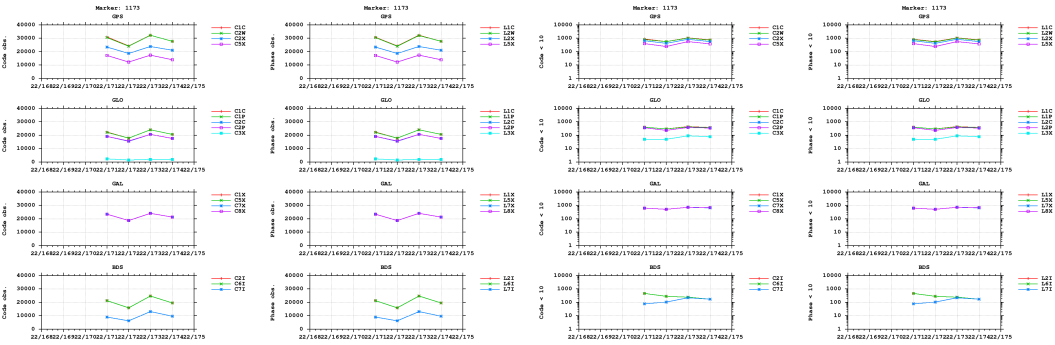


Multipath

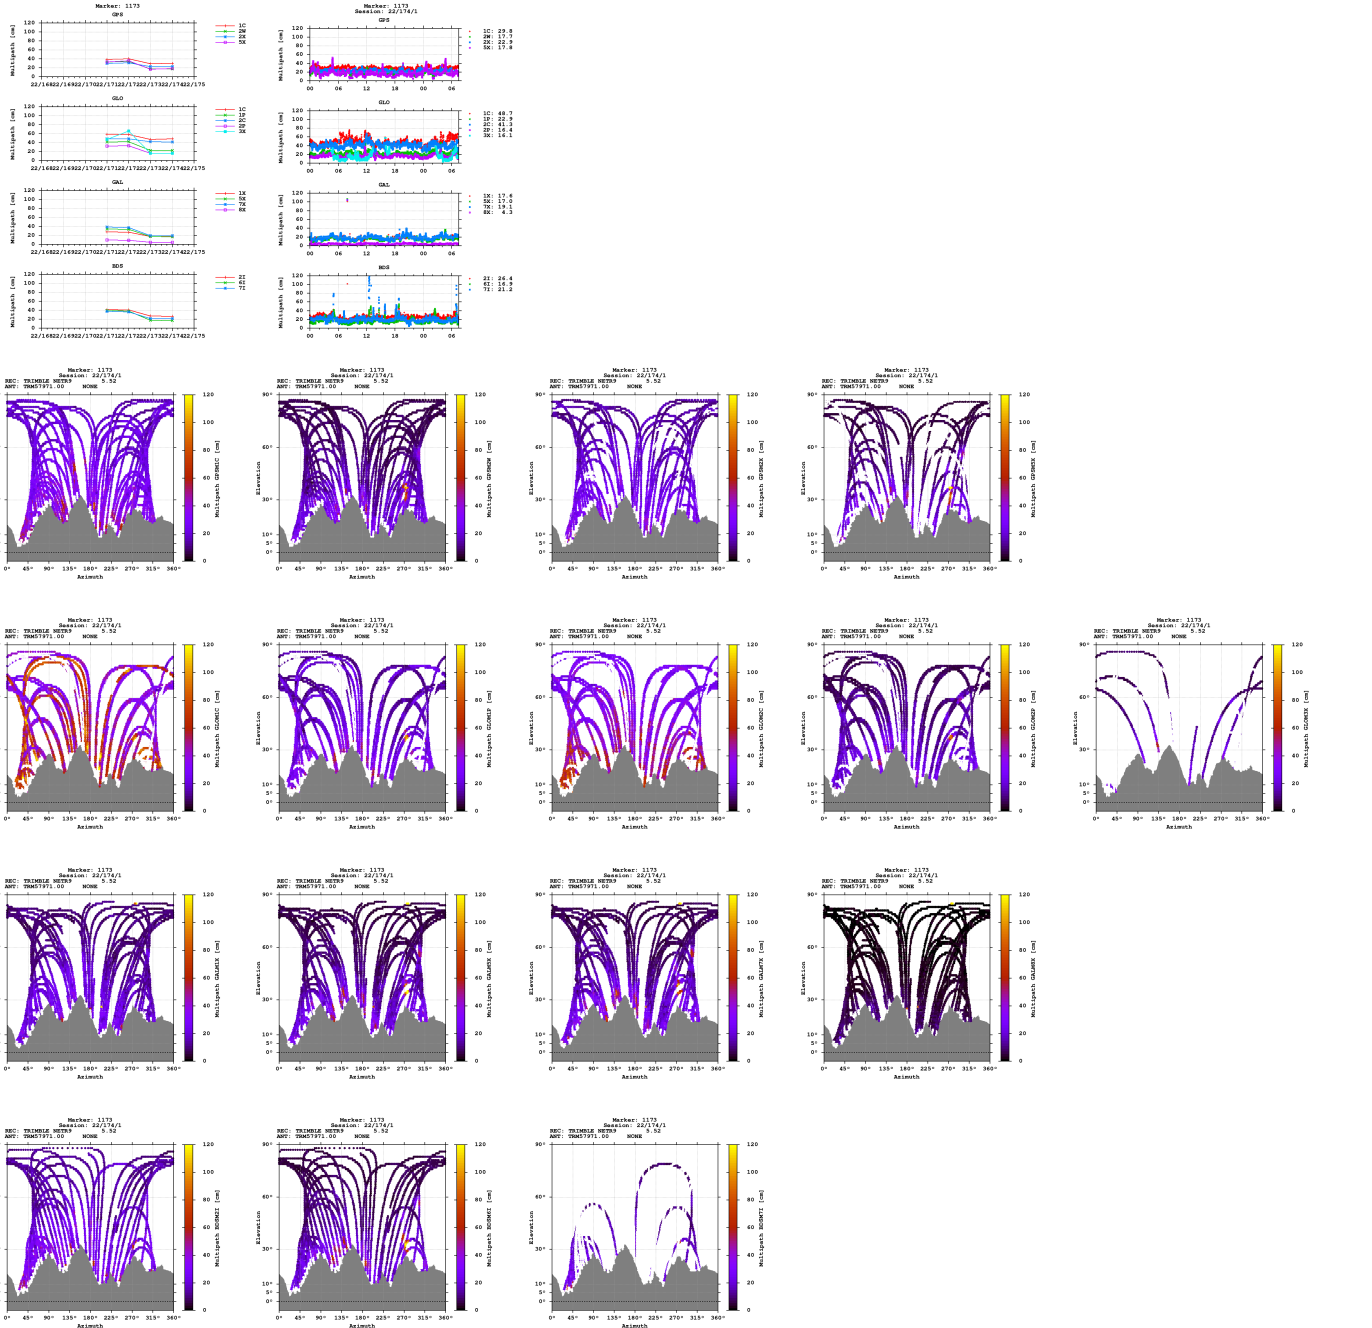


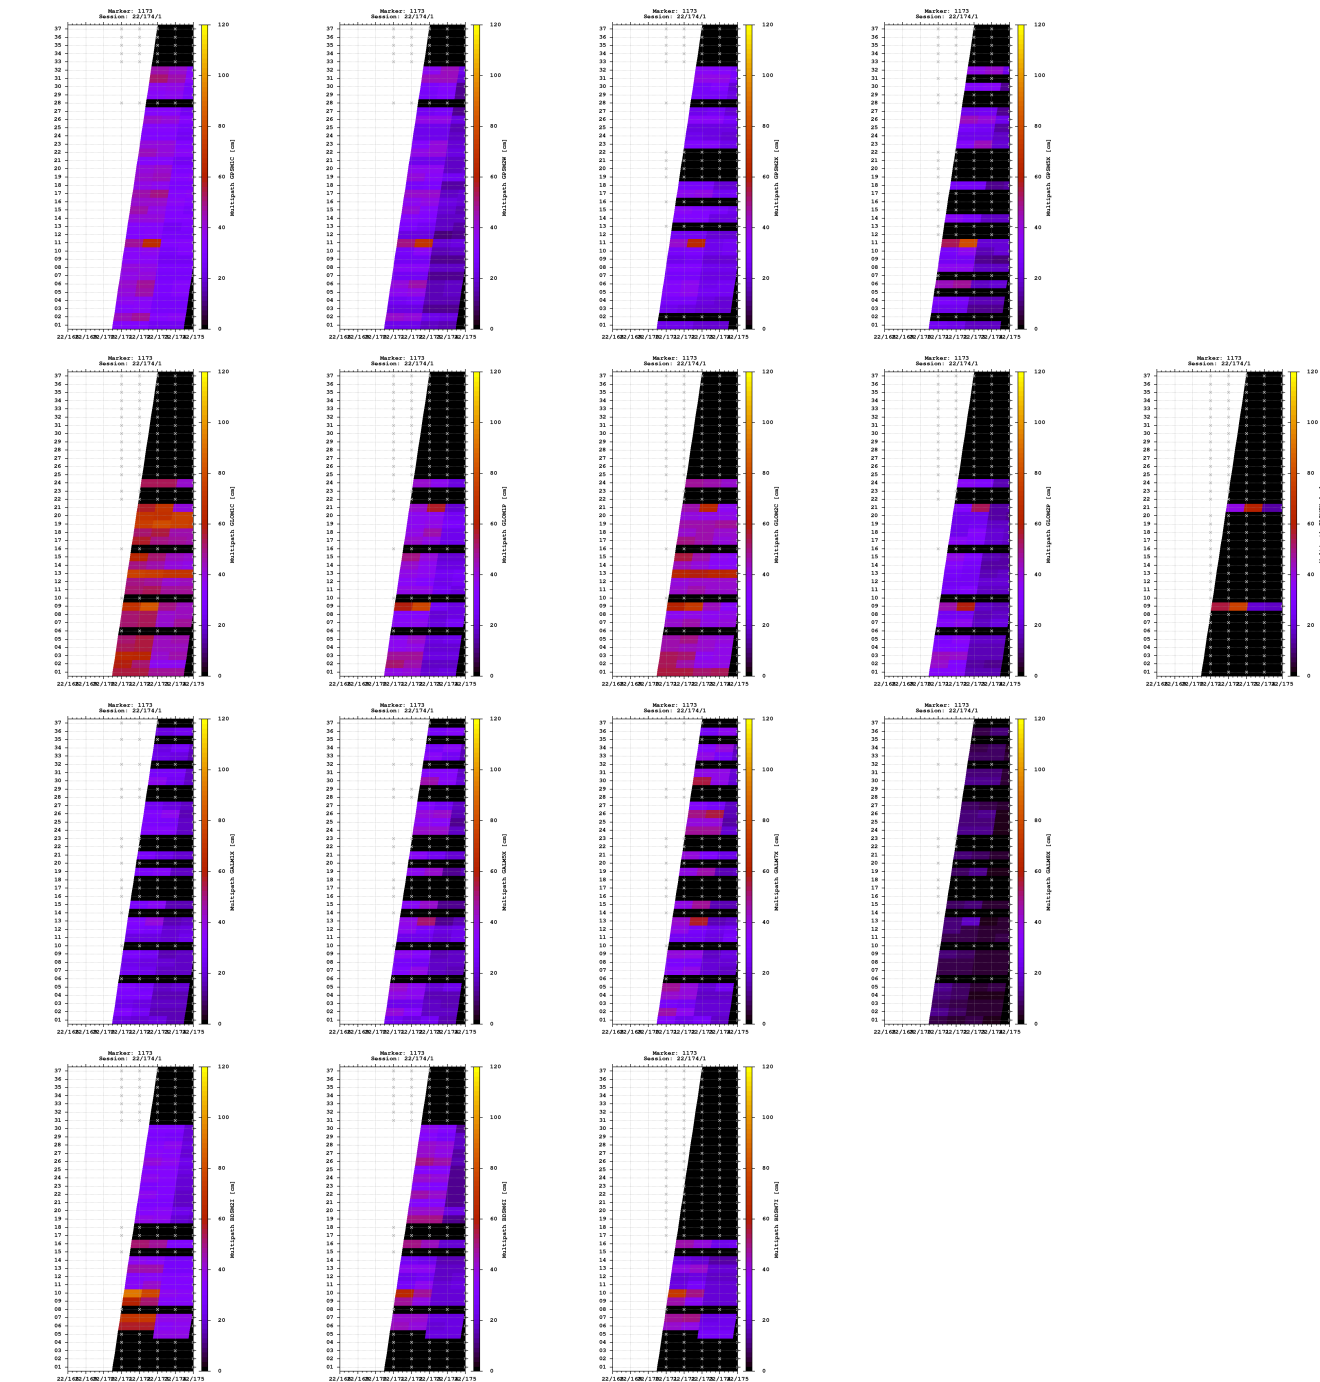


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

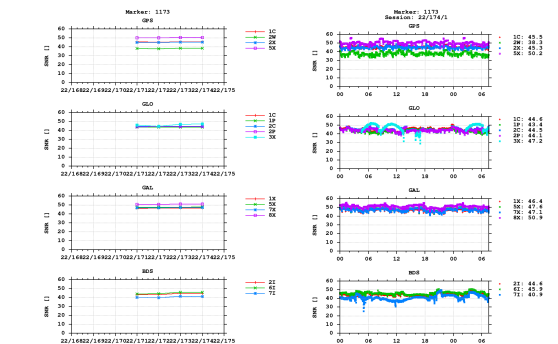


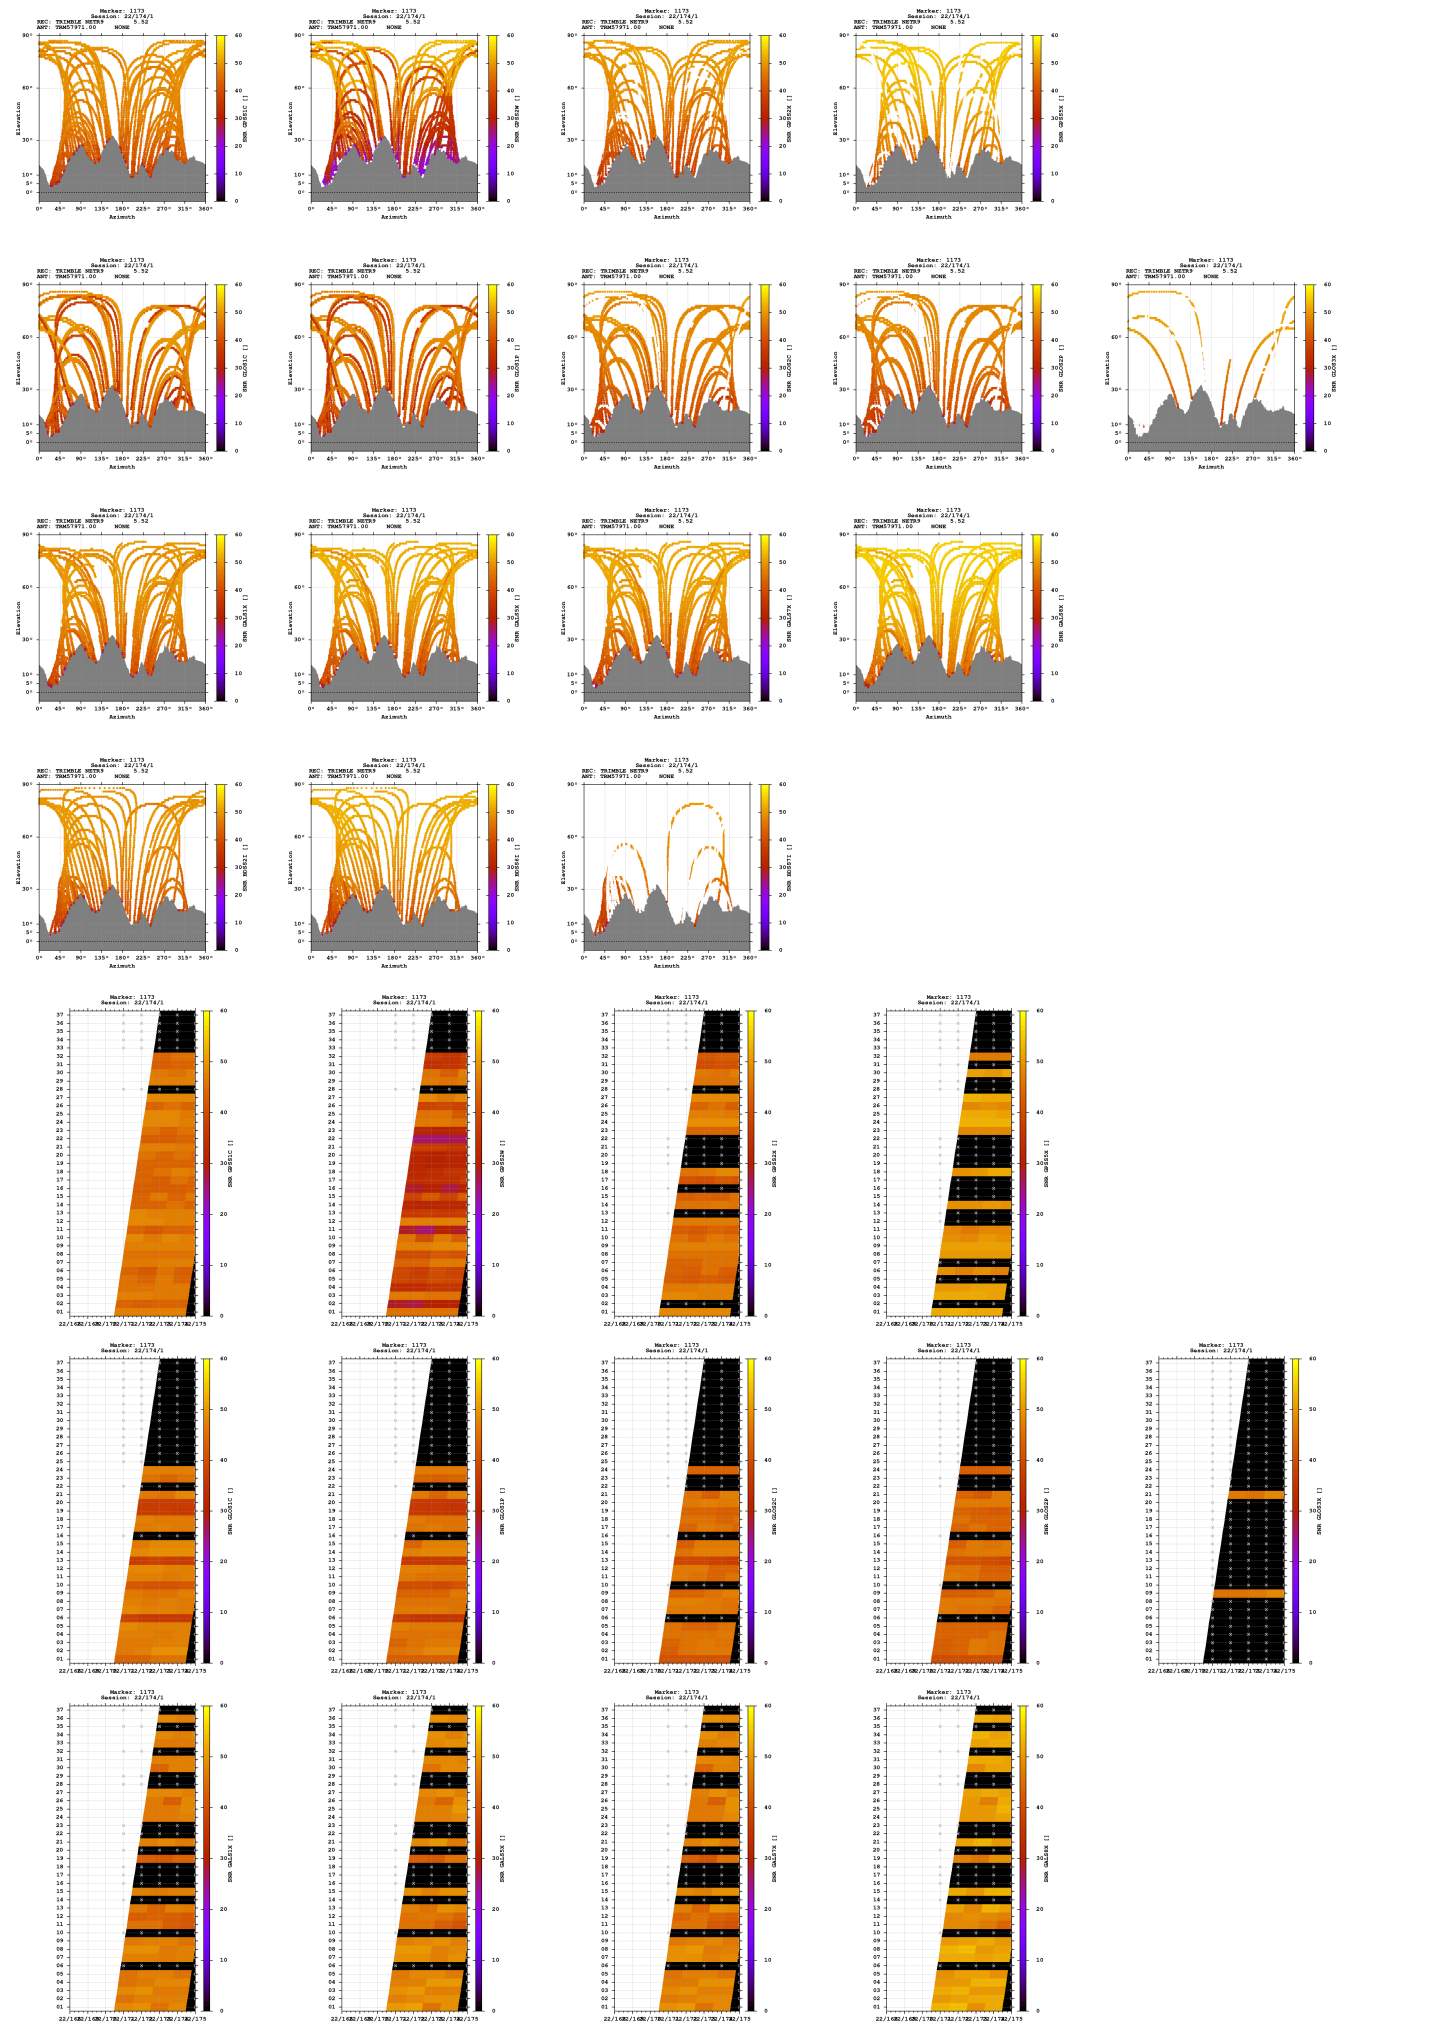

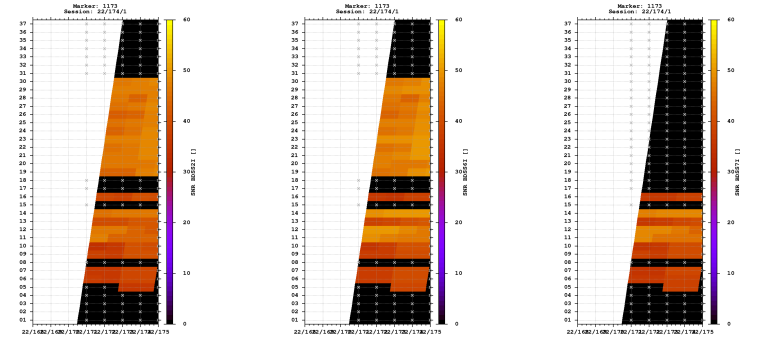



Estimates

2022-06-22 11:16:30	GPS	4310580.5099	683107.3767	4636524.0253	46.923886384	9.004907736	731.2152
2022-06-22 11:16:30	GLO	4310581.1295	683107.1824	4636524.5284	46.923885655	9.004903943	731.9799
2022-06-22 11:16:30	GAL	4310580.3830	683107.4224	4636523.7746	46.923885621	9.004908589	730.9514
2022-06-22 11:16:30	BDS	4310577.3185	683108.2812	4636525.7358	46.923916670	9.004926020	730.4085

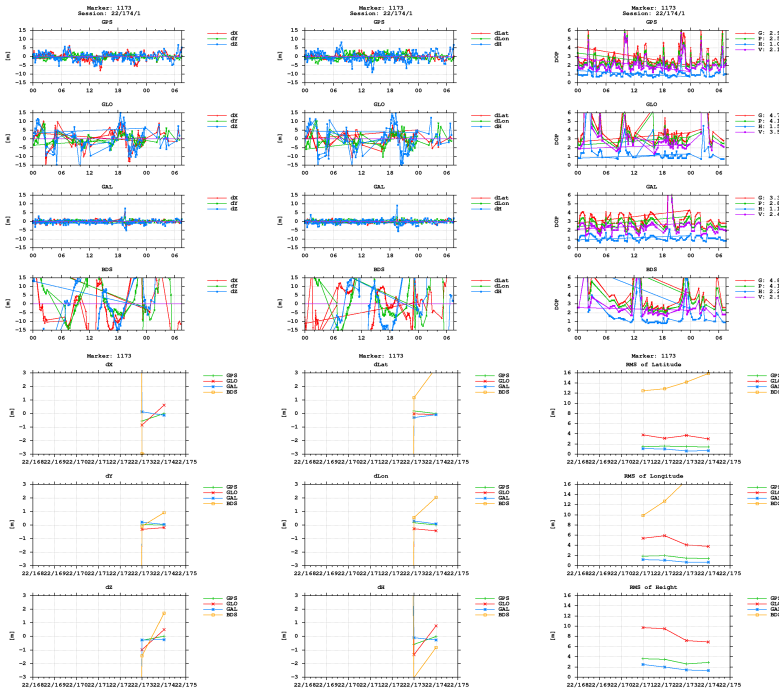

BNC

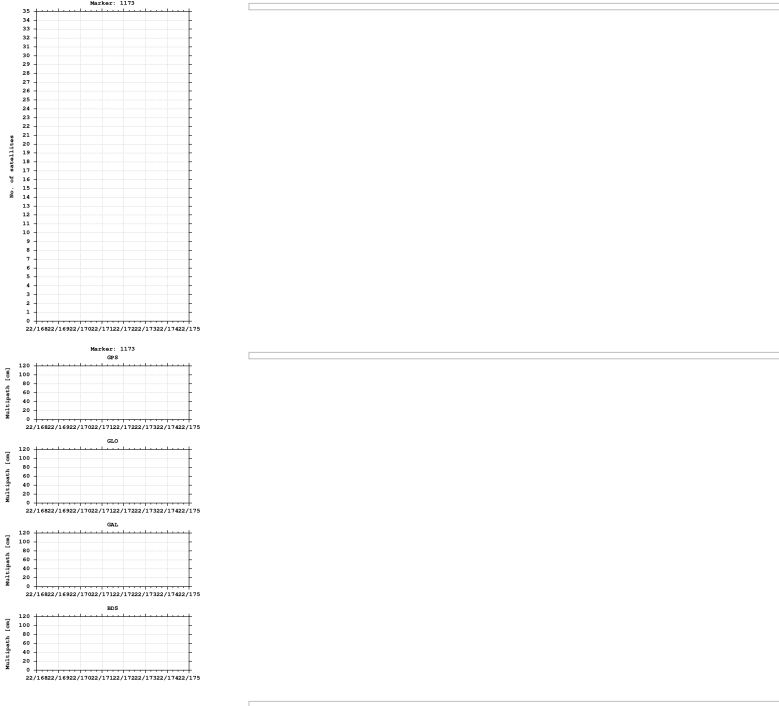

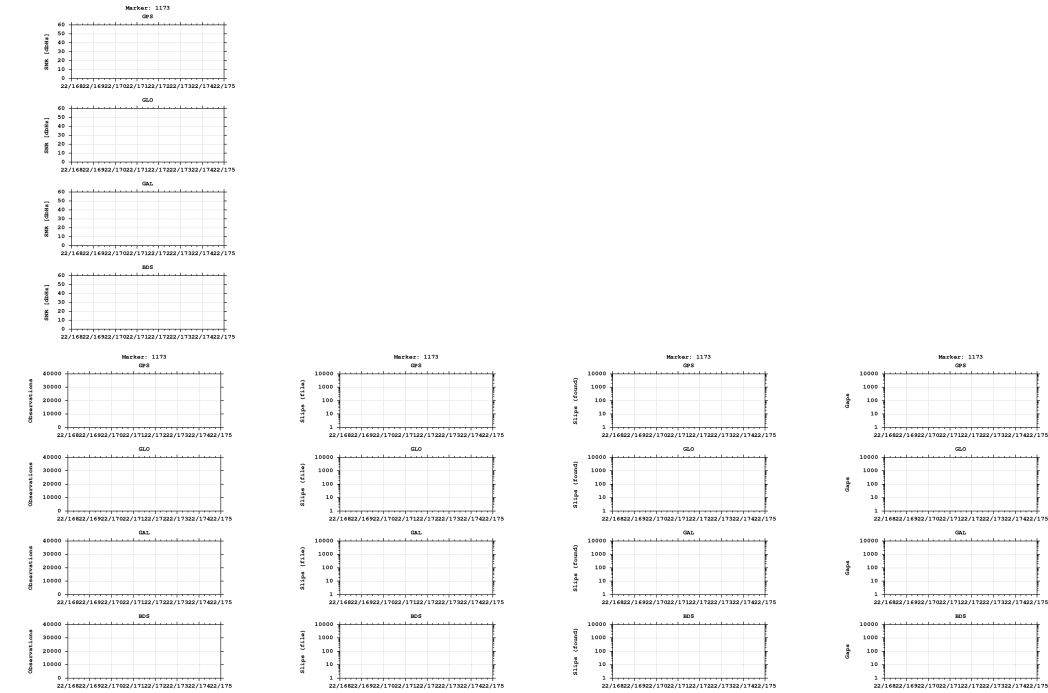

Equipment

2022-06-20 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)