


GNSS observation file monitoring for 0516


Last RINEX file: 05161711.22O
RINEX version: 3.02
Marker: 1212
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

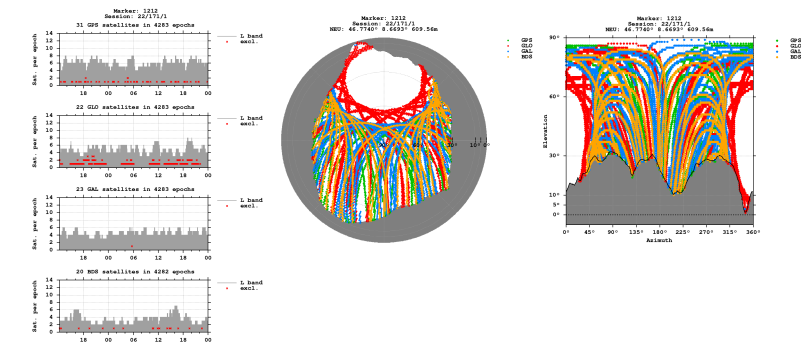


Bands

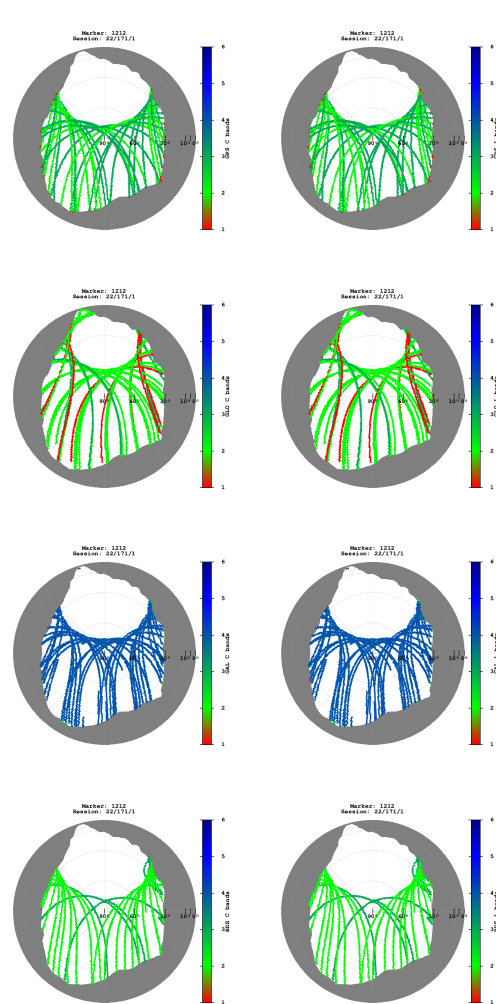

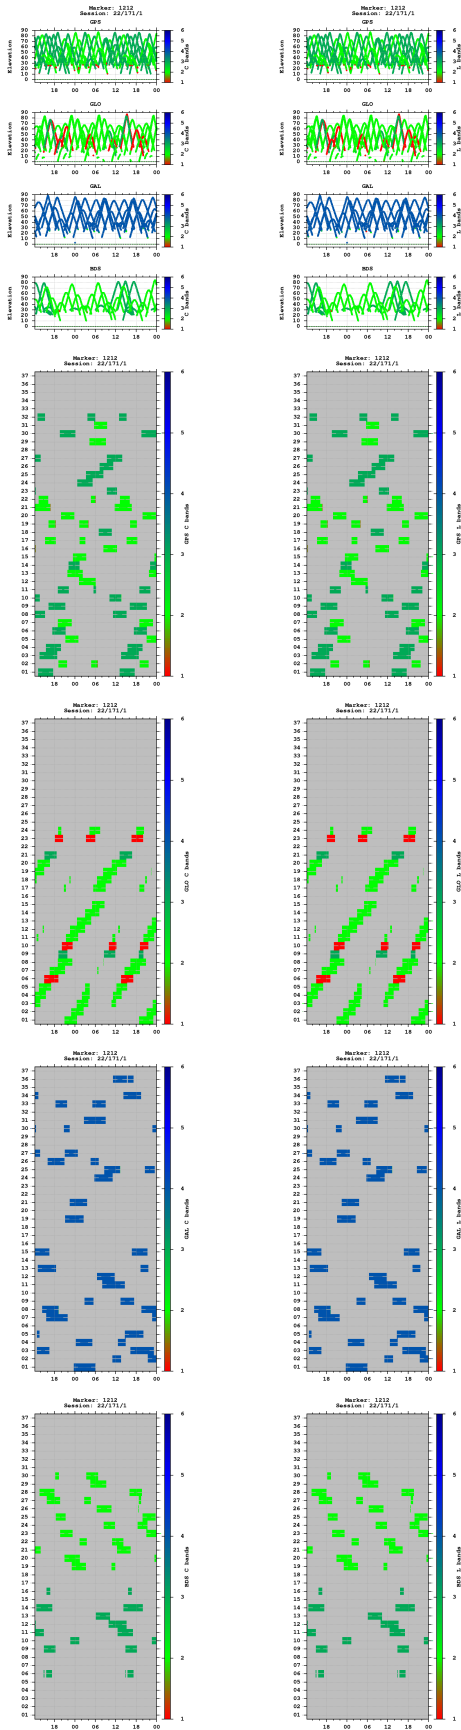



Multipath

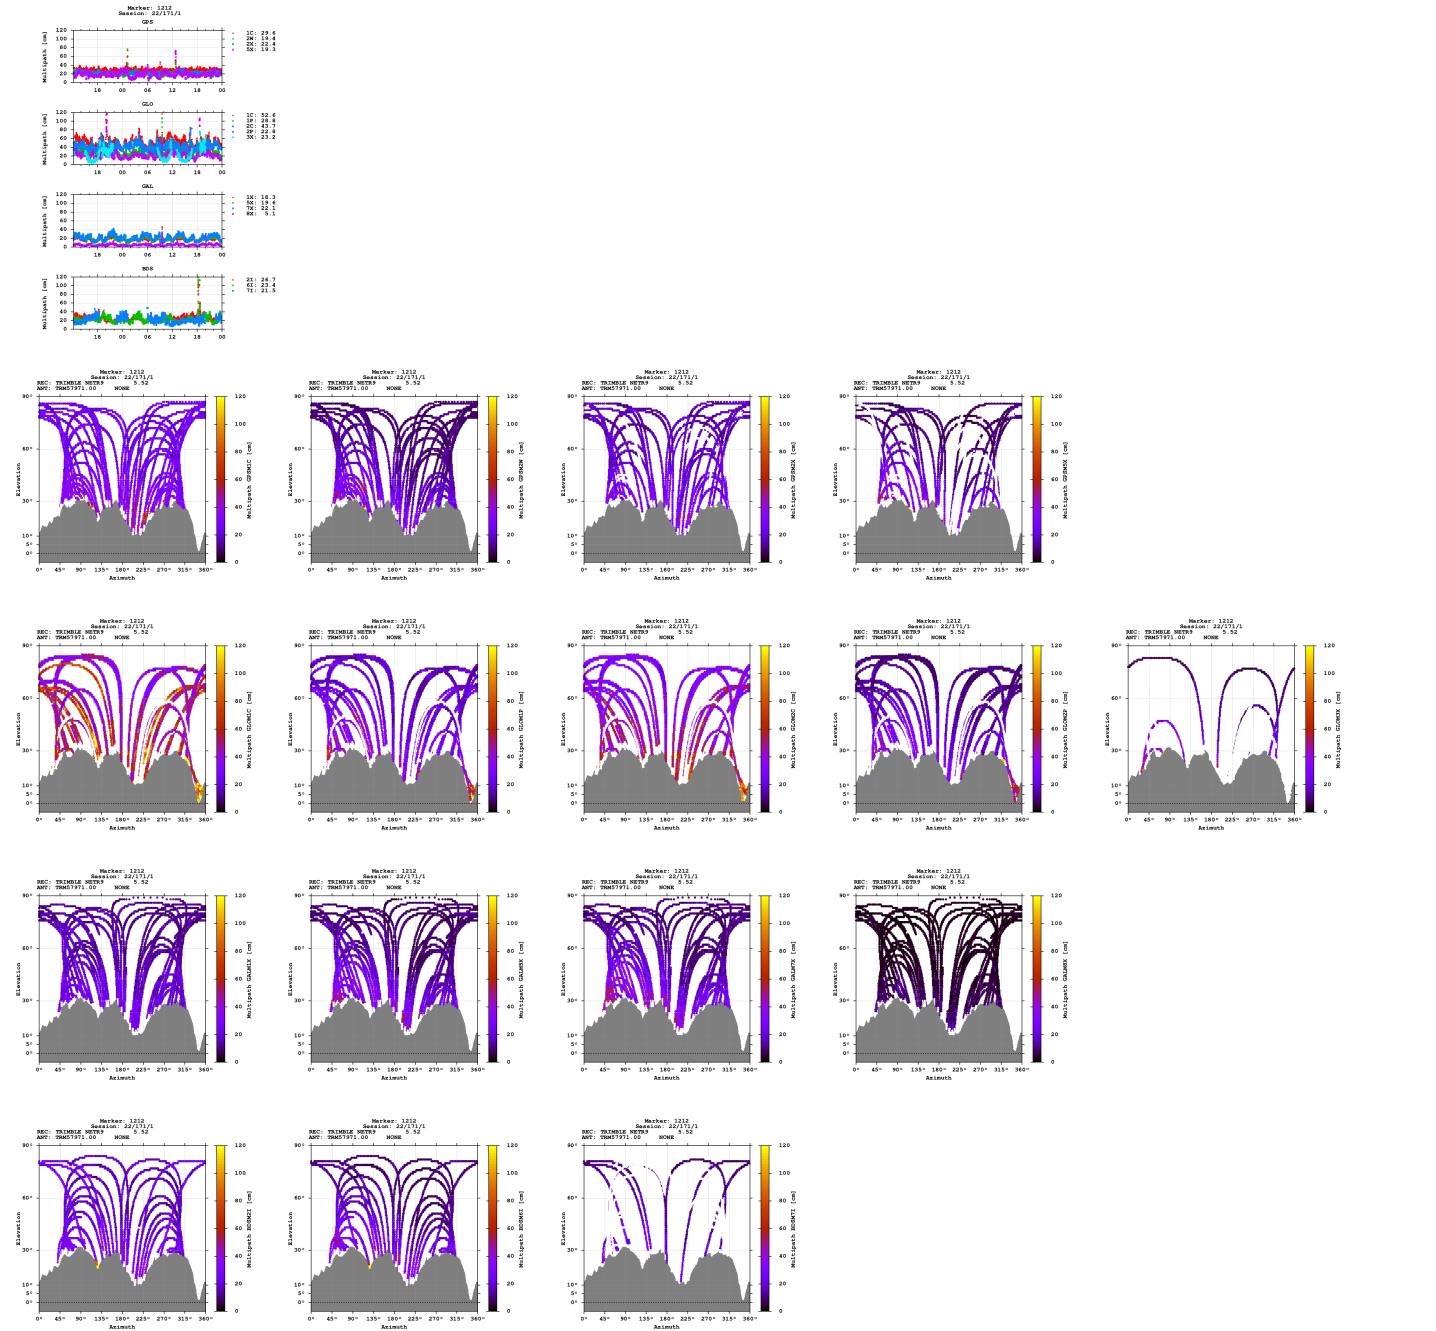

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

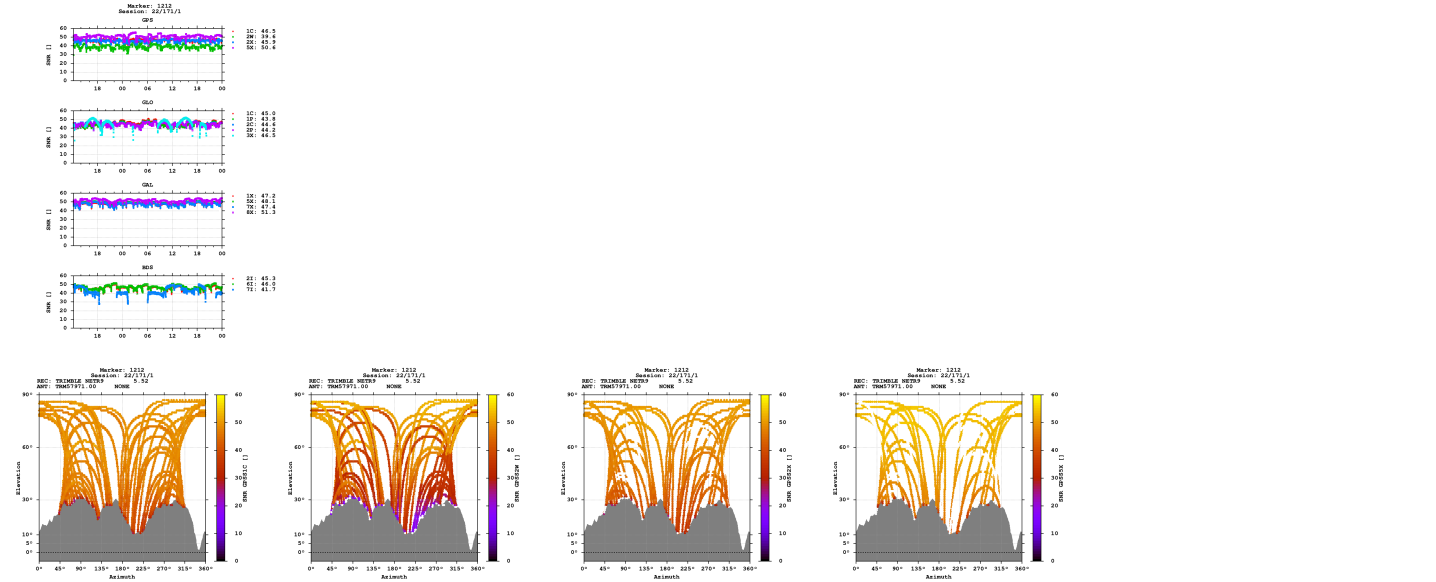

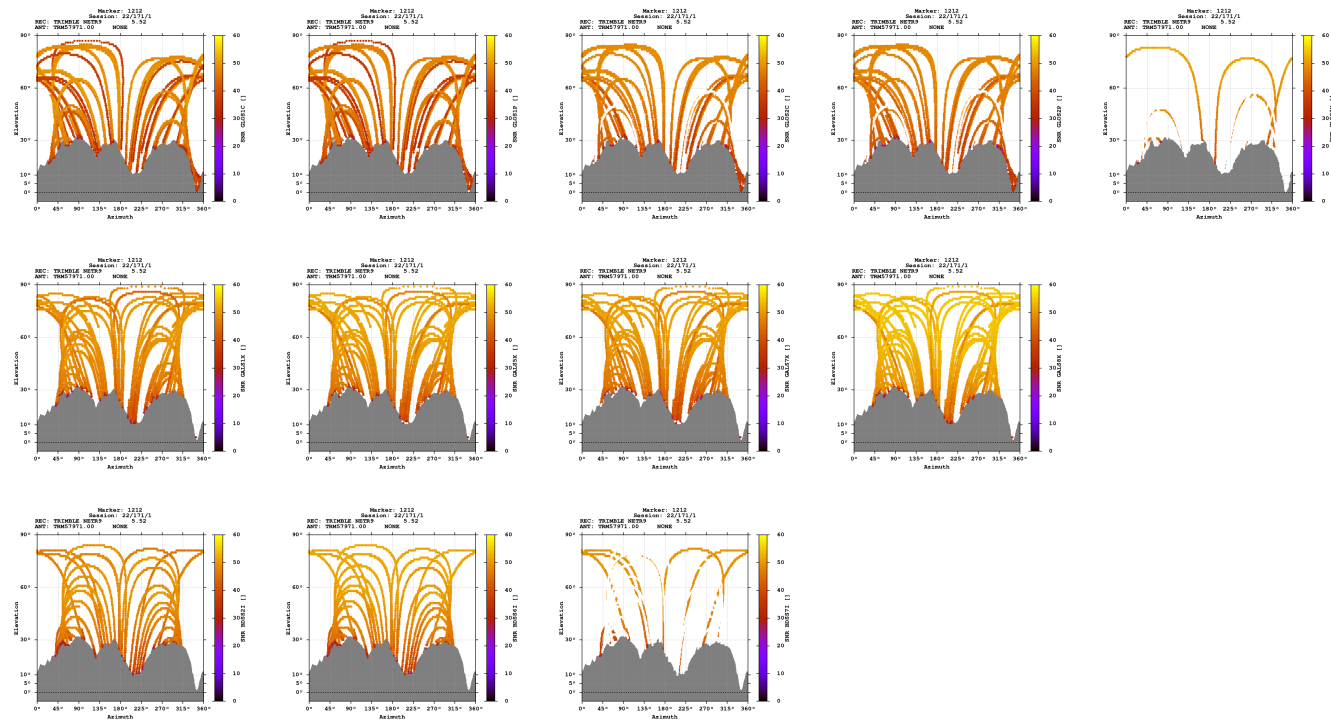

Estimates

2022-06-20 12:16:00	GPS	4326441.5661	659667.1644	4625040.4897	46.774030726	8.669310840	609.5570
2022-06-20 12:16:00	GLO	4326443.3200	659666.2588	4625041.0961	46.774023993	8.669295658	611.0928
2022-06-20 12:16:00	GAL	4326441.1634	659667.2420	4625040.0461	46.774030526	8.669312639	608.9692
2022-06-20 12:16:00	BDS	4326439.9237	659660.9343	4625029.9419	46.773982545	8.669233448	600.1162

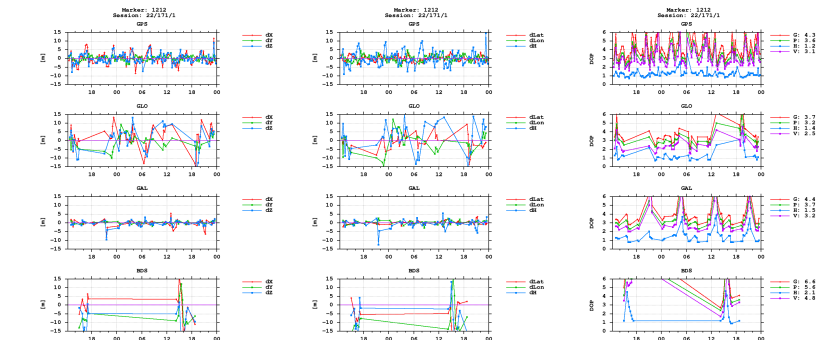

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)