


GNSS observation file monitoring for 0516


Last RINEX file: 05161721.220
RINEX version: 3.02
Marker: 1212
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

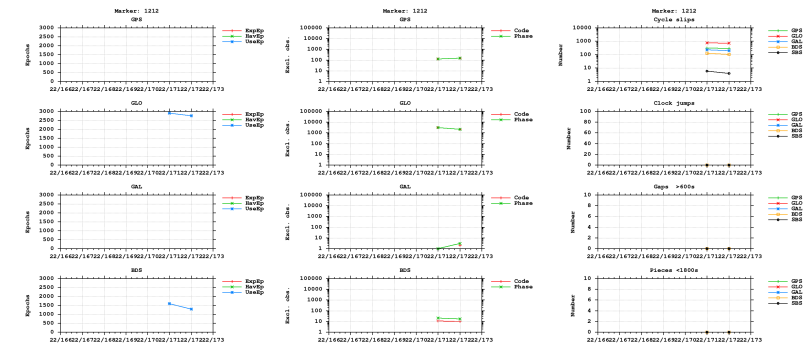



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

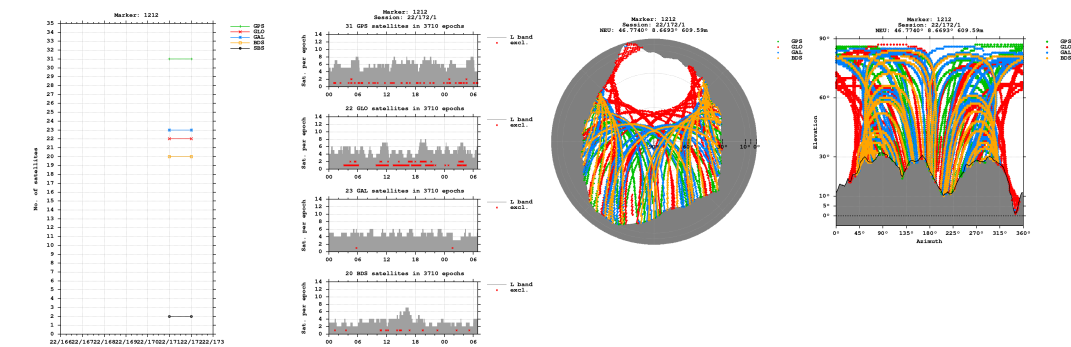


Bands

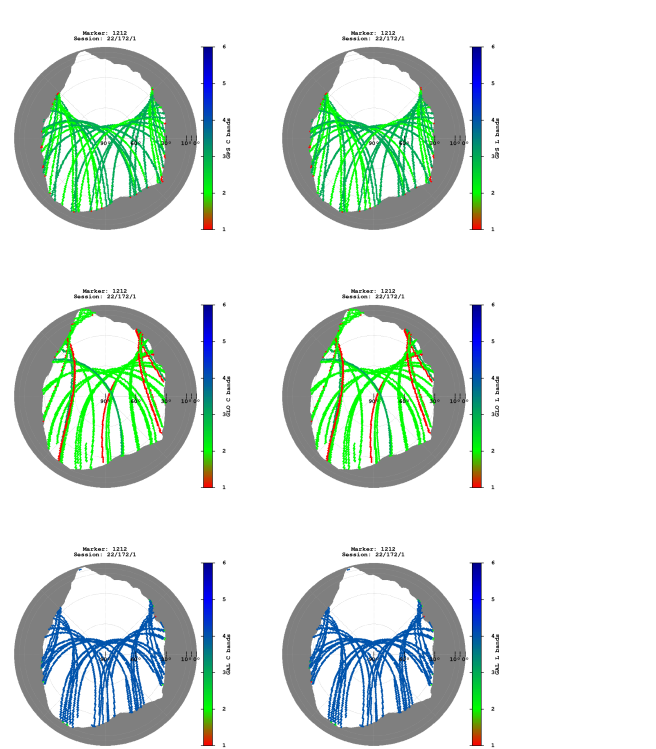


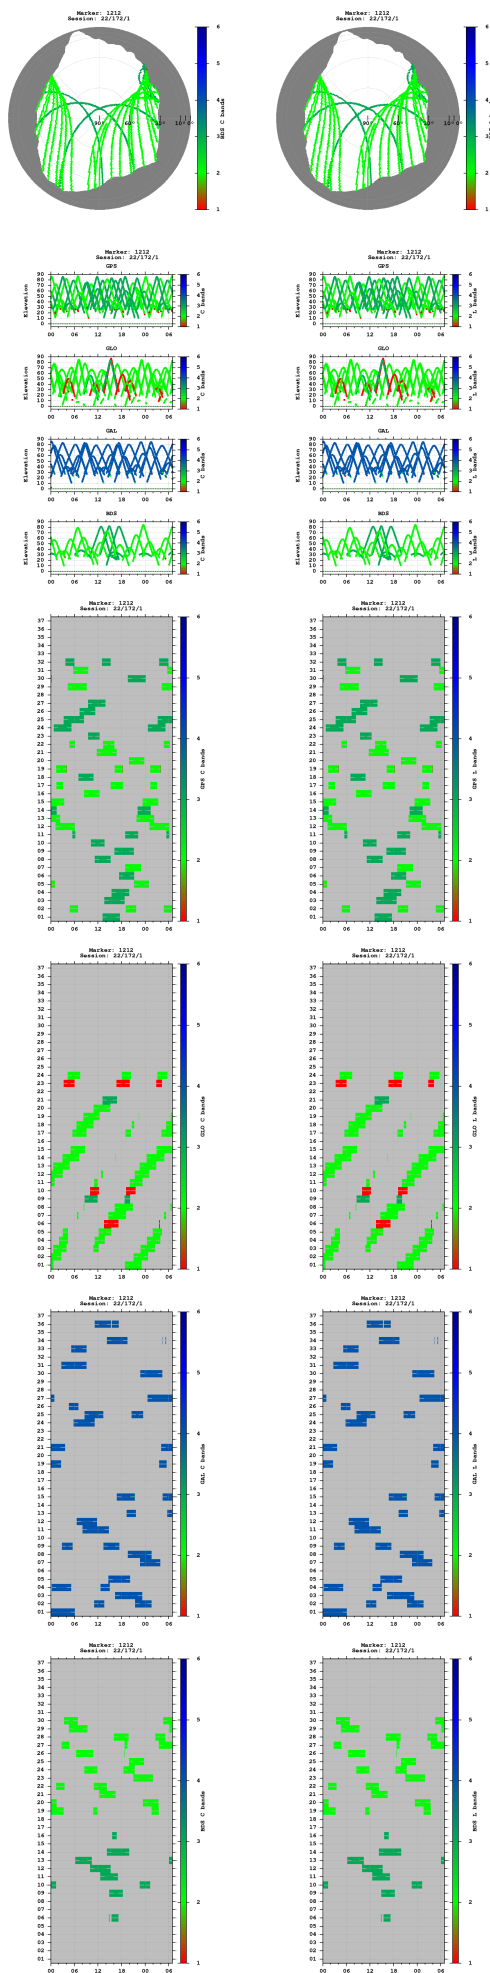


Observations

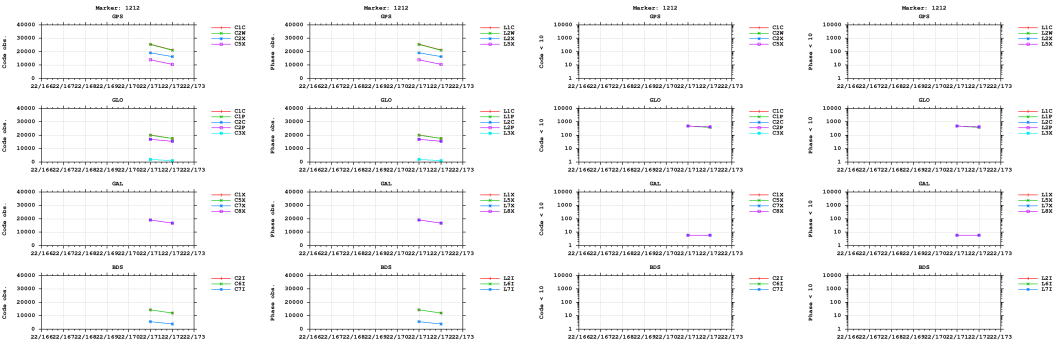



Multipath

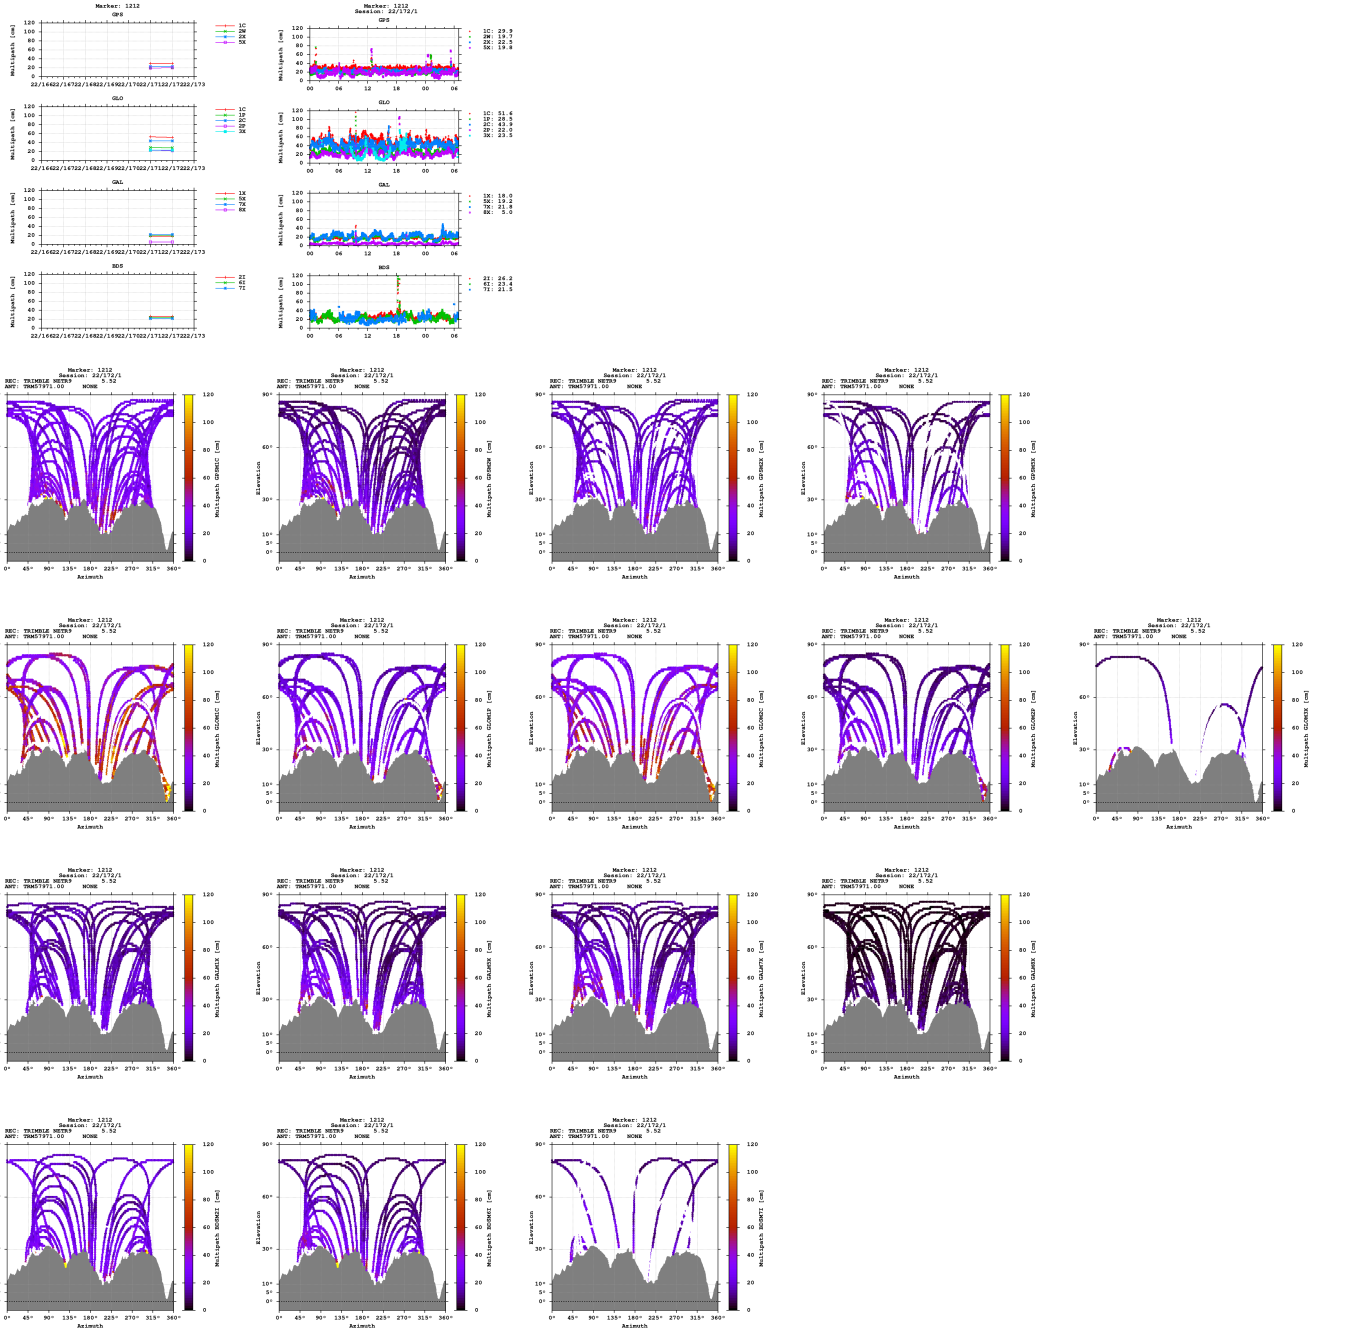


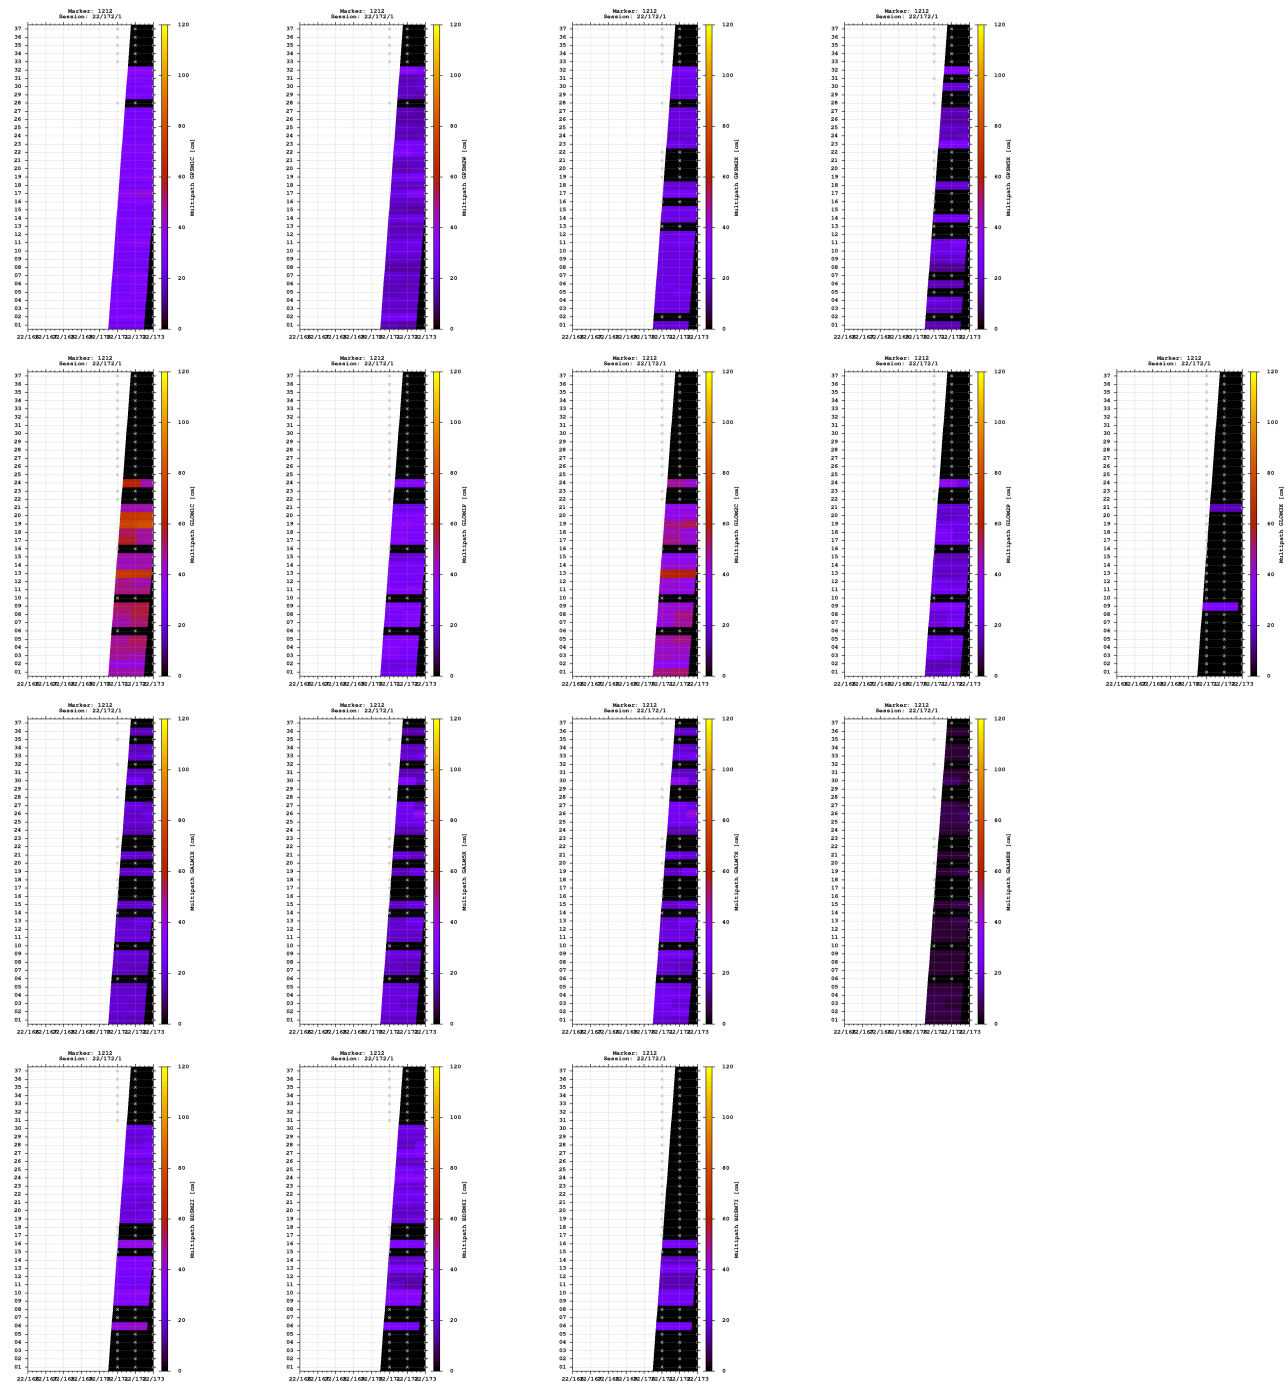


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

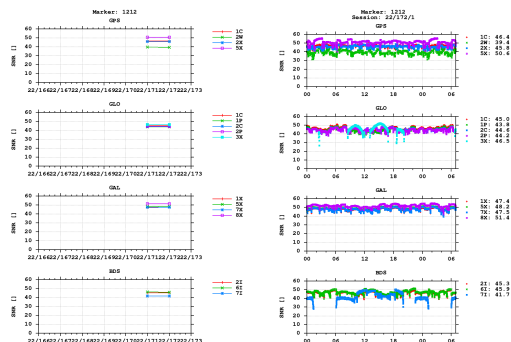


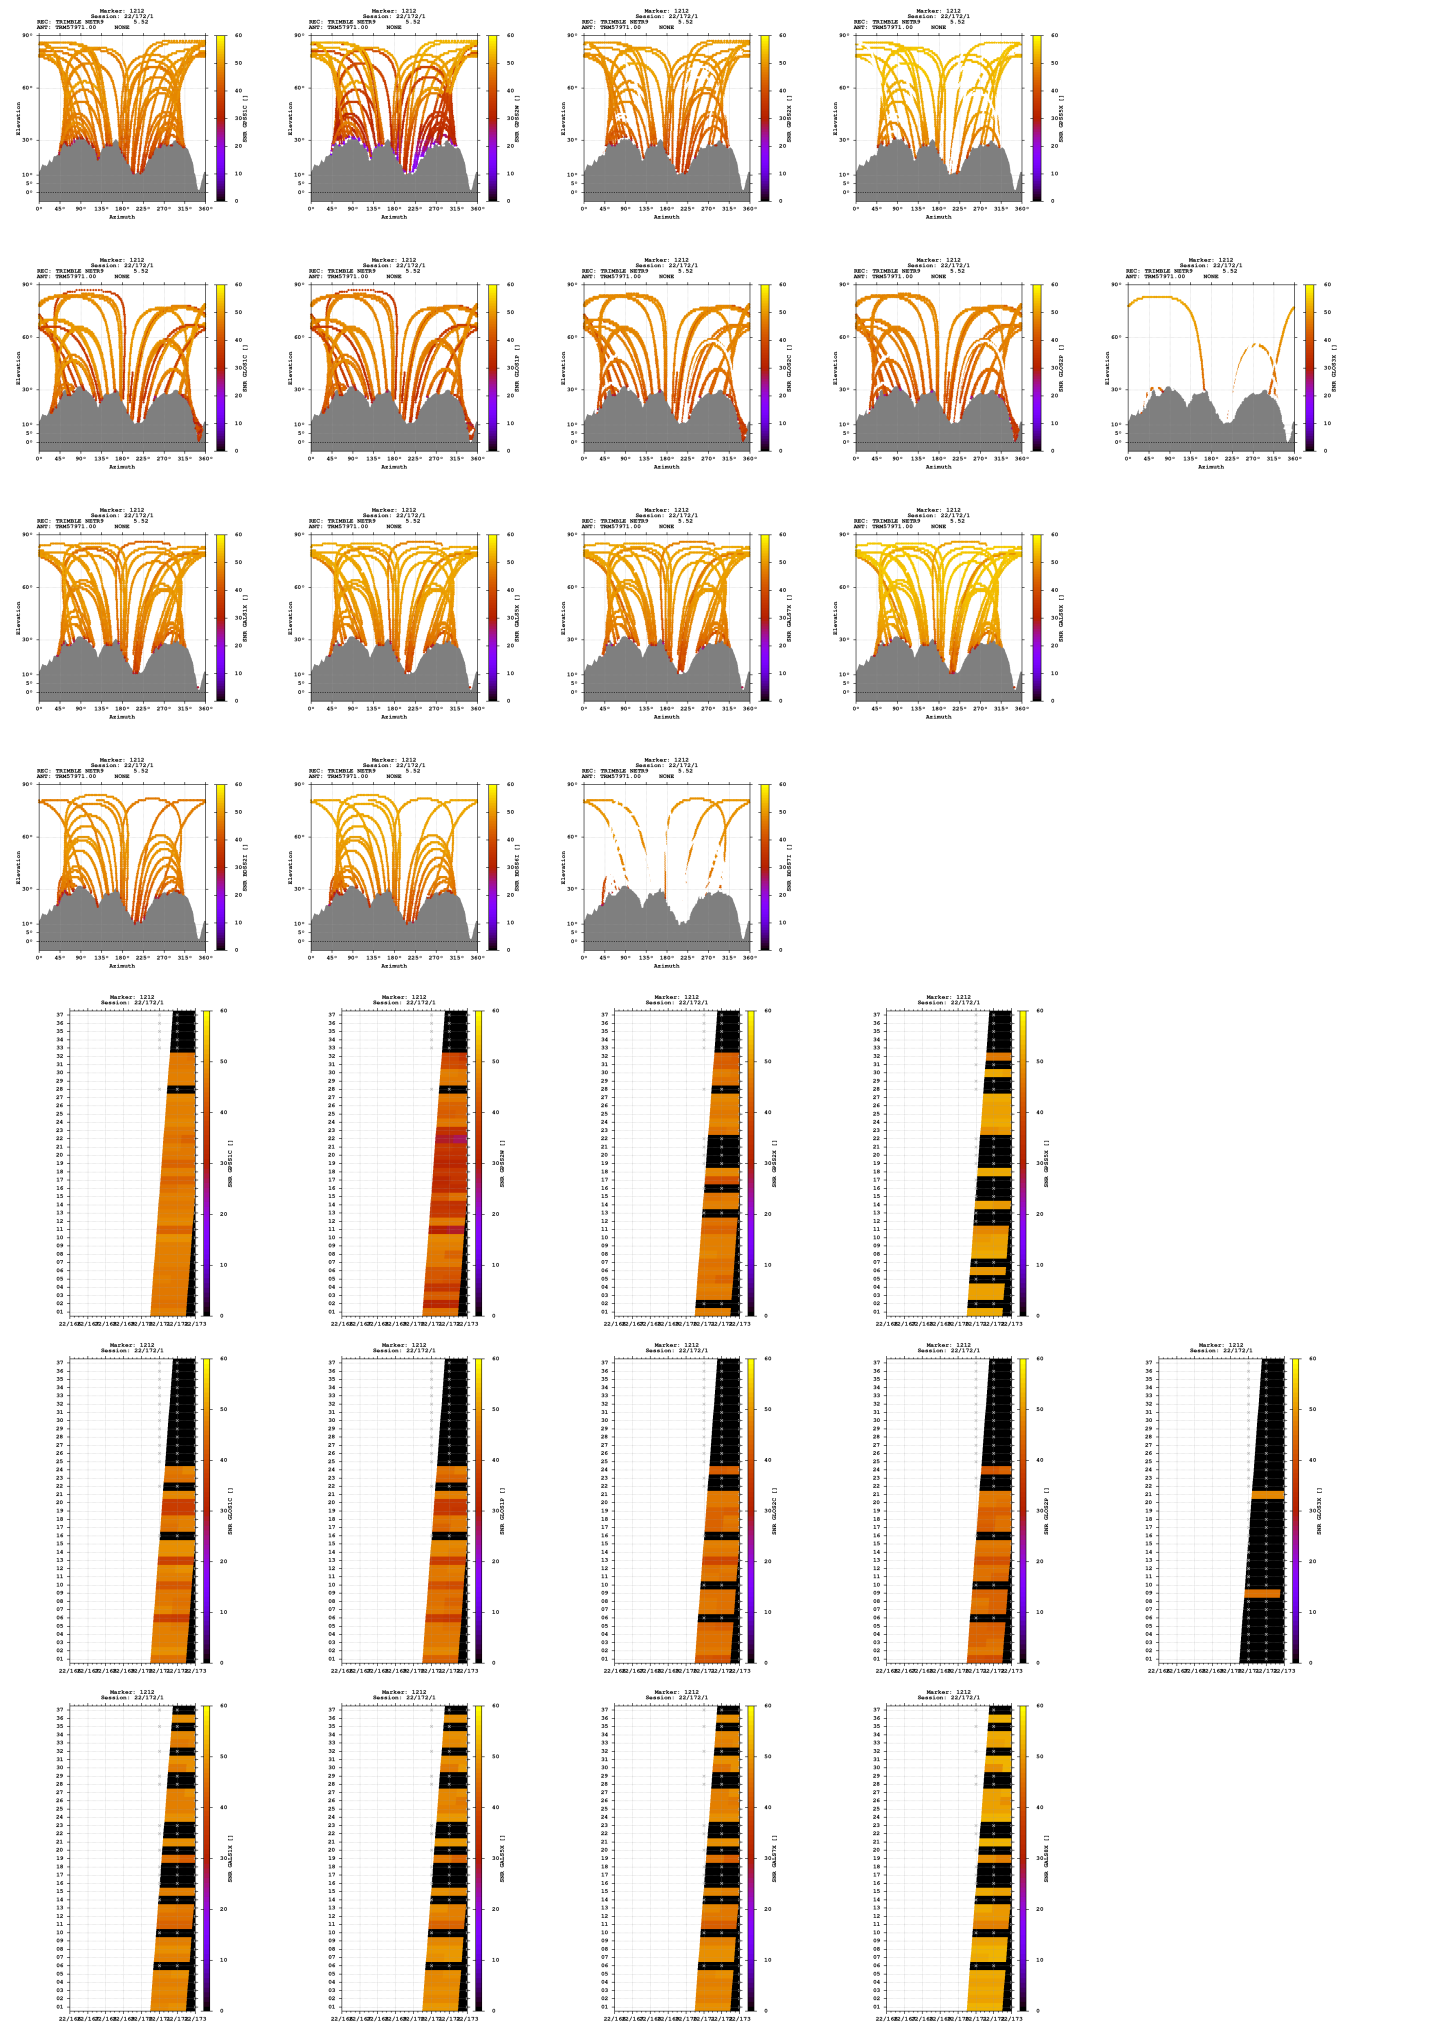

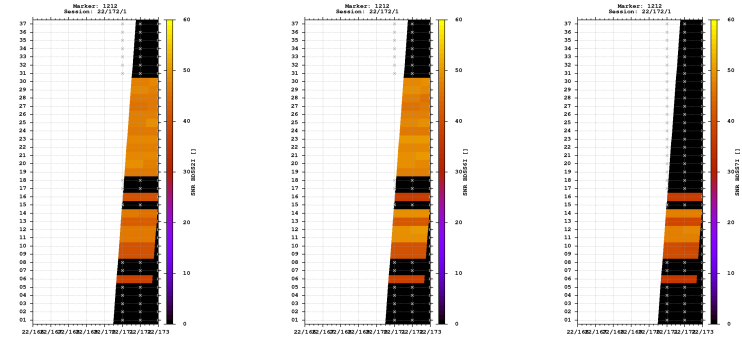



Estimates

2022-06-20 12:16:00	GPS	4326441.6498	659667.1368	4625040.4561	46.774030004	8.669310318	609.5863
2022-06-20 12:16:00	GLO	4326442.1310	659667.3150	4625042.2115	46.774037524	8.669311674	611.2096
2022-06-20 12:16:00	GAL	4326441.1016	659667.2480	4625040.0661	46.774031044	8.669312839	608.9425
2022-06-20 12:16:00	BDS	4326438.6950	659662.7303	4625028.8308	46.773981887	8.669259118	598.6601

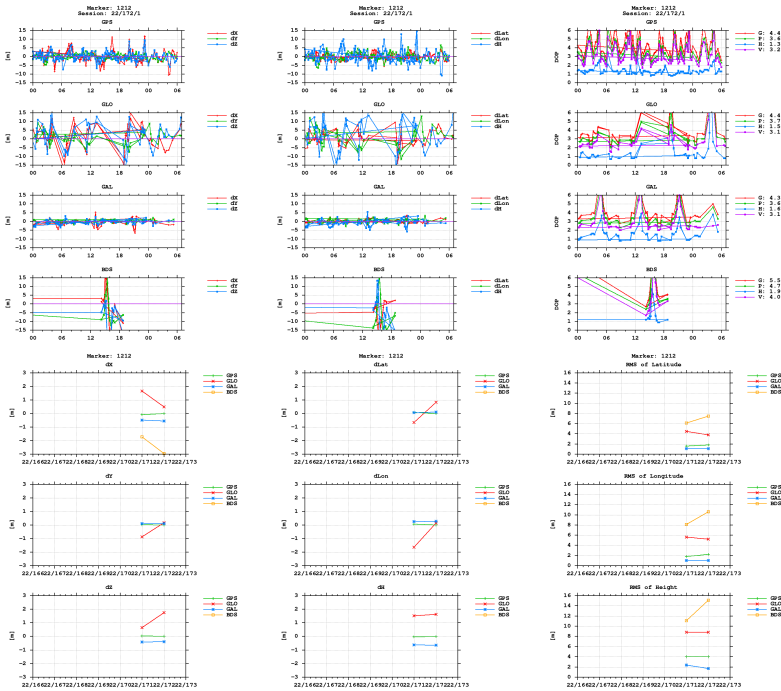

BNC

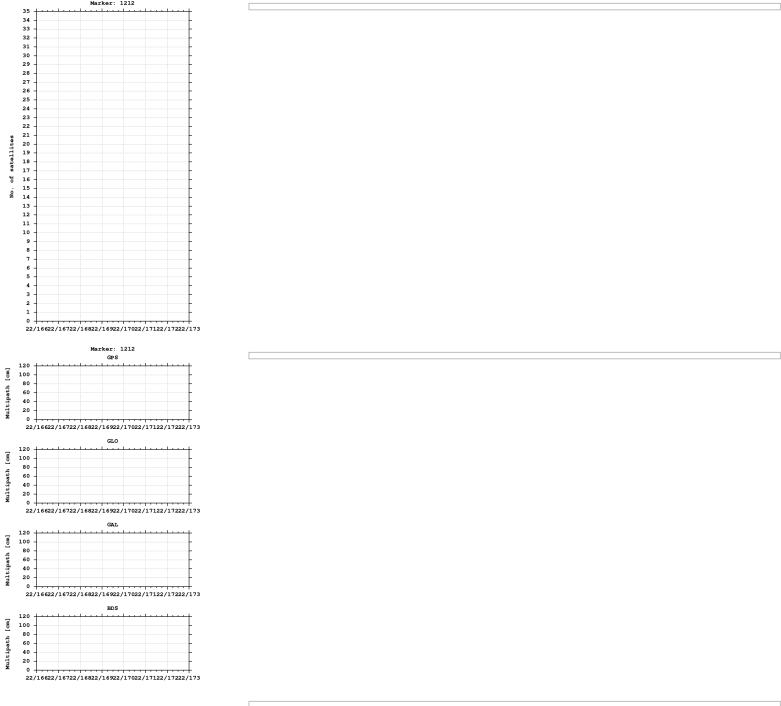

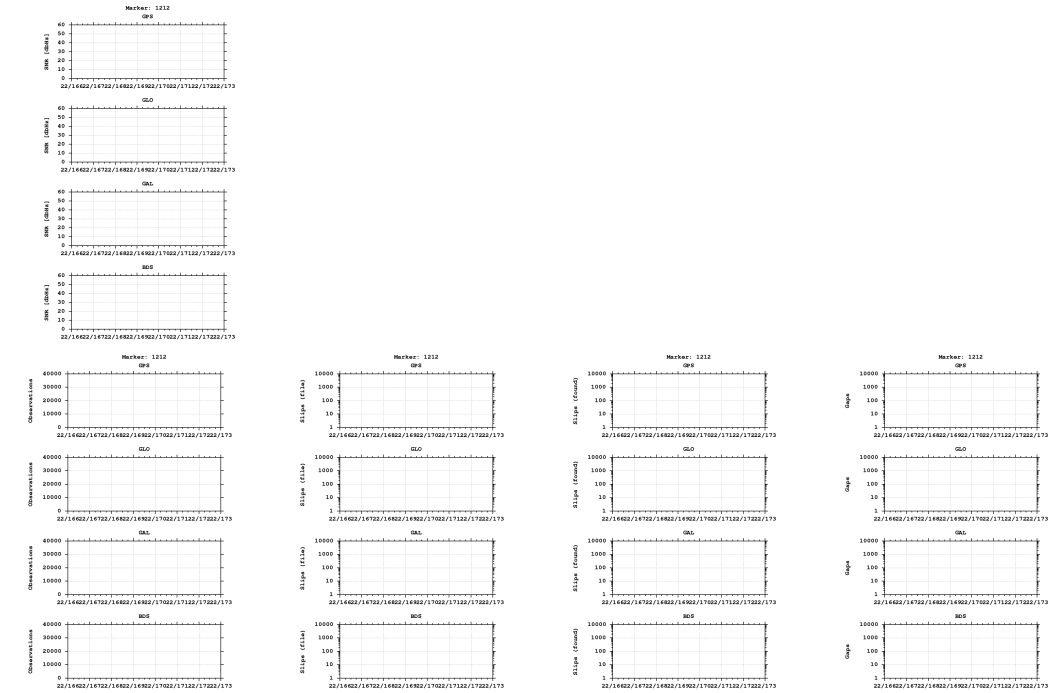

Equipment

2022-06-20 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)