


GNSS observation file monitoring for 0516


Last RINEX file: 05161731.220
RINEX version: 3.02
Marker: 1174
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

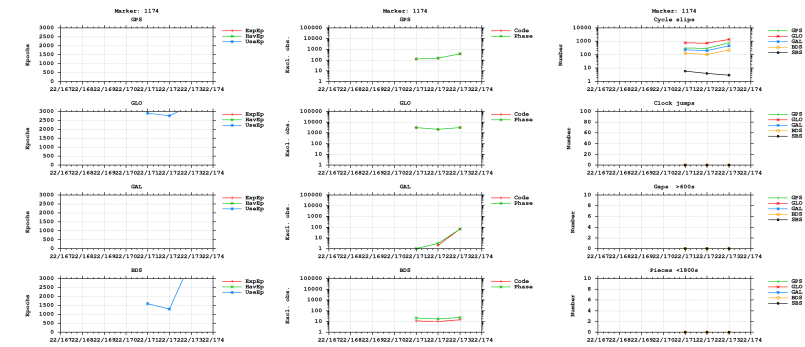



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

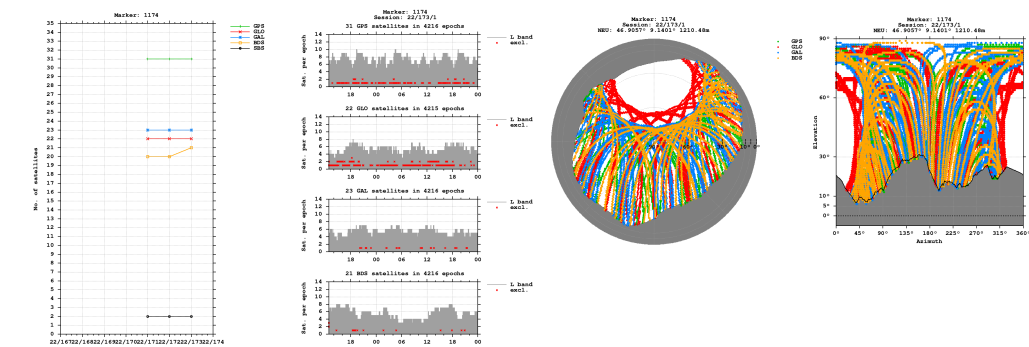


Bands

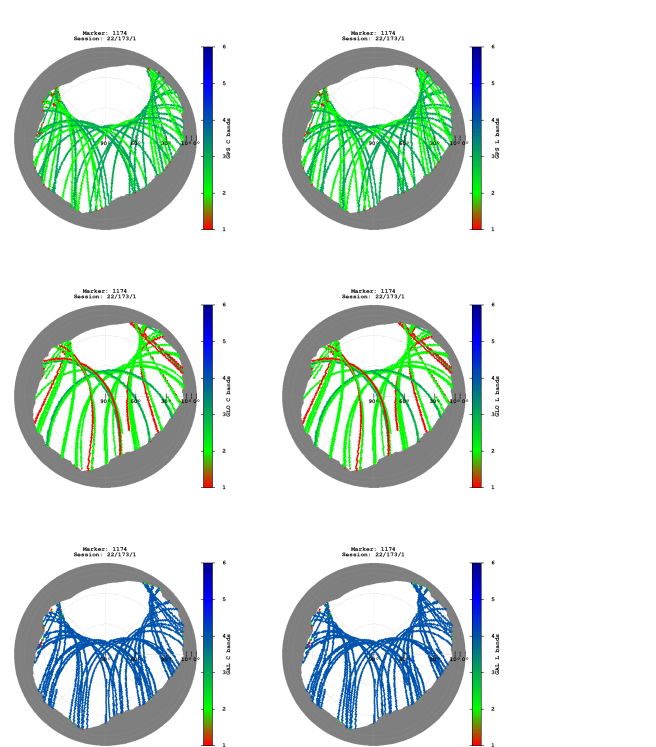


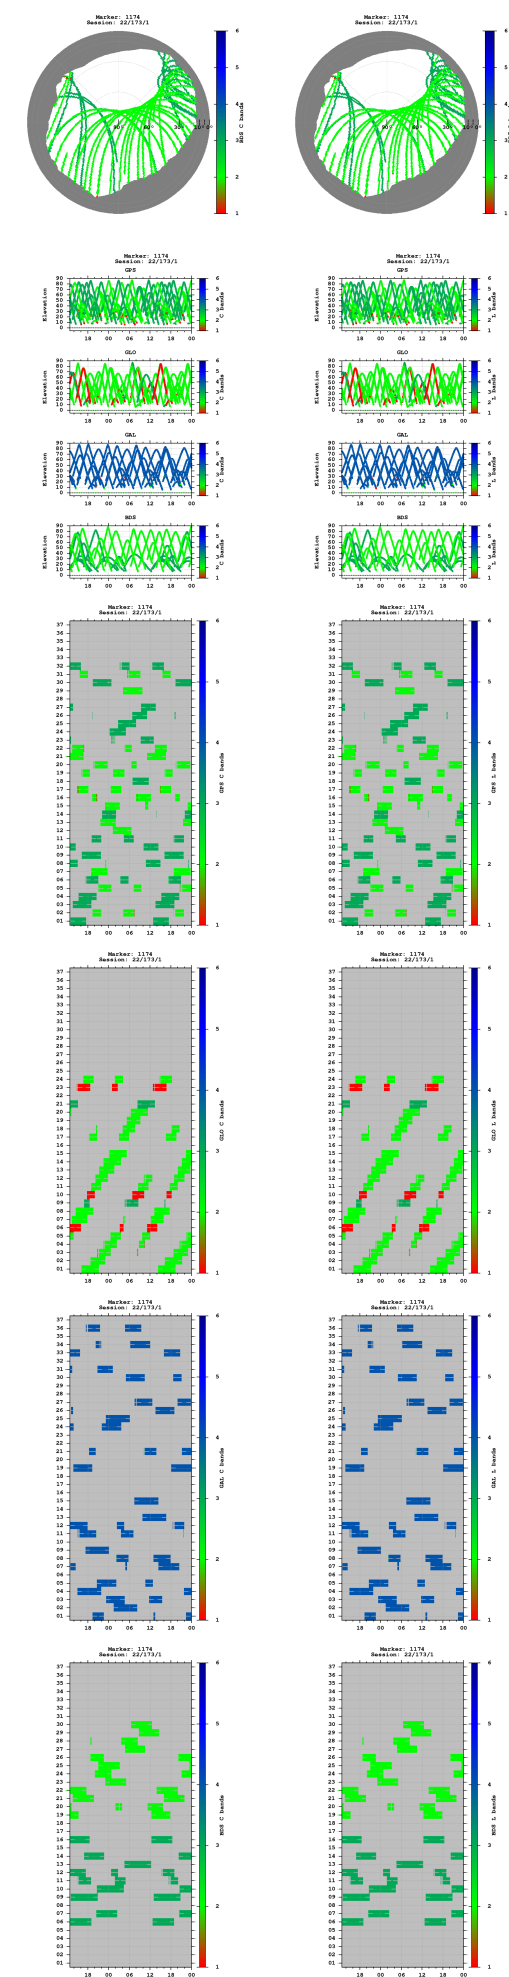


Observations

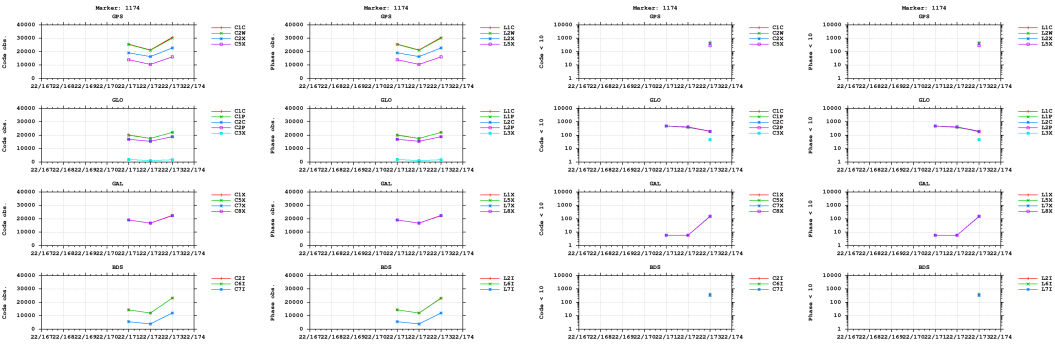


Multipath

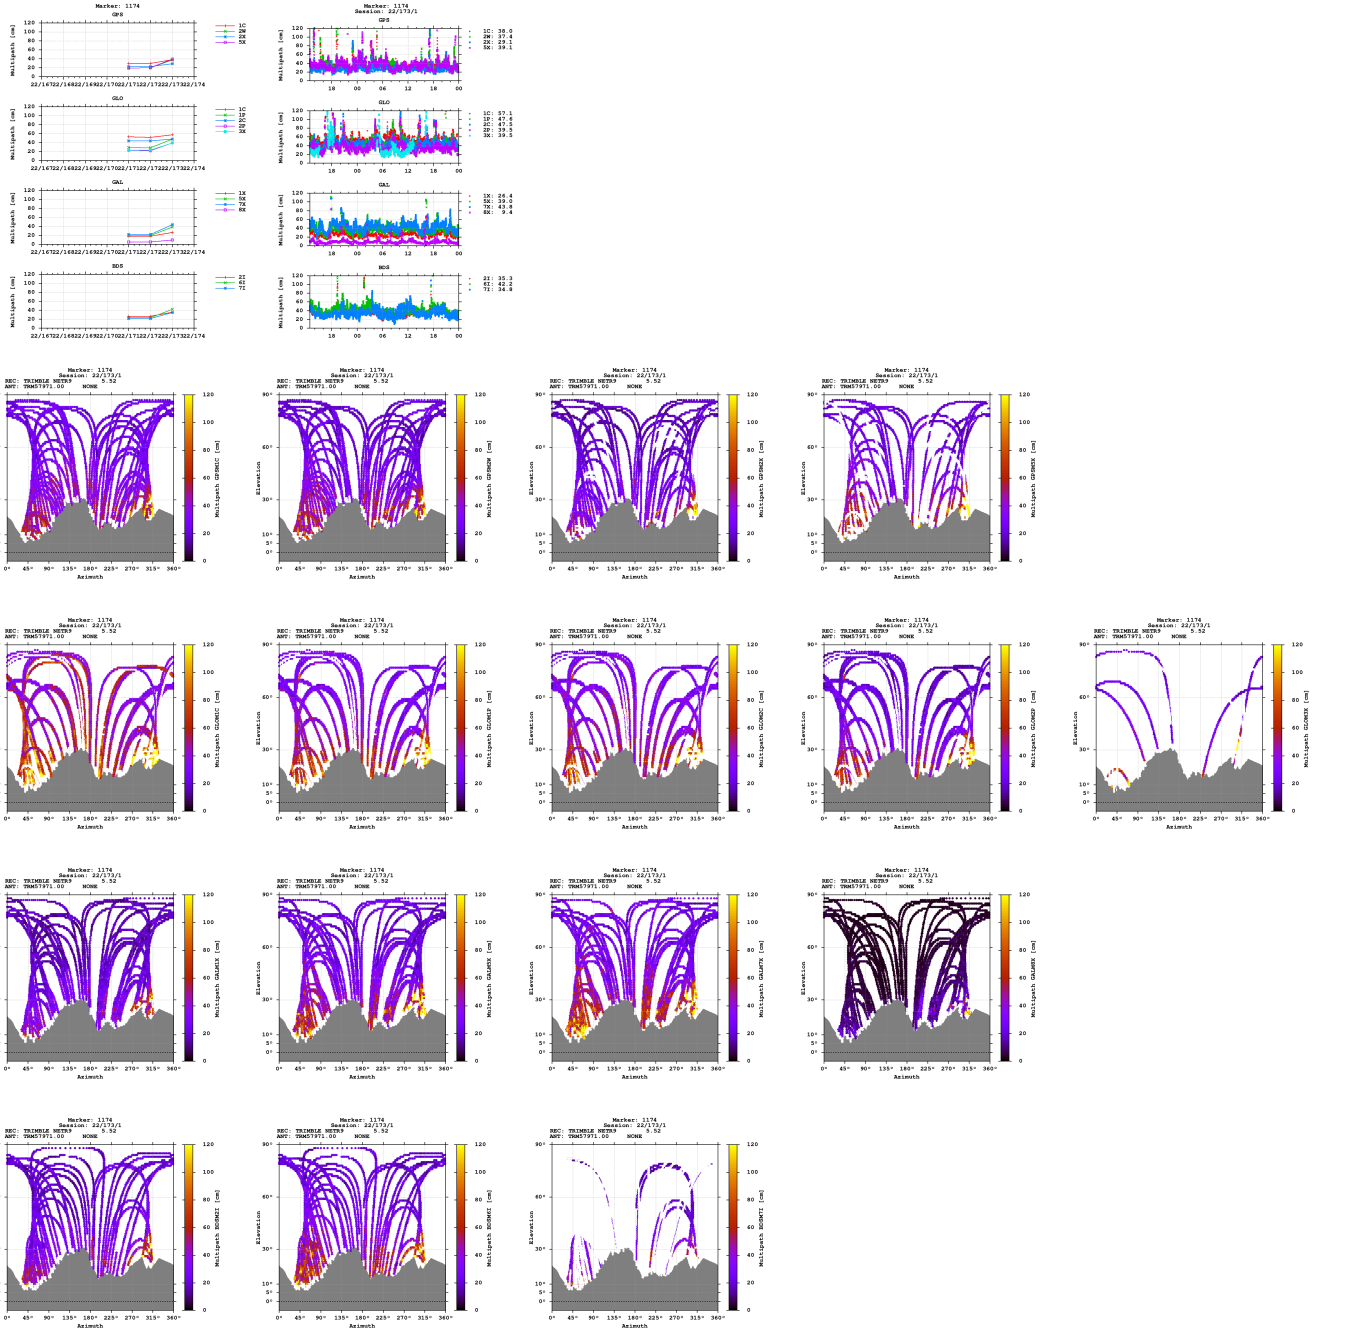


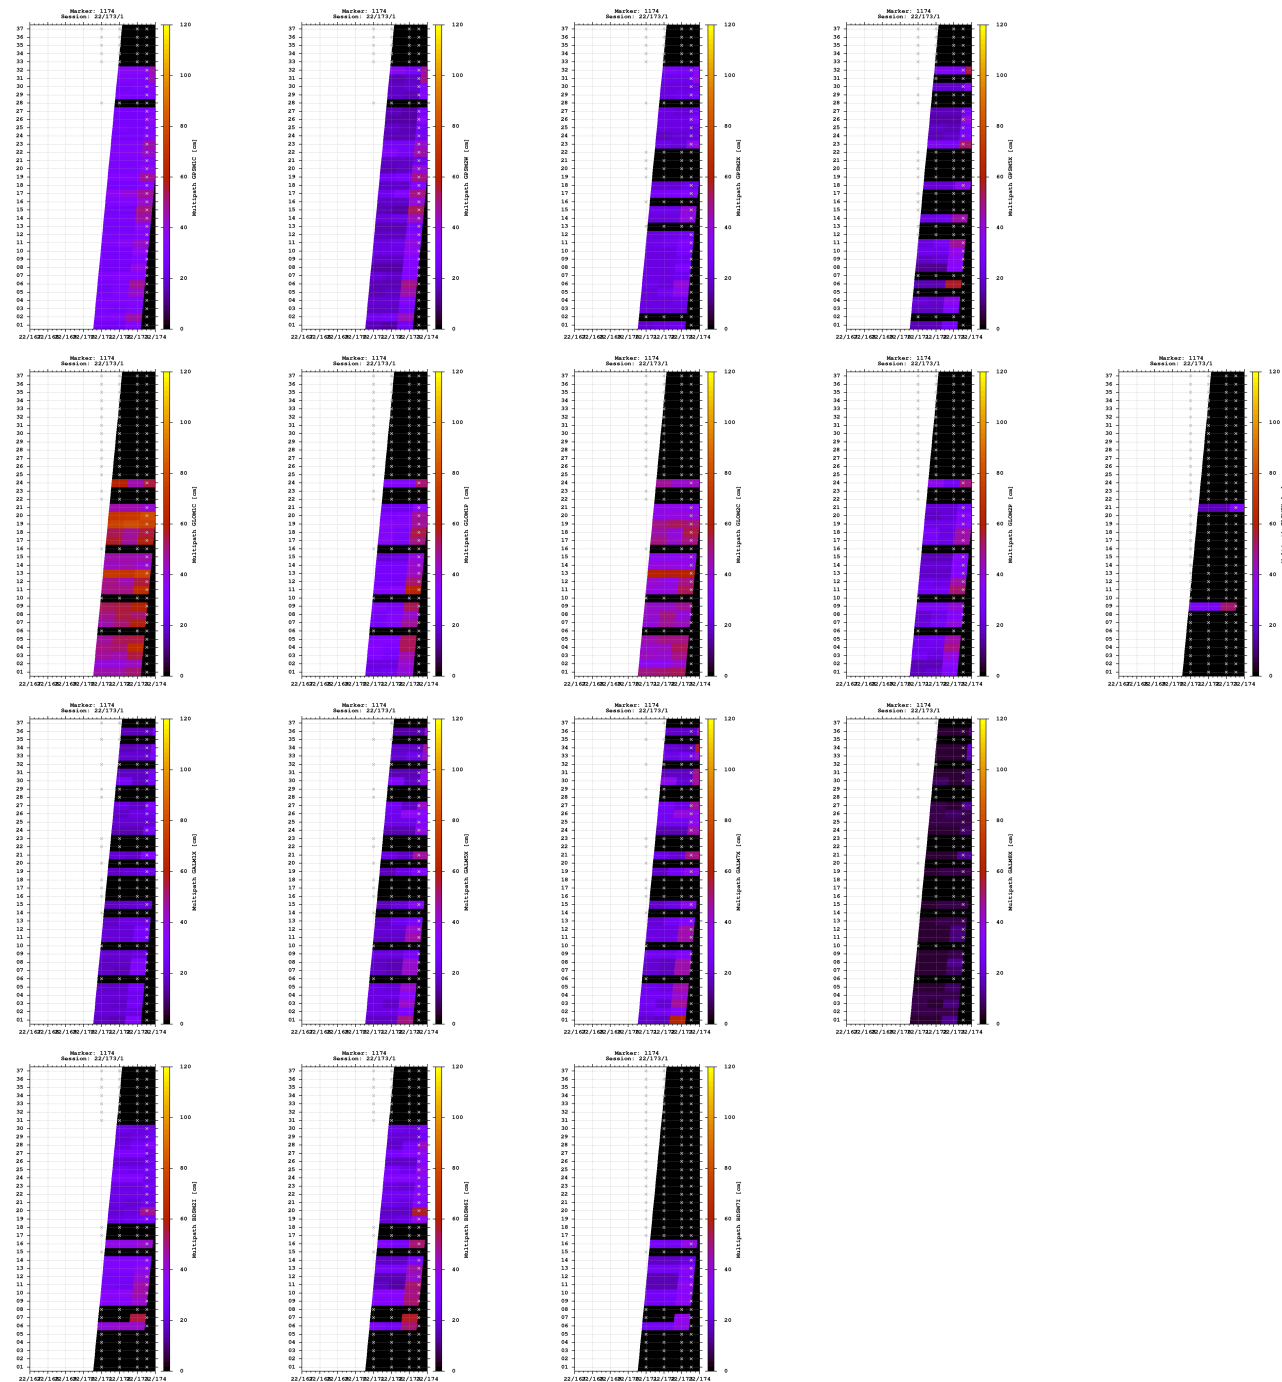


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

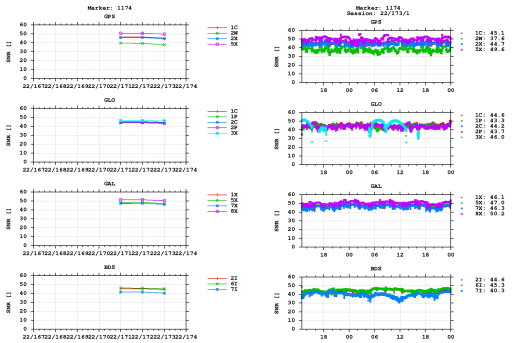


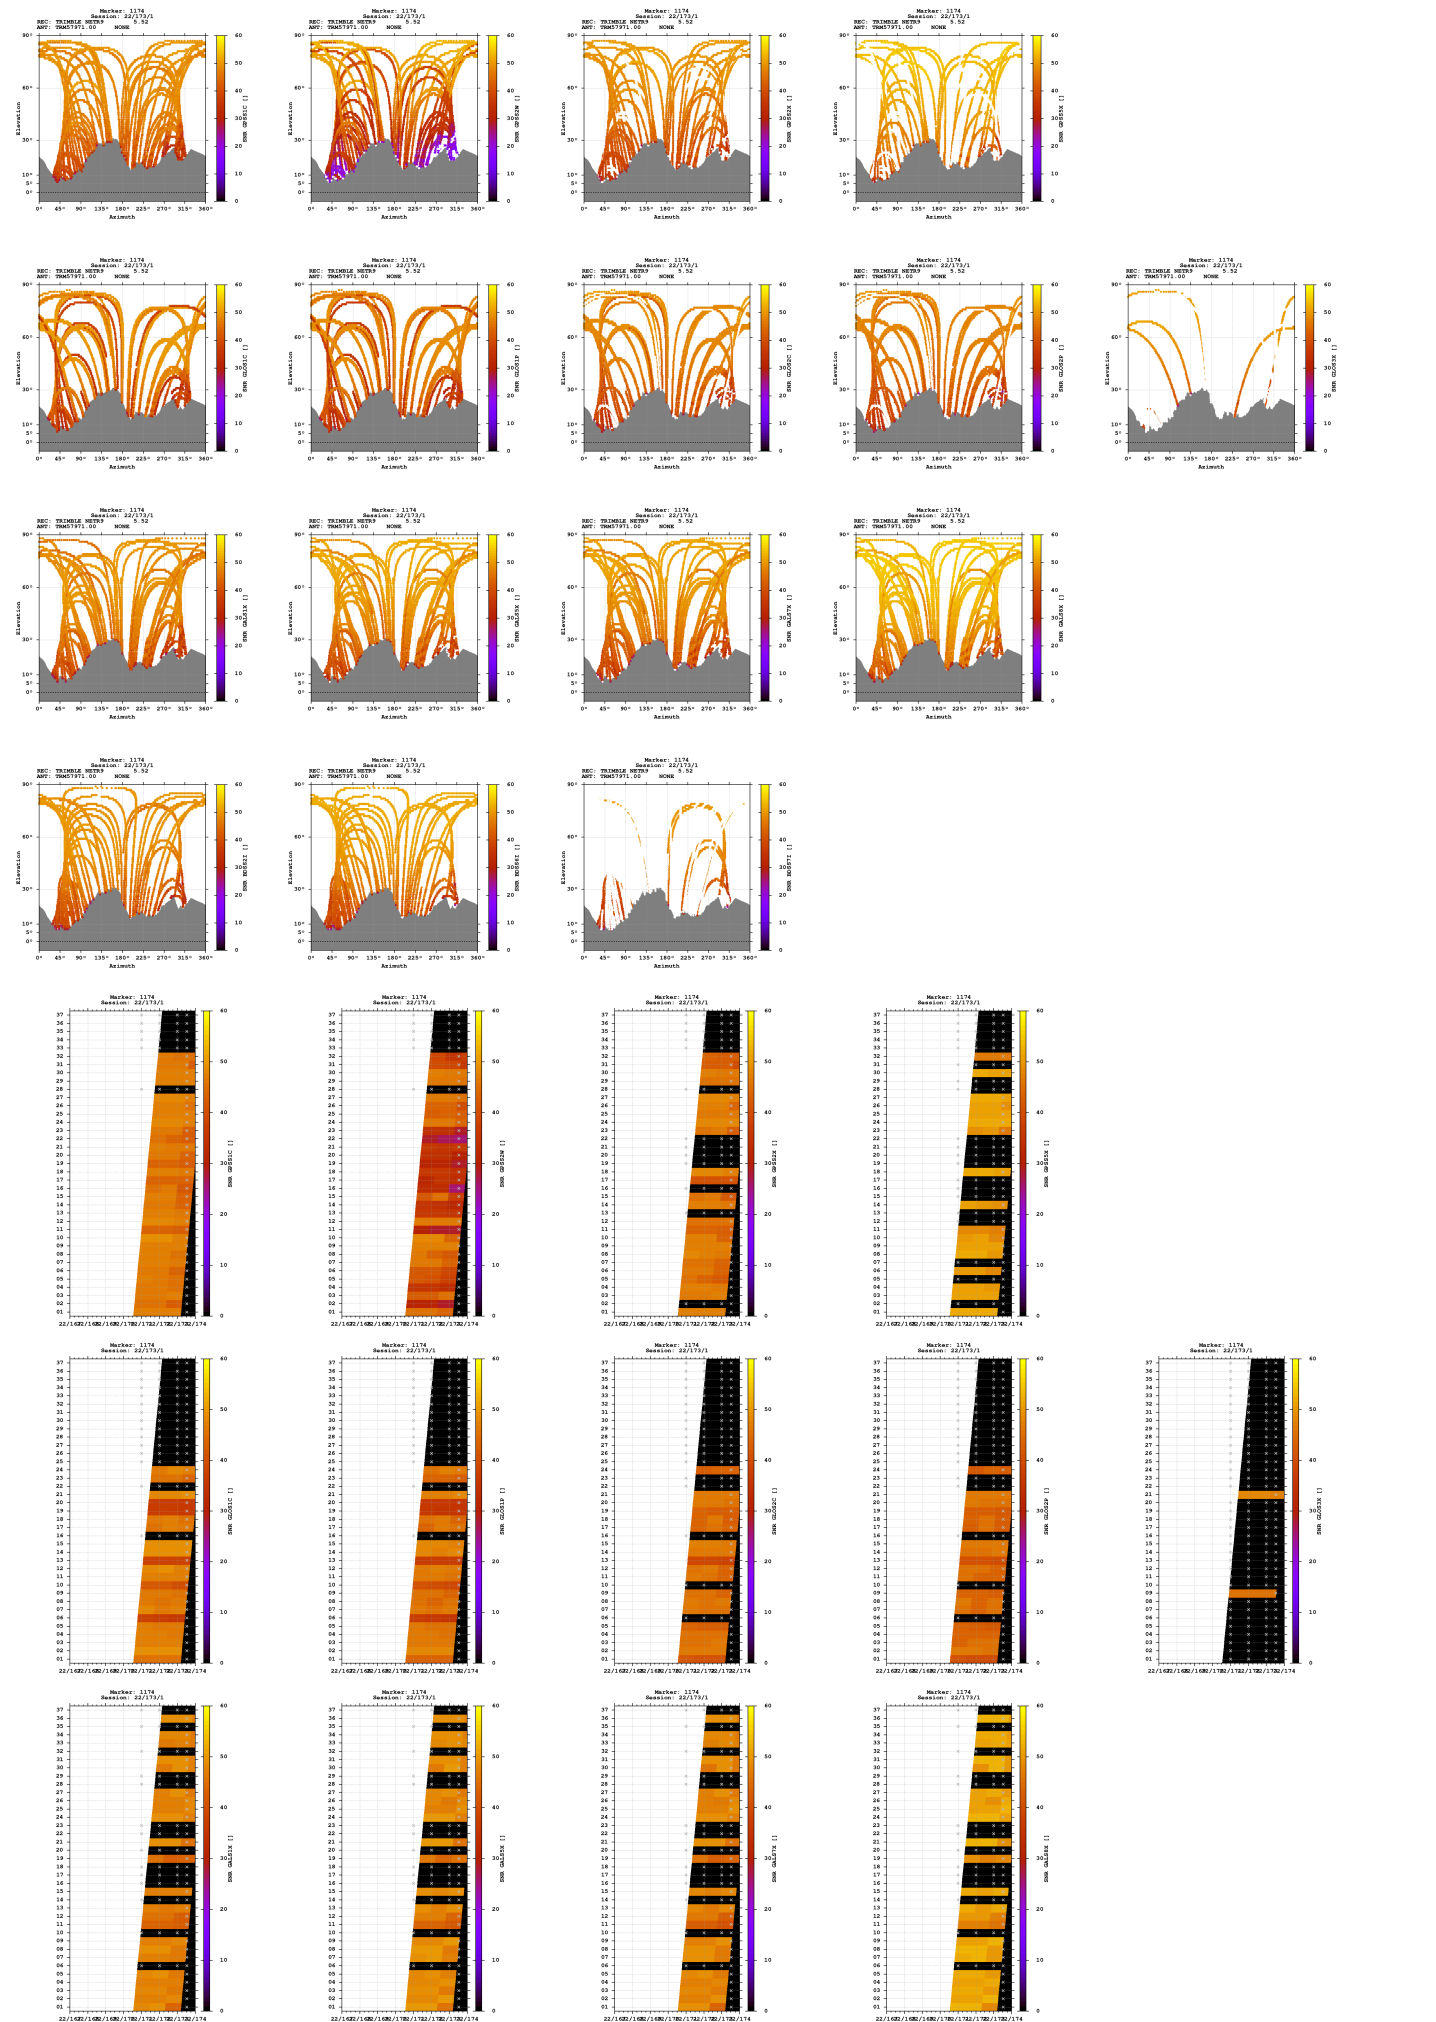

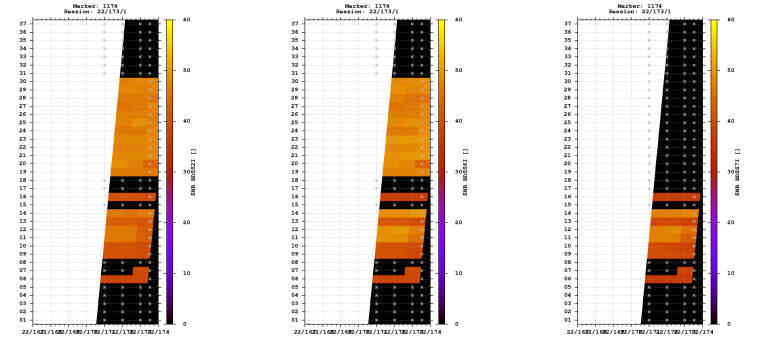



Estimates

2022-06-22 12:50:00	GPS	4310740.9366	693559.9270	4635490.5151	46.905669912	9.140052825	1210.4778
2022-06-22 12:50:00	GLO	4310740.2141	693559.3060	4635490.8672	46.905677408	9.140046287	1210.1802
2022-06-22 12:50:00	GAL	4310741.9341	693560.2854	4635491.3475	46.905668186	9.140055390	1211.7974
2022-06-22 12:50:00	BDS	4310742.5659	693561.7816	4635490.6644	46.905658331	9.140073457	1211.8871

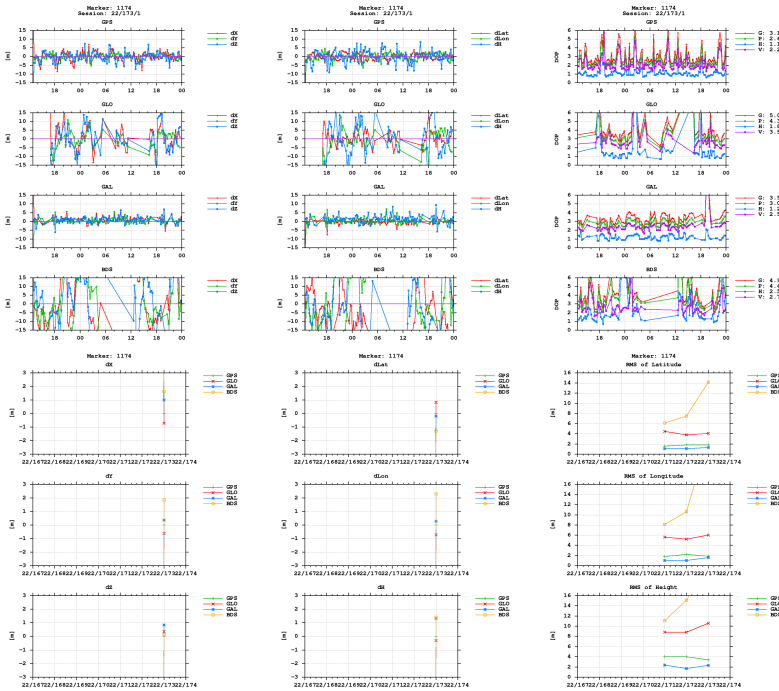

BNC

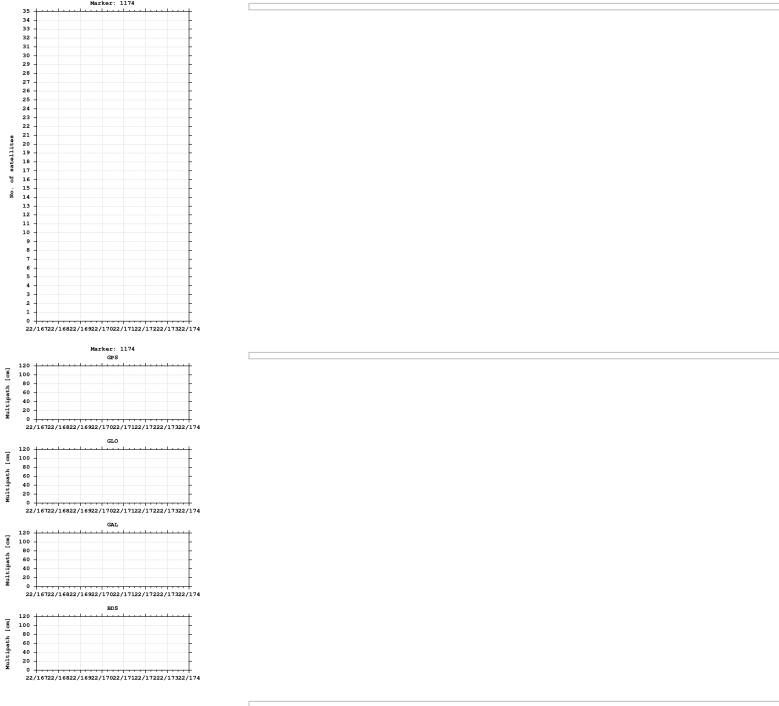

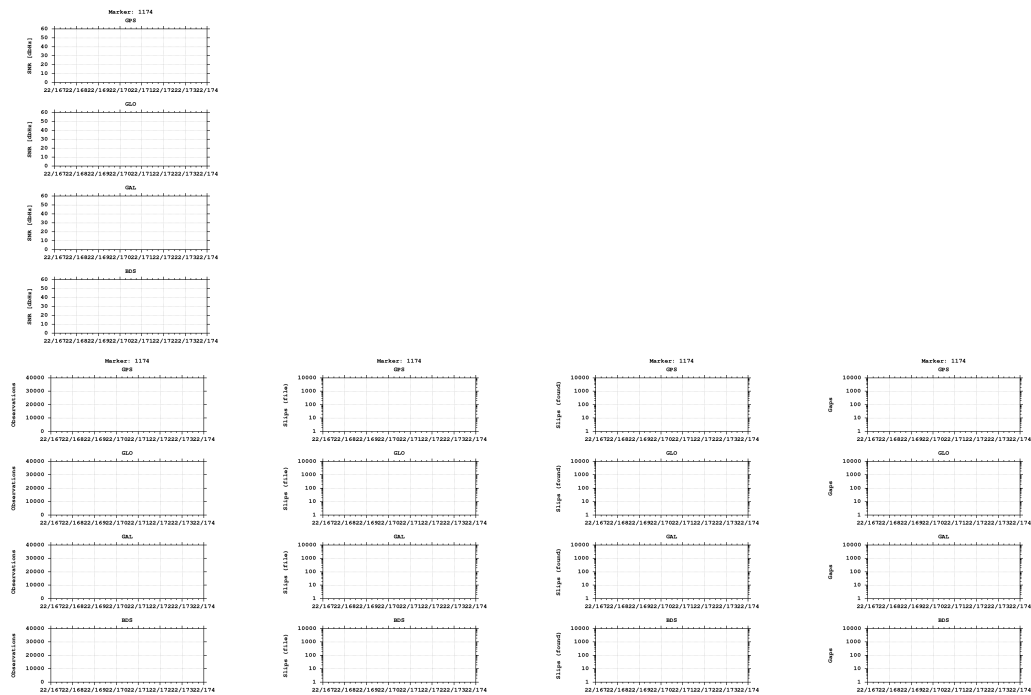

Equipment

2022-06-20 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)