


GNSS observation file monitoring for 0517


Last RINEX file: 05171711.22O
RINEX version: 3.02
Marker: 1192
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

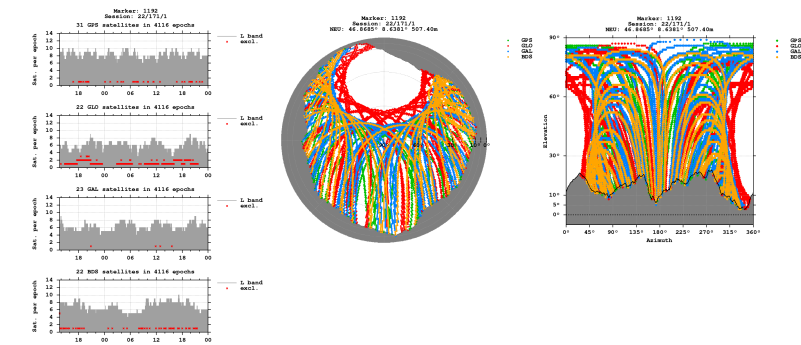


Bands

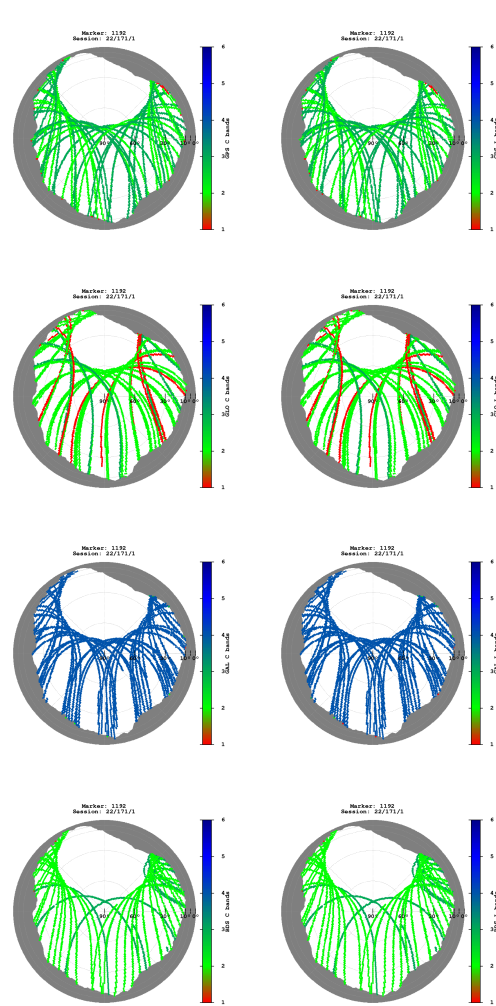

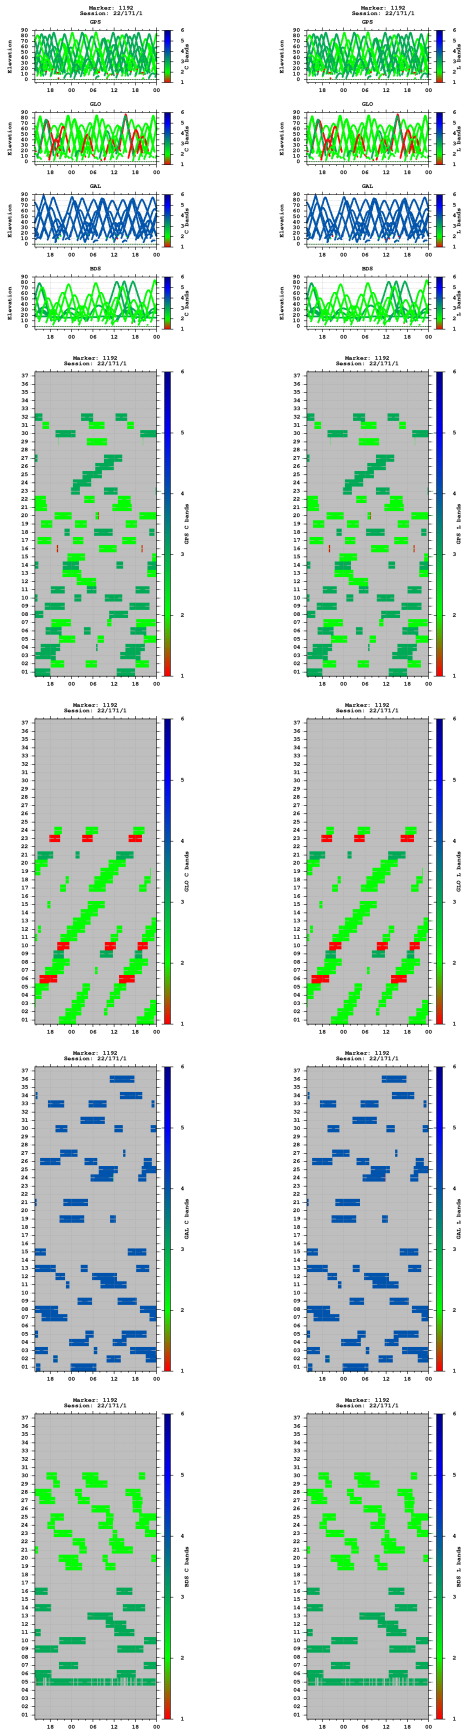



Multipath

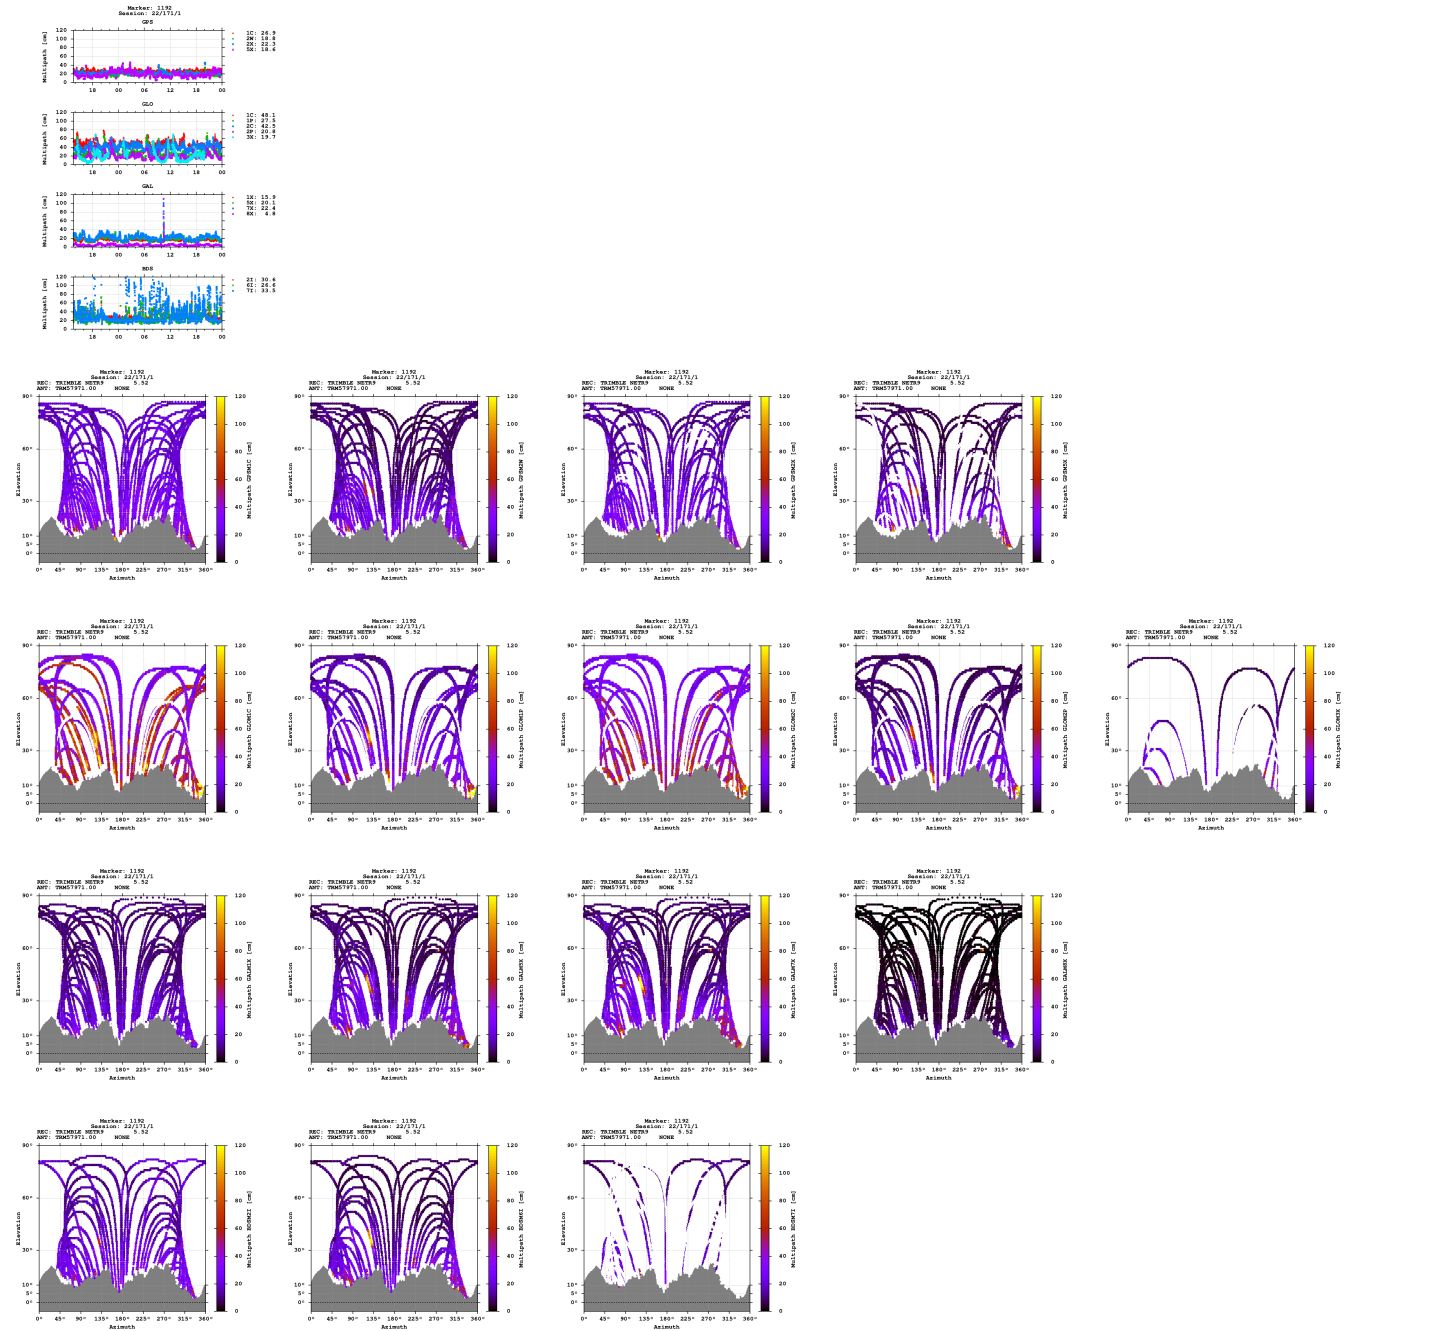

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

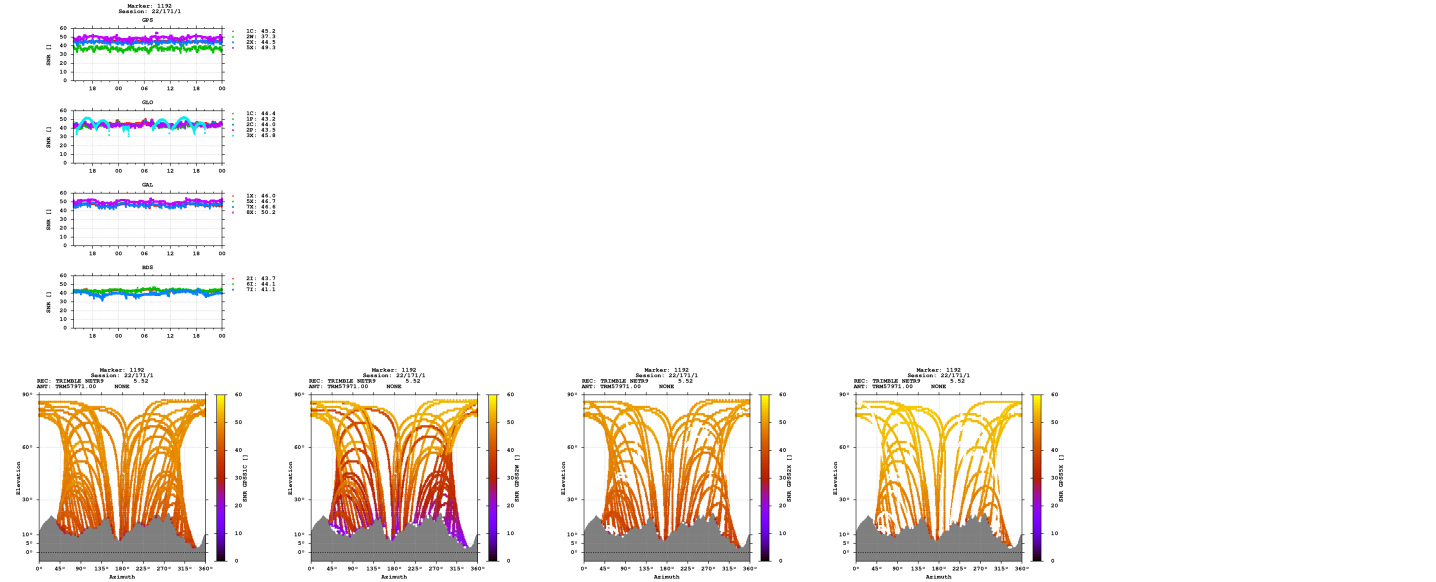

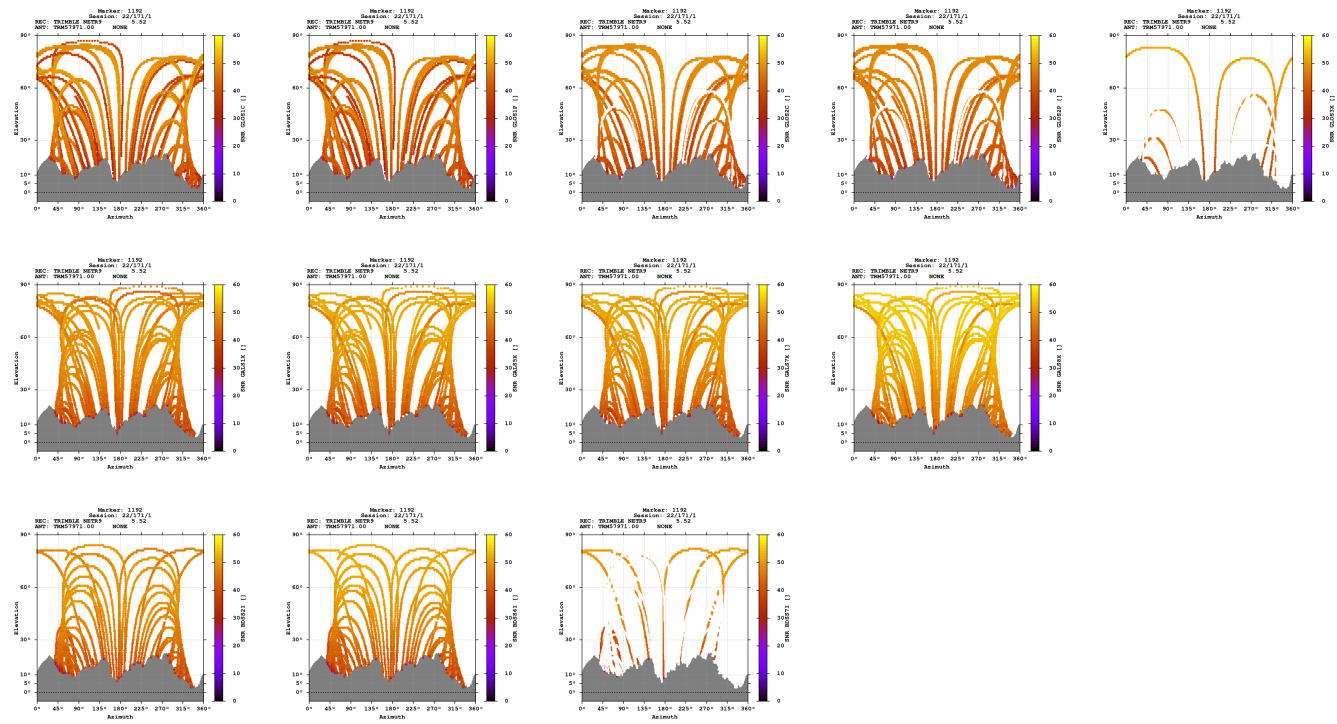

Estimates

2022-06-20 13:38:30	GPS	4319158.7595	656145.7519	4632153.7007	46.868511537	8.638052069	507.3960
2022-06-20 13:38:30	GLO	4319160.9152	656145.4077	4632154.9542	46.868505595	8.638043359	509.7325
2022-06-20 13:38:30	GAL	4319158.9412	656145.8119	4632153.3493	46.868508138	8.638052489	507.2686
2022-06-20 13:38:30	BDS	4319159.2336	656145.1544	4632156.3593	46.868525399	8.638043387	509.5954

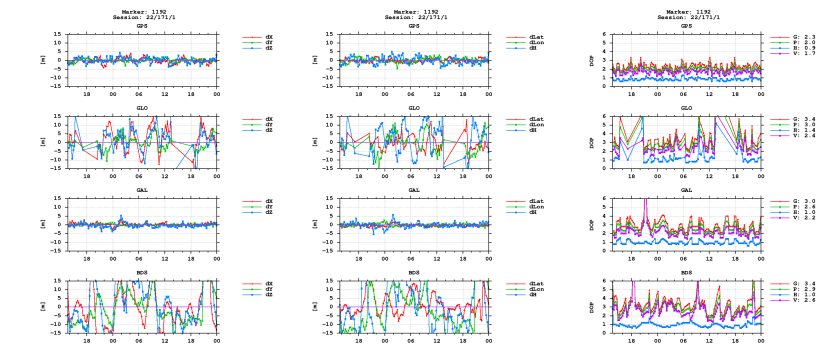

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)