


# GNSS observation file monitoring for 0518


Last RINEX file: 05181721.22O  
RINEX version: 3.02  
Marker: 1193  
Receiver: 518 TRIMBLE NETR9 5.52  
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.  
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

## Satellites


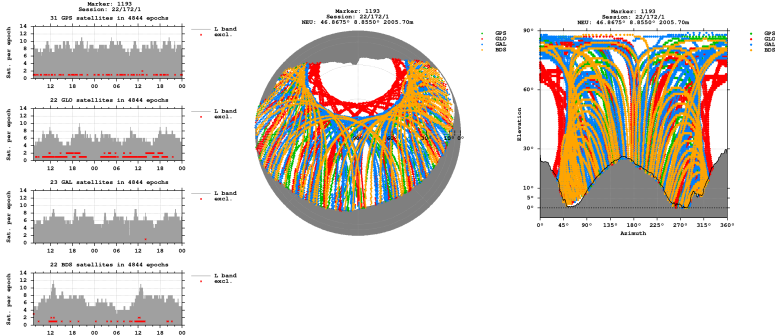


## Bands

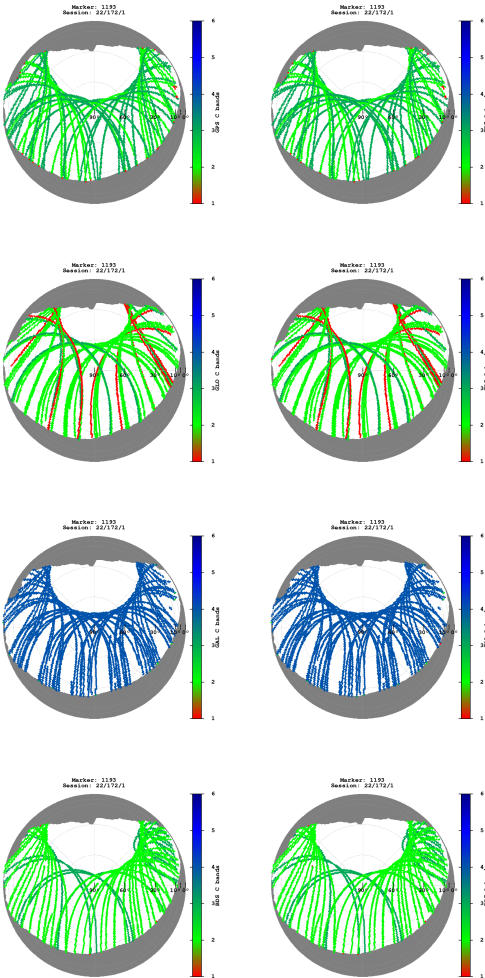

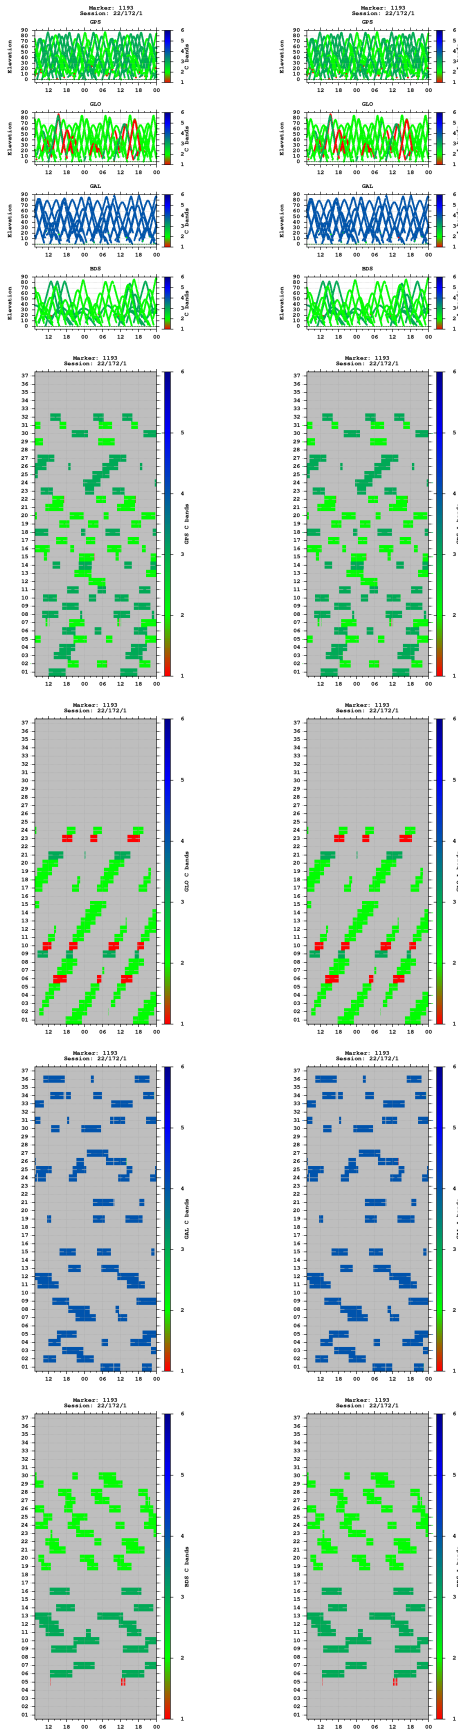



Multipath

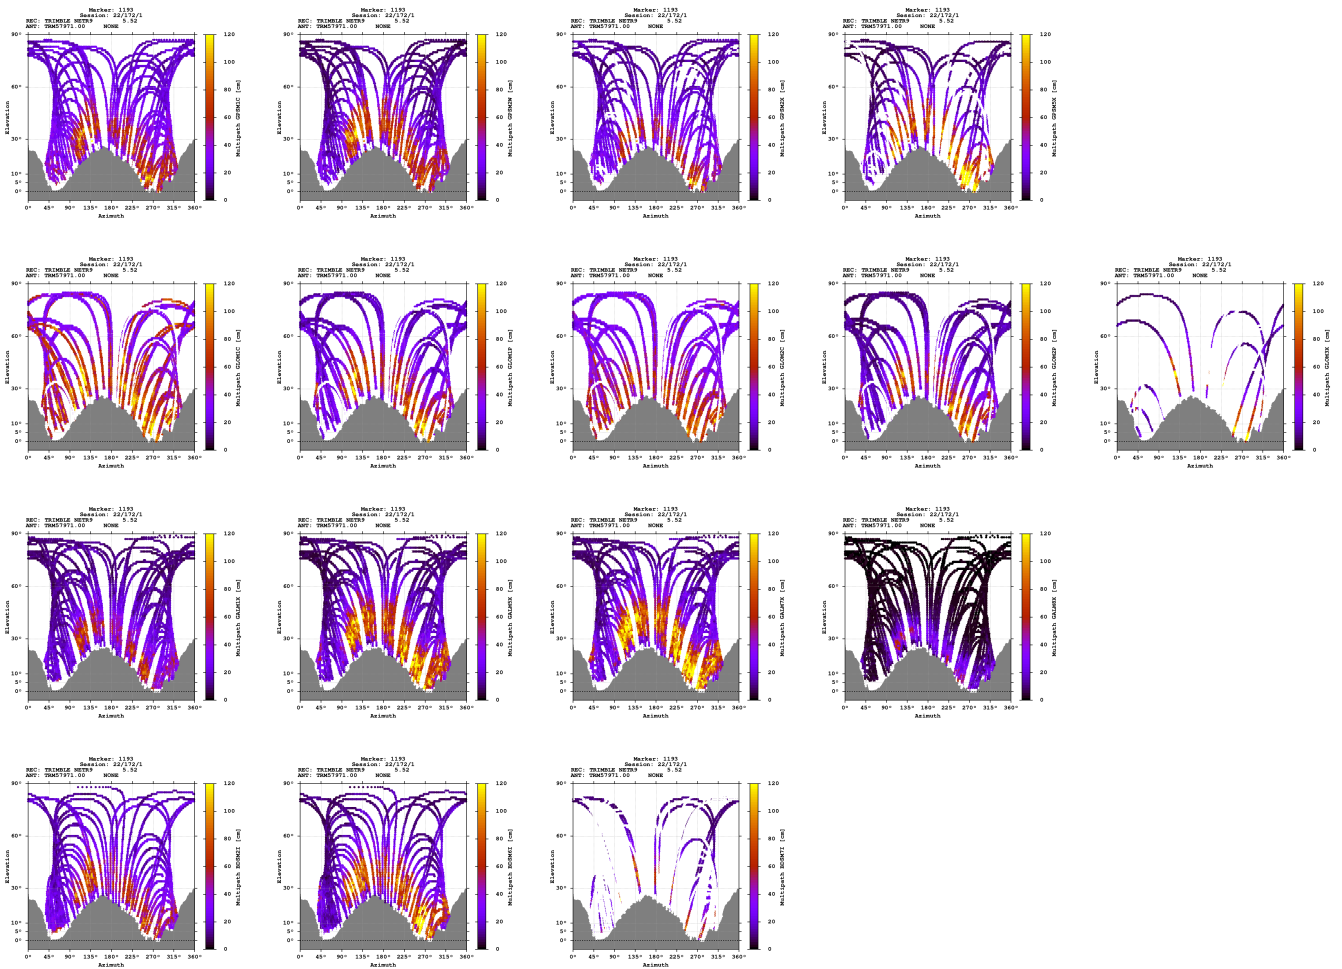

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


## Signal-to-noise ratio

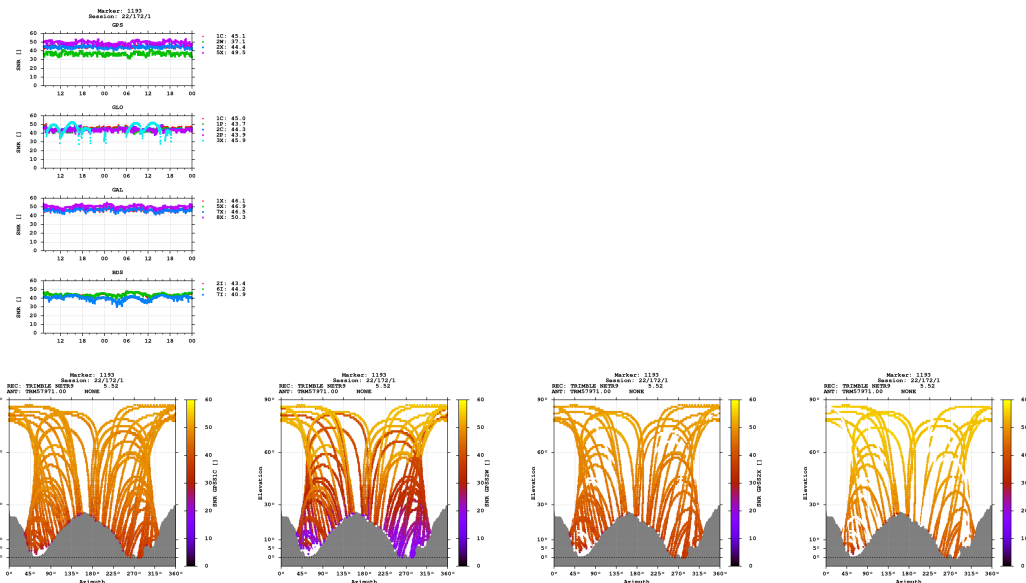

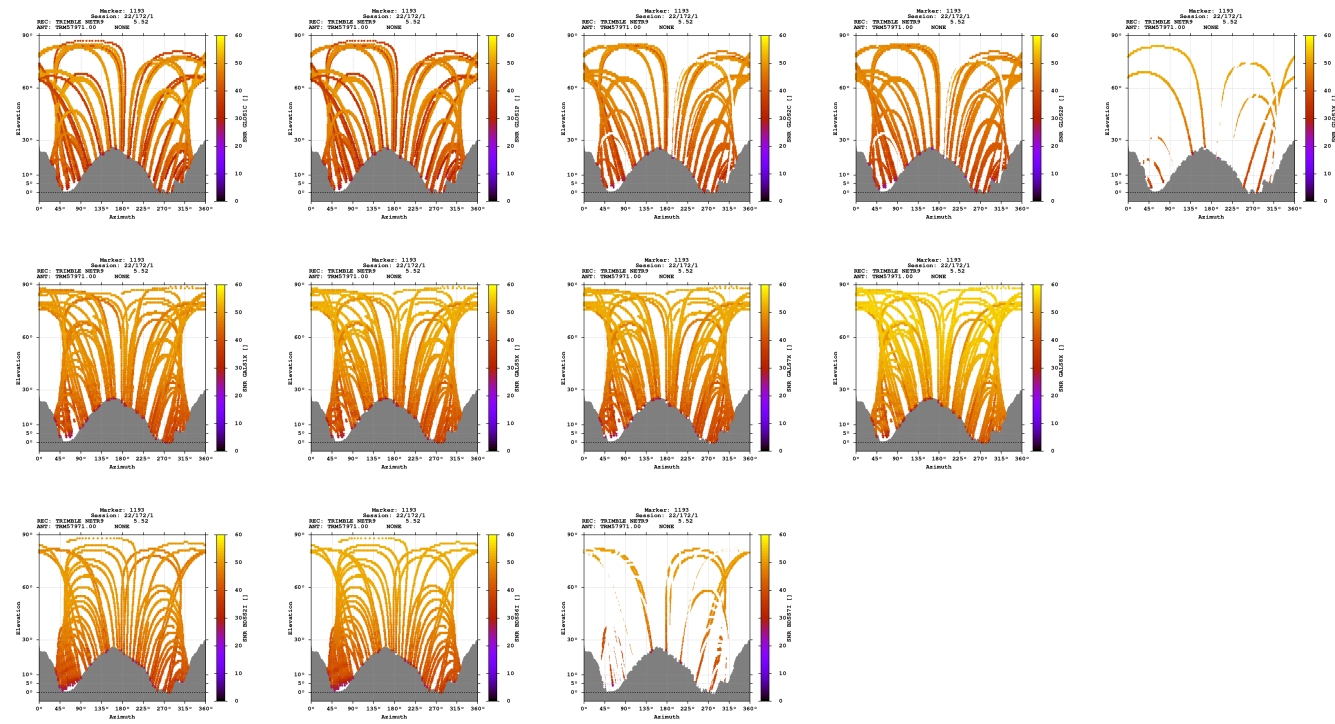

Estimates

|                     |     |              |             |              |              |             |           |
|---------------------|-----|--------------|-------------|--------------|--------------|-------------|-----------|
| 2022-06-21 07:25:00 | GPS | 4317736.0254 | 672668.4478 | 4633170.3531 | 46.867501535 | 8.855037621 | 2005.6975 |
| 2022-06-21 07:25:00 | GLO | 4317736.9102 | 672668.1870 | 4633170.5539 | 46.867497296 | 8.855032456 | 2006.4144 |
| 2022-06-21 07:25:00 | GAL | 4317736.4275 | 672668.4458 | 4633170.4749 | 46.867499679 | 8.855036783 | 2006.0579 |
| 2022-06-21 07:25:00 | BDS | 4317735.7930 | 672666.1529 | 4633172.1731 | 46.867516550 | 8.855008358 | 2006.6273 |

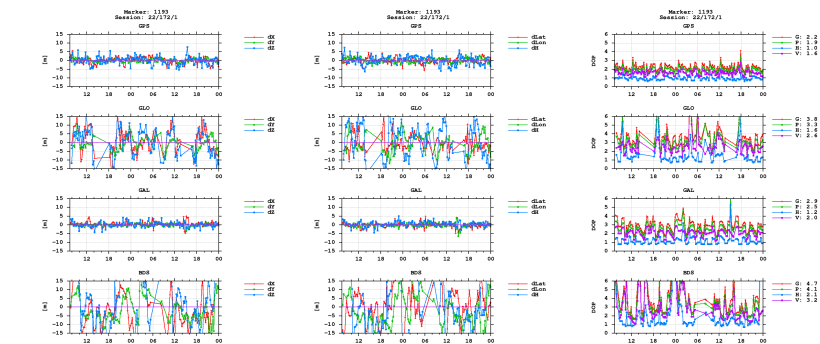

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)  
BNC 2.13.0 (checkout 9163)