

GNSS observation file monitoring for 0518

Last RINEX file: 05181751.220


RINEX version: 3.02

Marker: 1134

Receiver: 518 TRIMBLE NETR9 5.52

Antenna: 518 TRM57971.00 NONE


Epochs

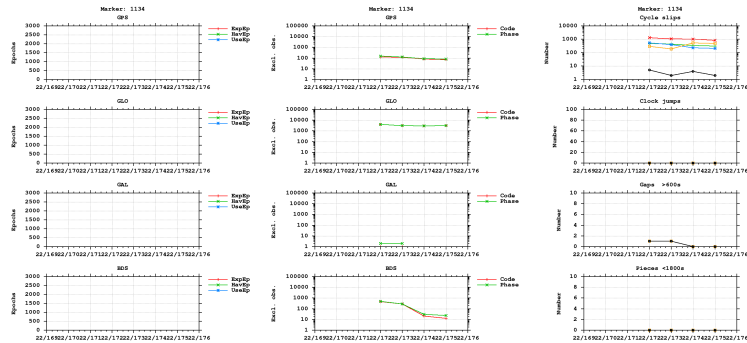


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

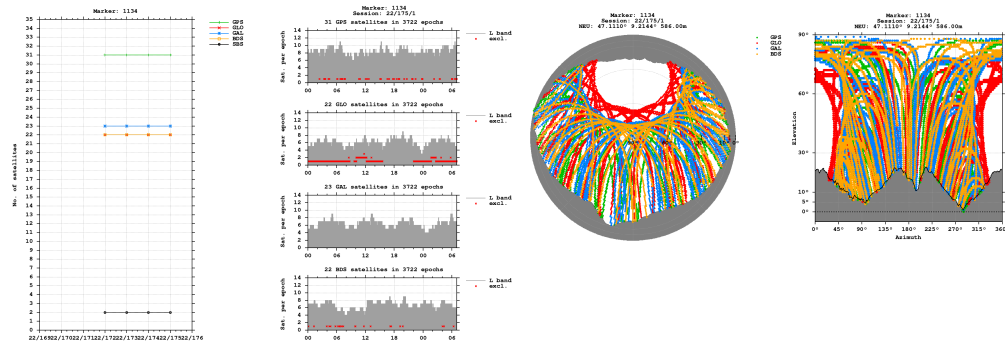


Bands

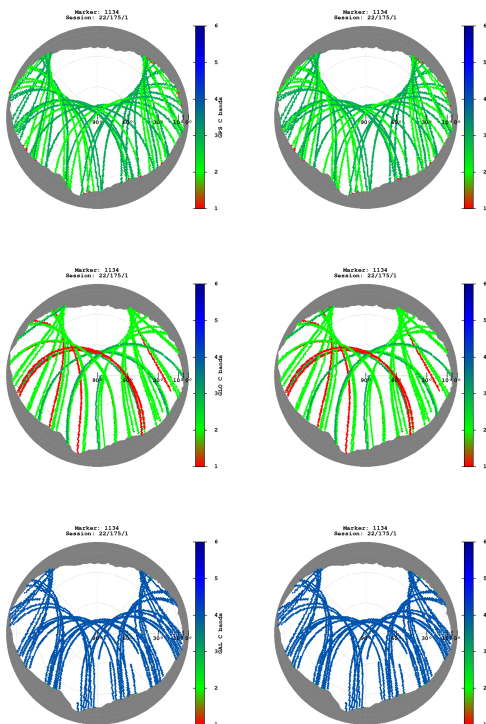


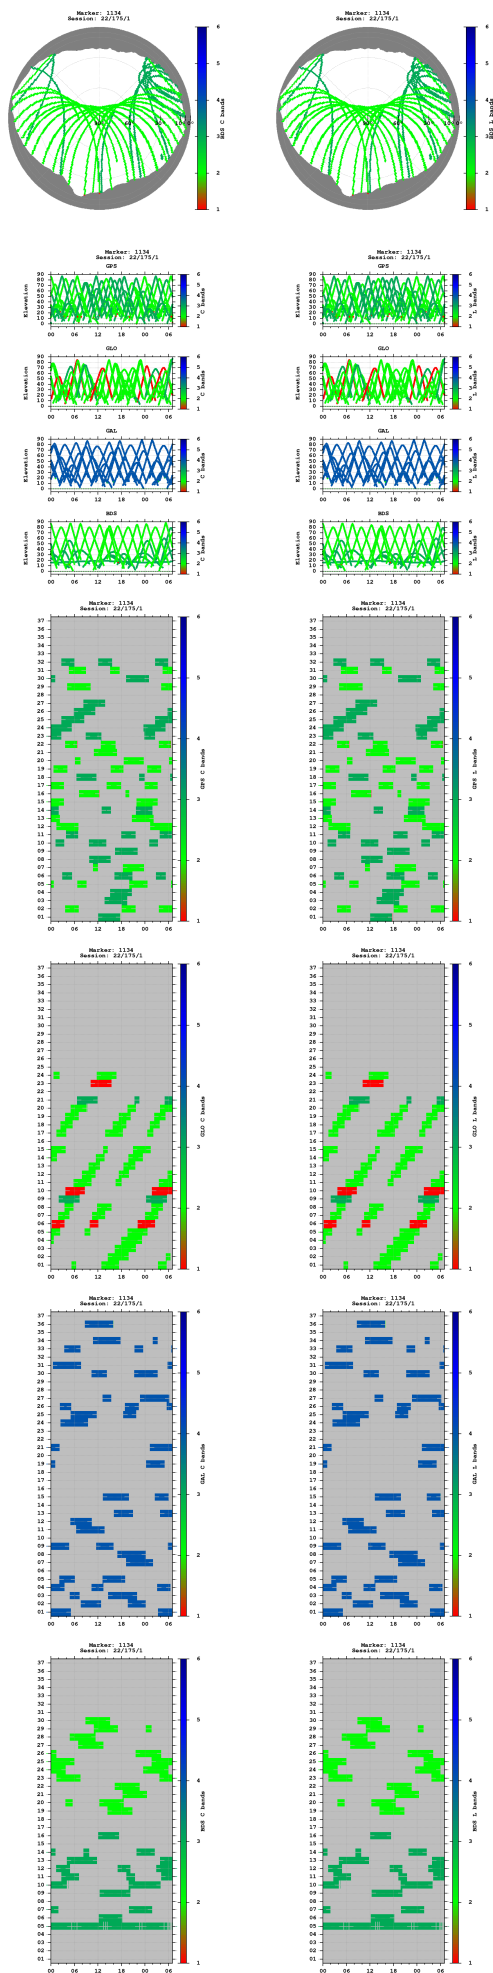


Observations

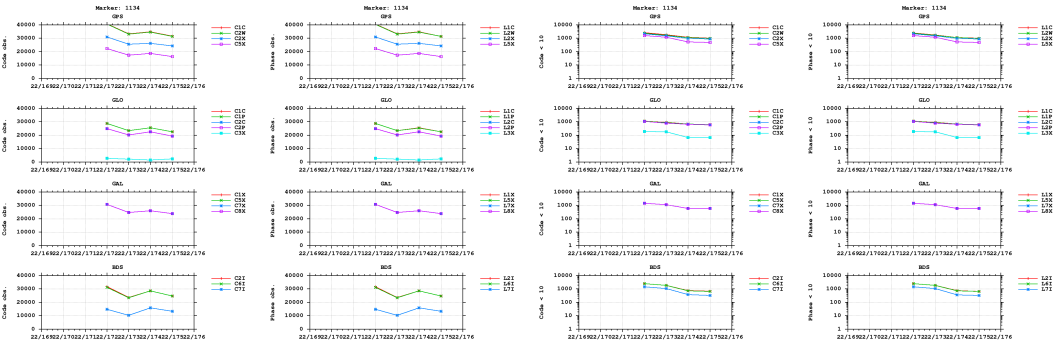


Multipath

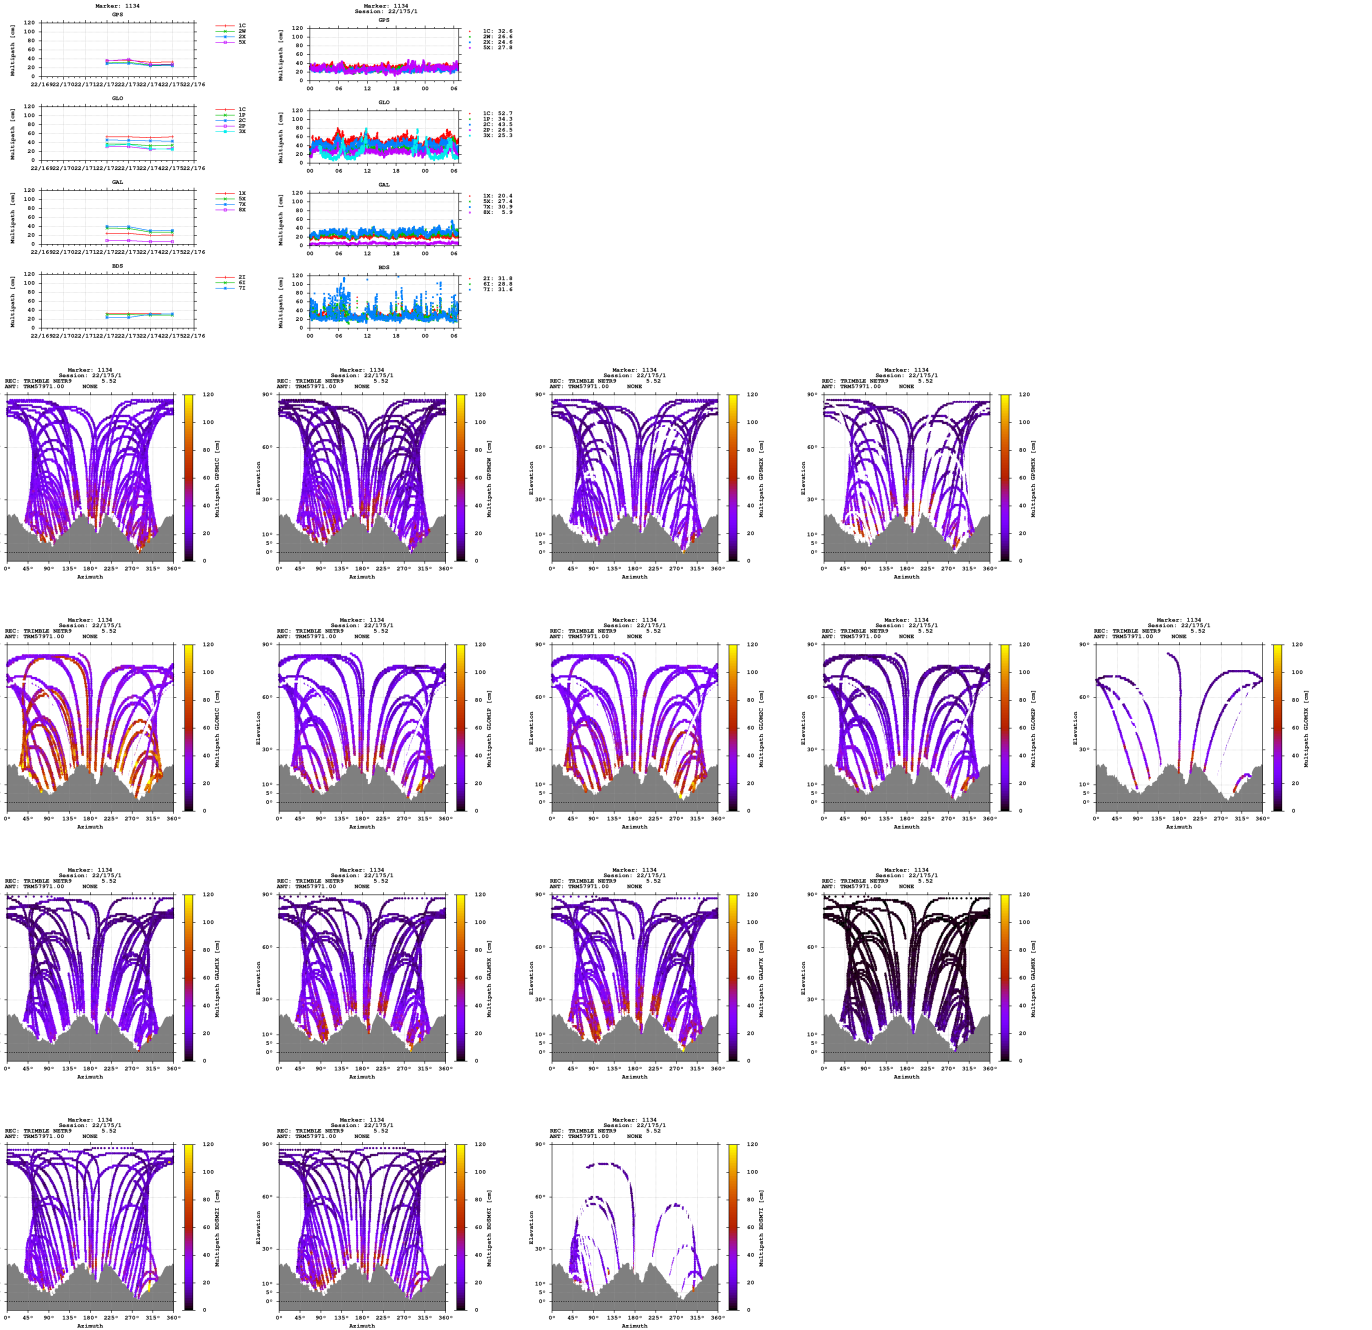


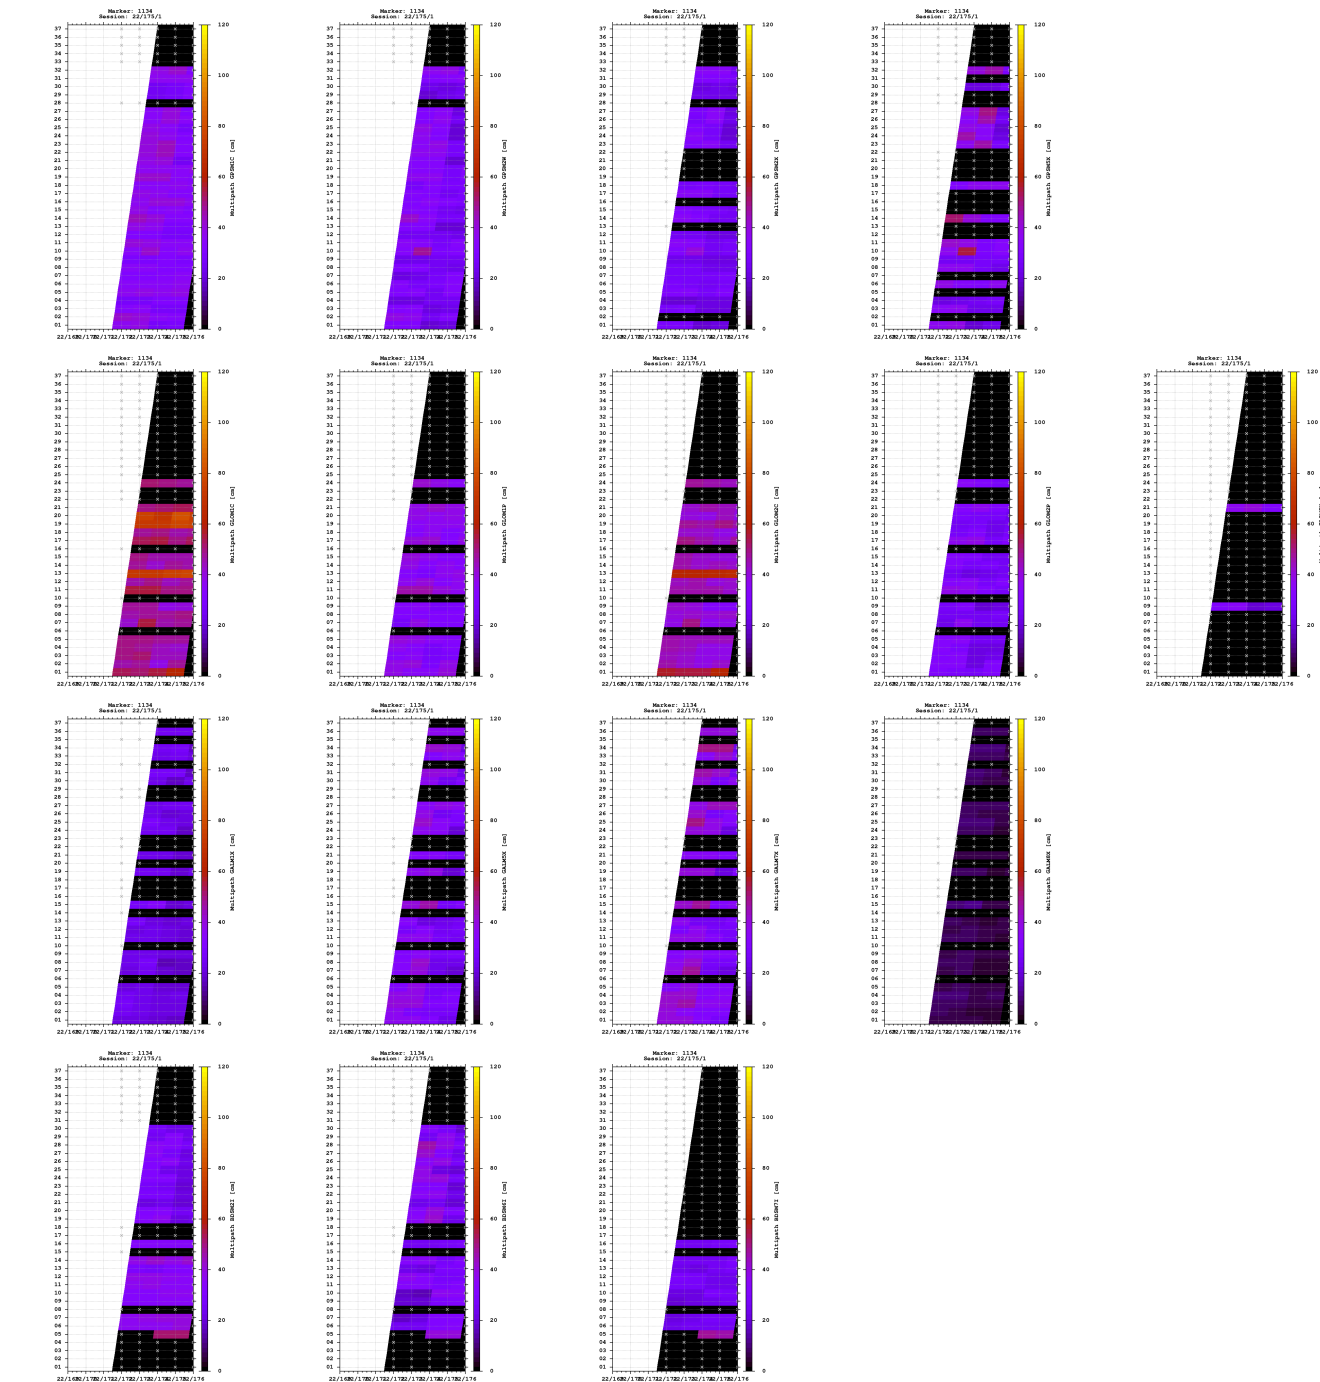


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

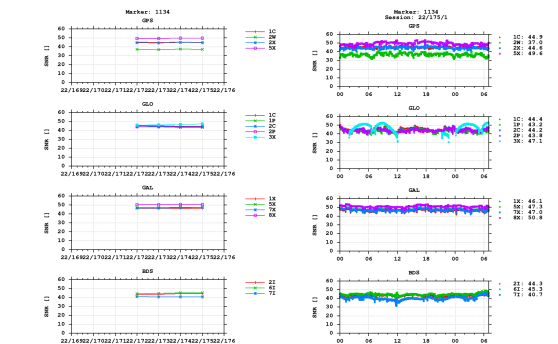


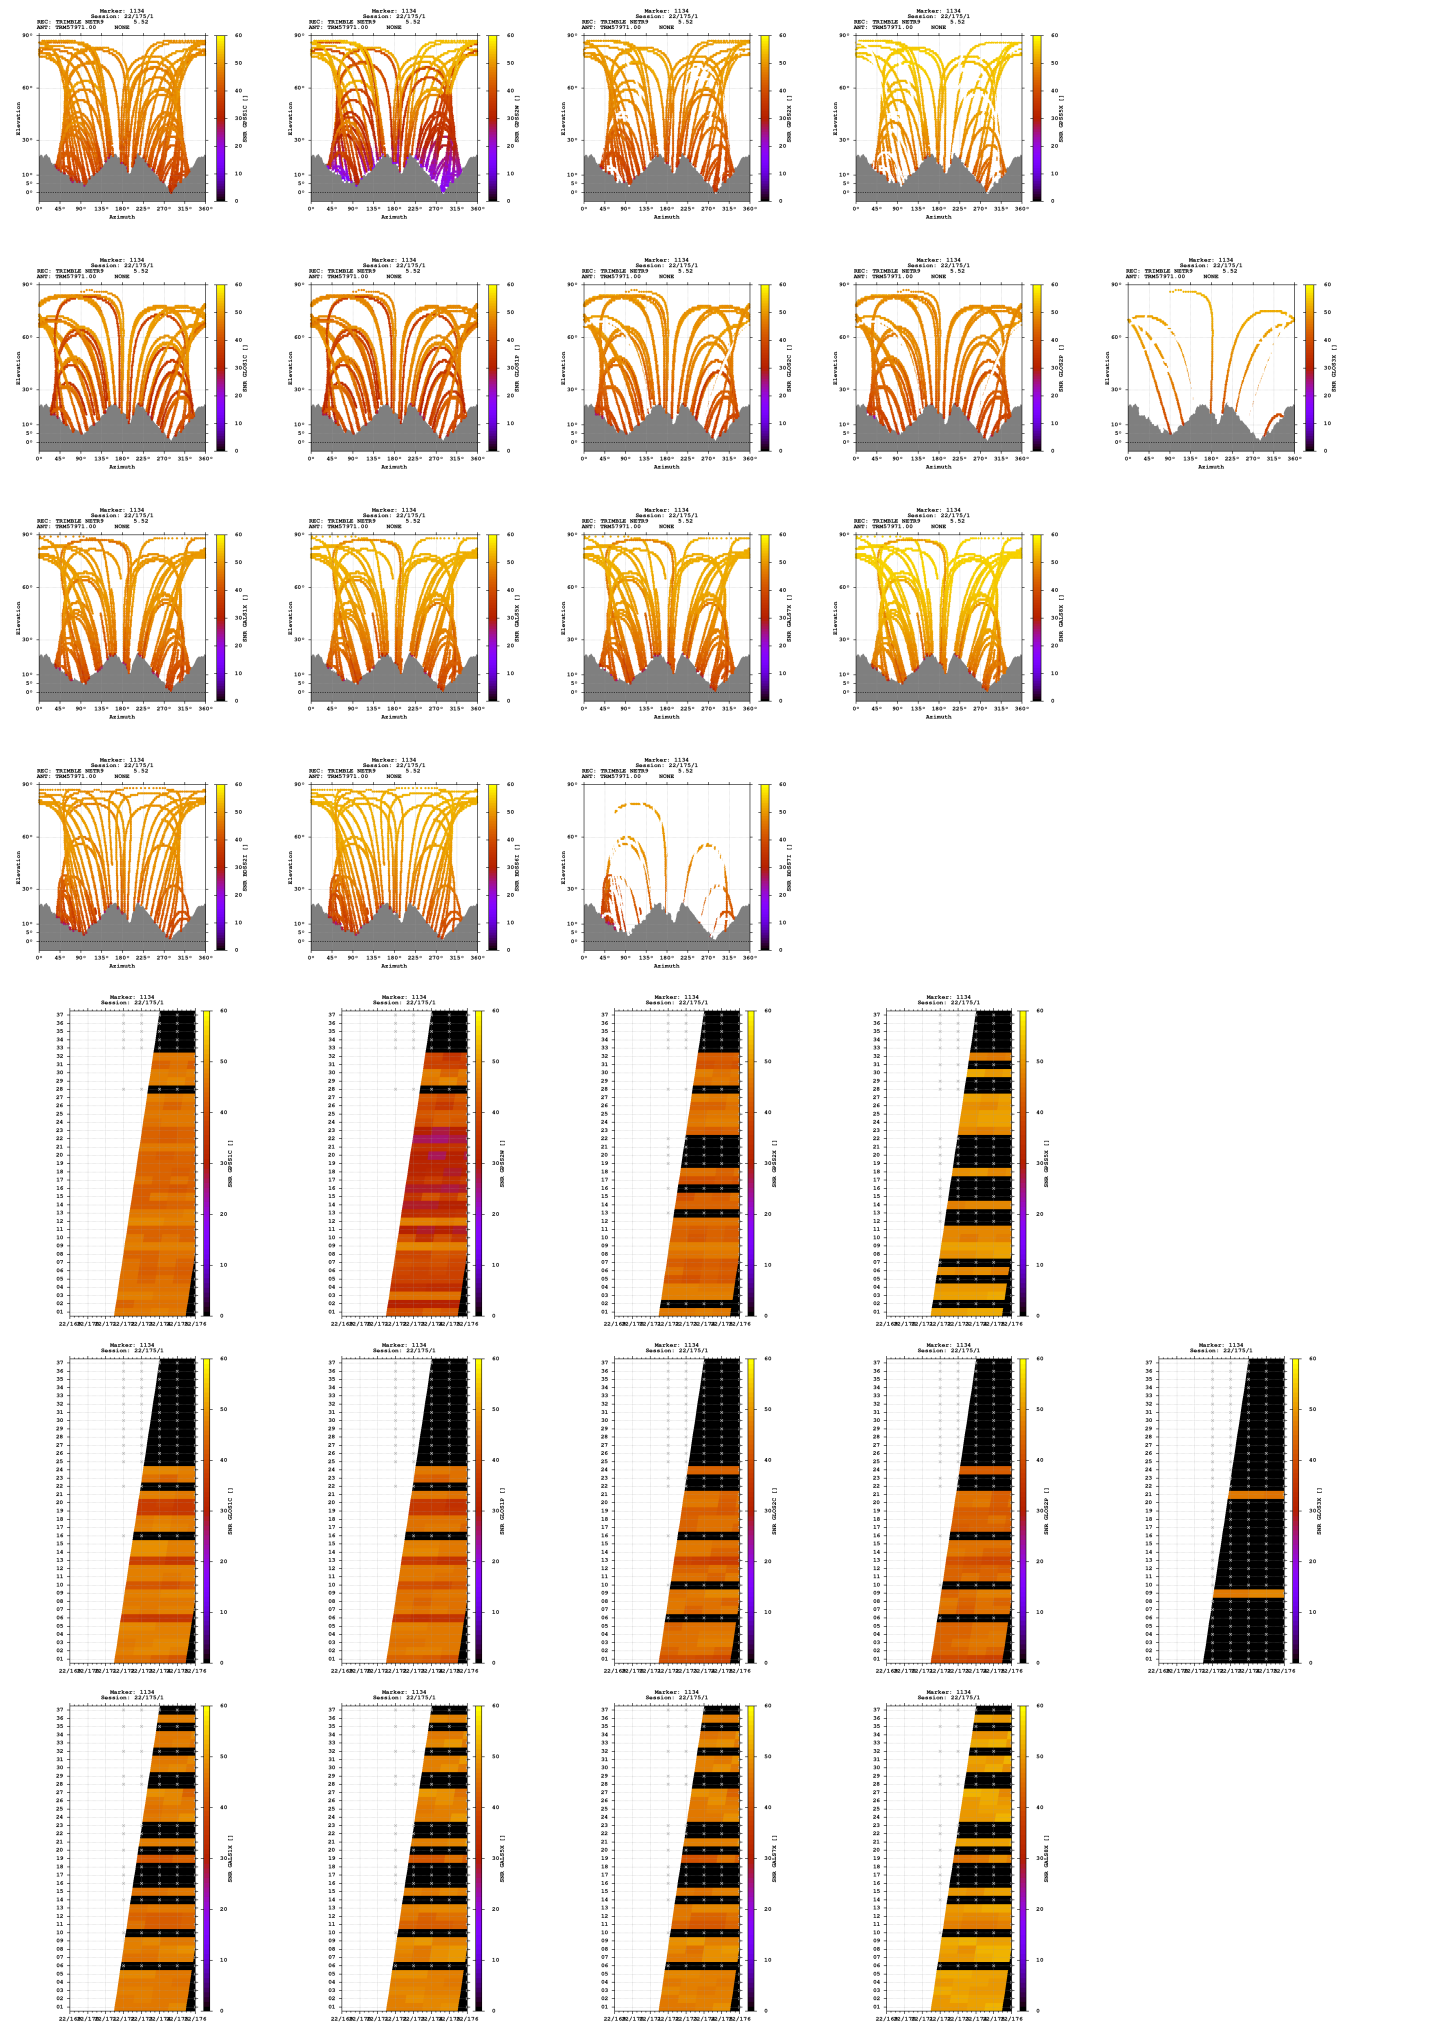

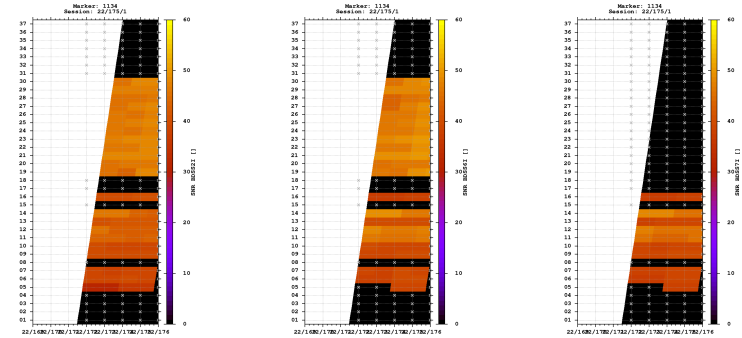



Estimates

2022-06-23 13:18:30	GPS	4292934.2641	696407.8884	4650600.9941	47.110995886	9.214360697	586.0007
2022-06-23 13:18:30	GLO	4292934.2138	696408.2901	4650600.2979	47.110991527	9.214366026	585.5006
2022-06-23 13:18:30	GAL	4292933.6376	696407.8402	4650600.5424	47.110997247	9.214361392	585.2436
2022-06-23 13:18:30	BDS	4292934.4686	696409.3735	4650603.2662	47.111006896	9.214379577	587.9646

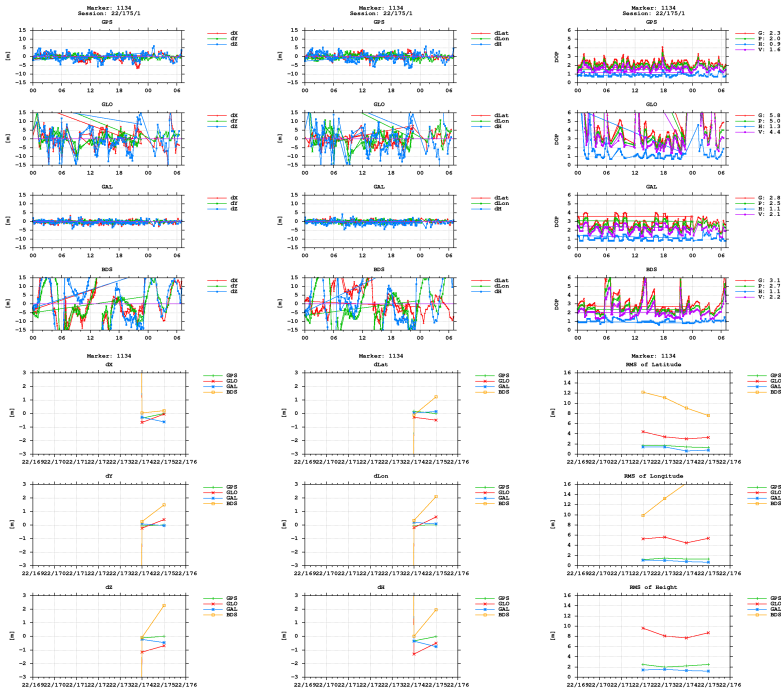

BNC

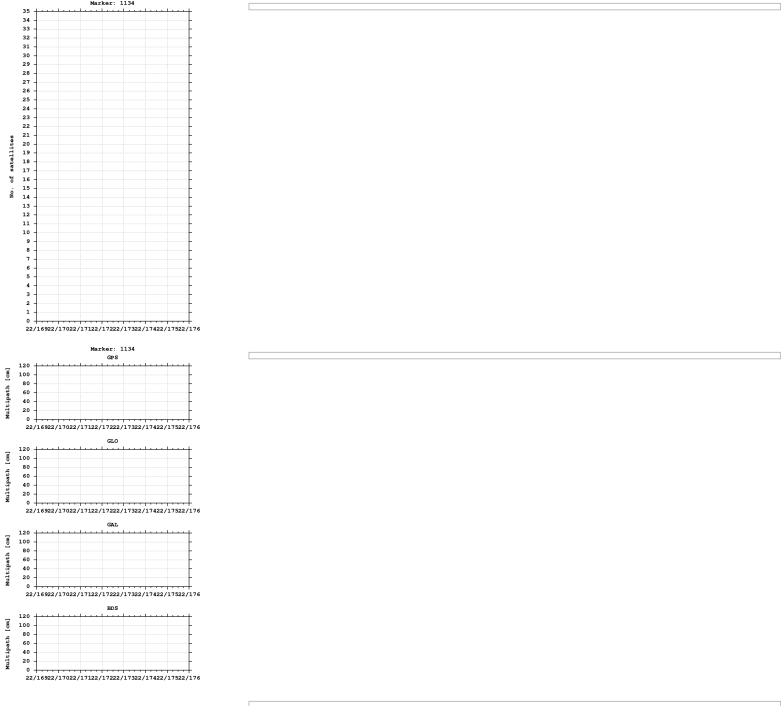

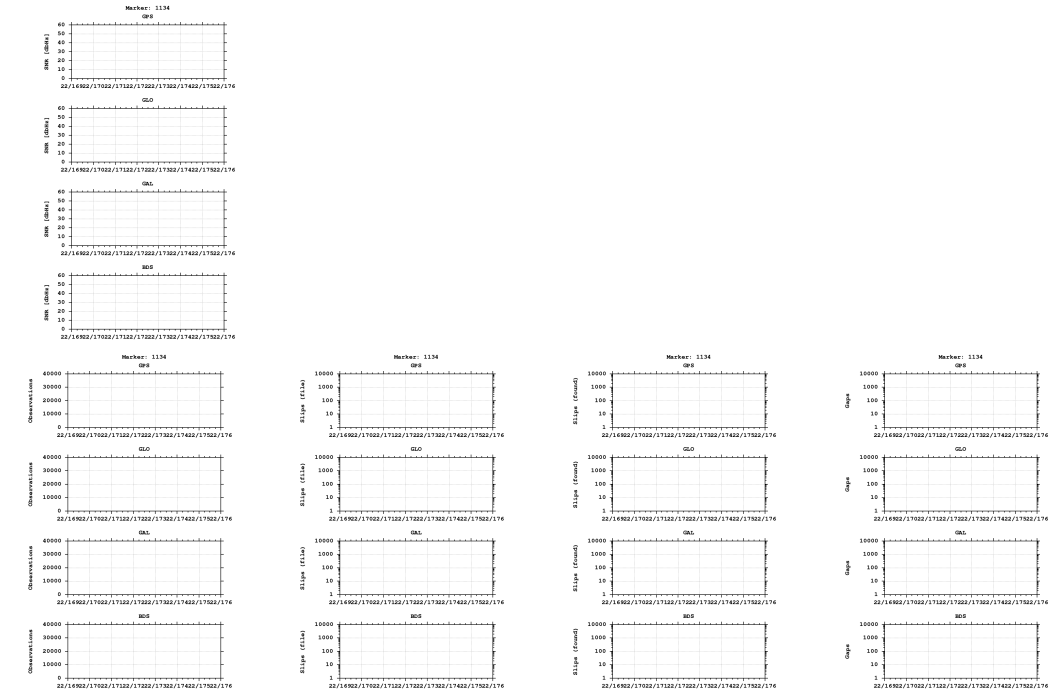

Equipment

2022-06-21 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)