


GNSS observation file monitoring for 0511


Last RINEX file: 05111871.220
RINEX version: 3.02
Marker: 1313
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

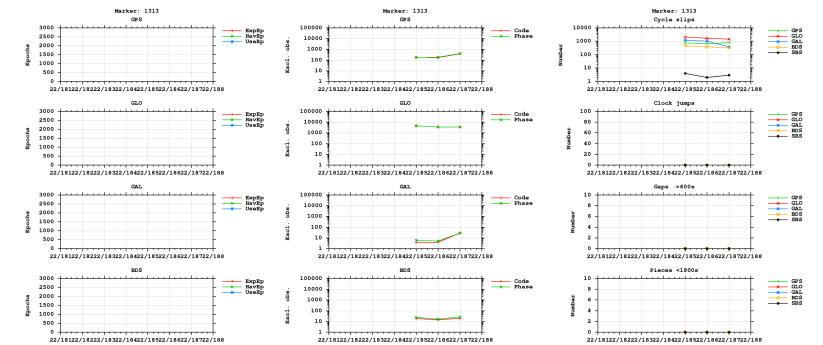



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

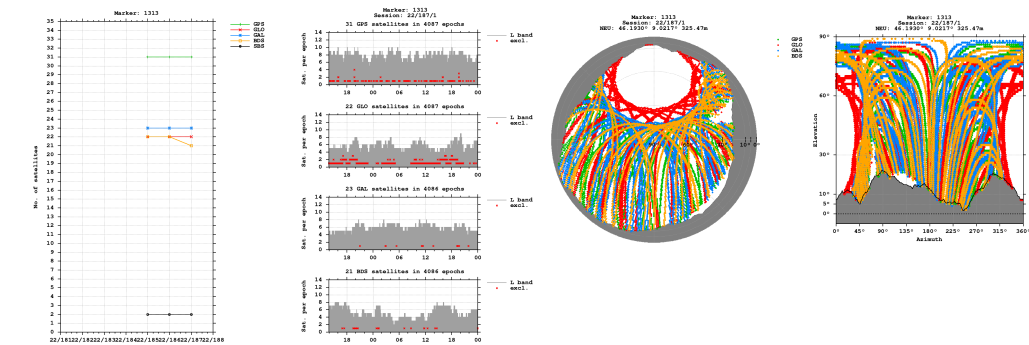


Bands

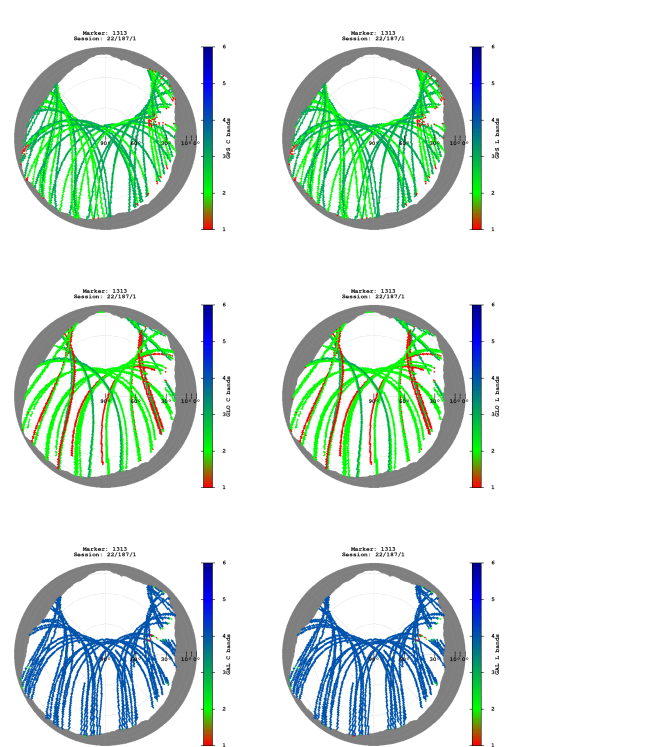


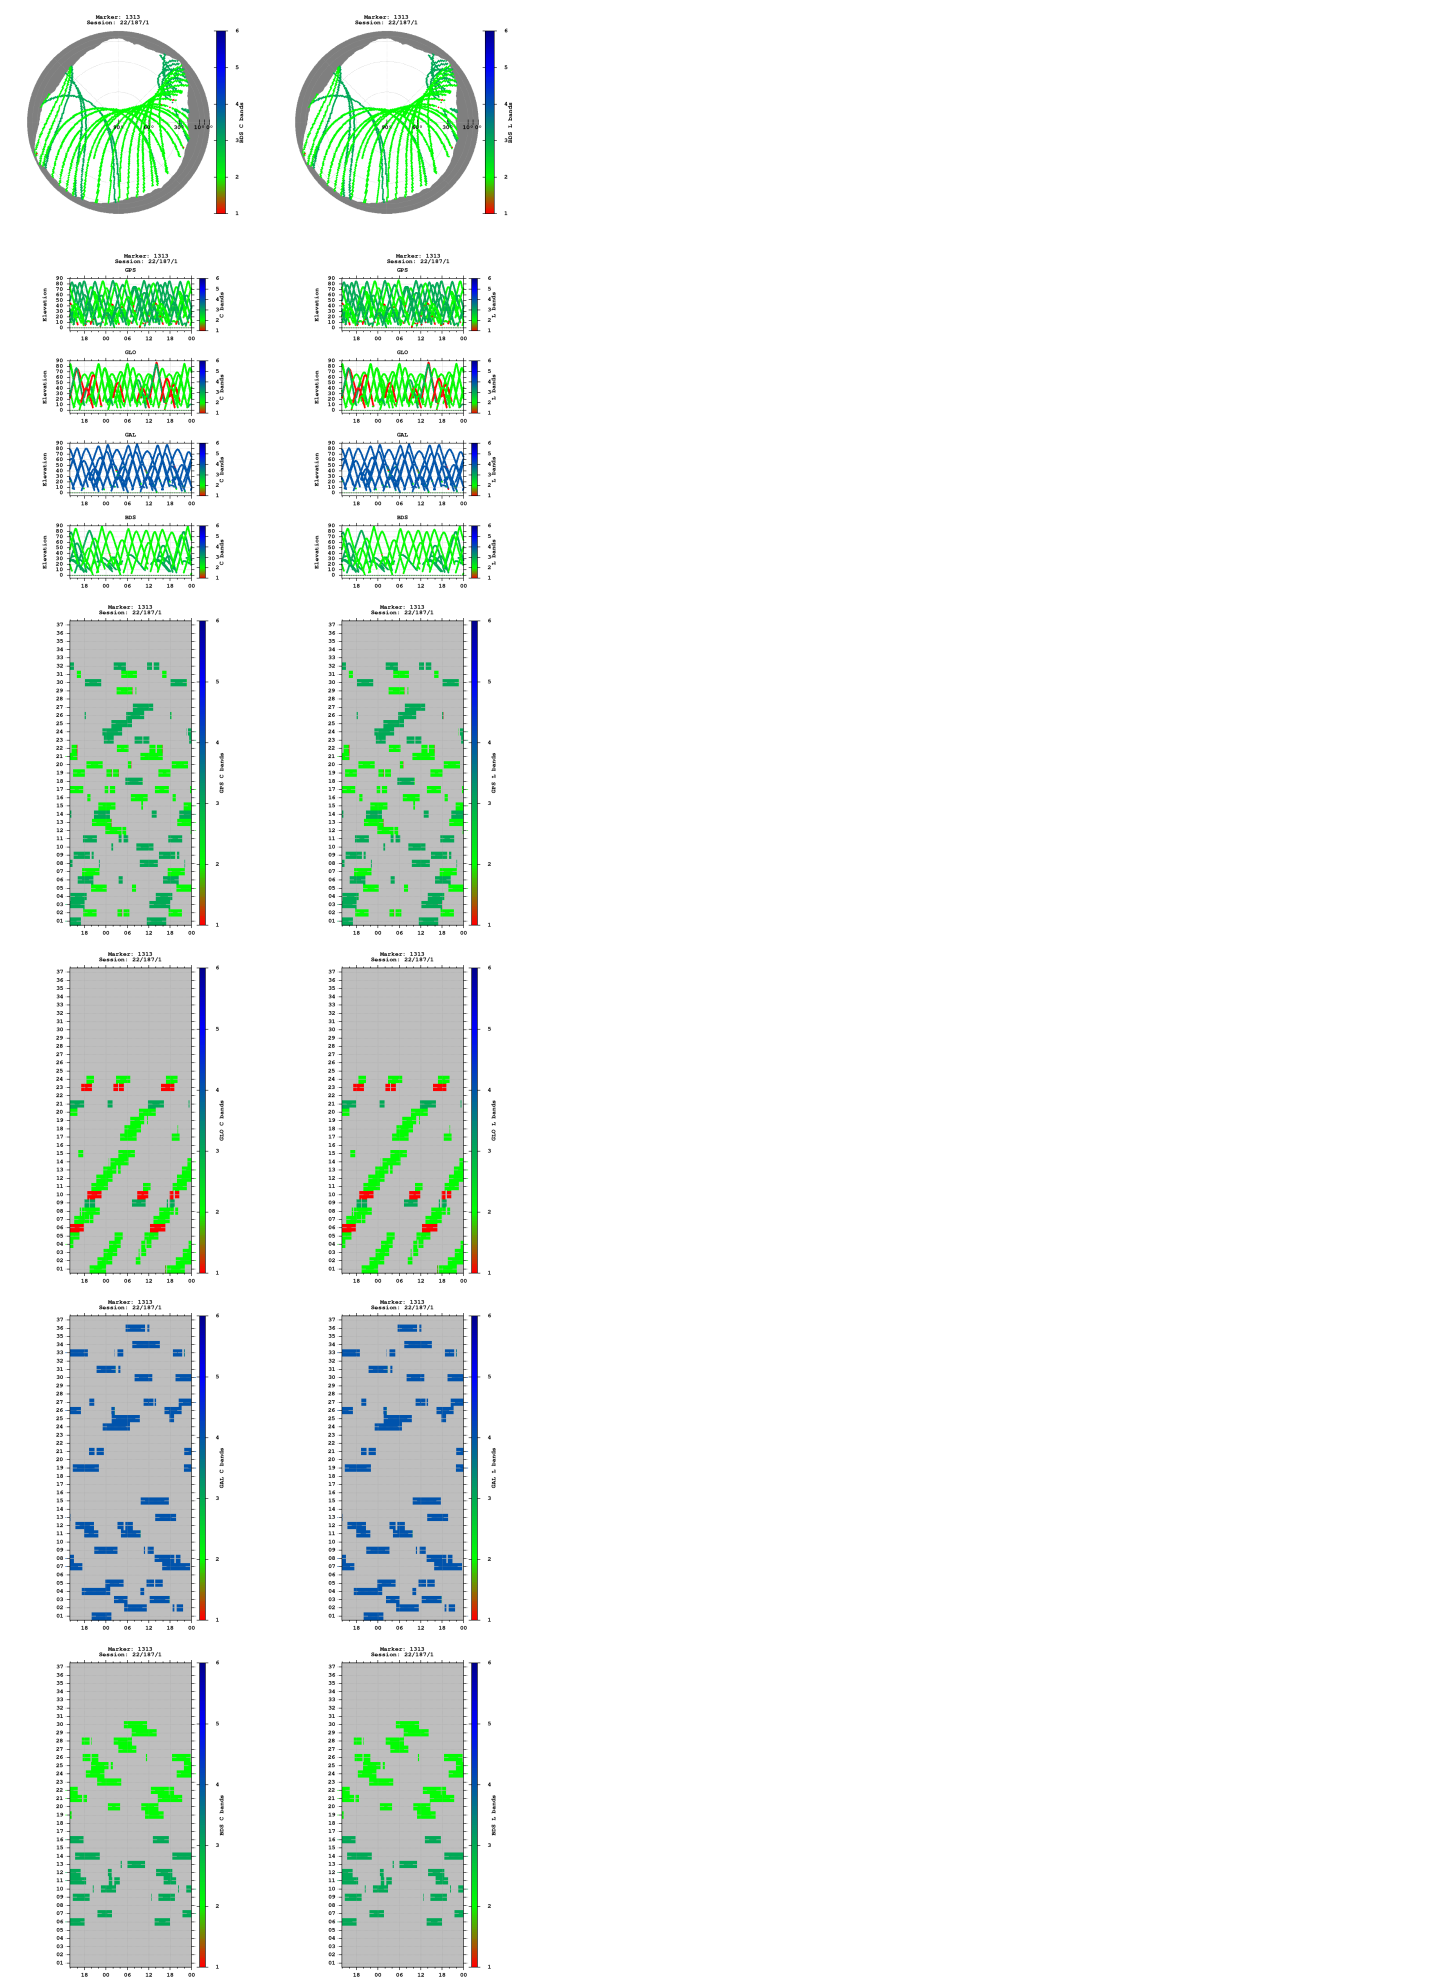


Observations

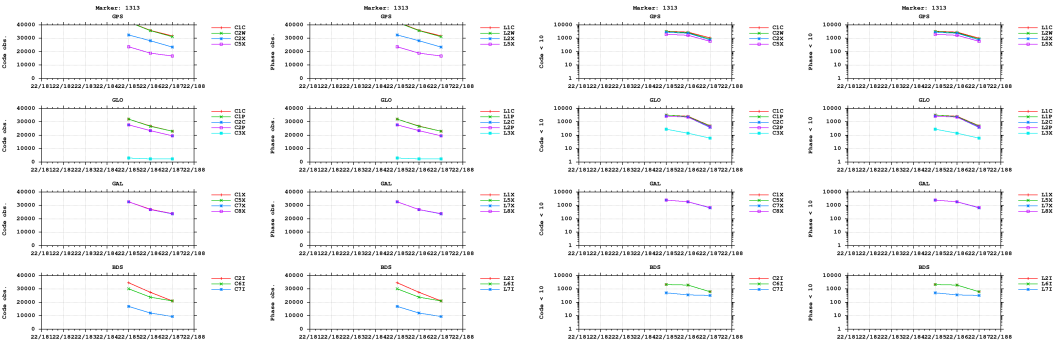


Multipath

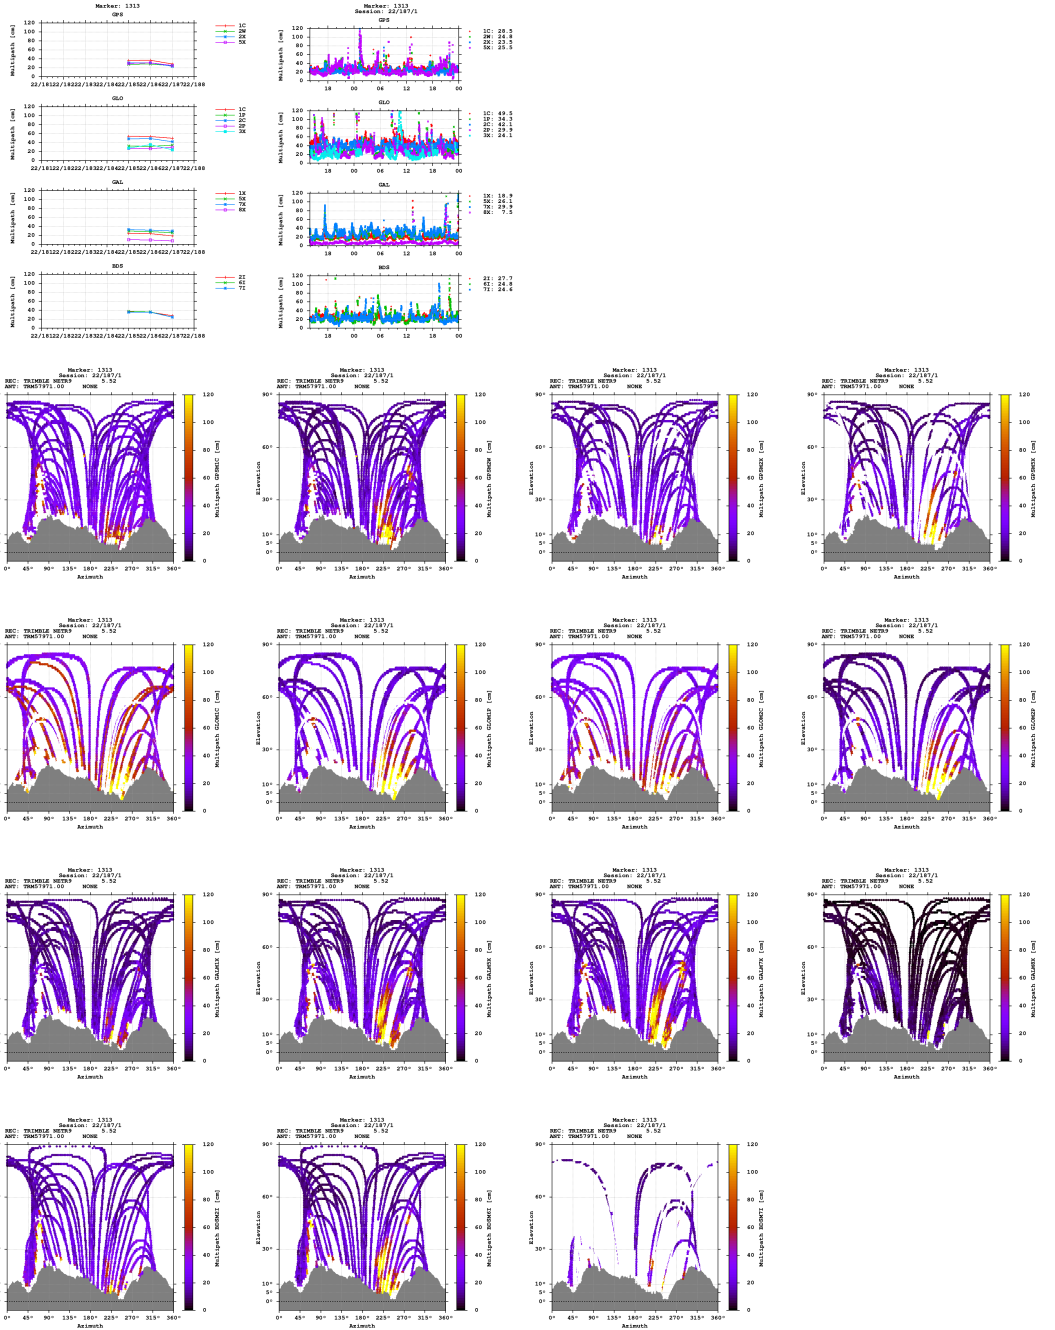


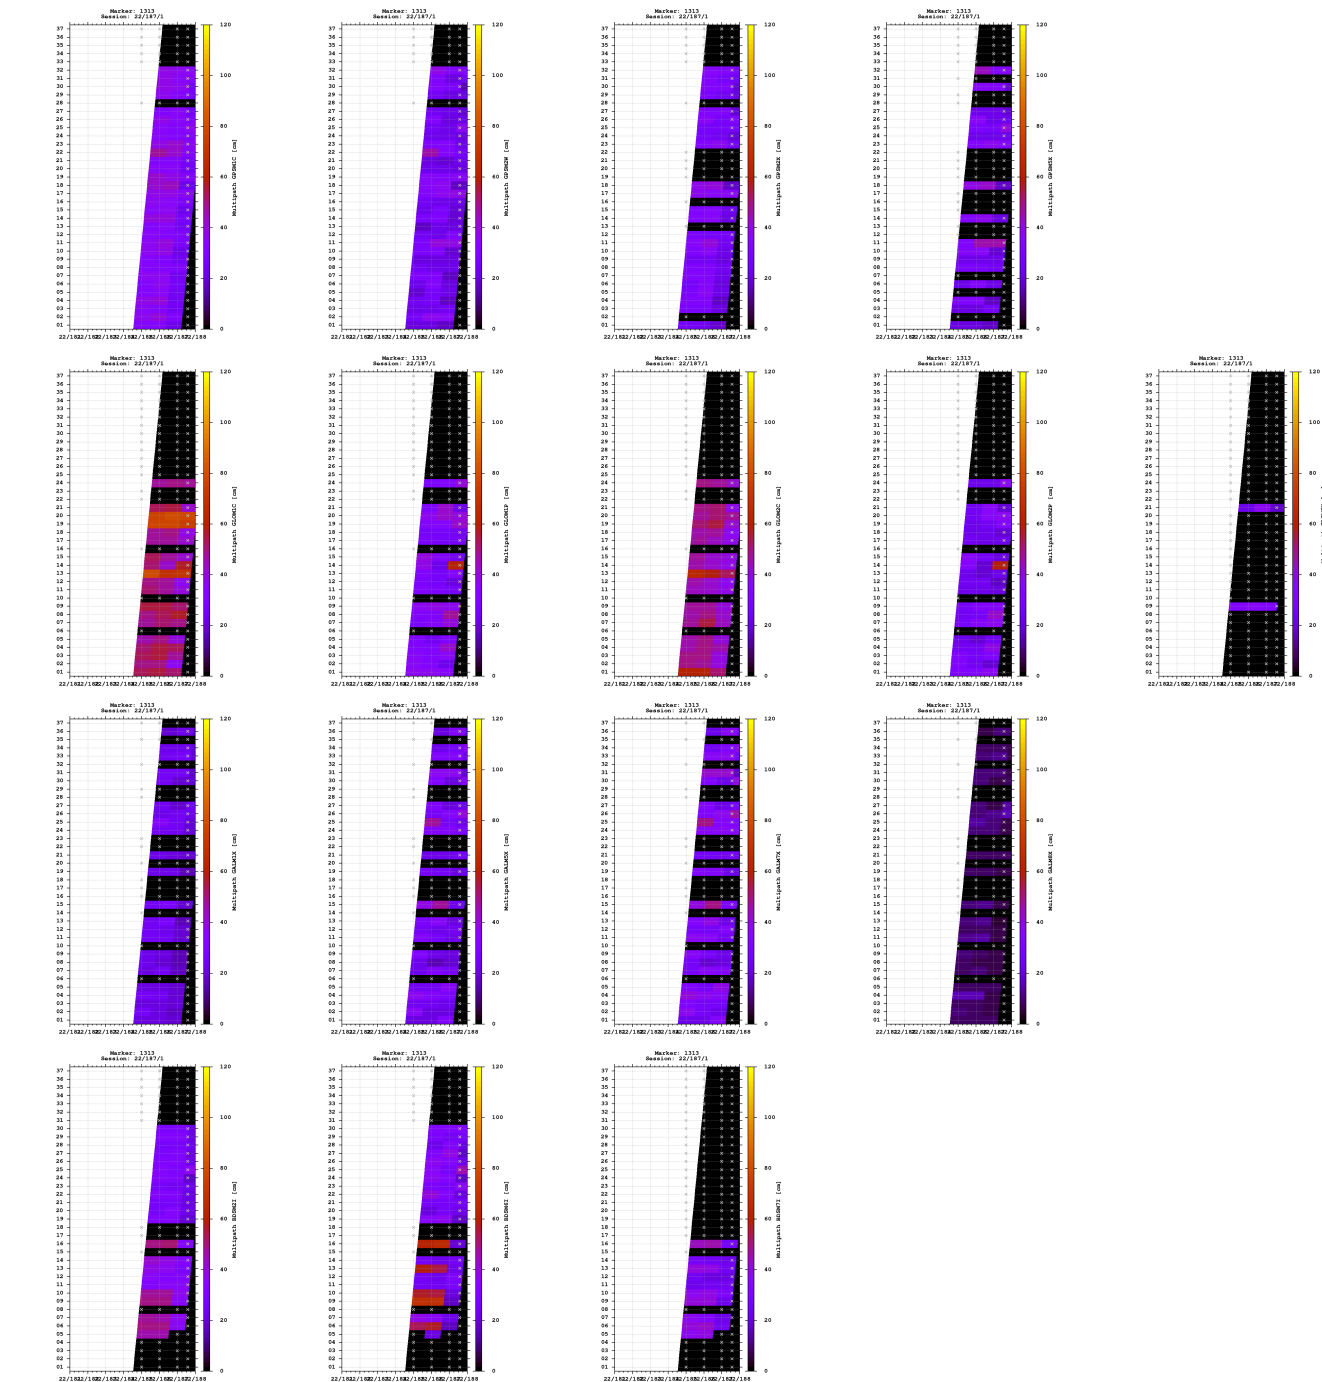


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

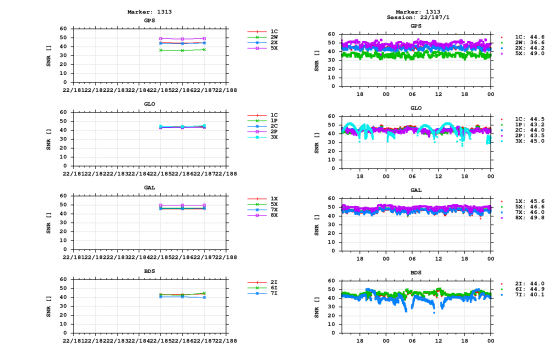


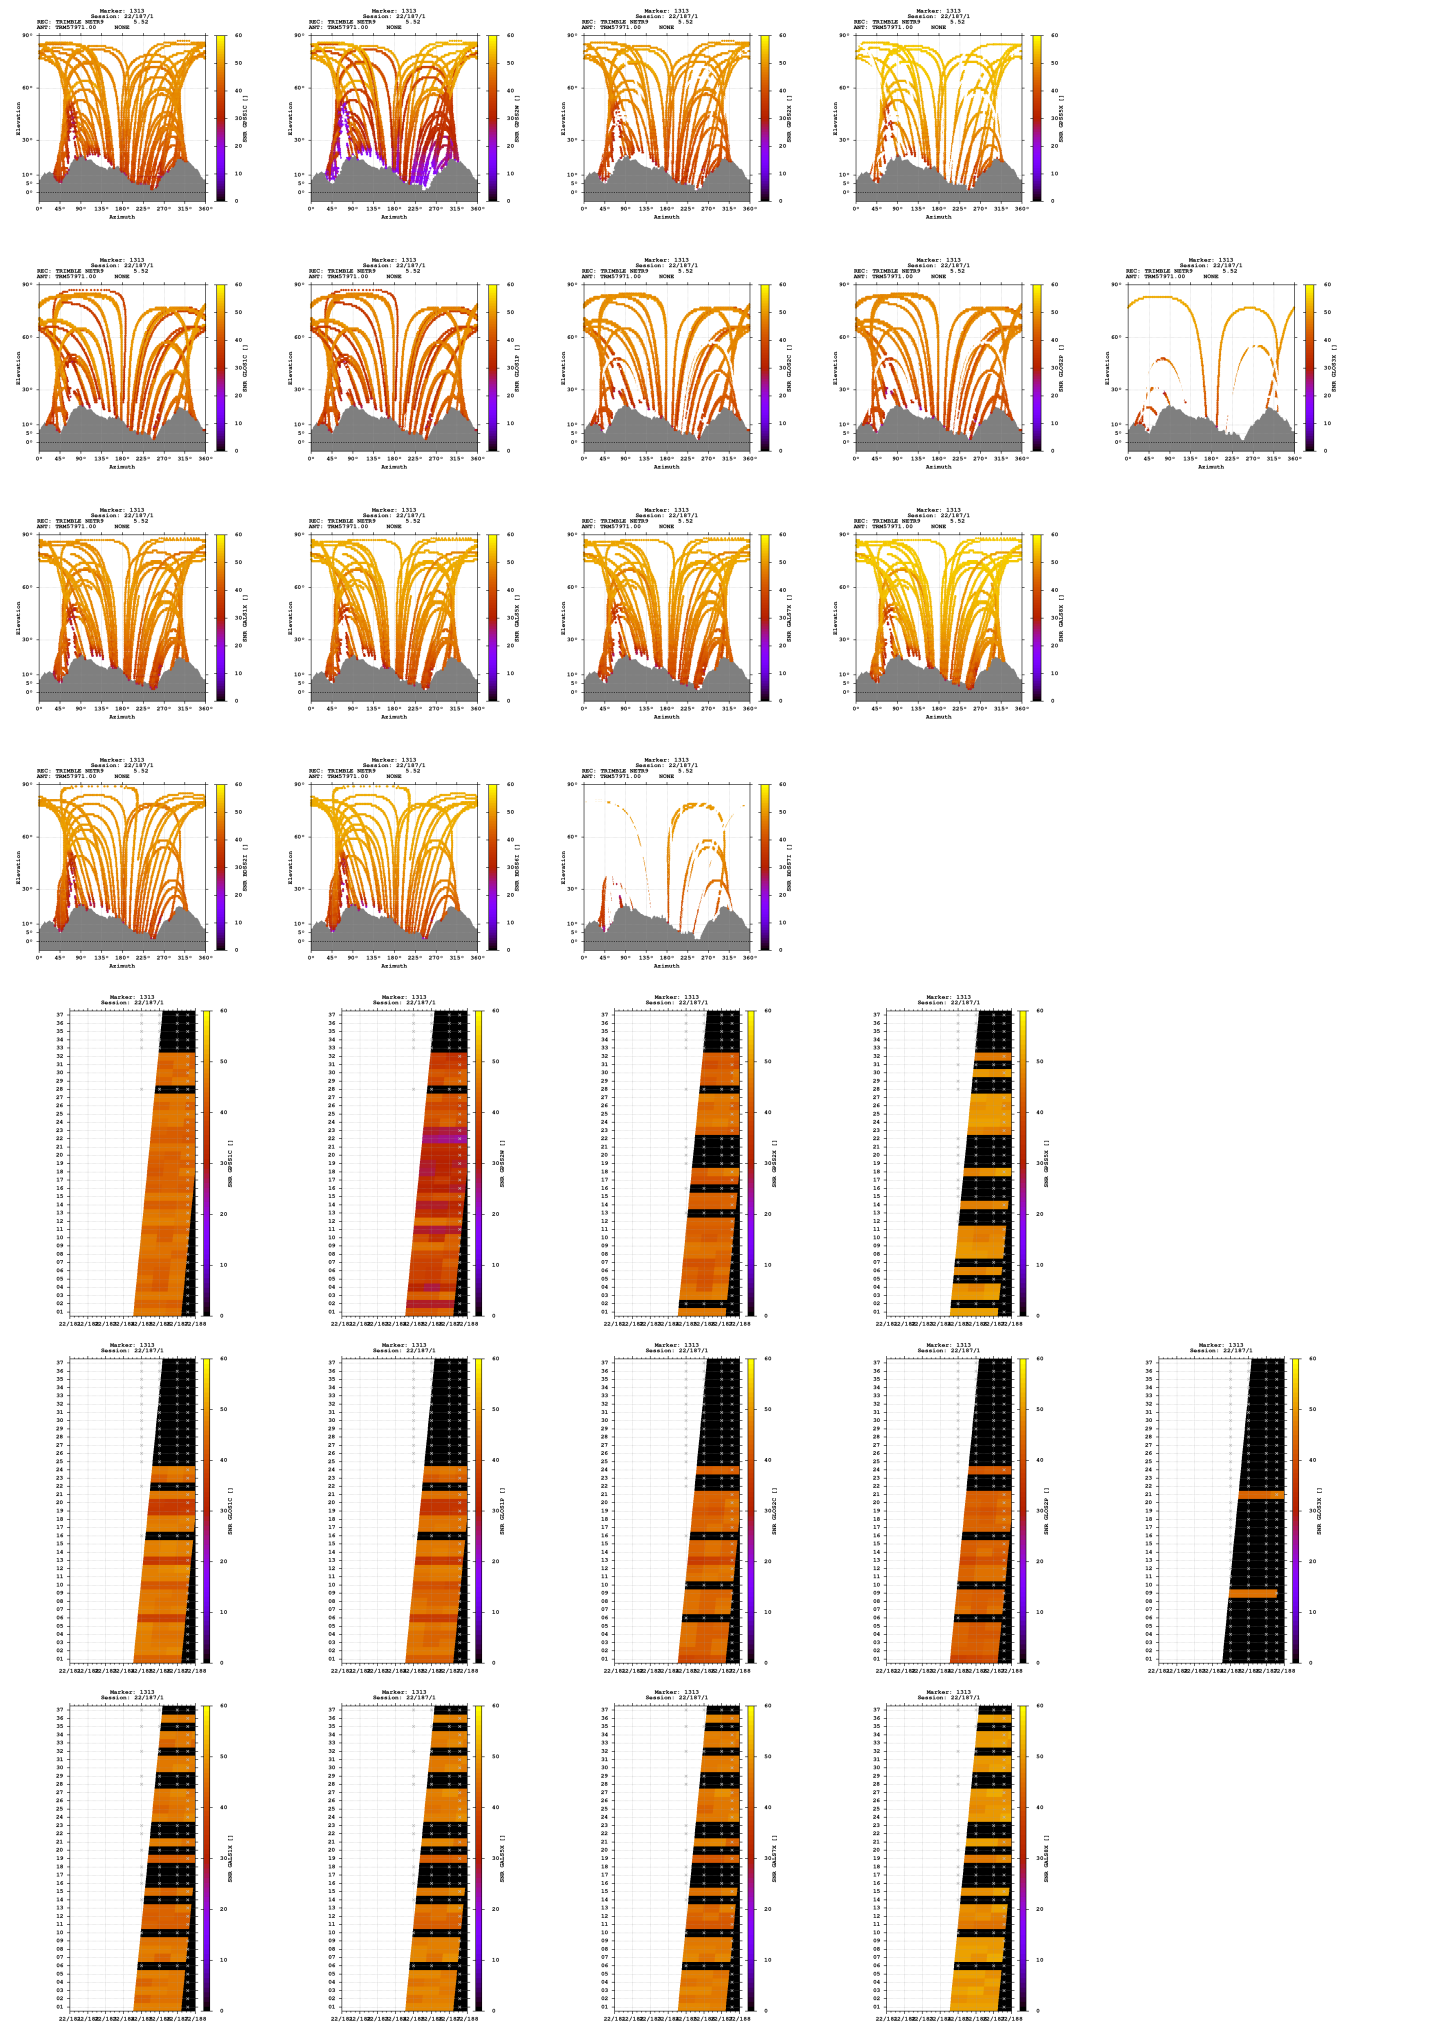

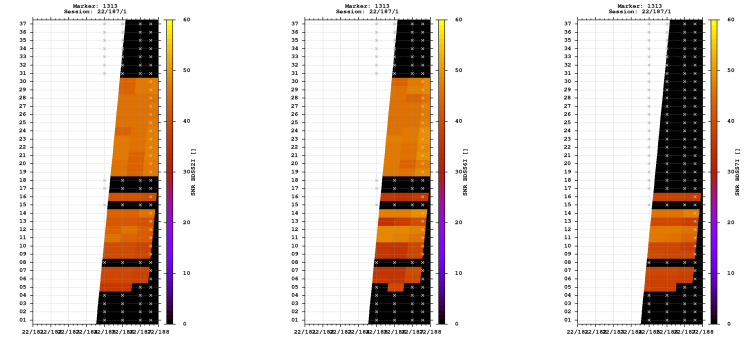



Estimates

2022-07-06 13:54:30	GPS	4368373.2286	693576.8902	4580356.4012	46.192971292	9.021680478	325.4679
2022-07-06 13:54:30	GLO	4368375.6708	693577.0812	4580358.0224	46.192965535	9.021677961	328.3283
2022-07-06 13:54:30	GAL	4368373.5275	693576.9213	4580356.4339	46.192969548	9.021680268	325.6992
2022-07-06 13:54:30	BDS	4368373.3380	693577.7449	4580354.8606	46.192960127	9.021691190	324.5237

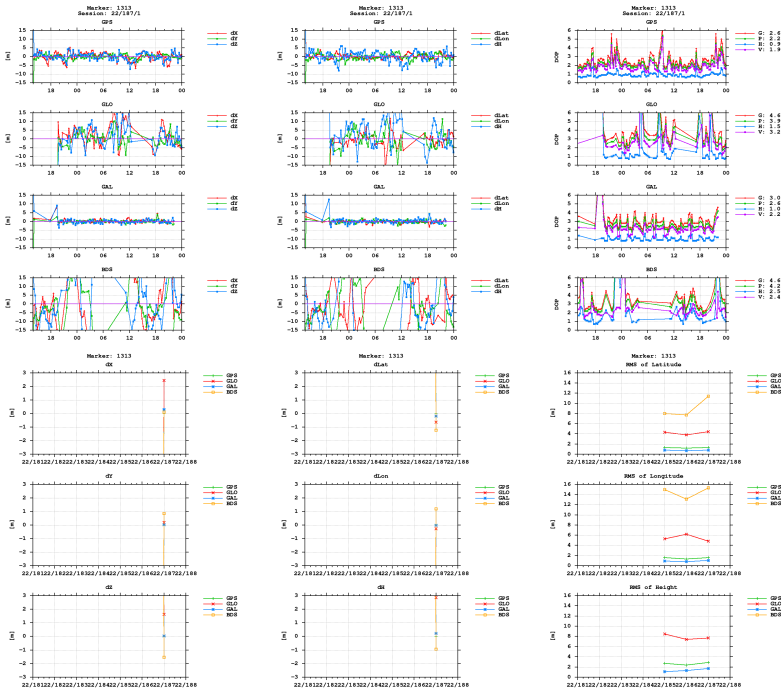

BNC

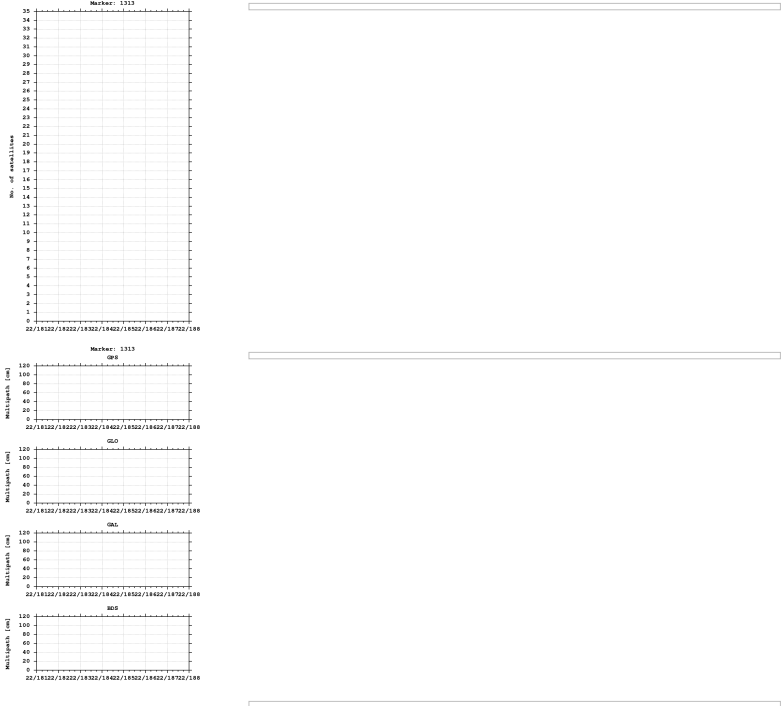

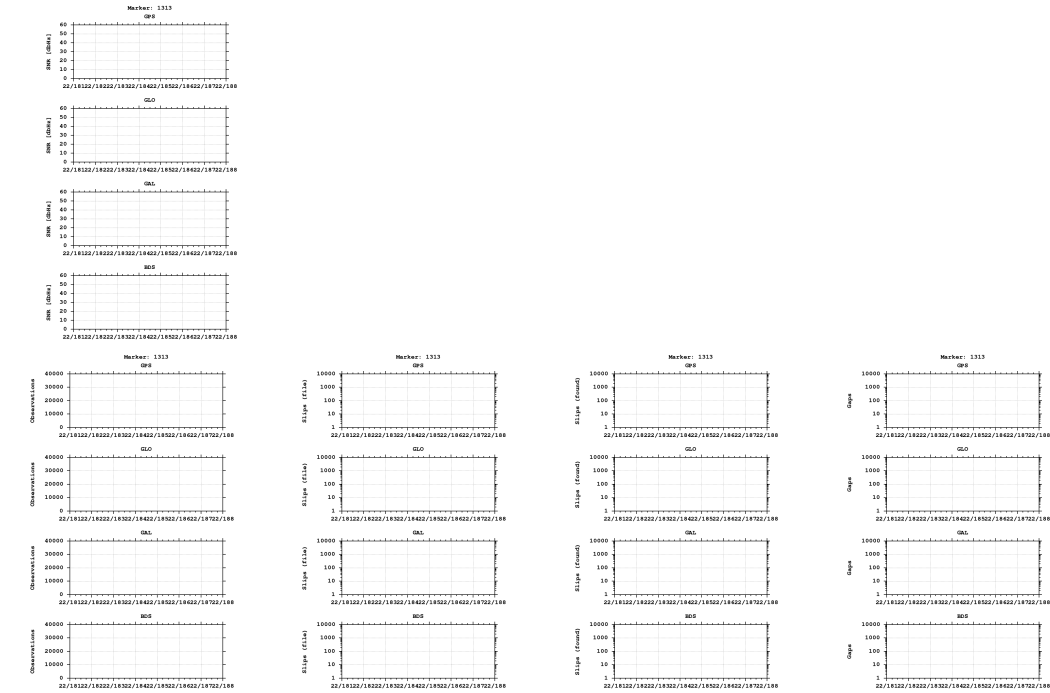

Equipment

2022-07-04 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)