


GNSS observation file monitoring for 0512


Last RINEX file: 05121851.22O
RINEX version: 3.02
Marker: 1269
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

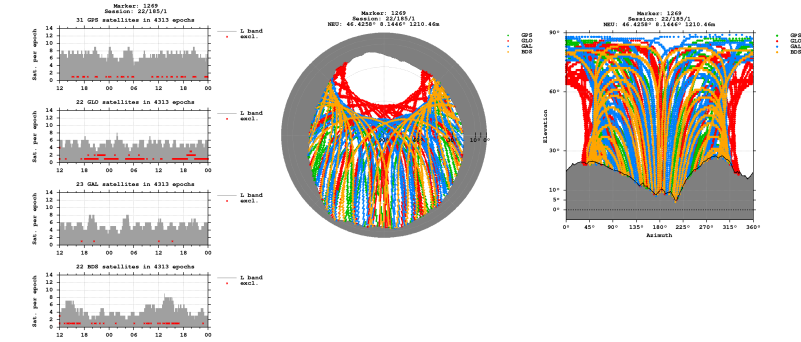


Bands

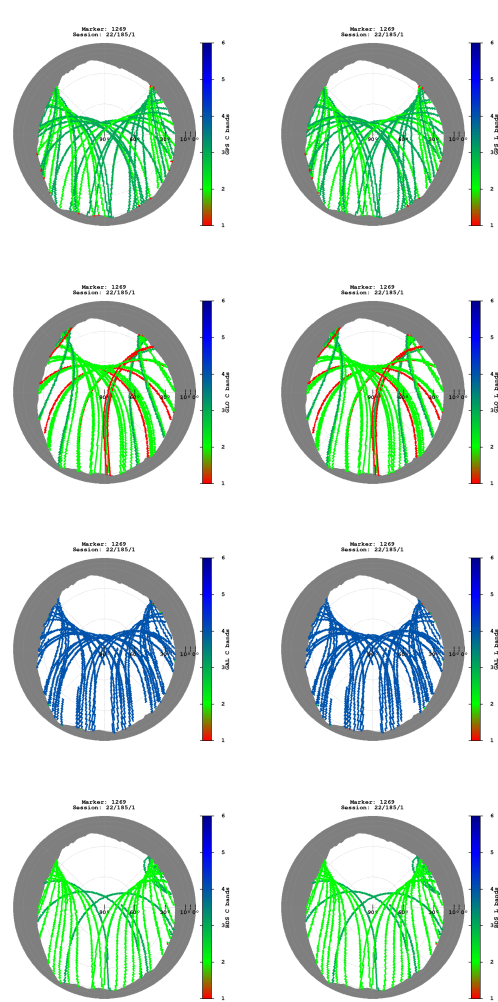


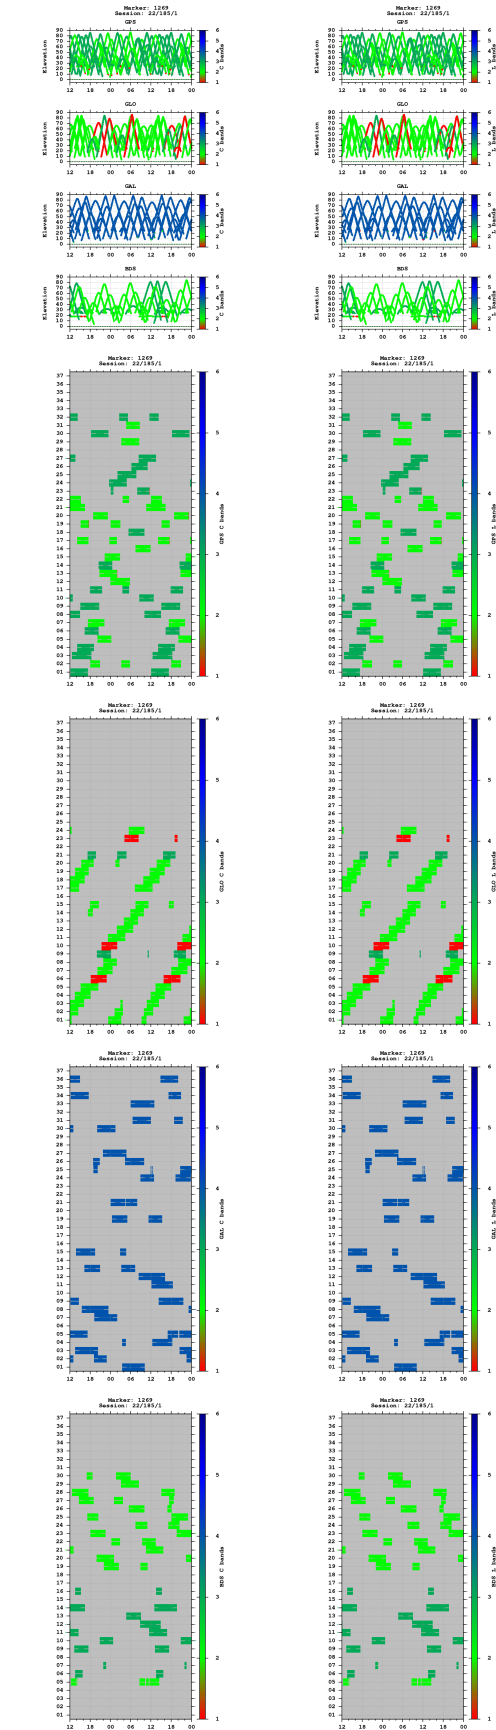


Multipath

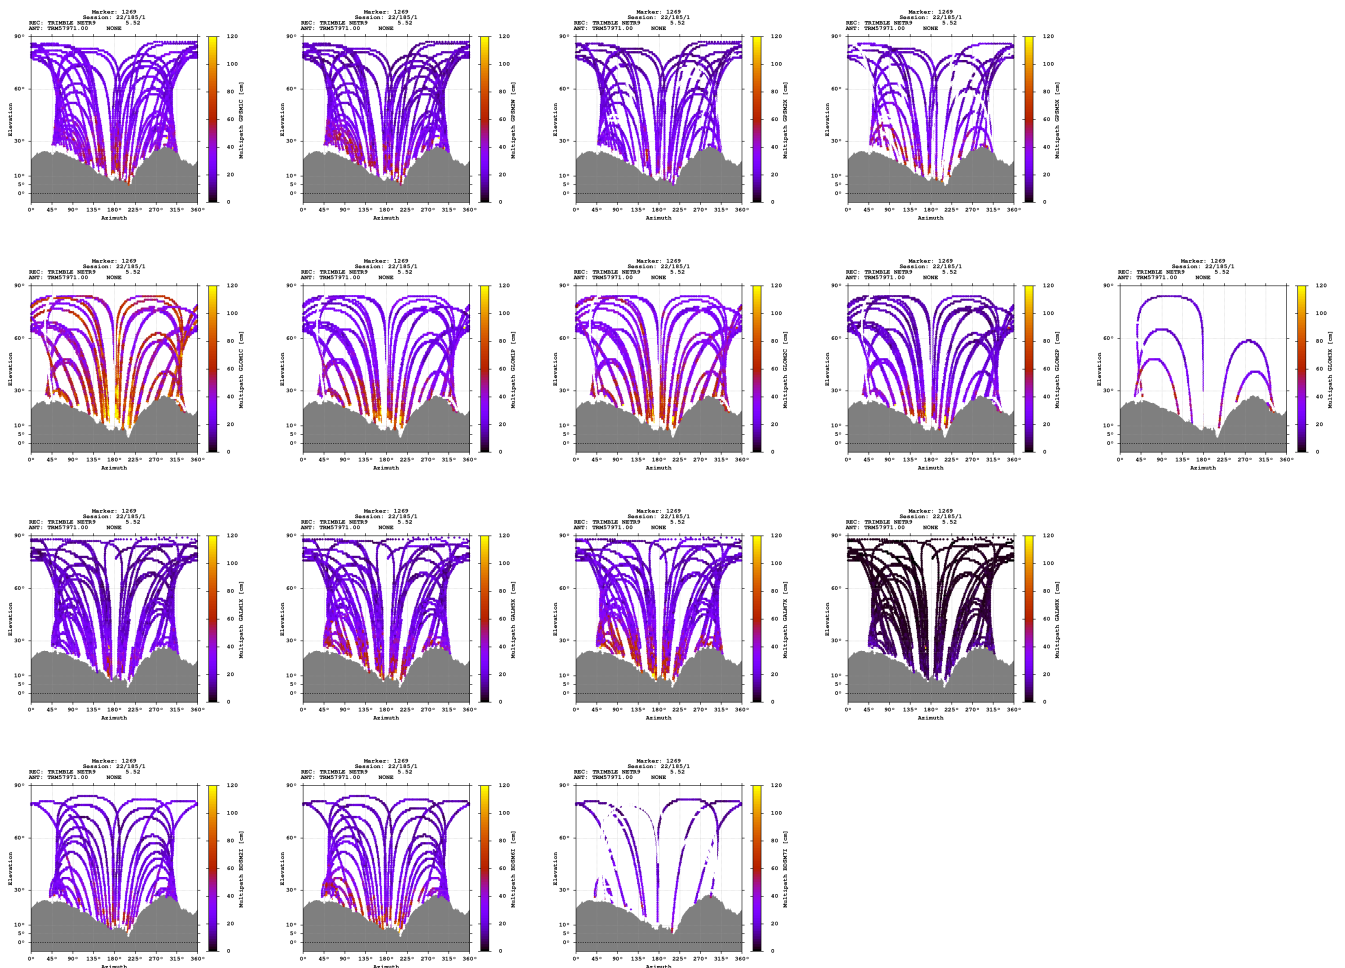


Signal-to-noise ratio



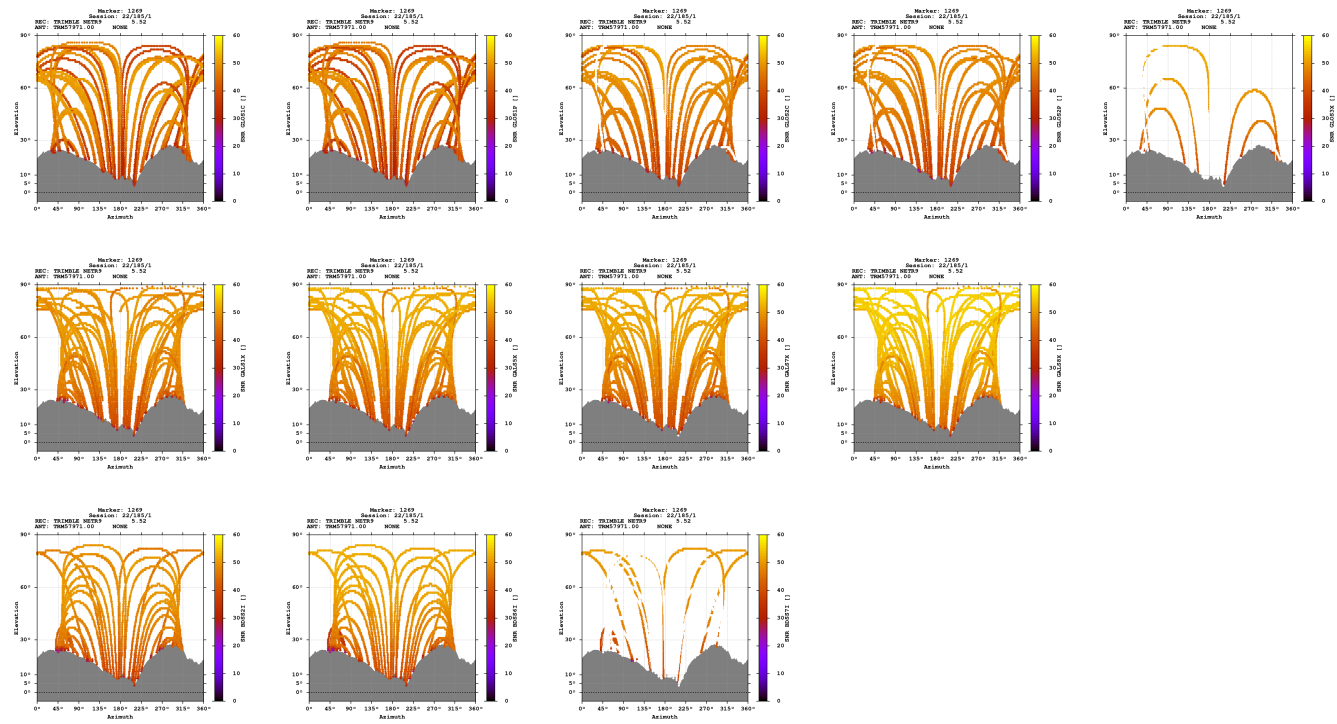

Estimates

2022-07-04 12:01:00	GPS	4360554.6920	624060.3847	4598877.5280	46.425821645	8.144575324	1210.4636
2022-07-04 12:01:00	GLO	4360554.1169	624060.1435	4598875.9776	46.425815965	8.144573278	1208.9244
2022-07-04 12:01:00	GAL	4360555.1907	624060.6588	4598877.4367	46.425817610	8.144577935	1210.7645
2022-07-04 12:01:00	BDS	4360552.1963	624052.7605	4598870.3687	46.425800396	8.144481755	1202.8294

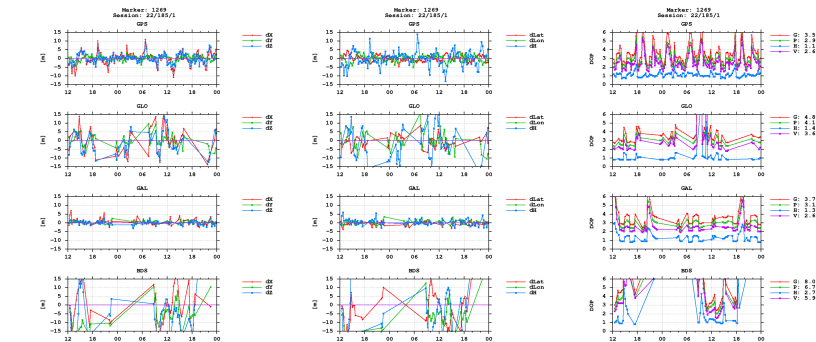

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)