


GNSS observation file monitoring for 0512


Last RINEX file: 05121881.220
RINEX version: 3.02
Marker: 1252
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

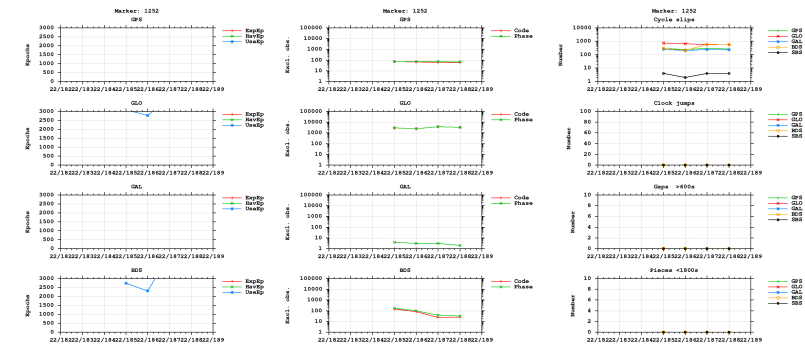



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

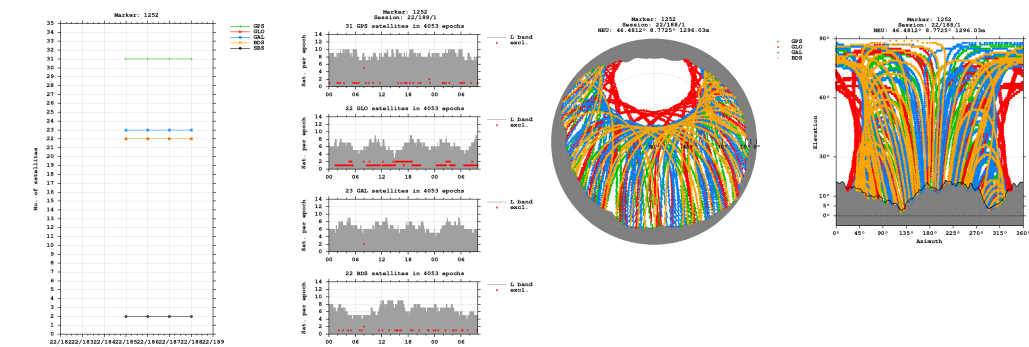


Bands

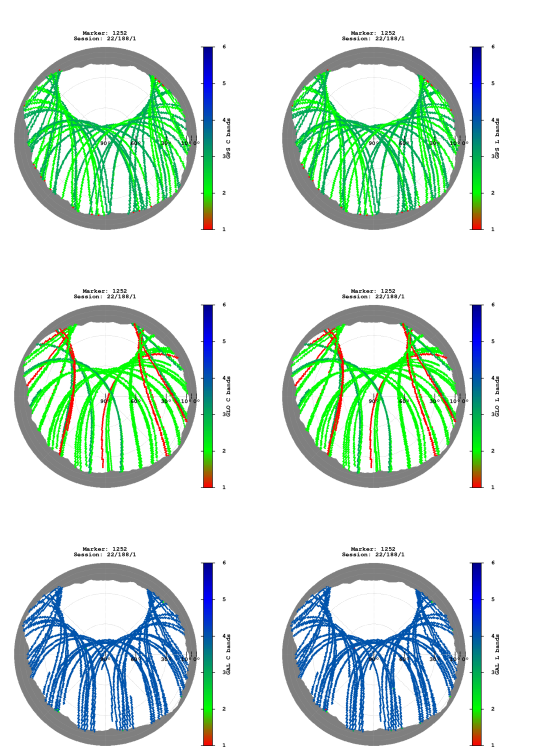


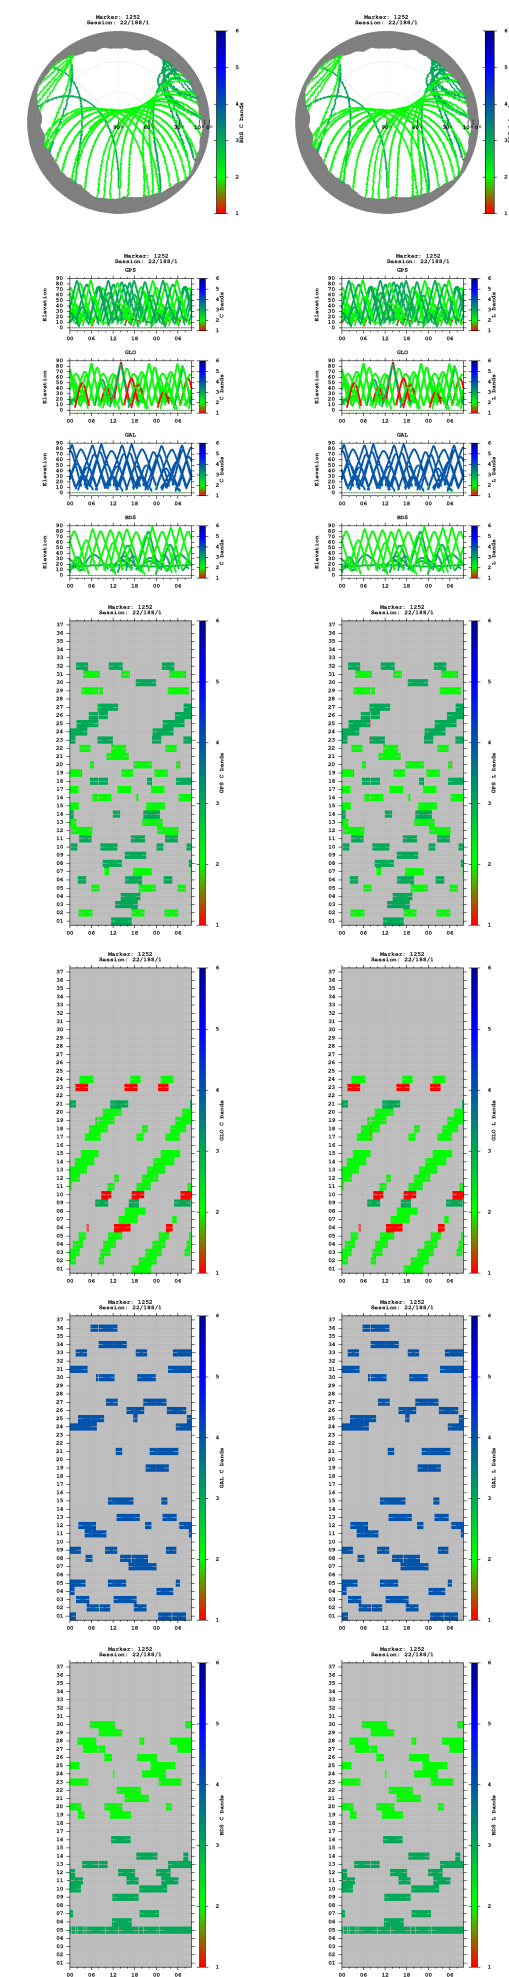


Observations

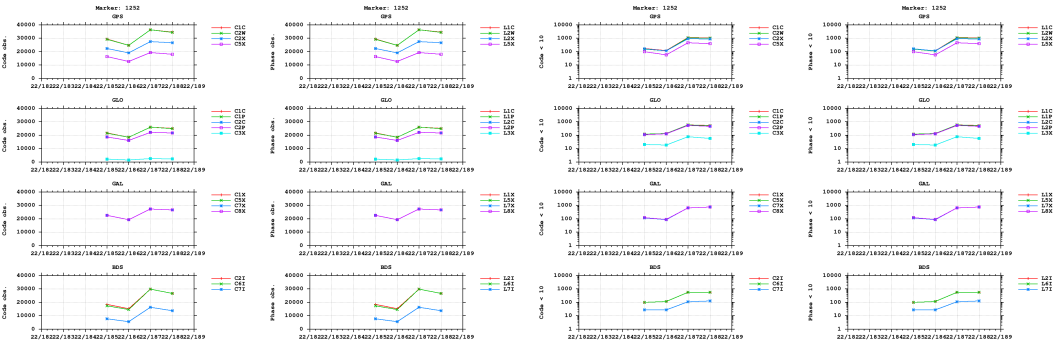


Multipath

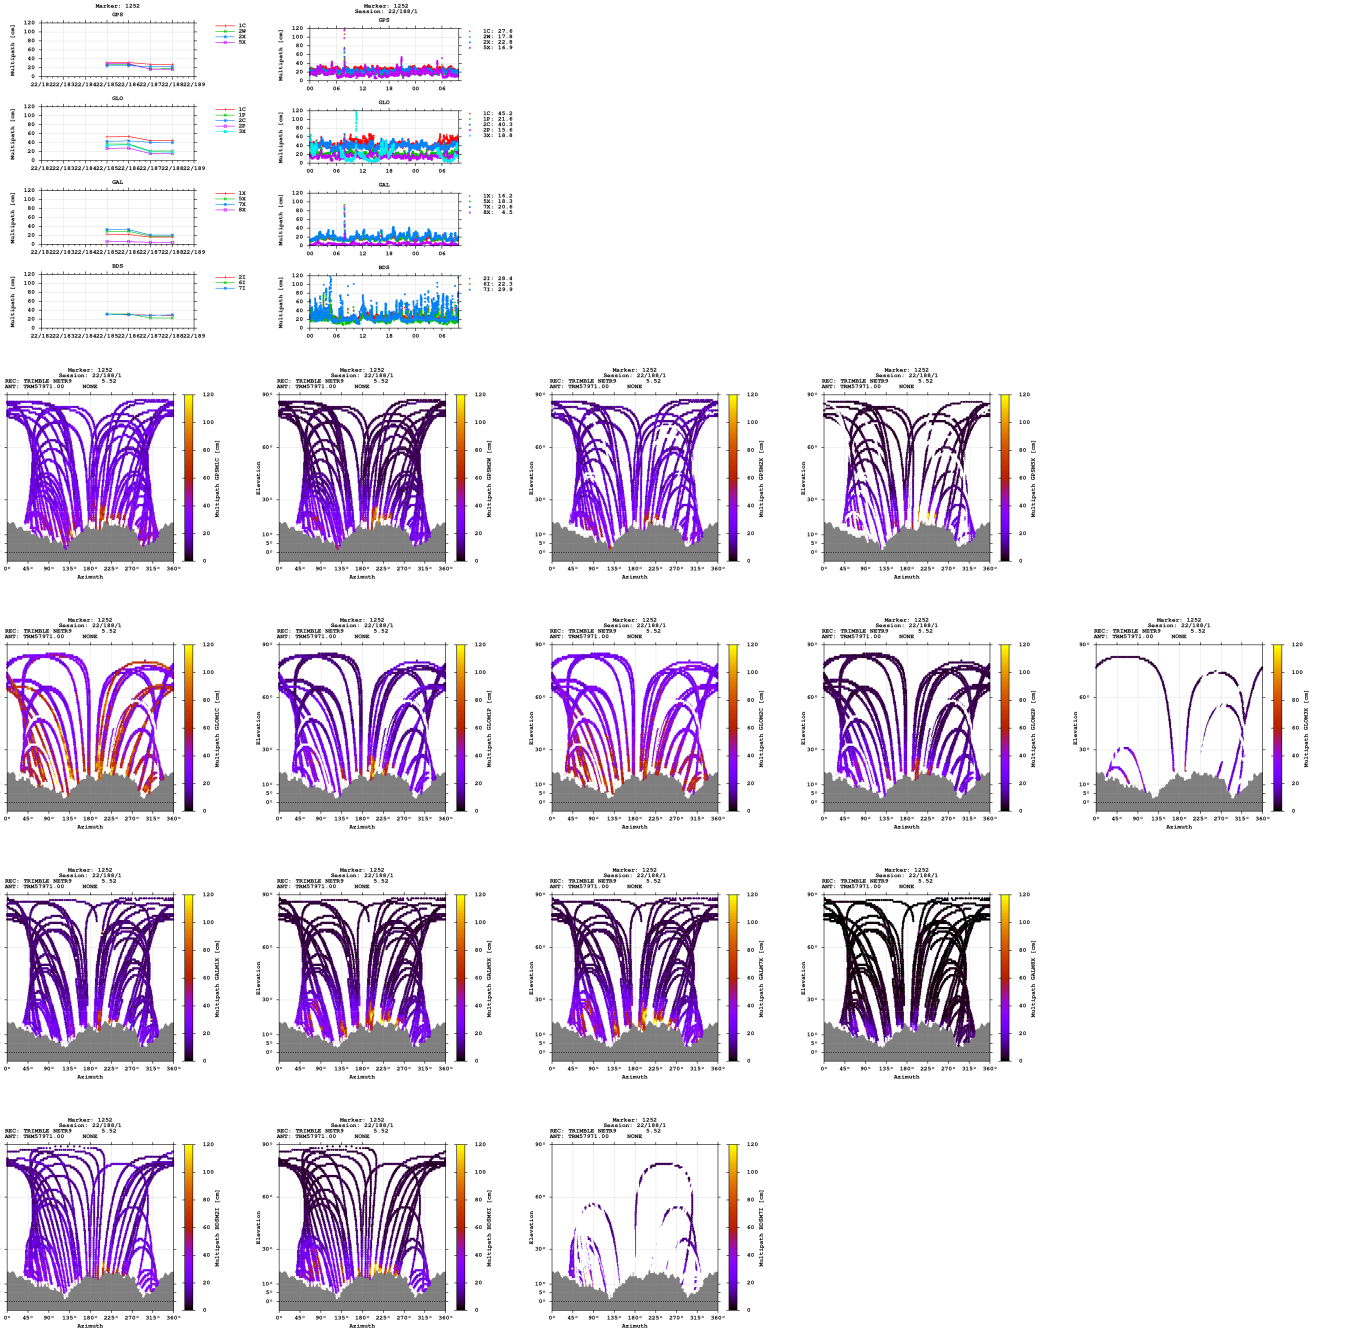


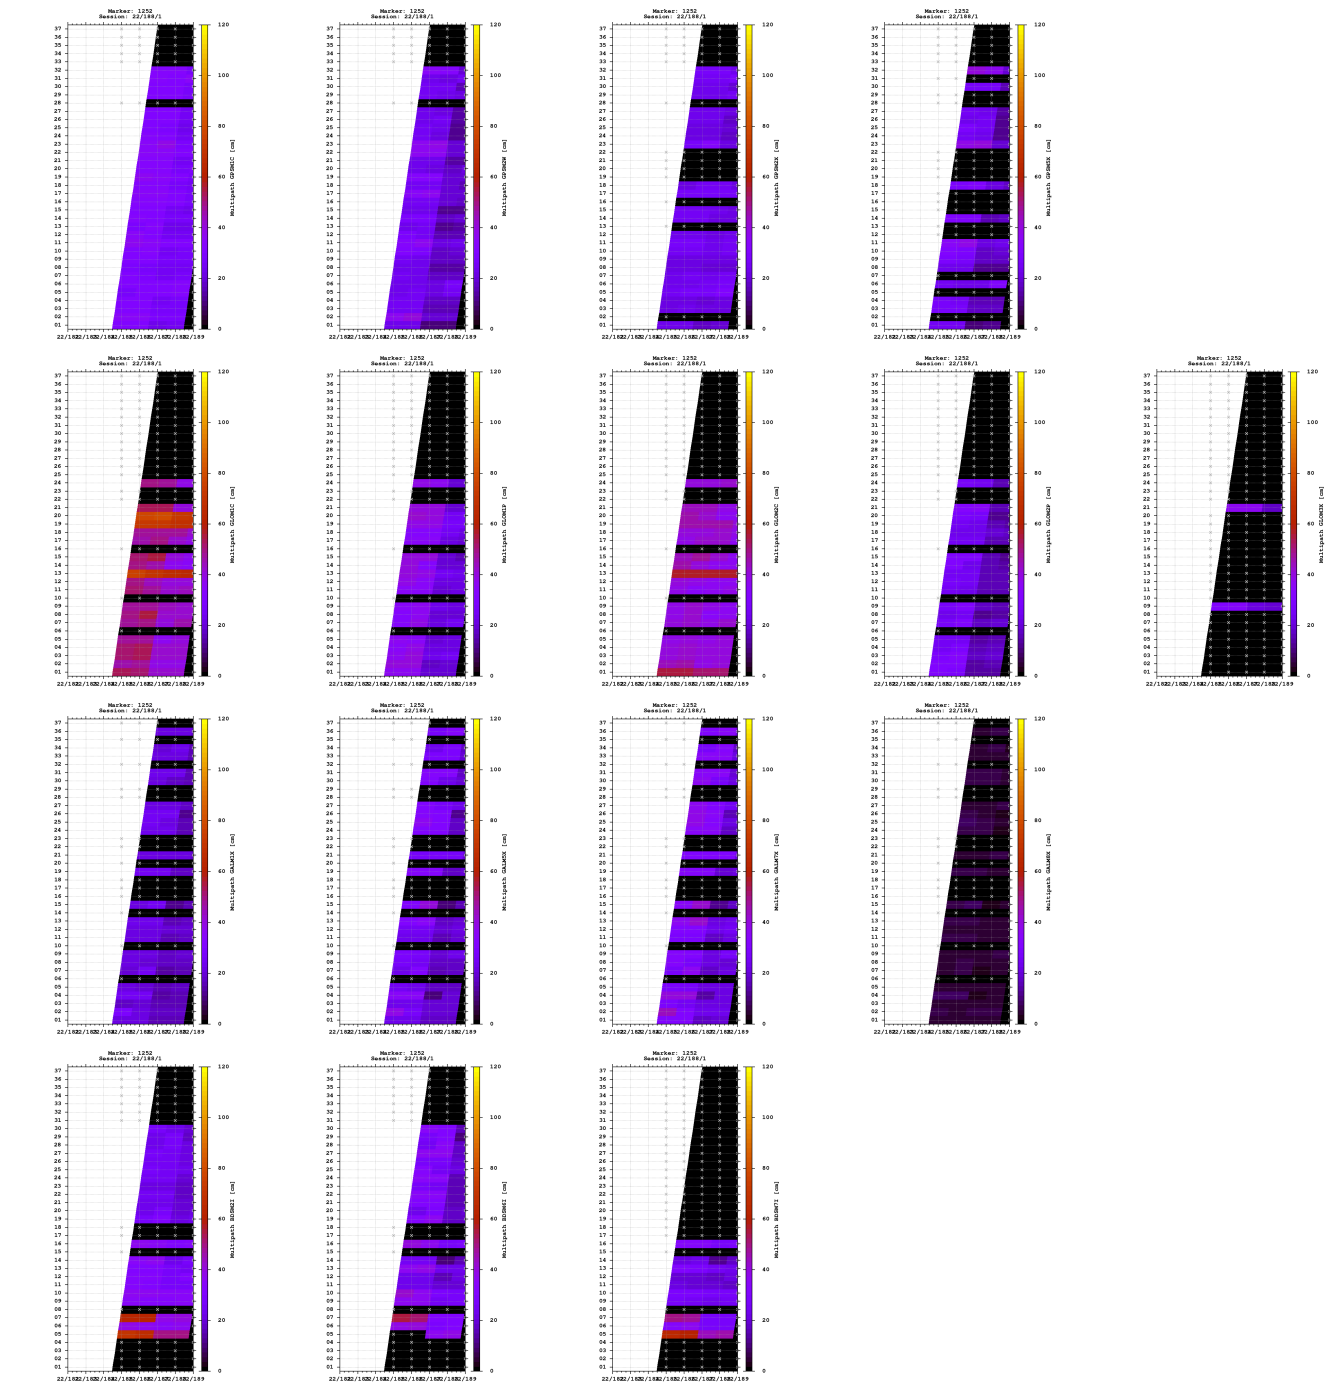


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

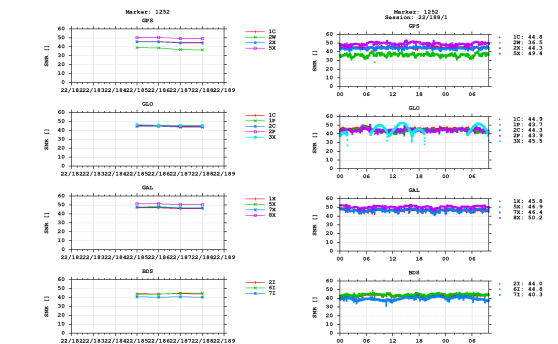


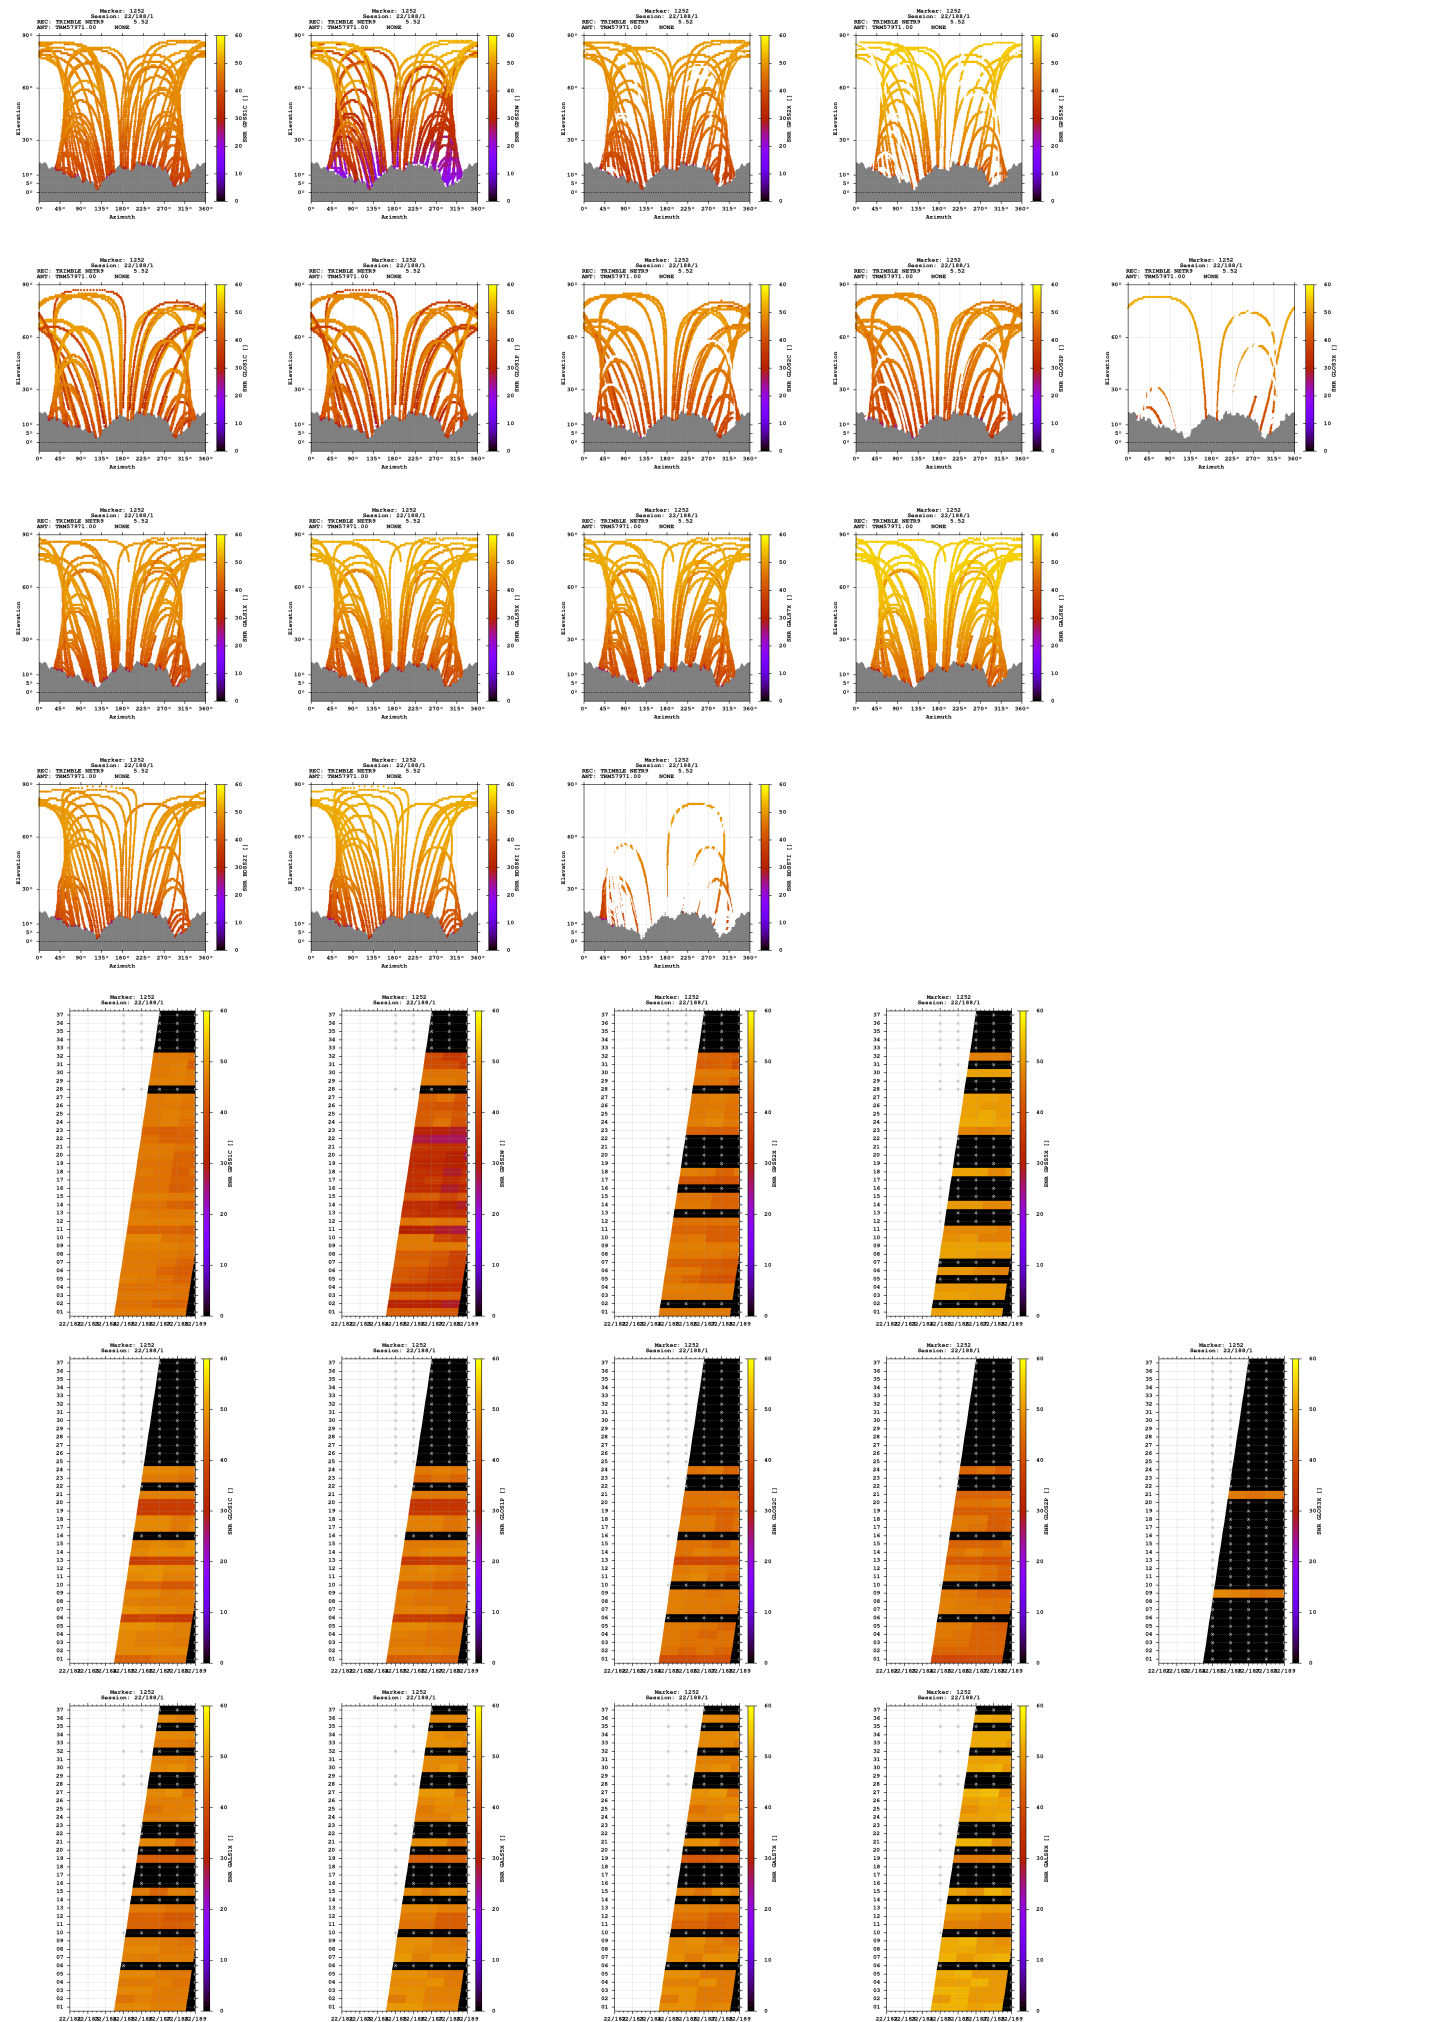

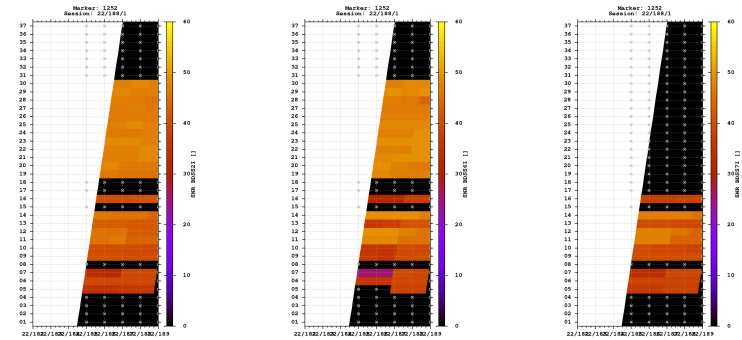



Estimates

2022-07-06 12:33:00	GPS	4349101.1763	671140.2358	4603181.4627	46.481200548	8.772514002	1296.0262
2022-07-06 12:33:00	GLO	4349102.2216	671140.9711	4603182.9250	46.481202134	8.772521388	1297.8751
2022-07-06 12:33:00	GAL	4349101.2076	671140.1832	4603181.4606	46.481200385	8.772513263	1296.0405
2022-07-06 12:33:00	BDS	4349096.6933	671139.9291	4603182.2720	46.481234761	8.772518957	1293.5300

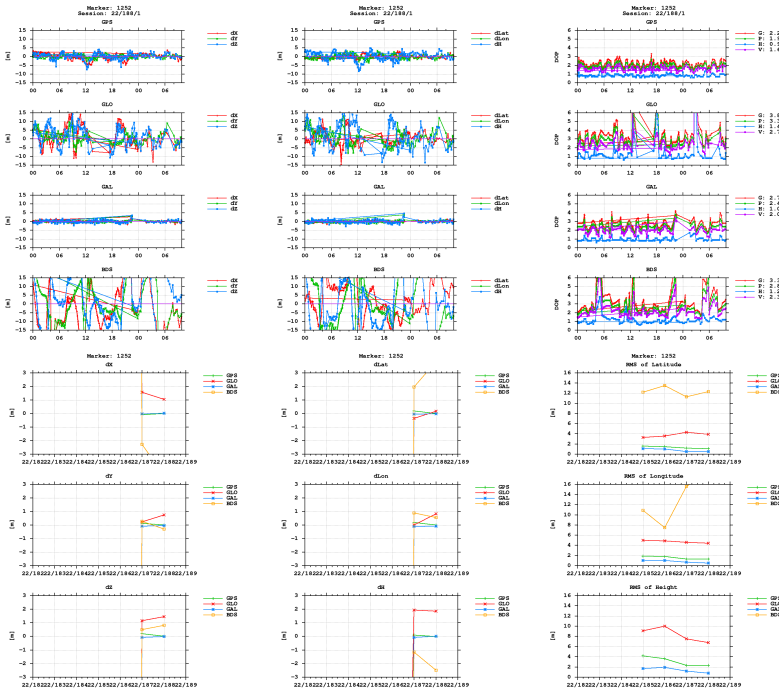

BNC

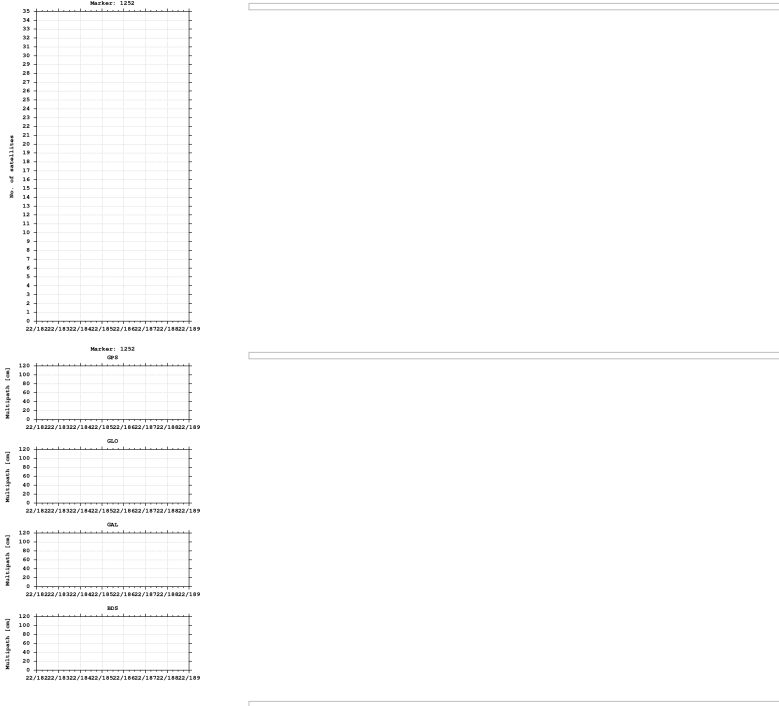

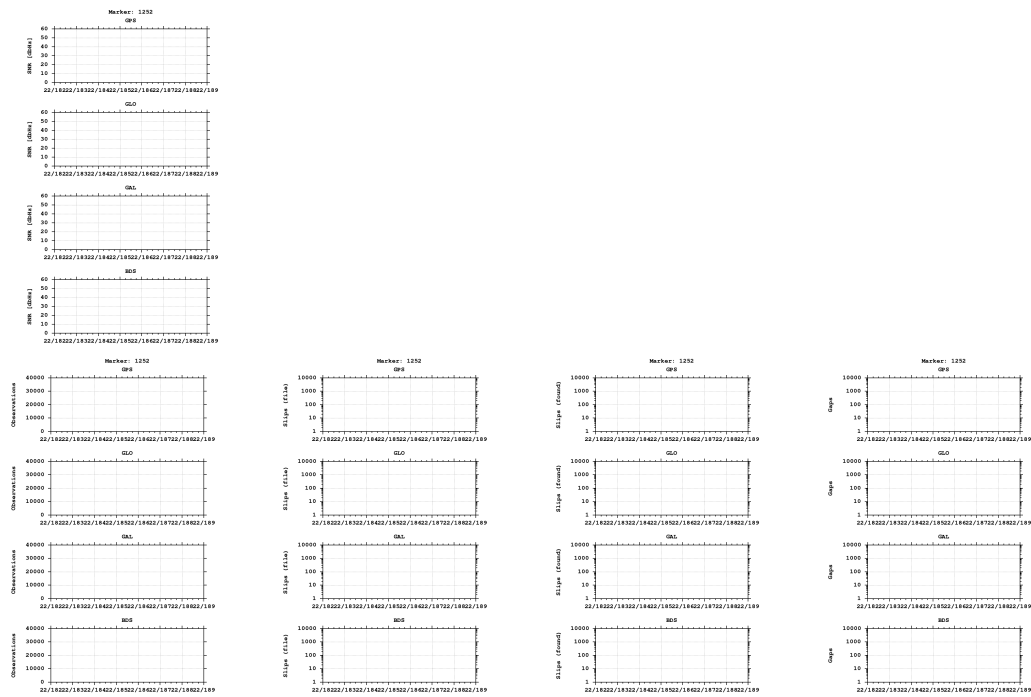

Equipment

2022-07-04 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)