


GNSS observation file monitoring for 0513


Last RINEX file: 05131871.220
RINEX version: 3.02
Marker: 1251
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE

Epochs

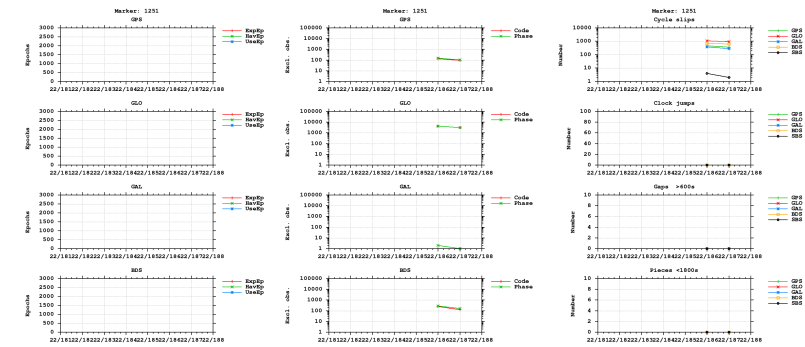



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

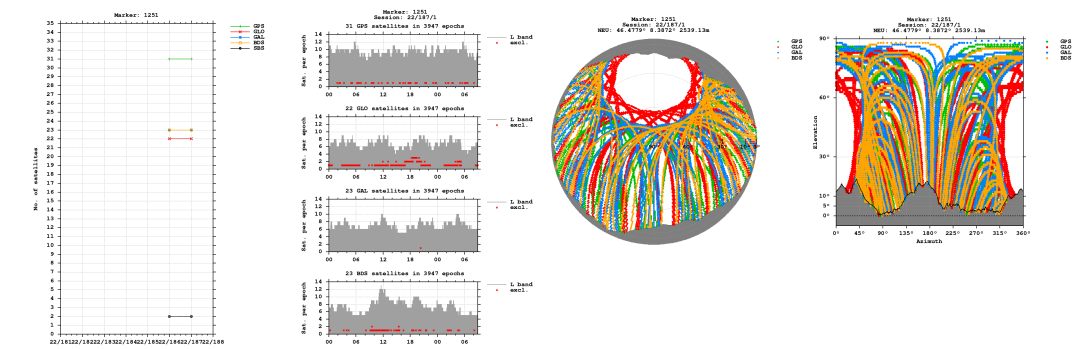


Bands

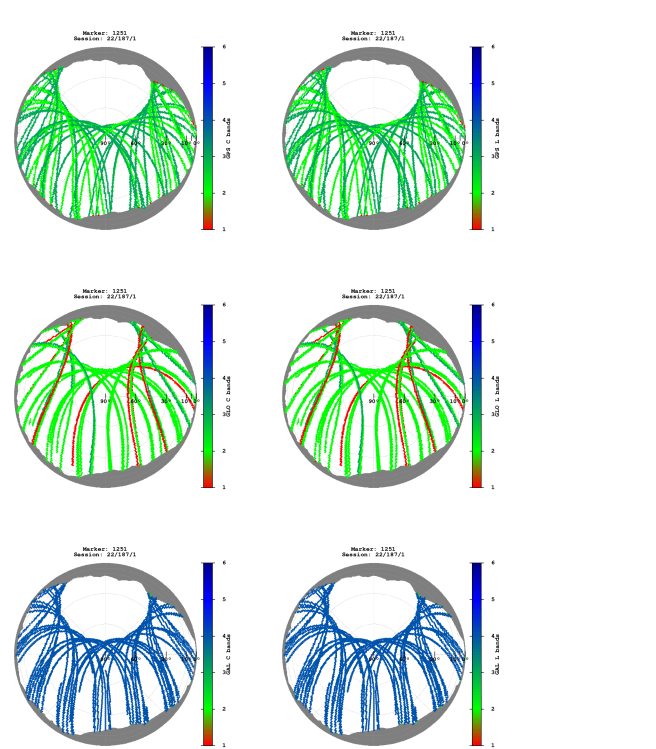


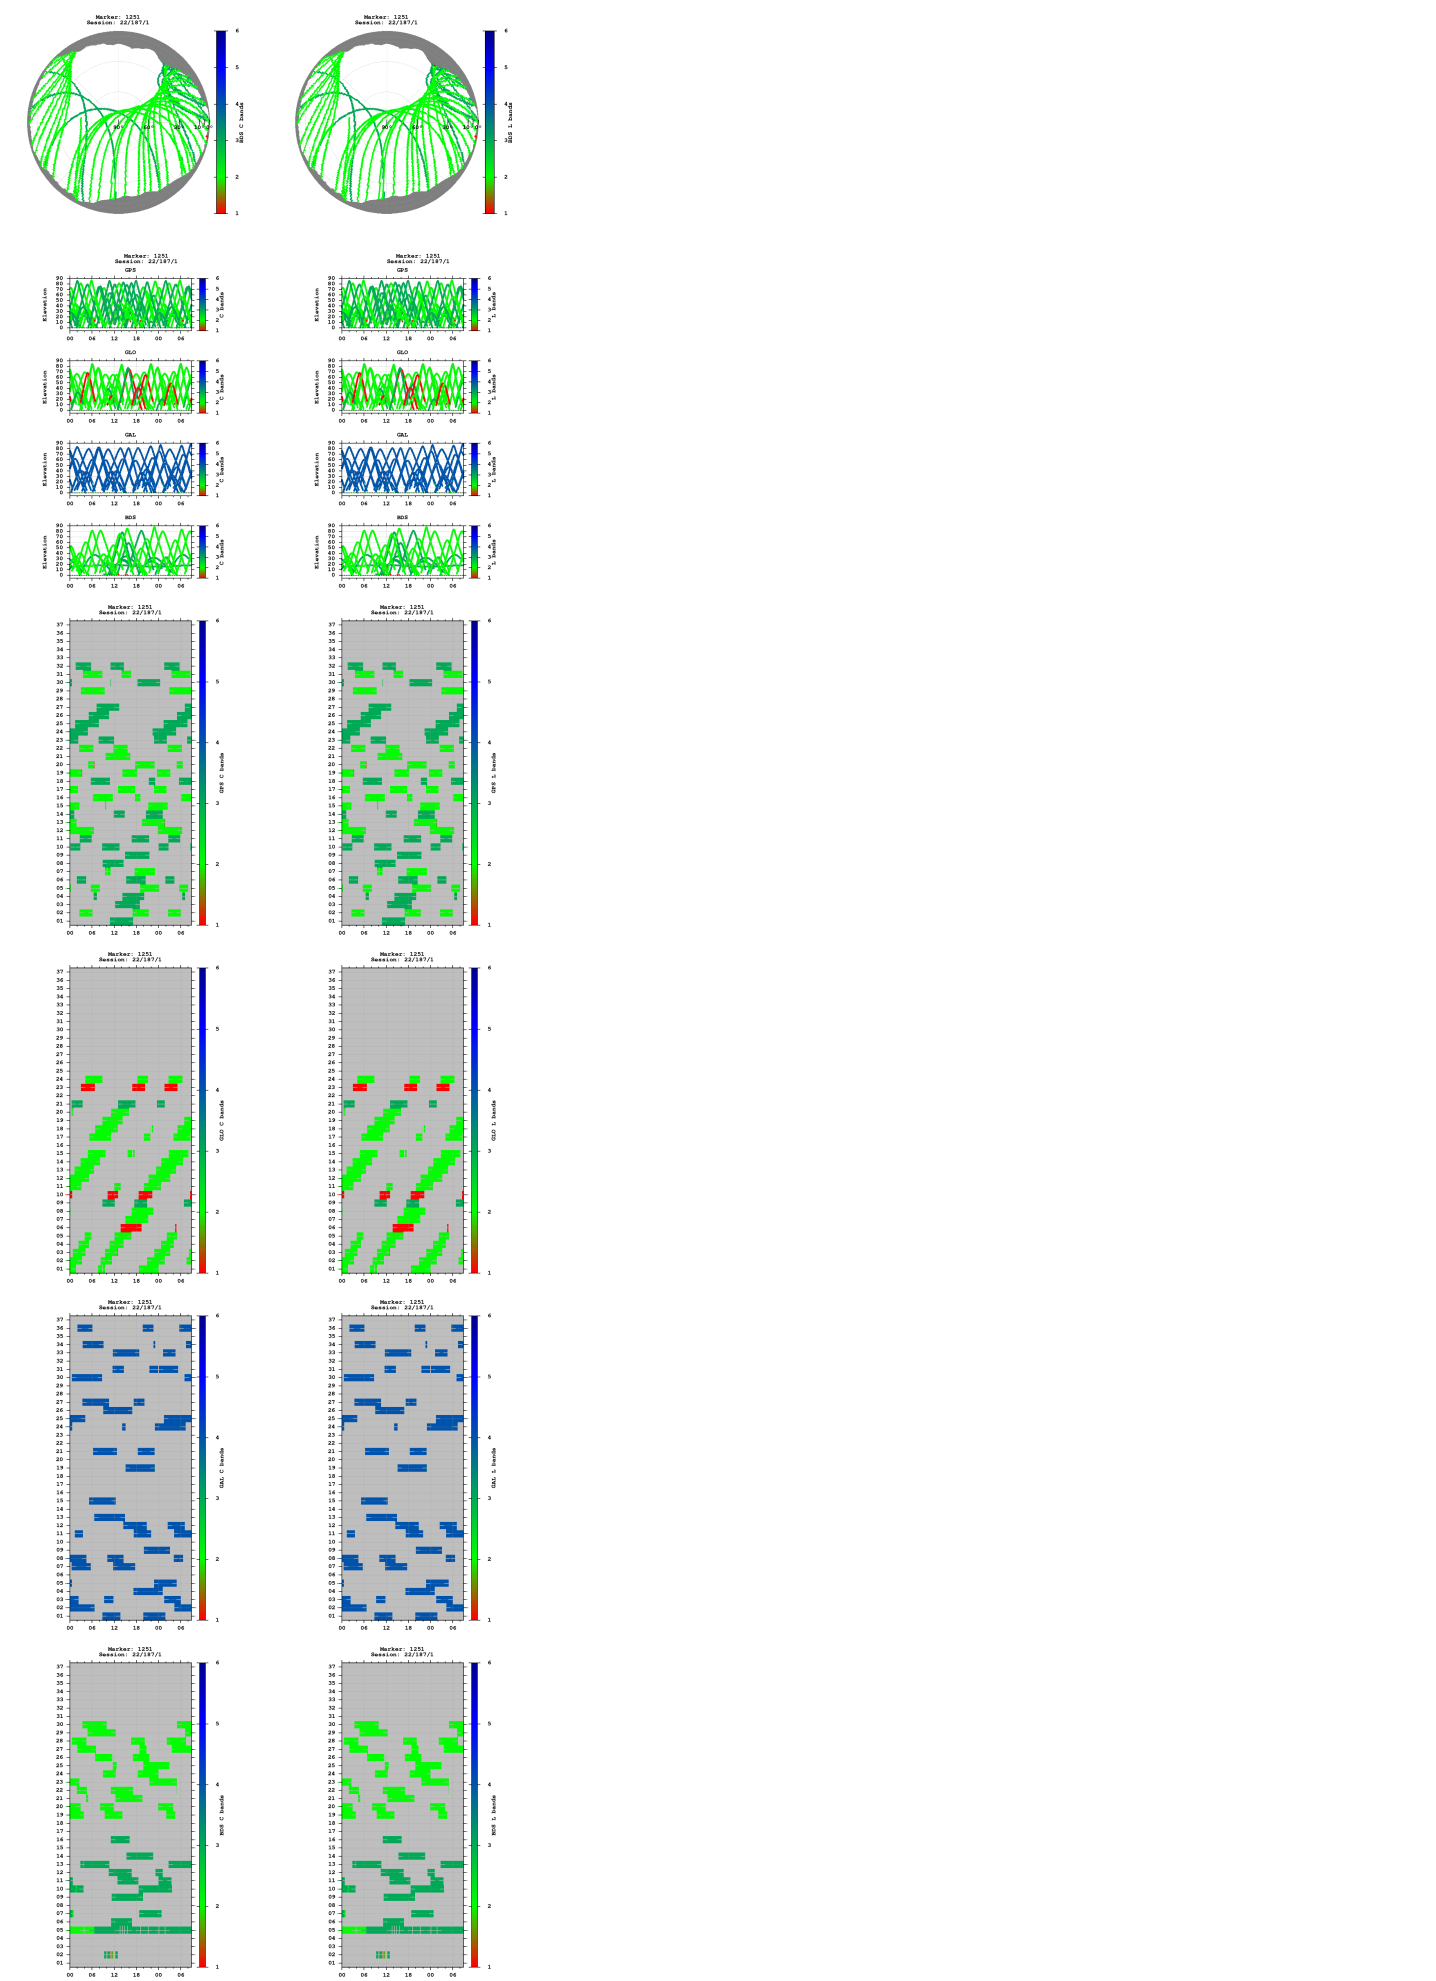


Observations

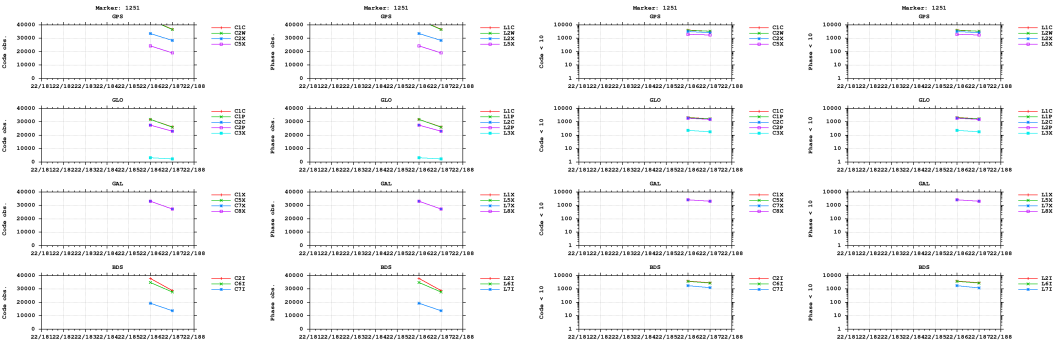


Multipath

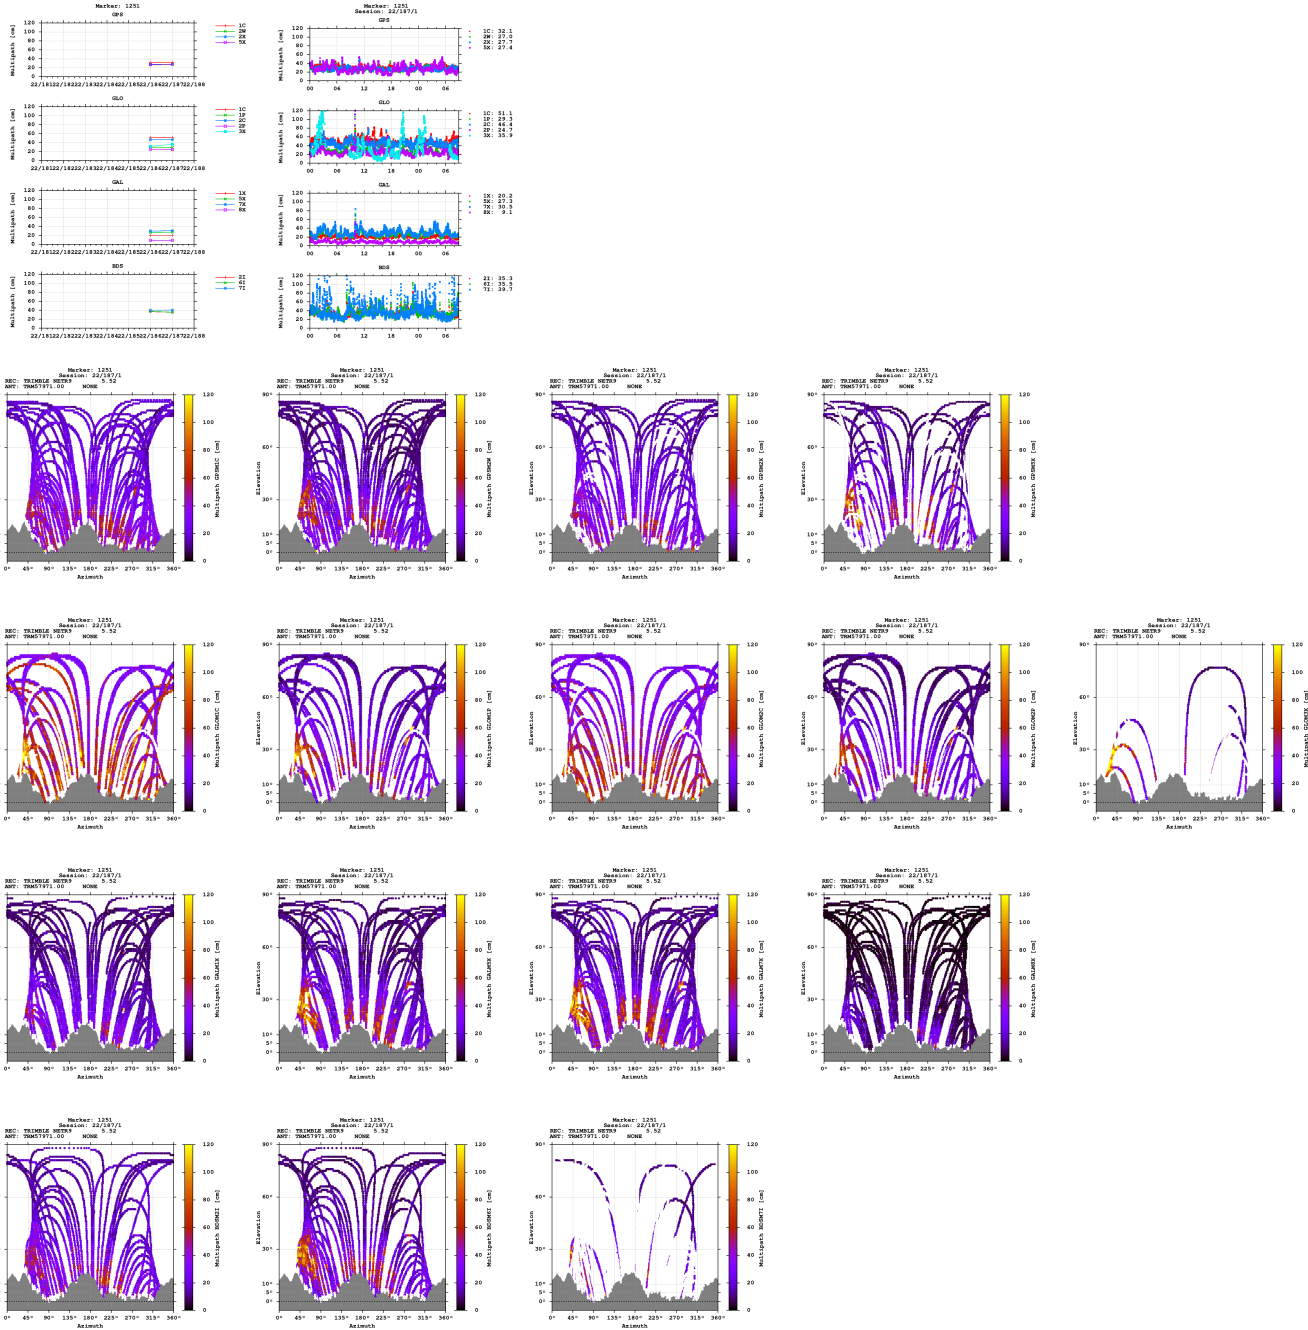


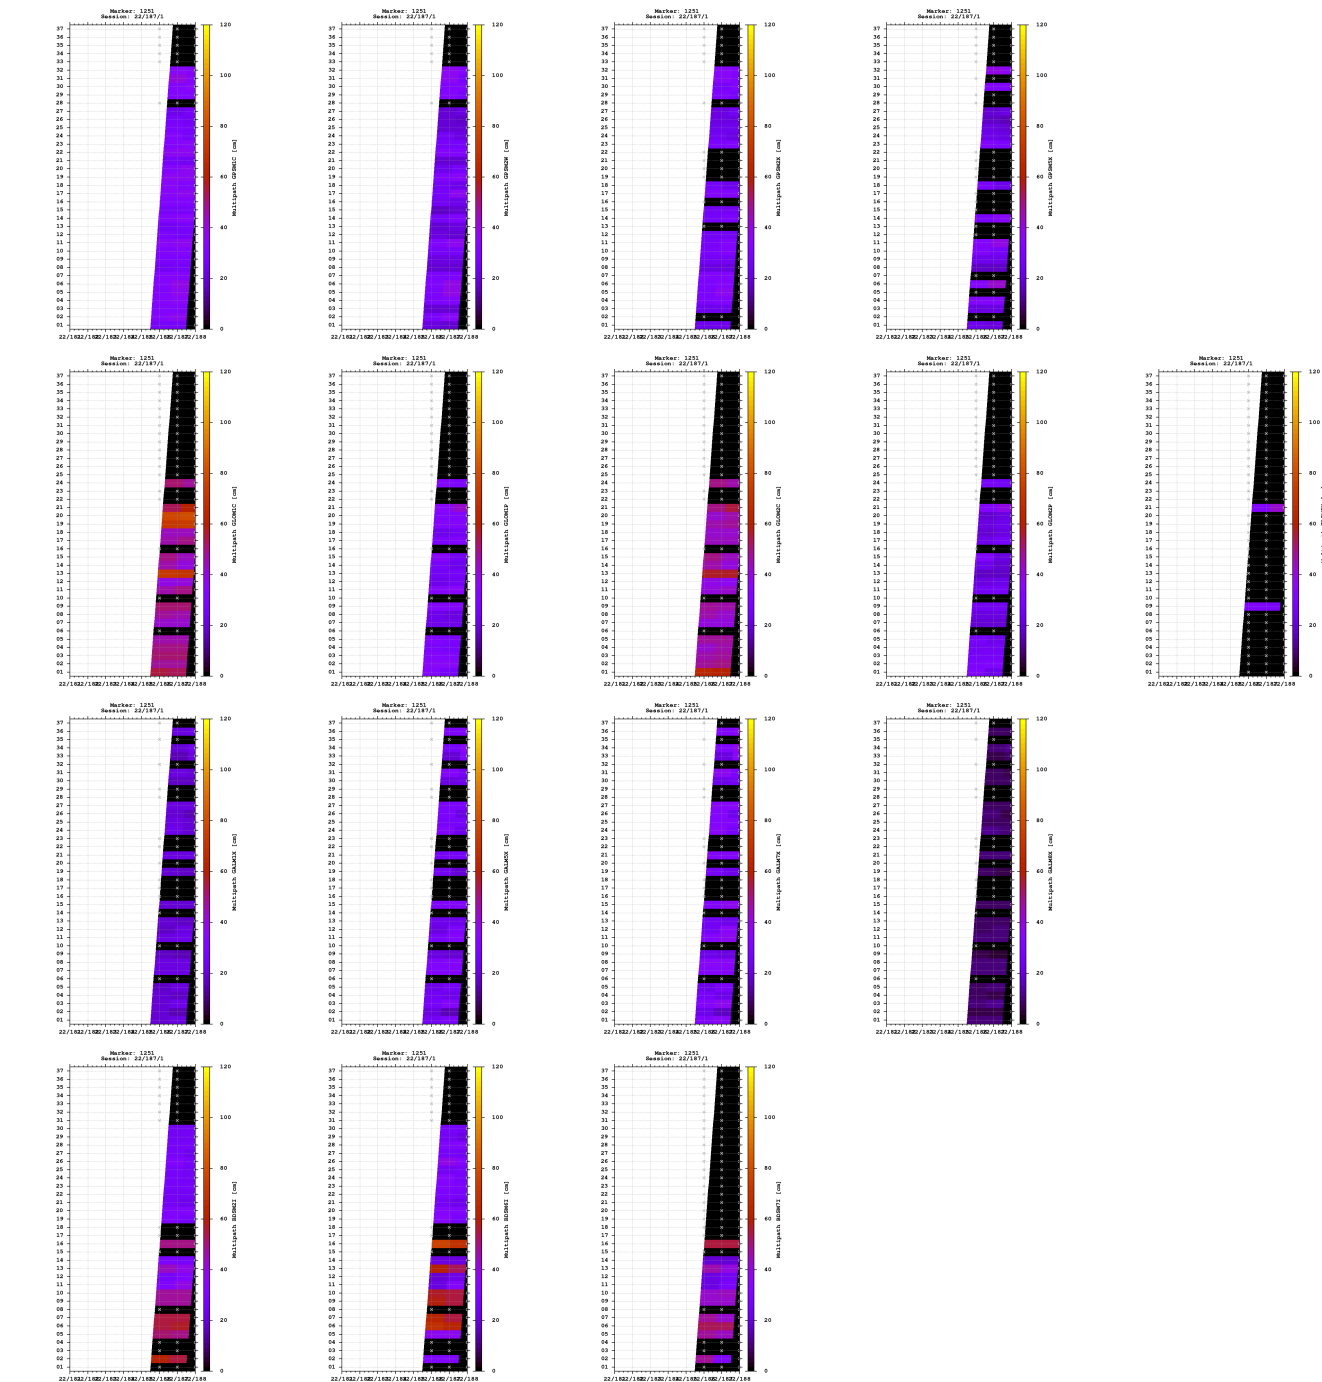


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

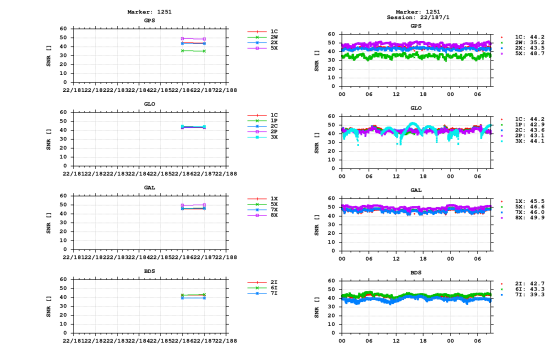


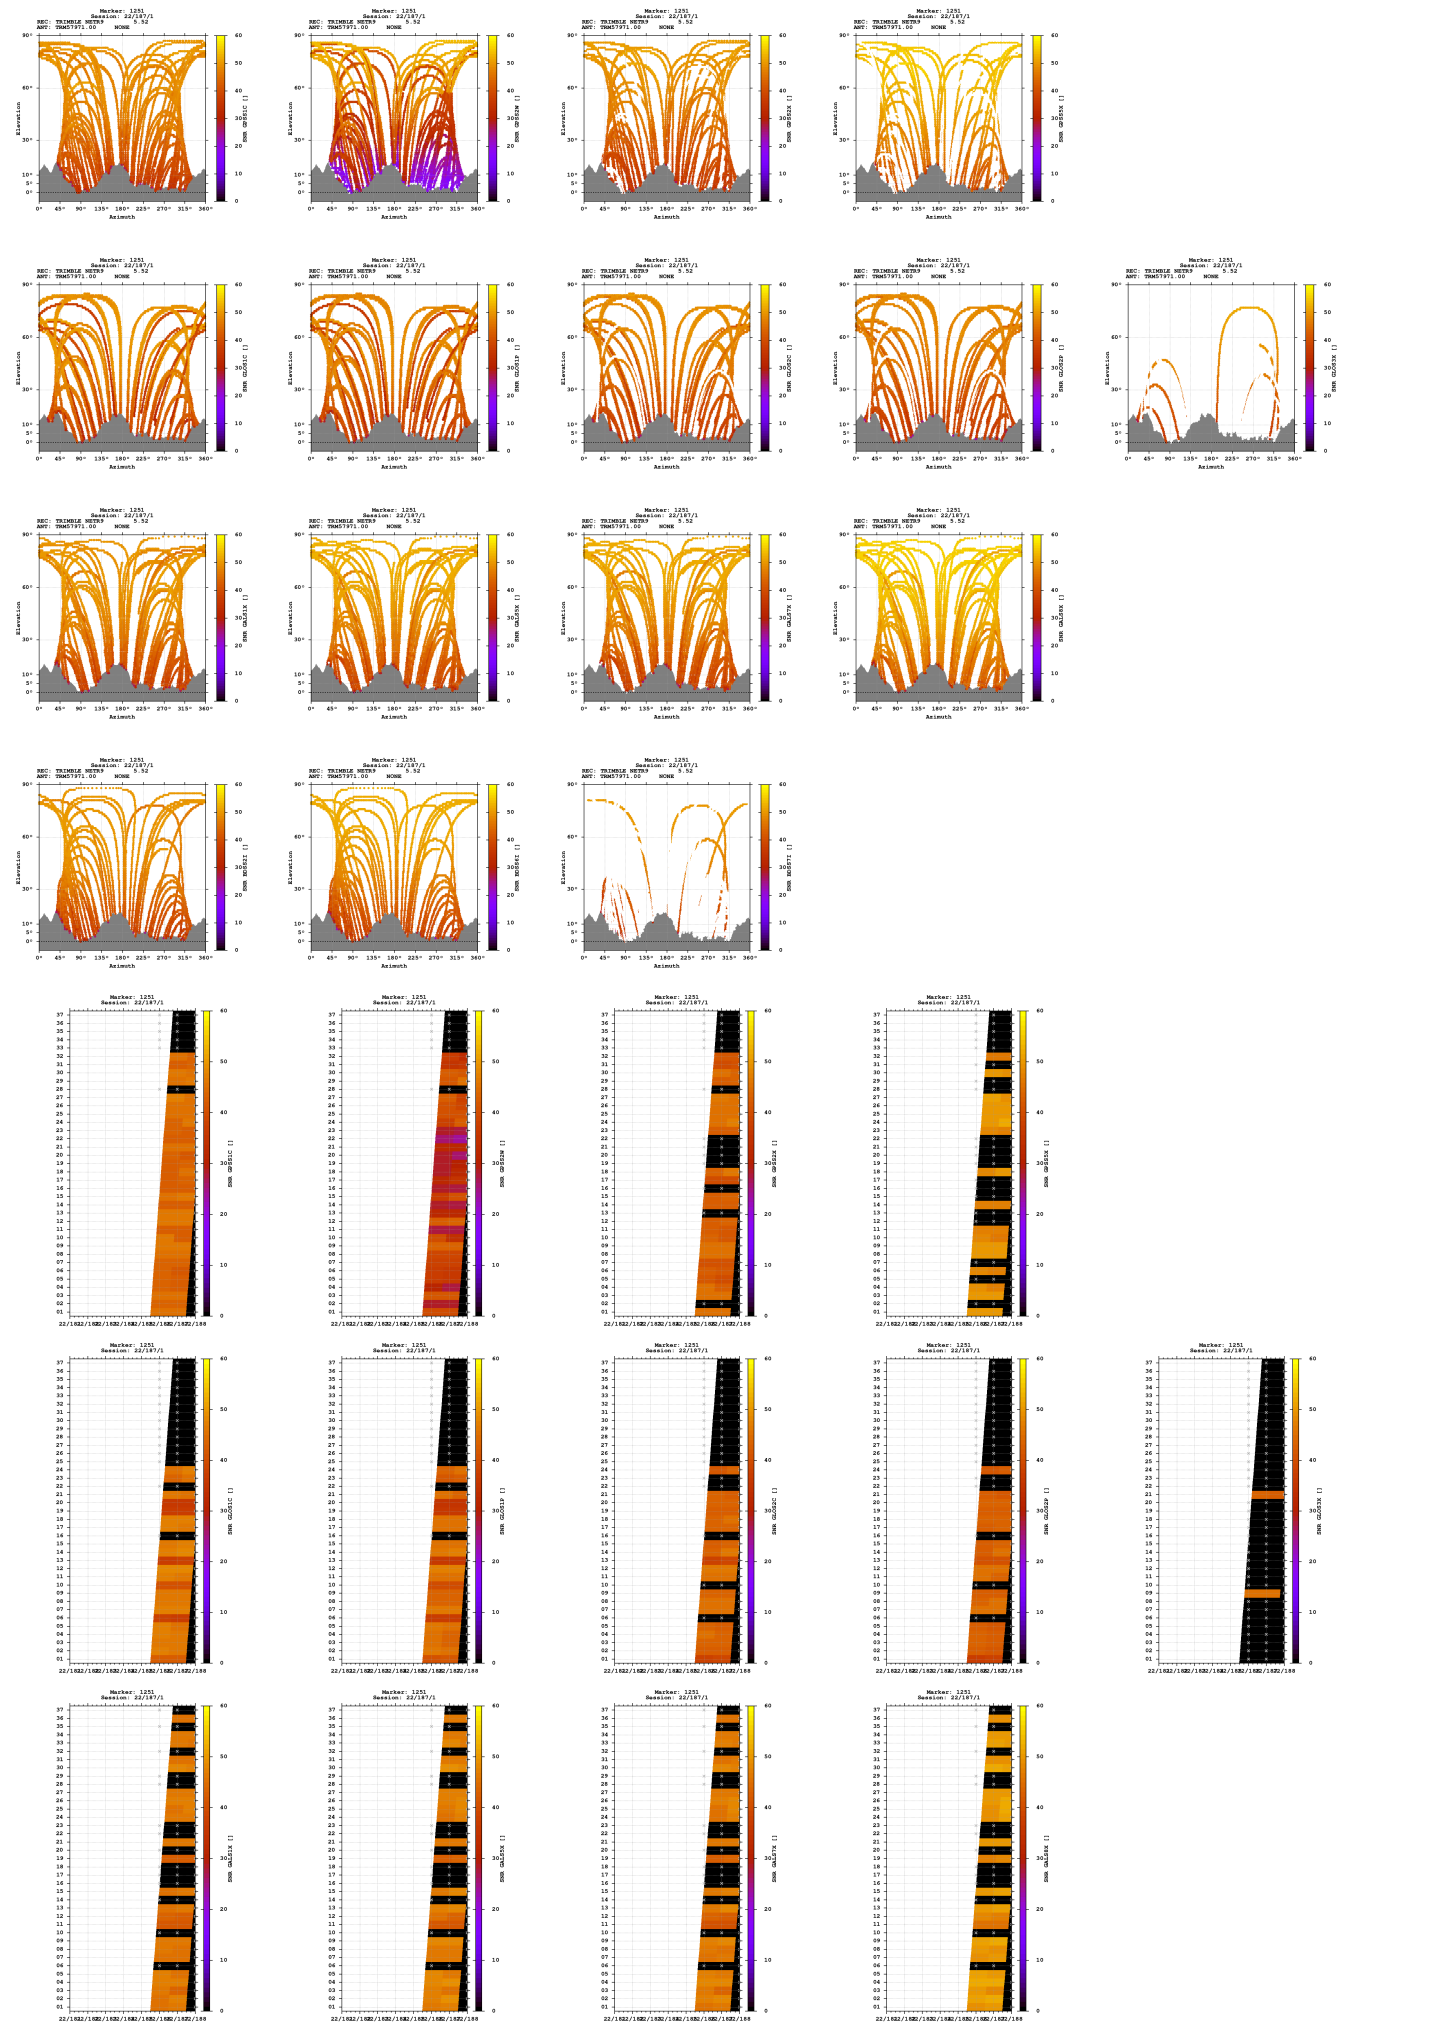

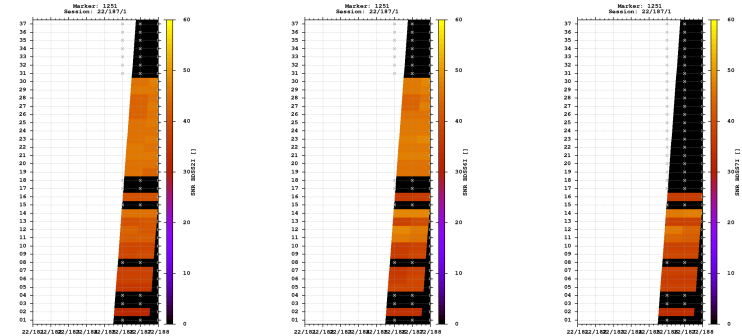



Estimates

2022-07-05 08:09:30	GPS	4354629.5406	642044.3755	4603826.7262	46.477855275	8.387234056	2539.1306
2022-07-05 08:09:30	GLO	4354631.2061	642045.3110	4603827.8299	46.477850477	8.387242940	2541.1596
2022-07-05 08:09:30	GAL	4354629.2976	642044.2171	4603826.4381	46.477855210	8.387232477	2538.7403
2022-07-05 08:09:30	BDS	4354627.4506	642044.8799	4603826.0963	46.477864377	8.387244519	2537.3007

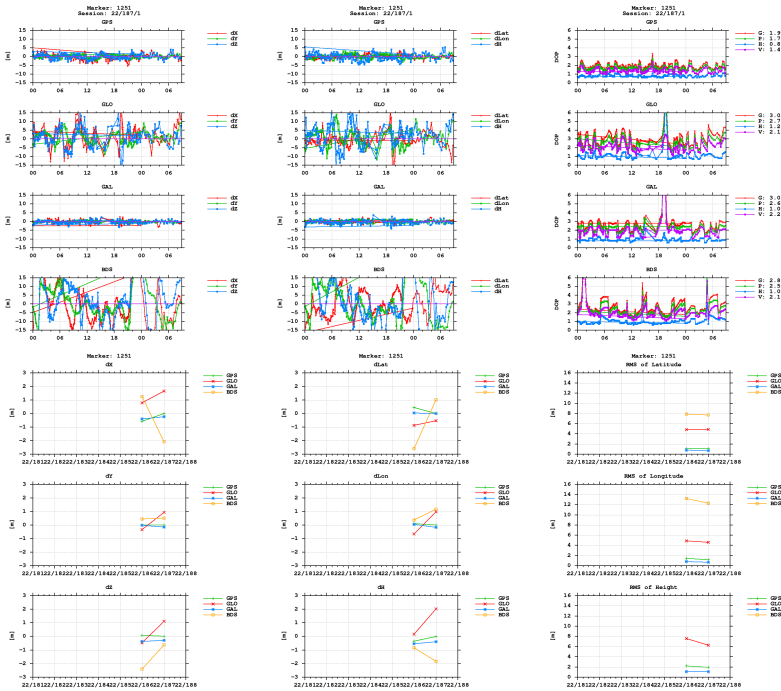

BNC

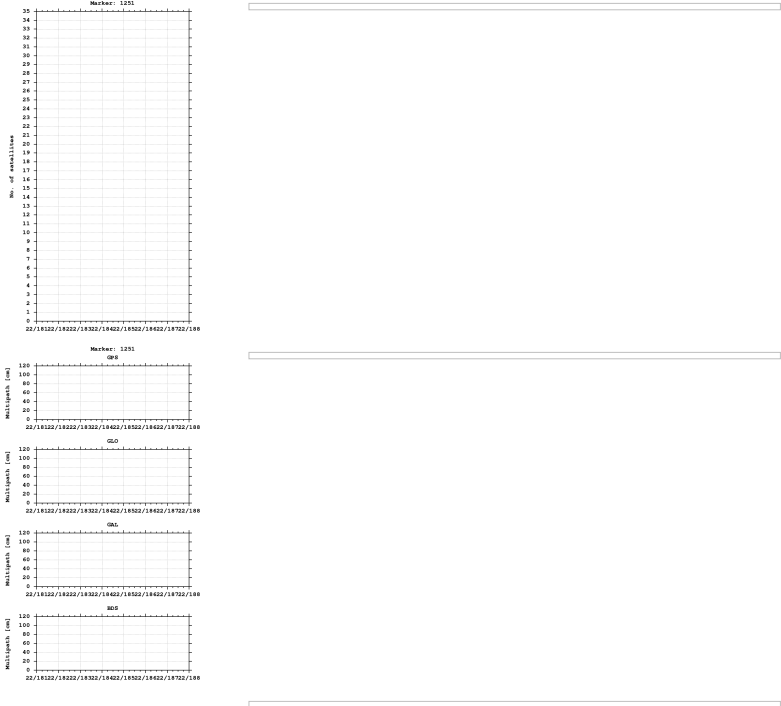

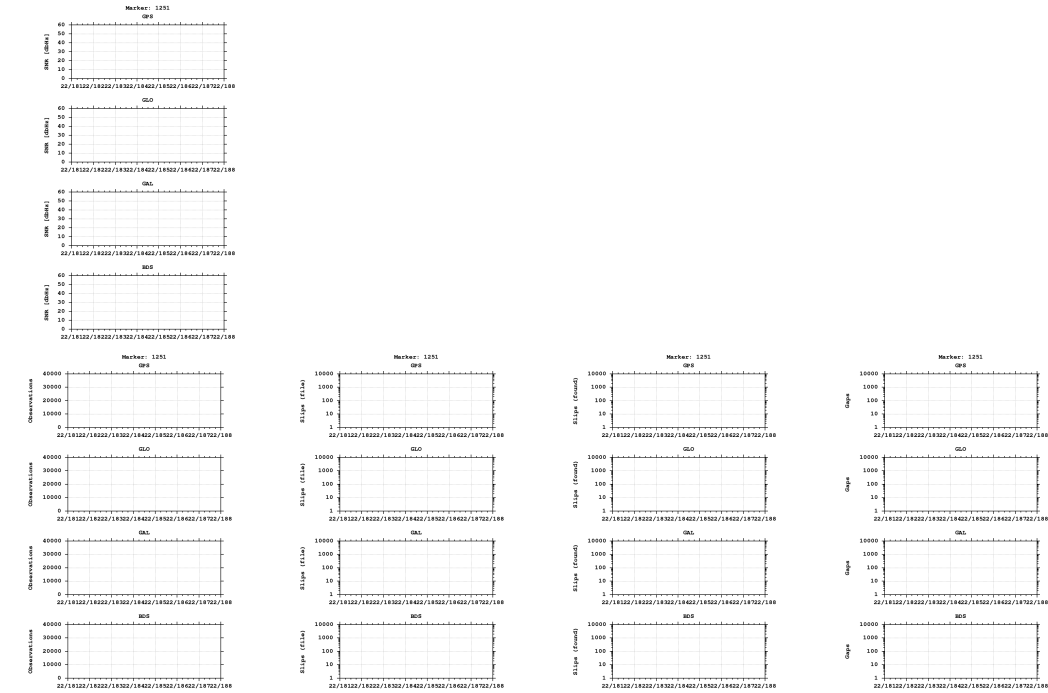

Equipment

2022-07-05 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)