


GNSS observation file monitoring for 0514


Last RINEX file: 05141891.220
RINEX version: 3.02
Marker: 1213
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

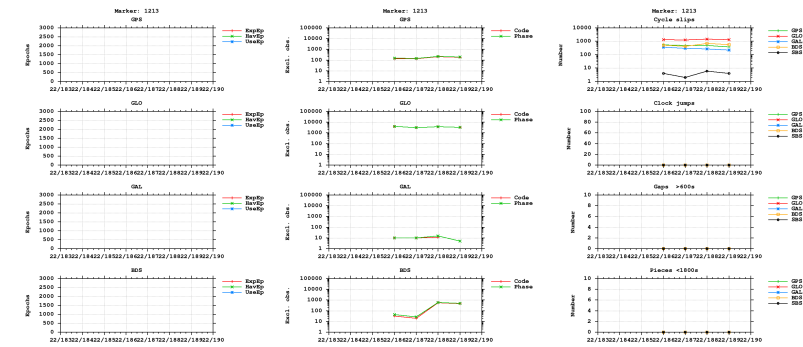



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

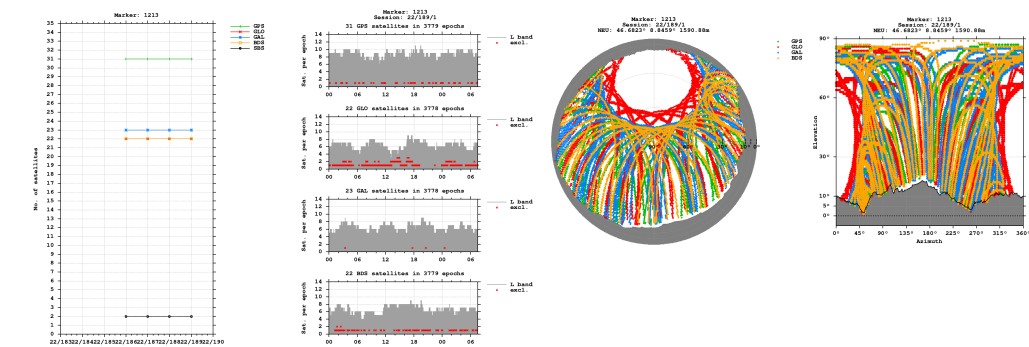


Bands

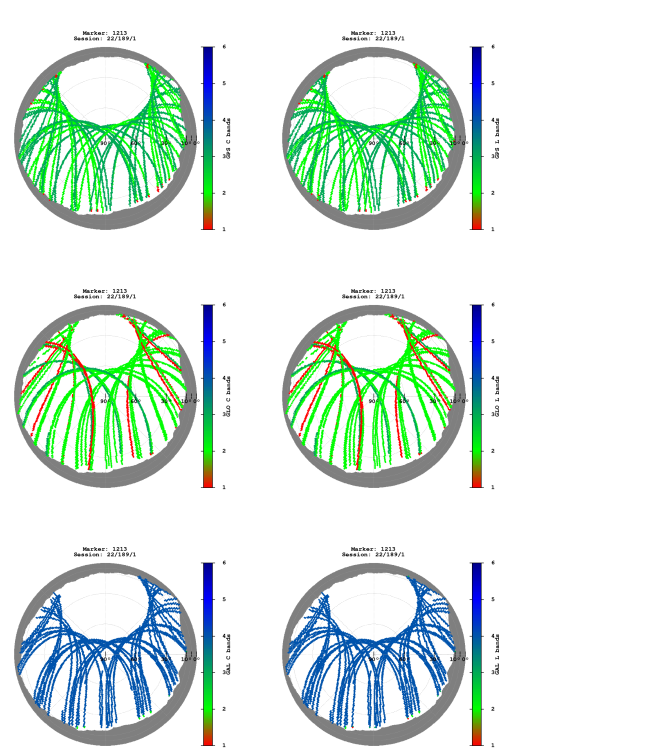


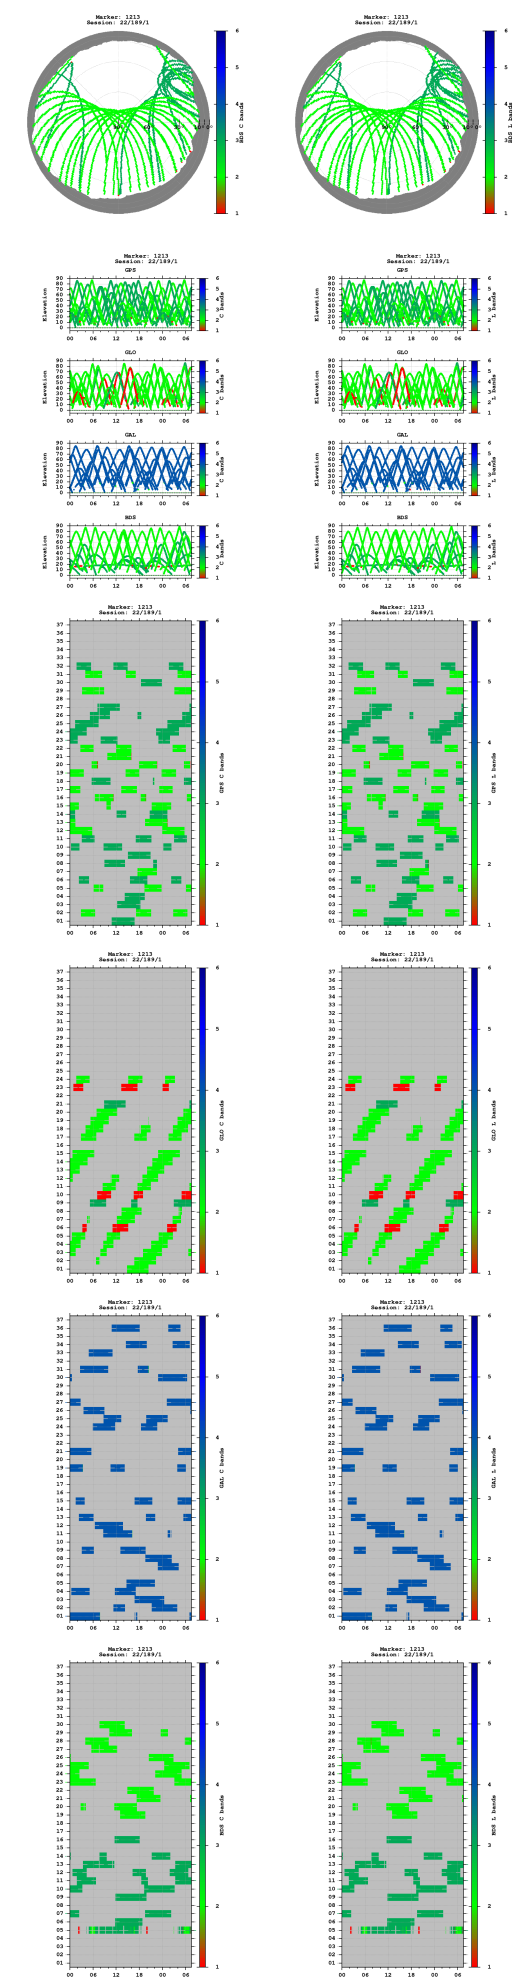


Observations

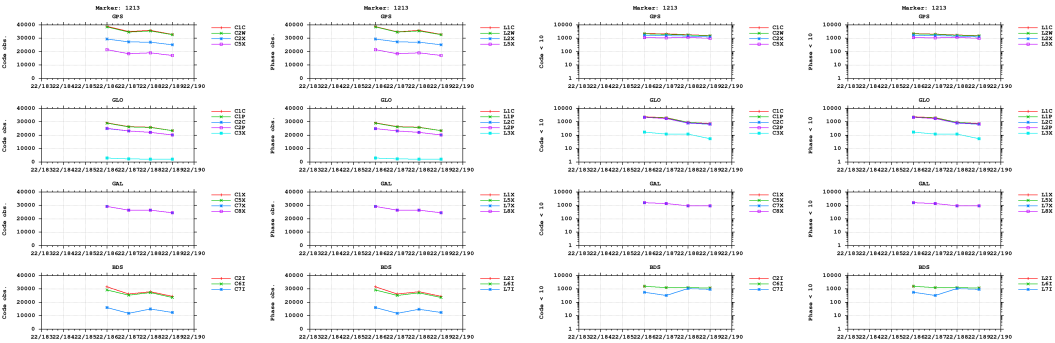



Multipath

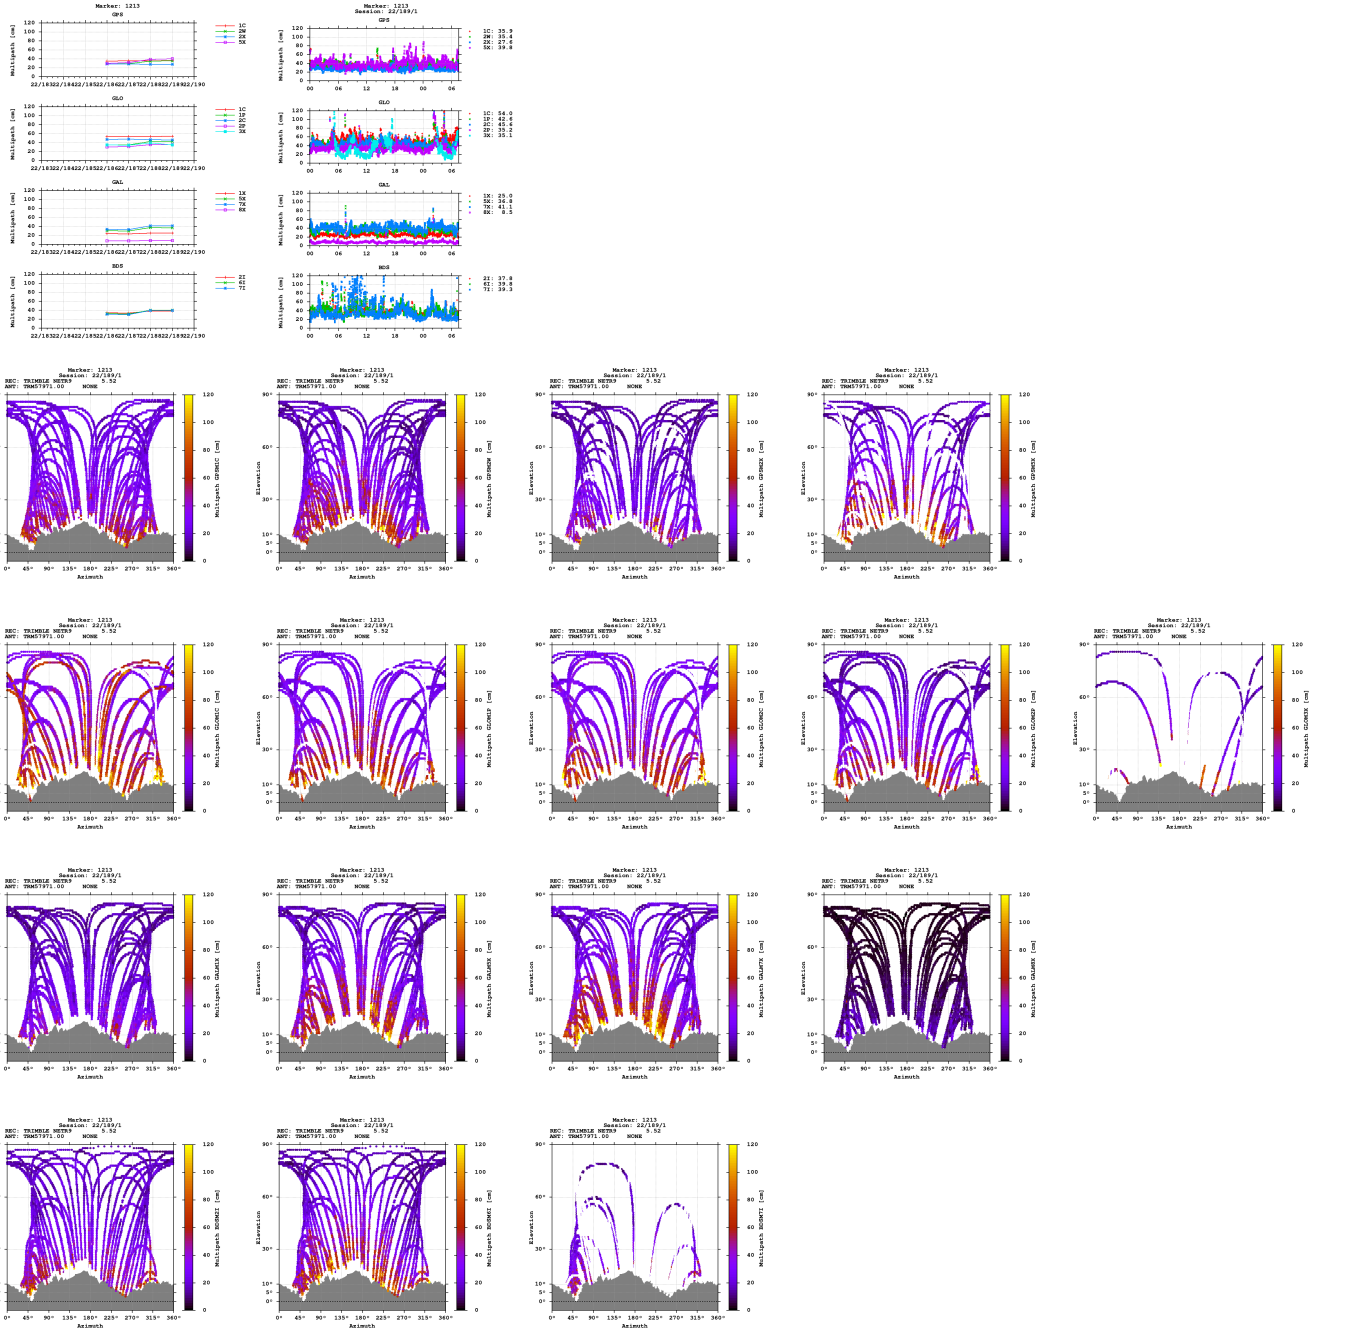


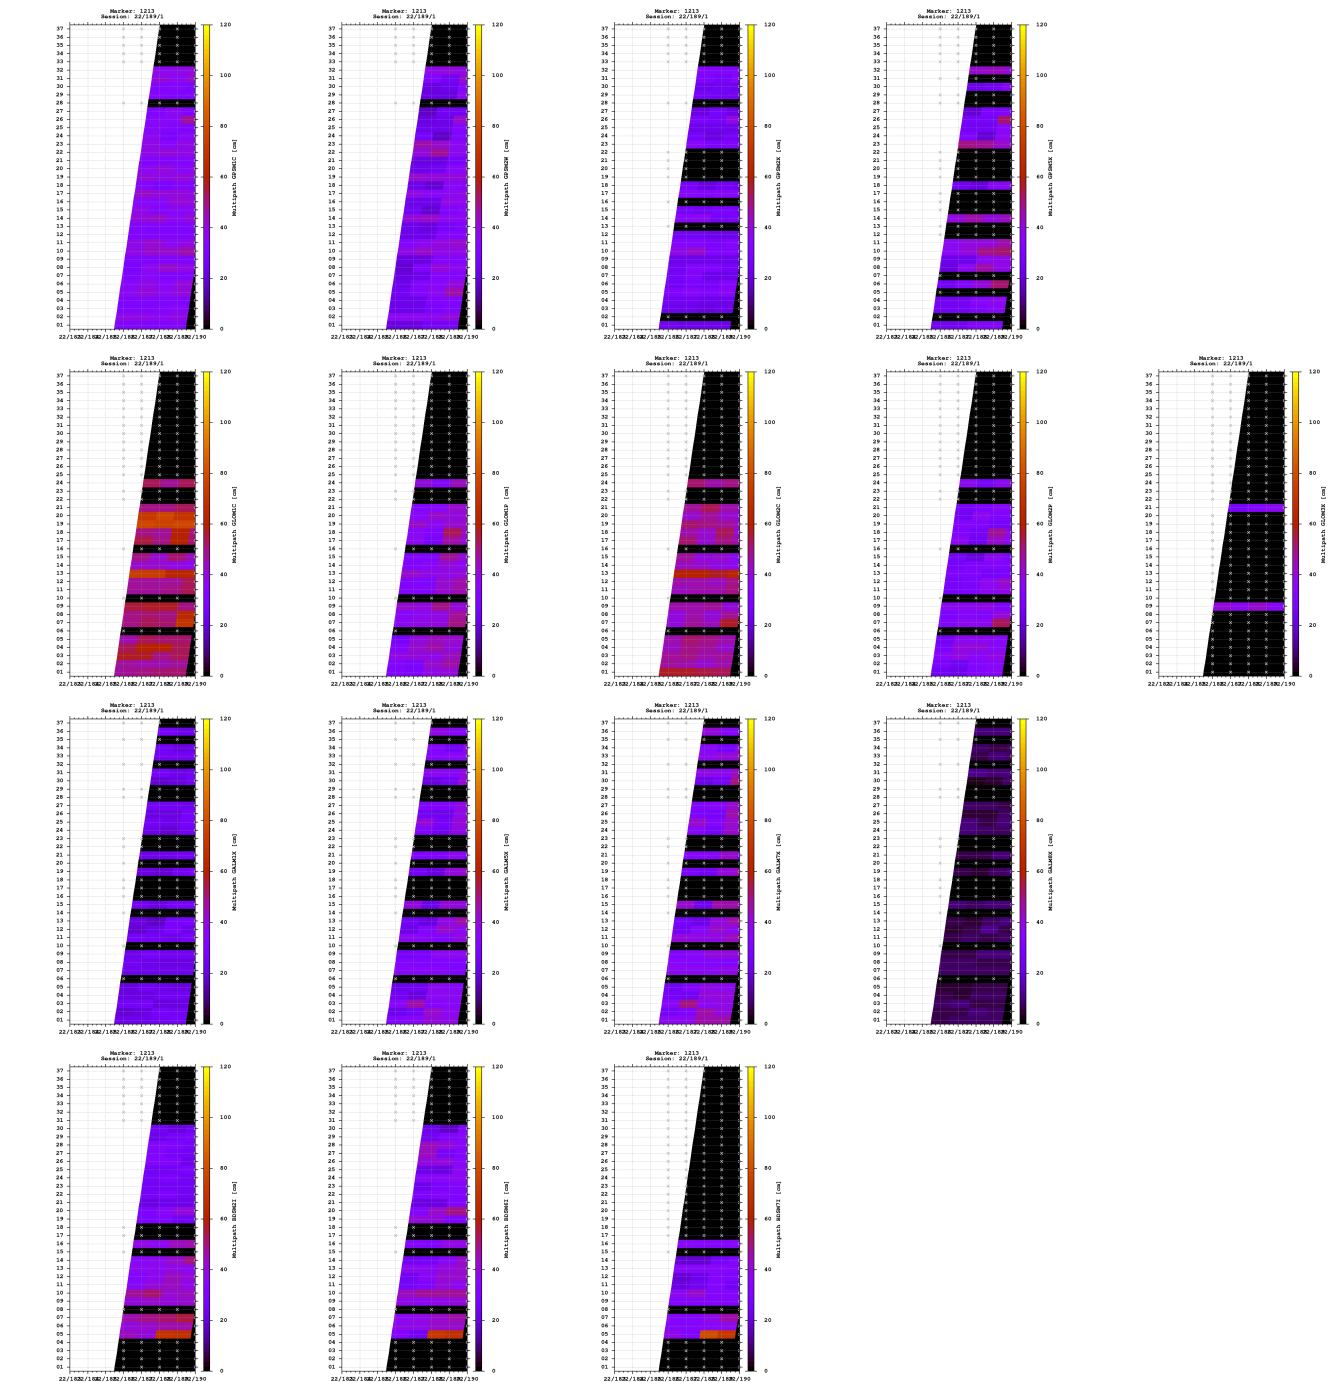

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

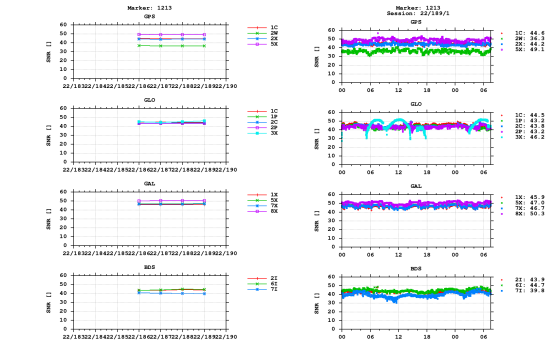

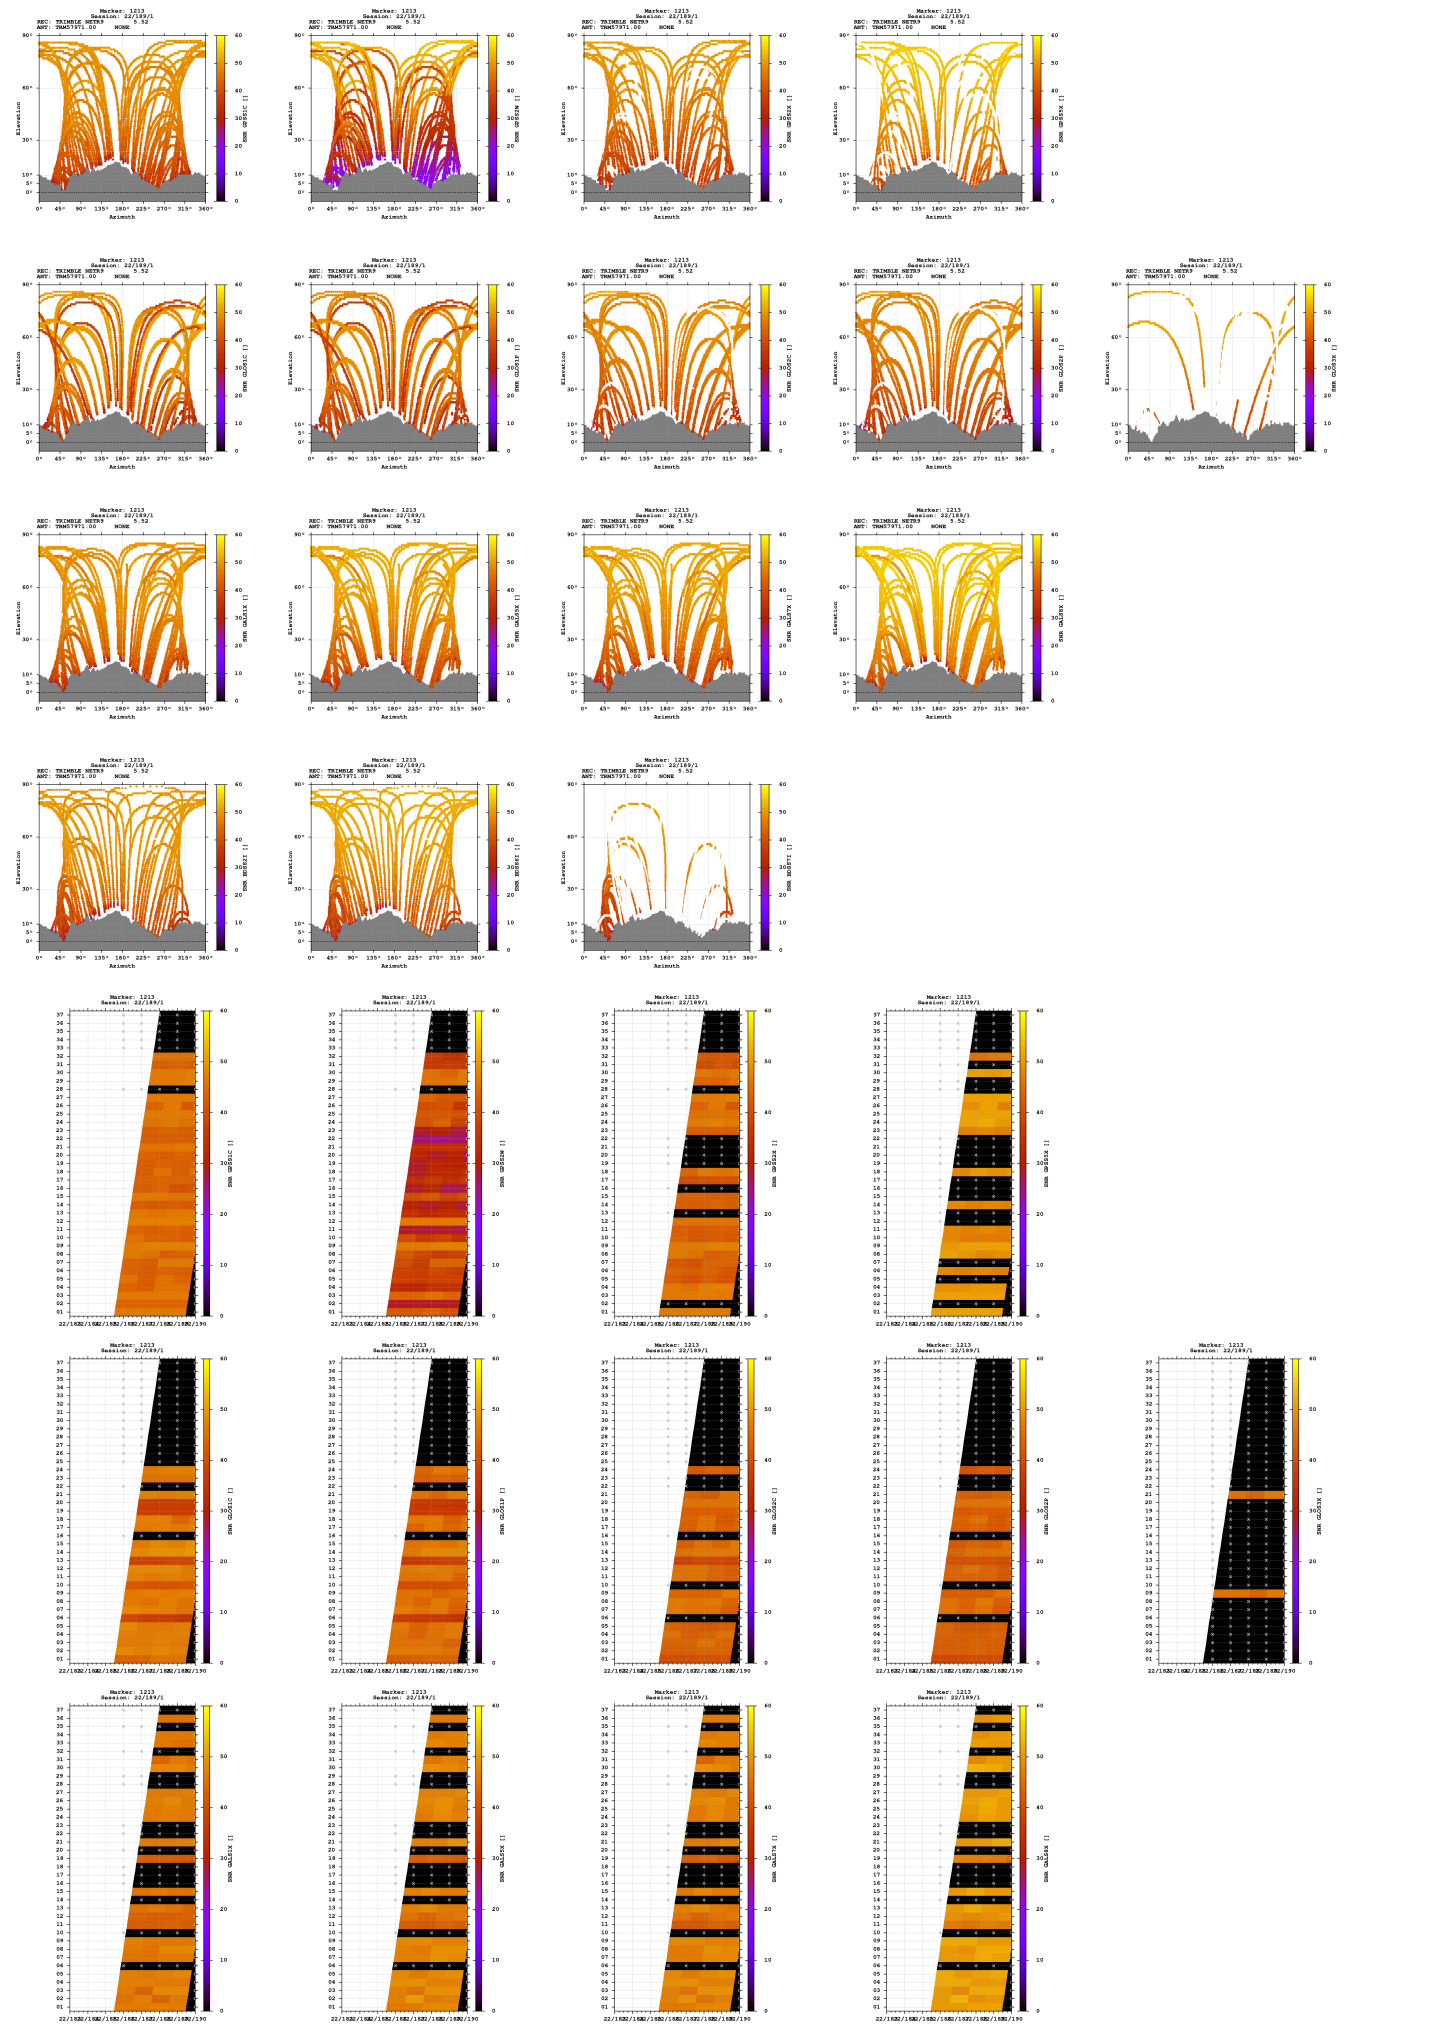





2022-07-07 13:21:30	GPS	4332387.1153	674240.9488	4618767.2827	46.682343639	8.845869881	1590.8847
2022-07-07 13:21:30	GLO	4332386.6091	674240.5580	4618767.4484	46.682348328	8.845865852	1590.6209
2022-07-07 13:21:30	GAL	4332386.7064	674241.1037	4618766.5797	46.682341790	8.845872703	1590.1124
2022-07-07 13:21:30	BDS	4332384.8012	674242.0505	4618767.5950	46.682359419	8.845888757	1589.6595

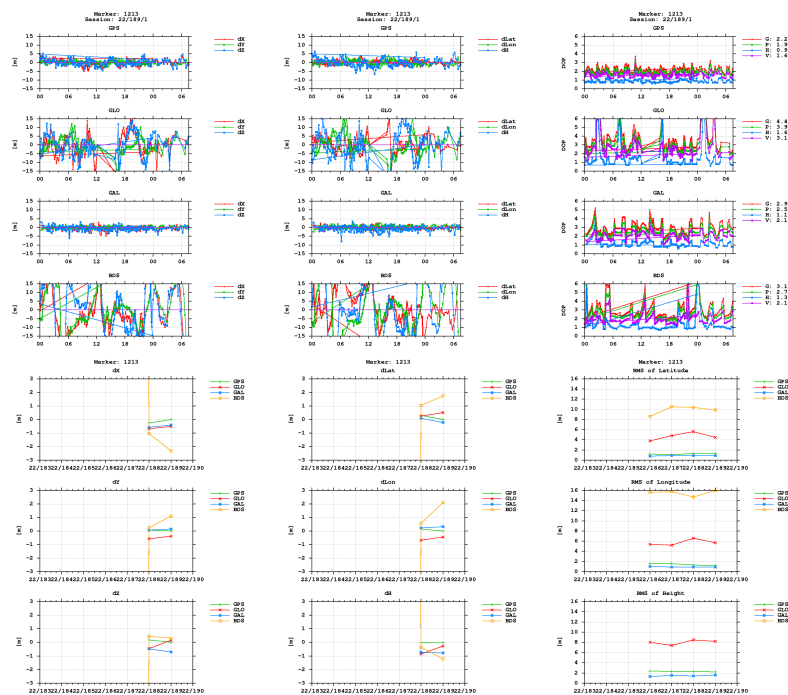

BNC

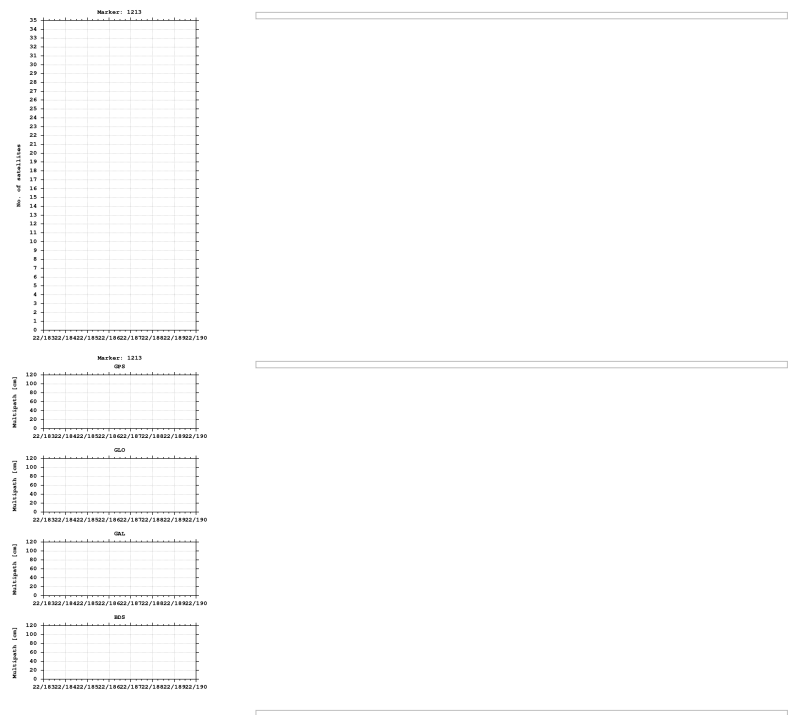

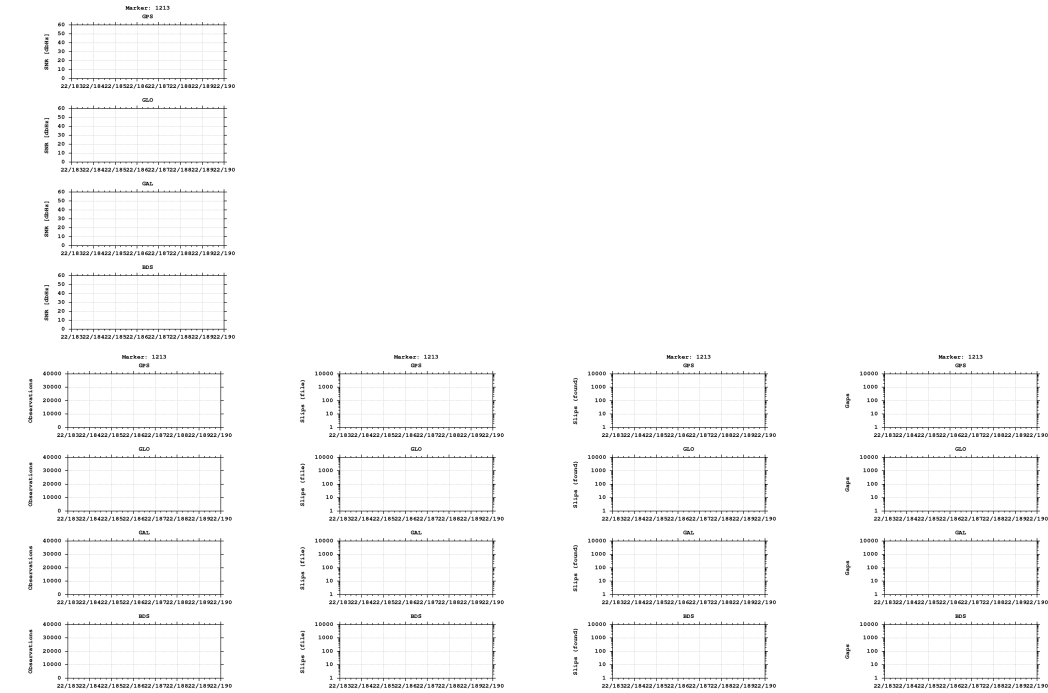

Equipment

2022-07-05 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)