


GNSS observation file monitoring for 0515


Last RINEX file: 05151851.22O
RINEX version: 3.02
Marker: 1290
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

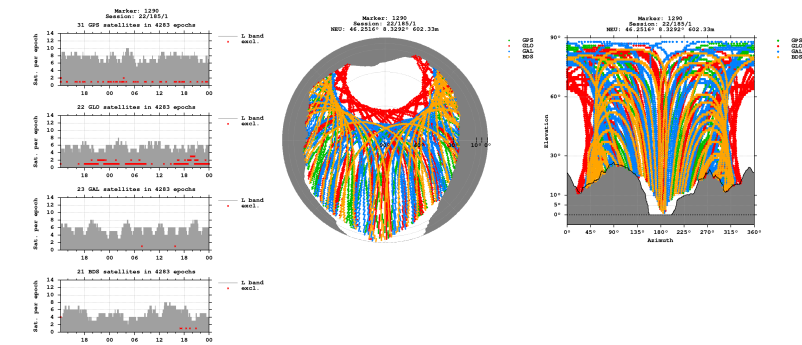


Bands

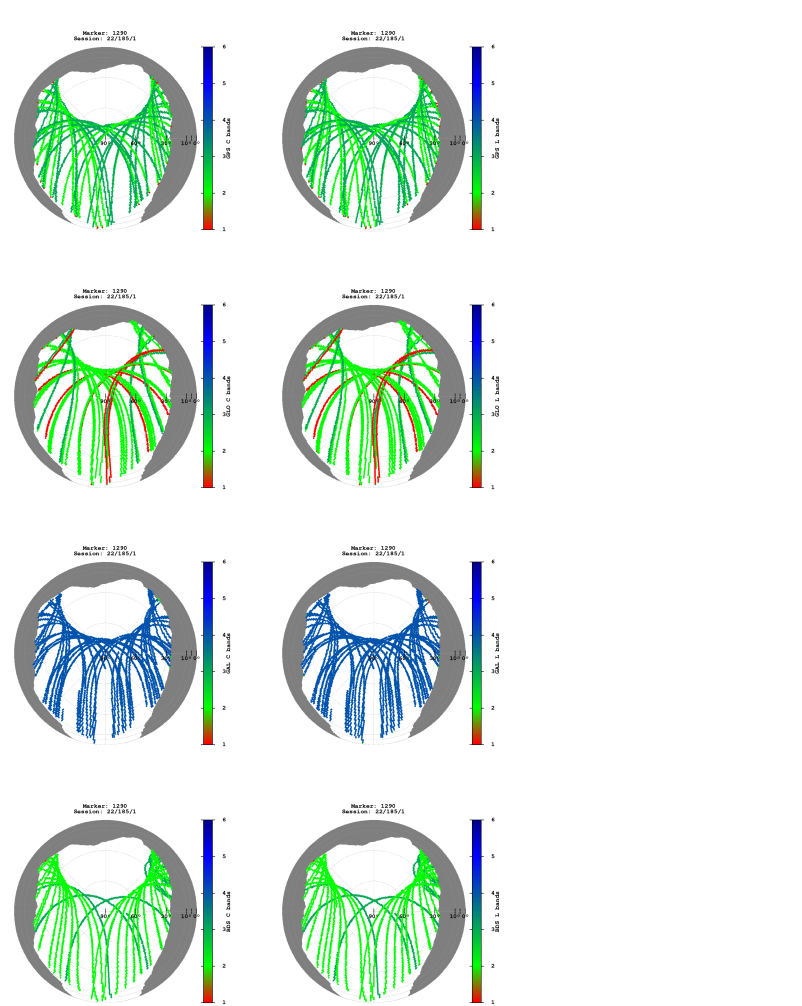

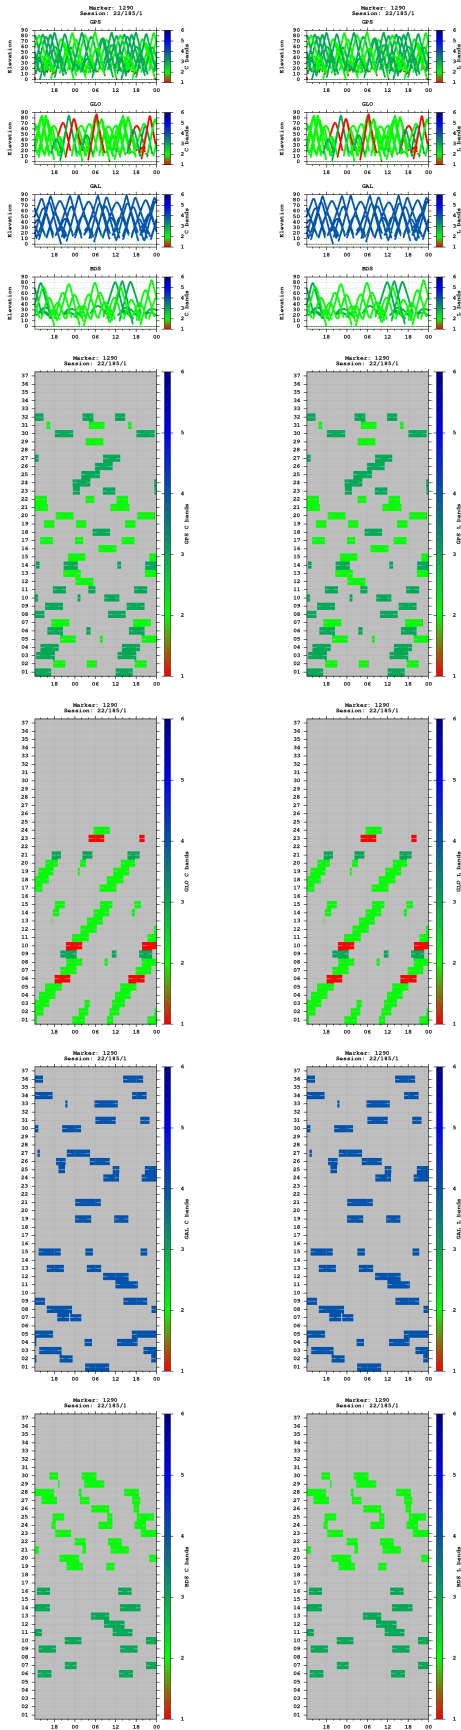



Multipath

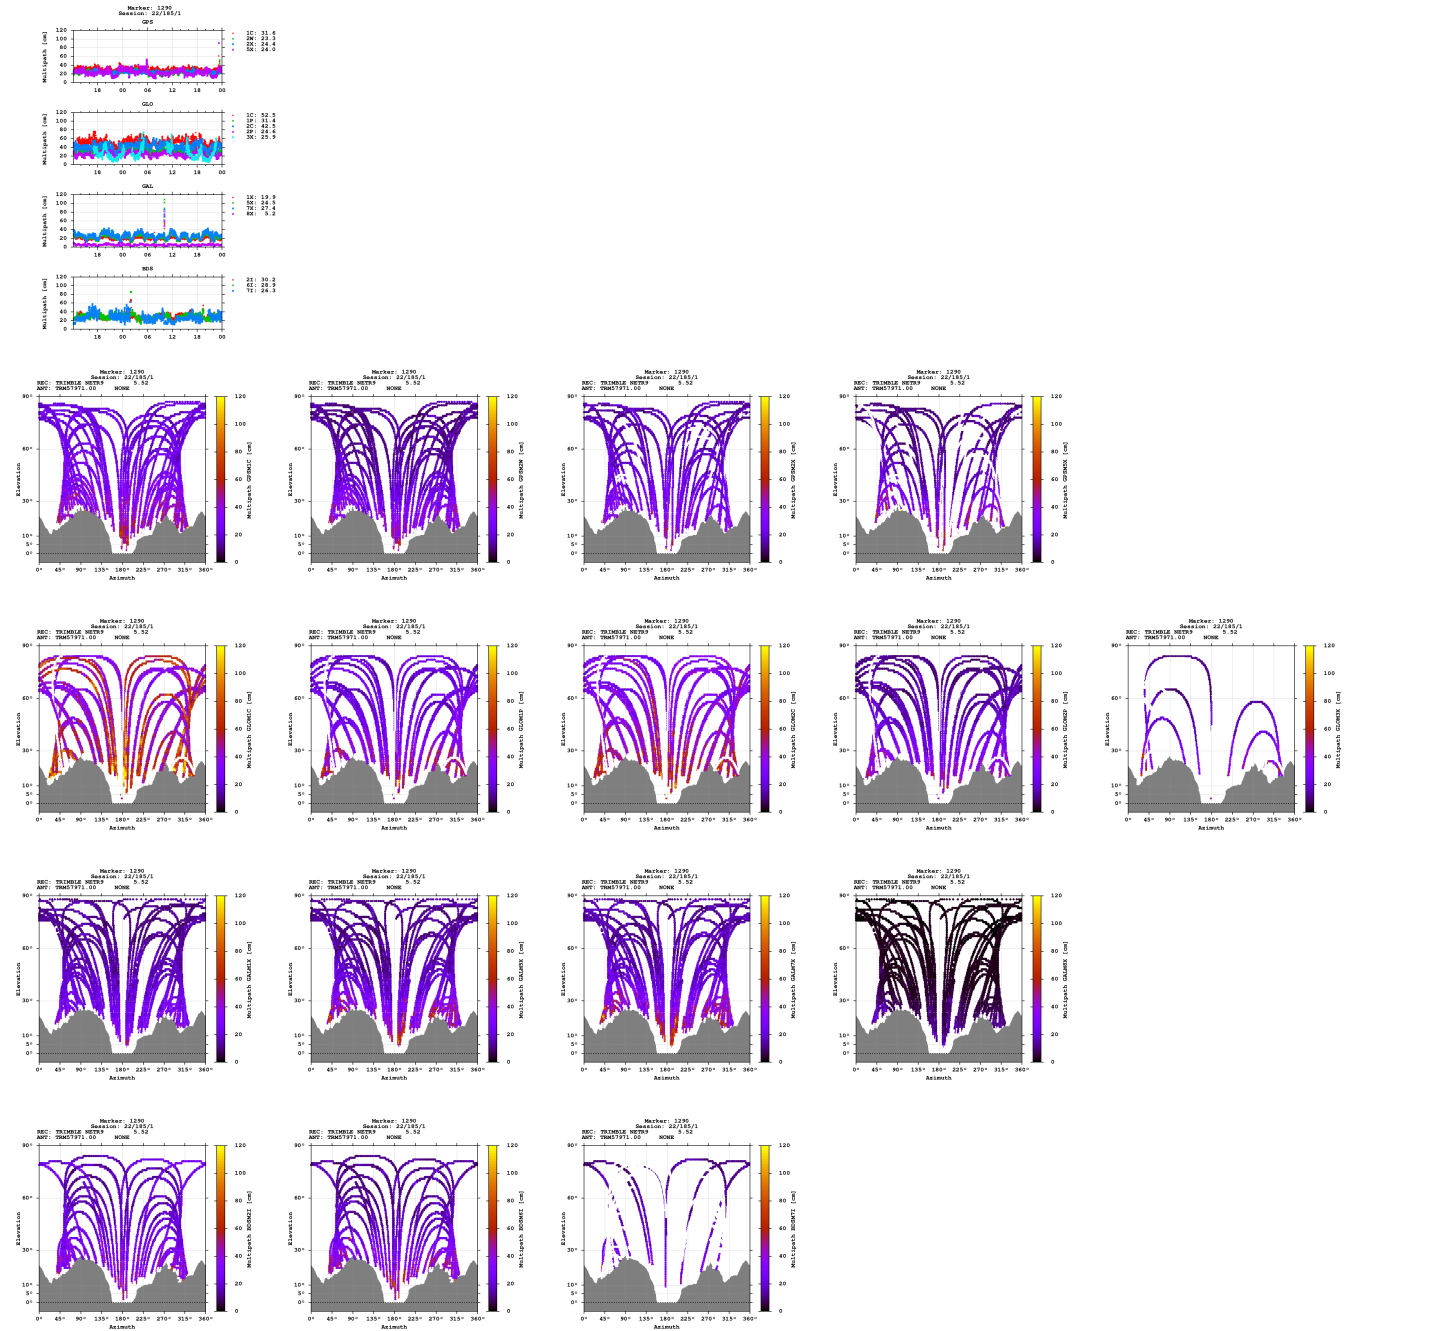

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

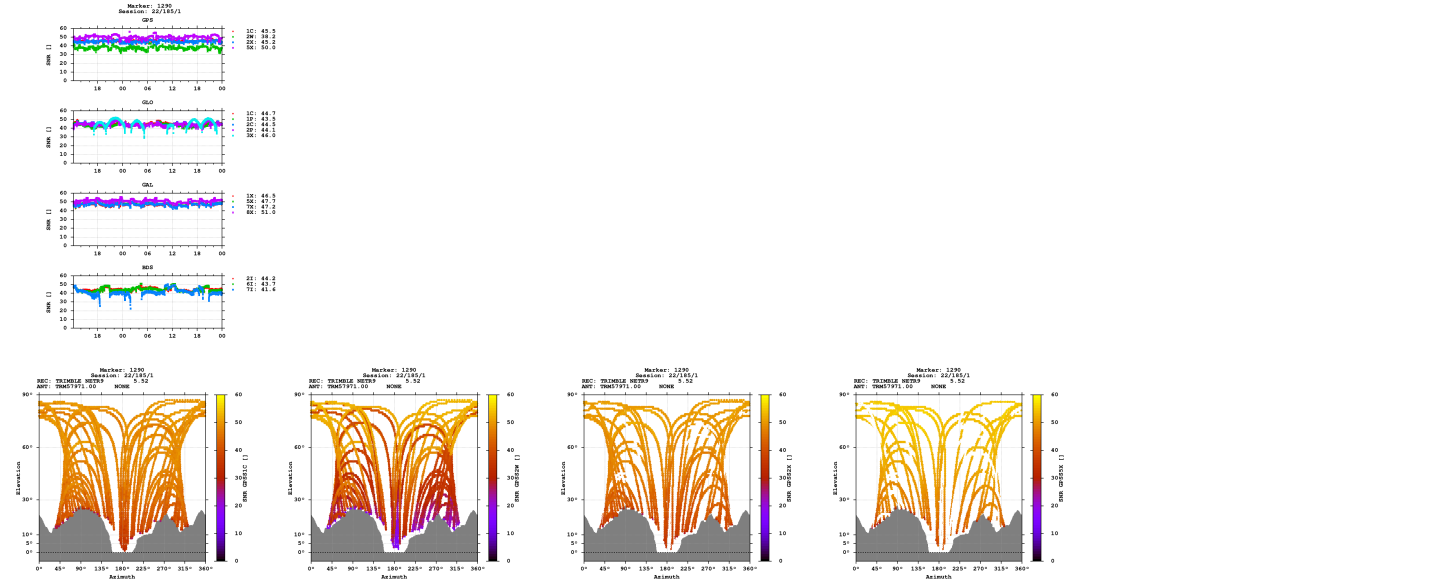

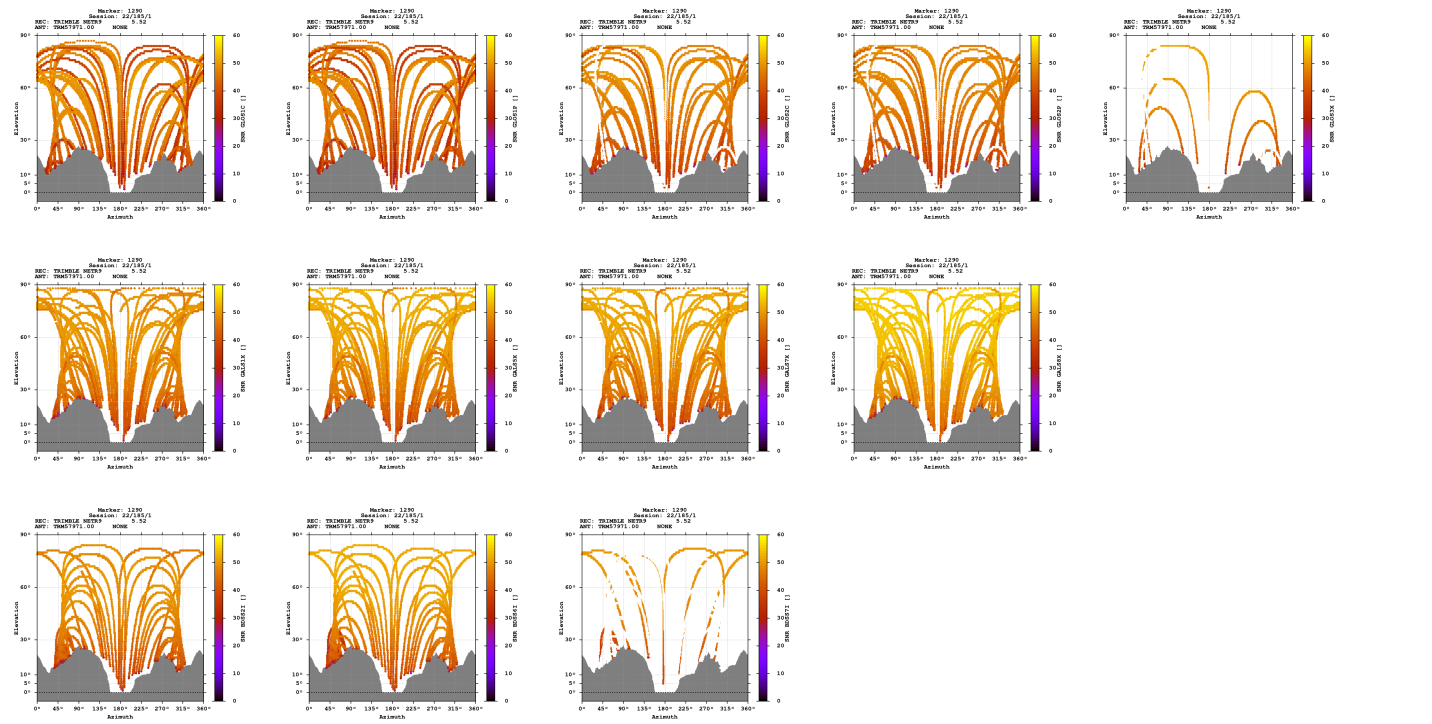

Estimates

2022-07-04 12:15:30	GPS	4371971.9986	640073.8609	4585064.0194	46.251581505	8.329154052	602.3333
2022-07-04 12:15:30	GLO	4371971.7597	640073.5941	4585062.6246	46.251574616	8.329151078	601.1356
2022-07-04 12:15:30	GAL	4371972.3898	640073.9126	4585063.8672	46.251577994	8.329153982	602.4962
2022-07-04 12:15:30	BDS	4371975.4637	640067.4900	4585065.9249	46.251577075	8.329065804	605.4425

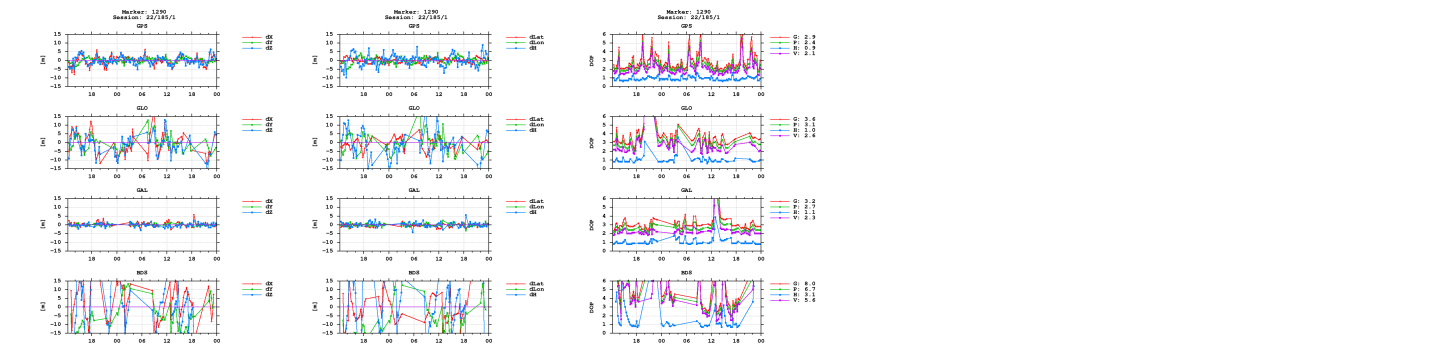

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)