


GNSS observation file monitoring for 0516


Last RINEX file: 05161871.220
RINEX version: 3.02
Marker: 1329
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

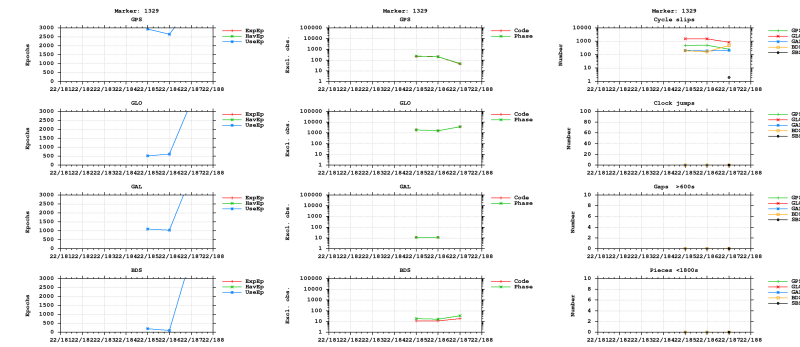



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

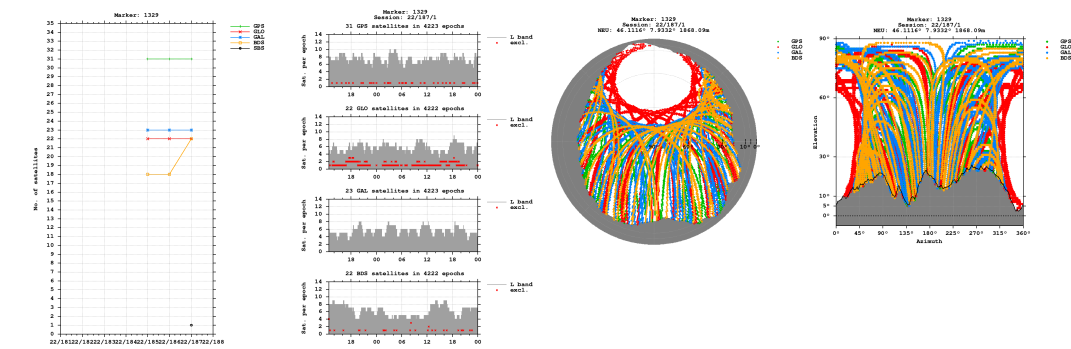


Bands

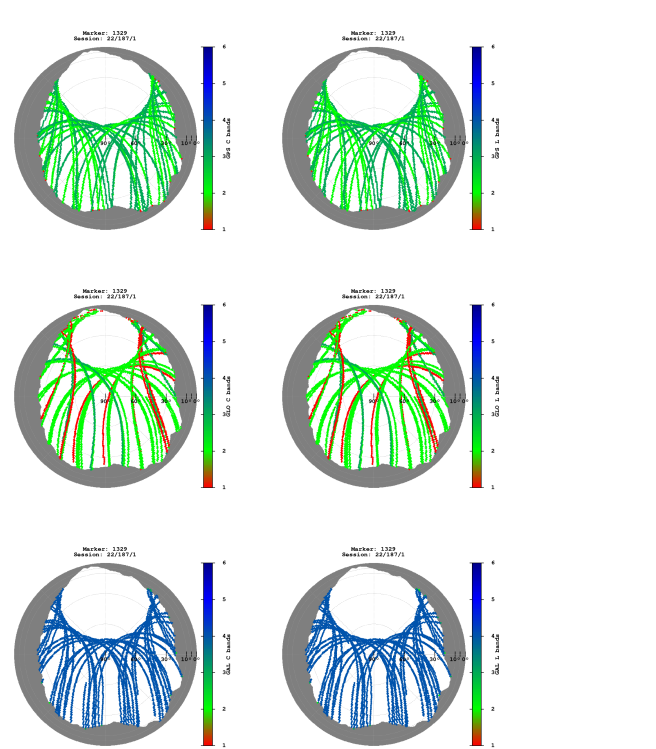


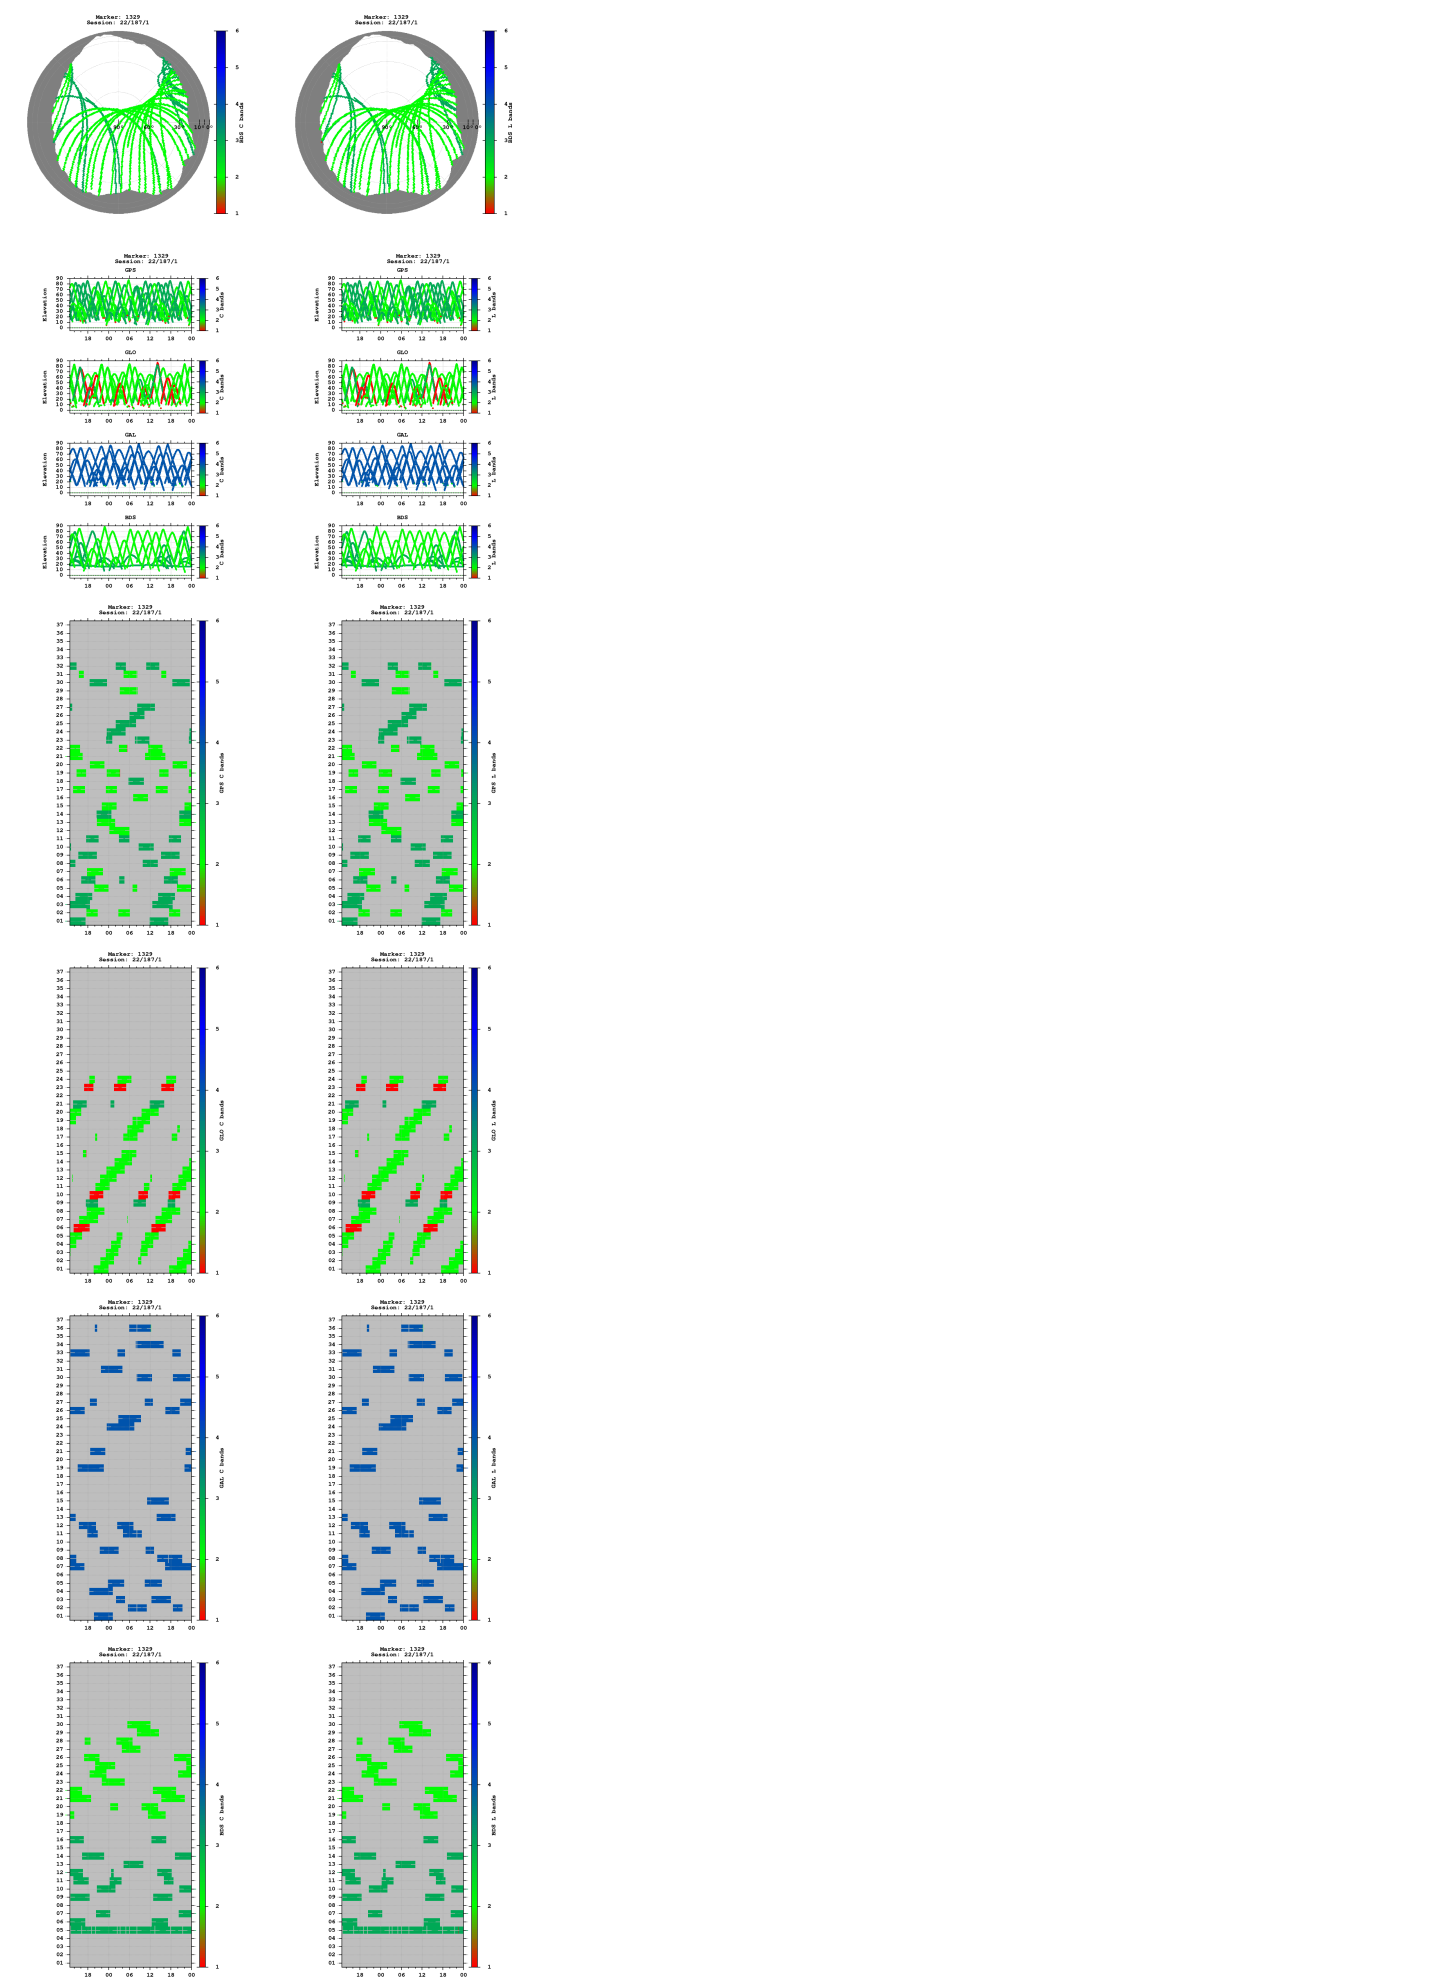


Observations


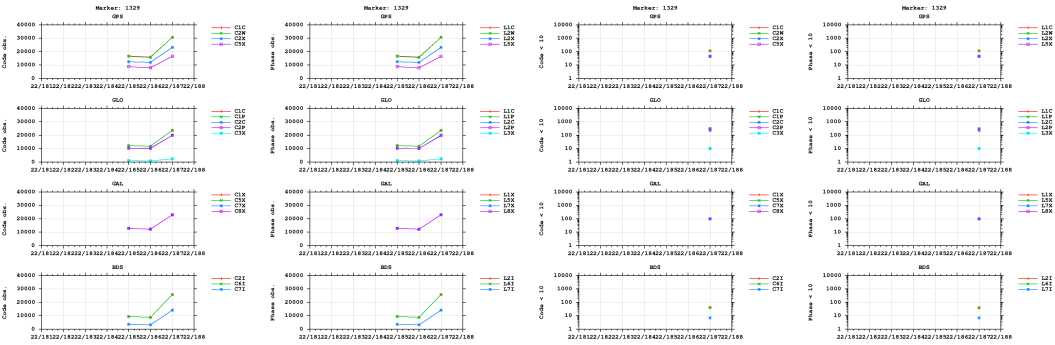



Multipath

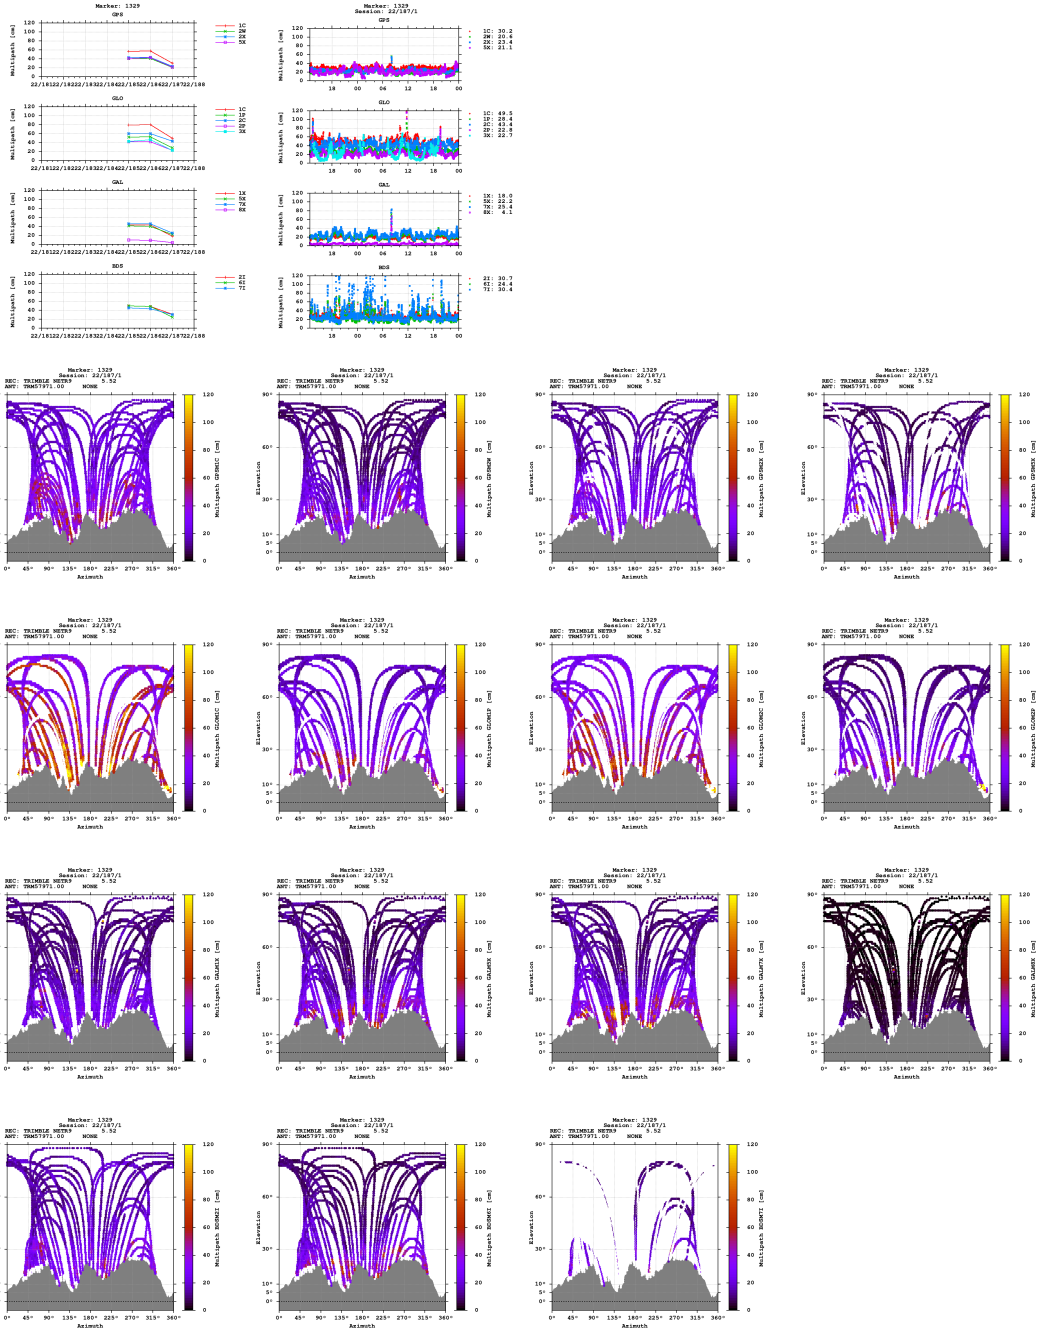




Signal-to-noise ratio

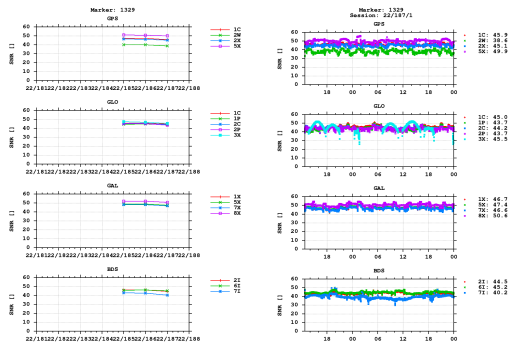


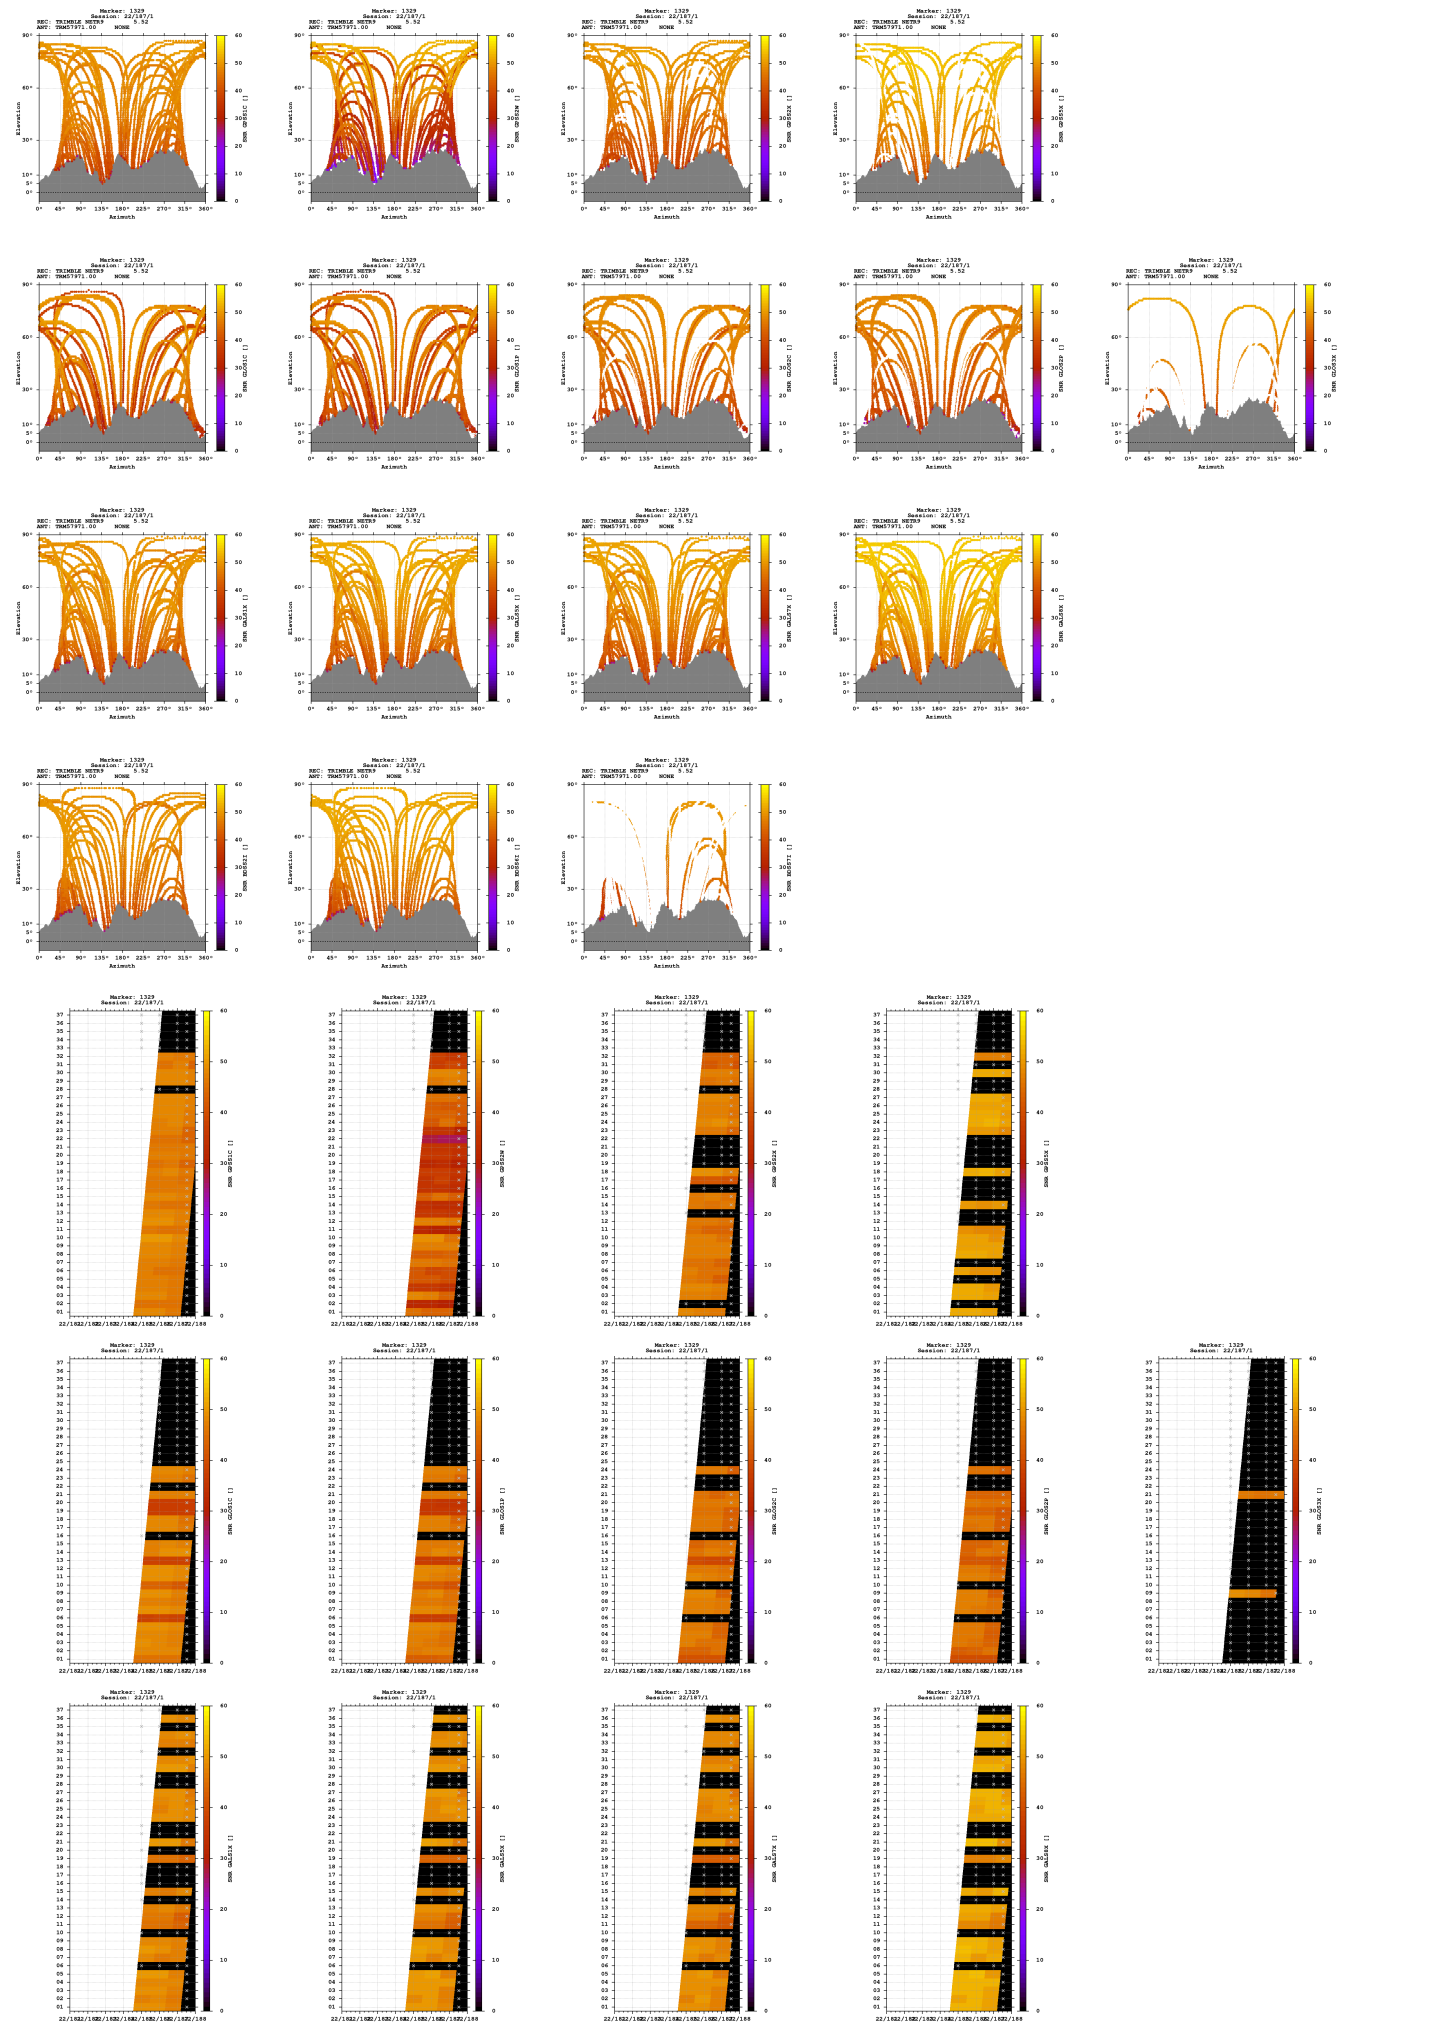

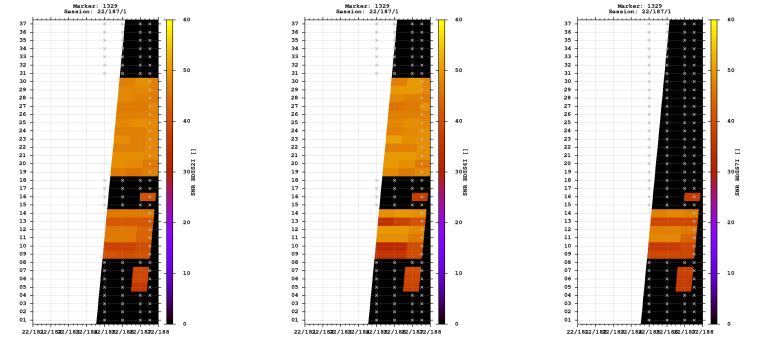



Estimates

2022-07-06 12:46:00	GPS	4388277.3418	611516.4110	4575205.0883	46.111638433	7.933208409	1868.0883
2022-07-06 12:46:00	GLO	4388280.3910	611516.7825	4575206.3803	46.111626582	7.933207725	1871.1487
2022-07-06 12:46:00	GAL	4388277.7038	611516.5642	4575205.0469	46.111635715	7.933209725	1868.3217
2022-07-06 12:46:00	BDS	4388275.7183	611516.3687	4575205.5516	46.111651783	7.933210763	1867.3034

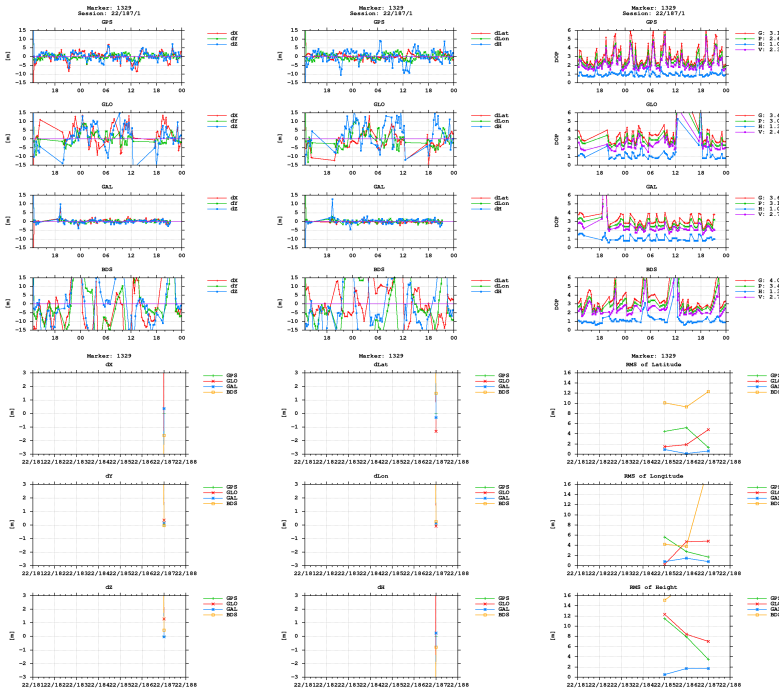

BNC

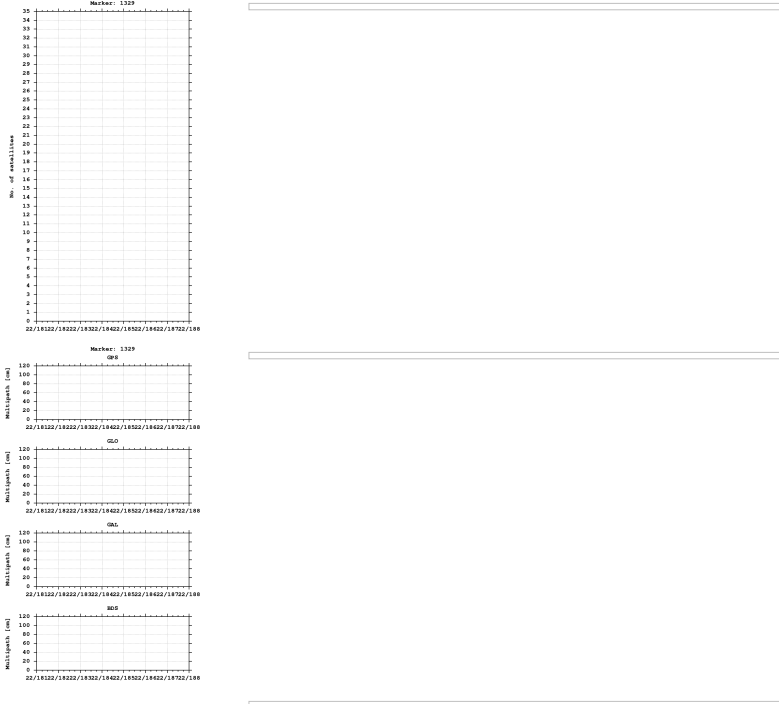

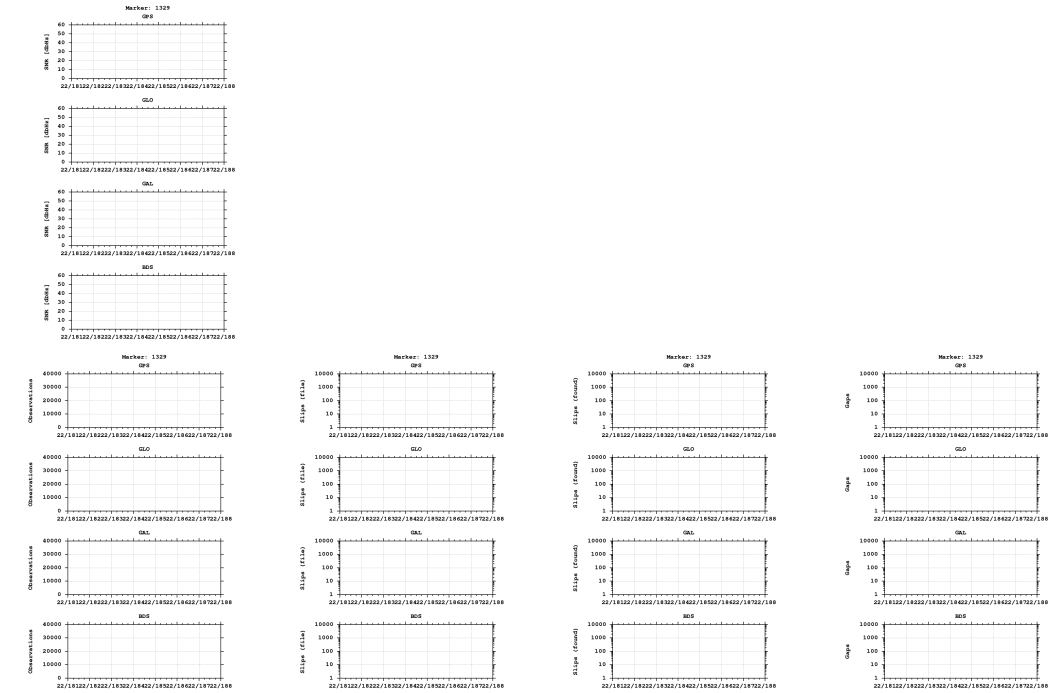

Equipment

2022-07-04 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)