

GNSS observation file monitoring for 0516

Last RINEX file: 05161881.220


RINEX version: 3.02

Marker: 1329

Receiver: 516 TRIMBLE NETR9 5.52


Antenna: 516 TRM57971.00 NONE

Epochs

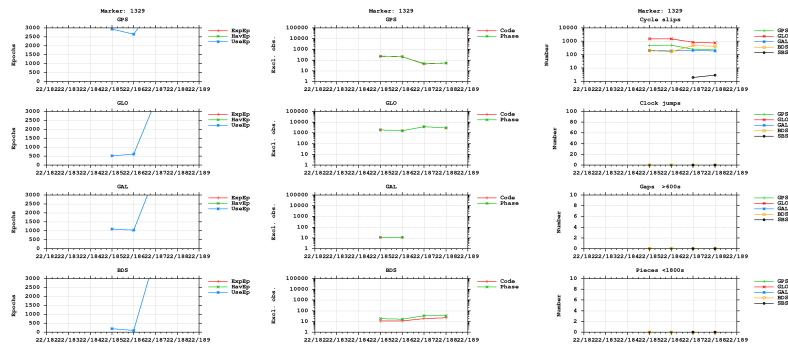



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

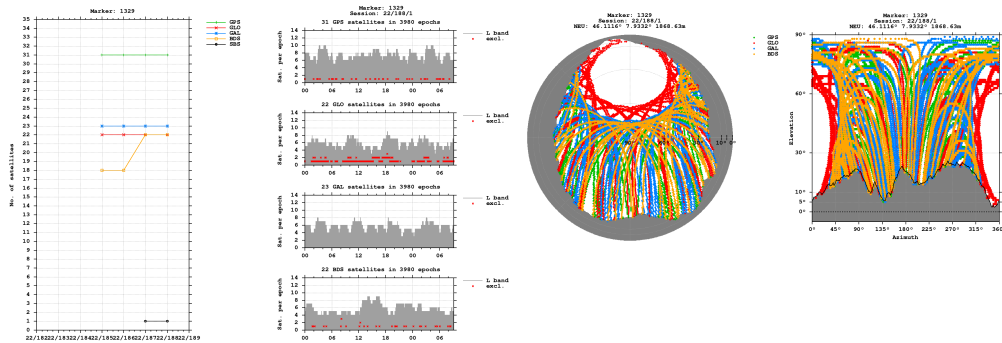


Bands

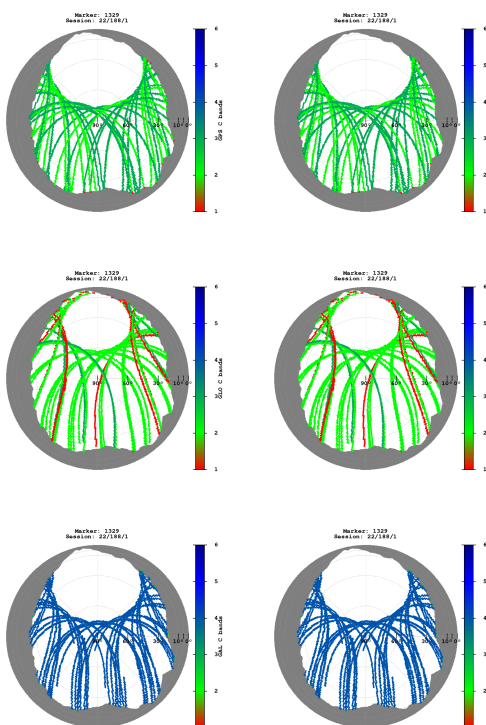


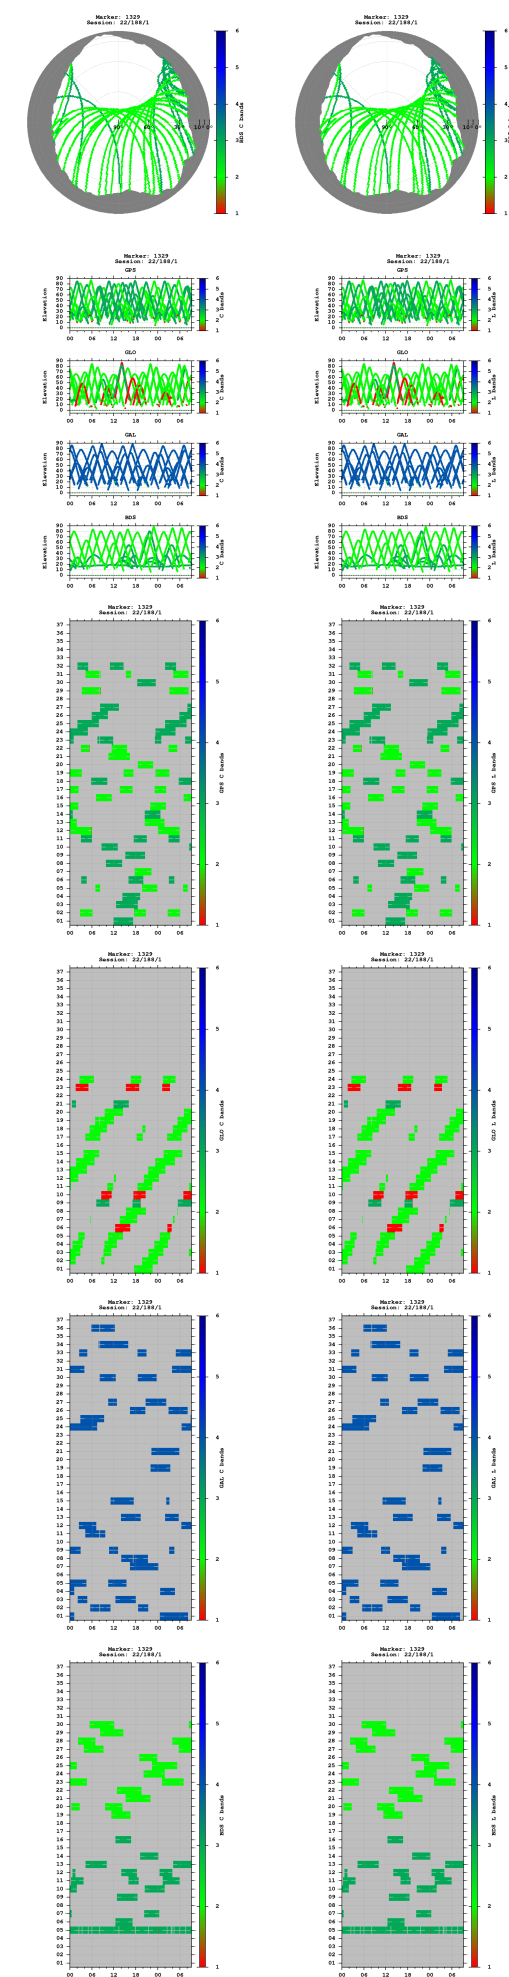


Observations

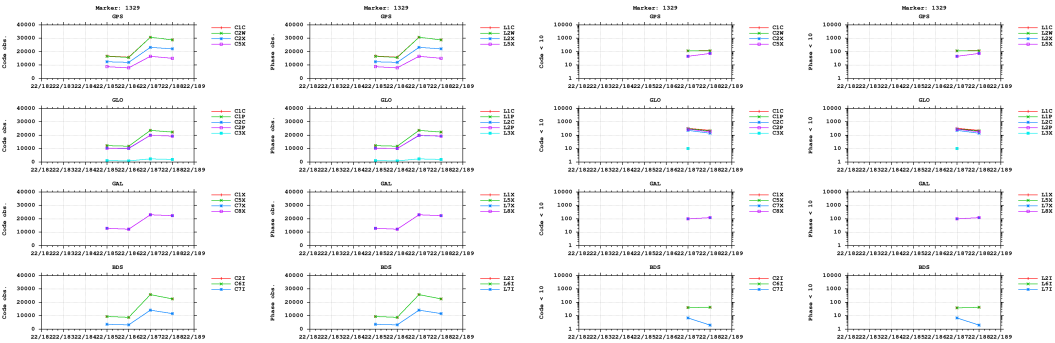



Multipath

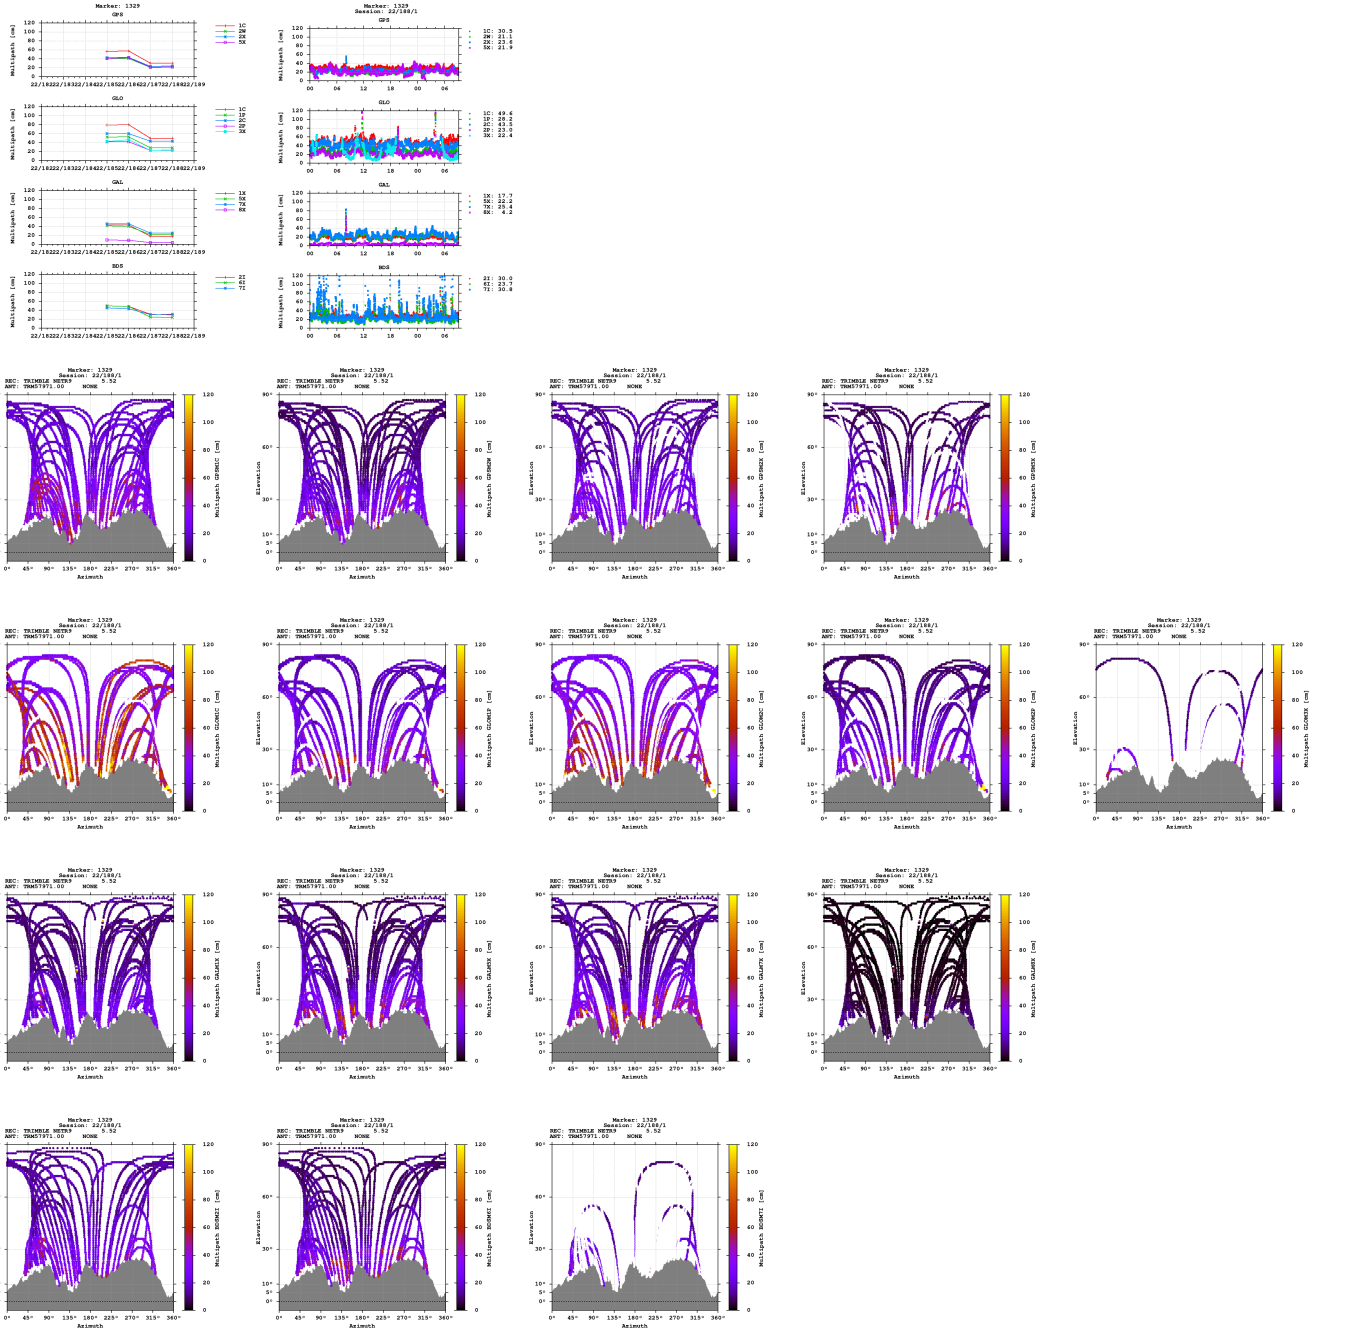


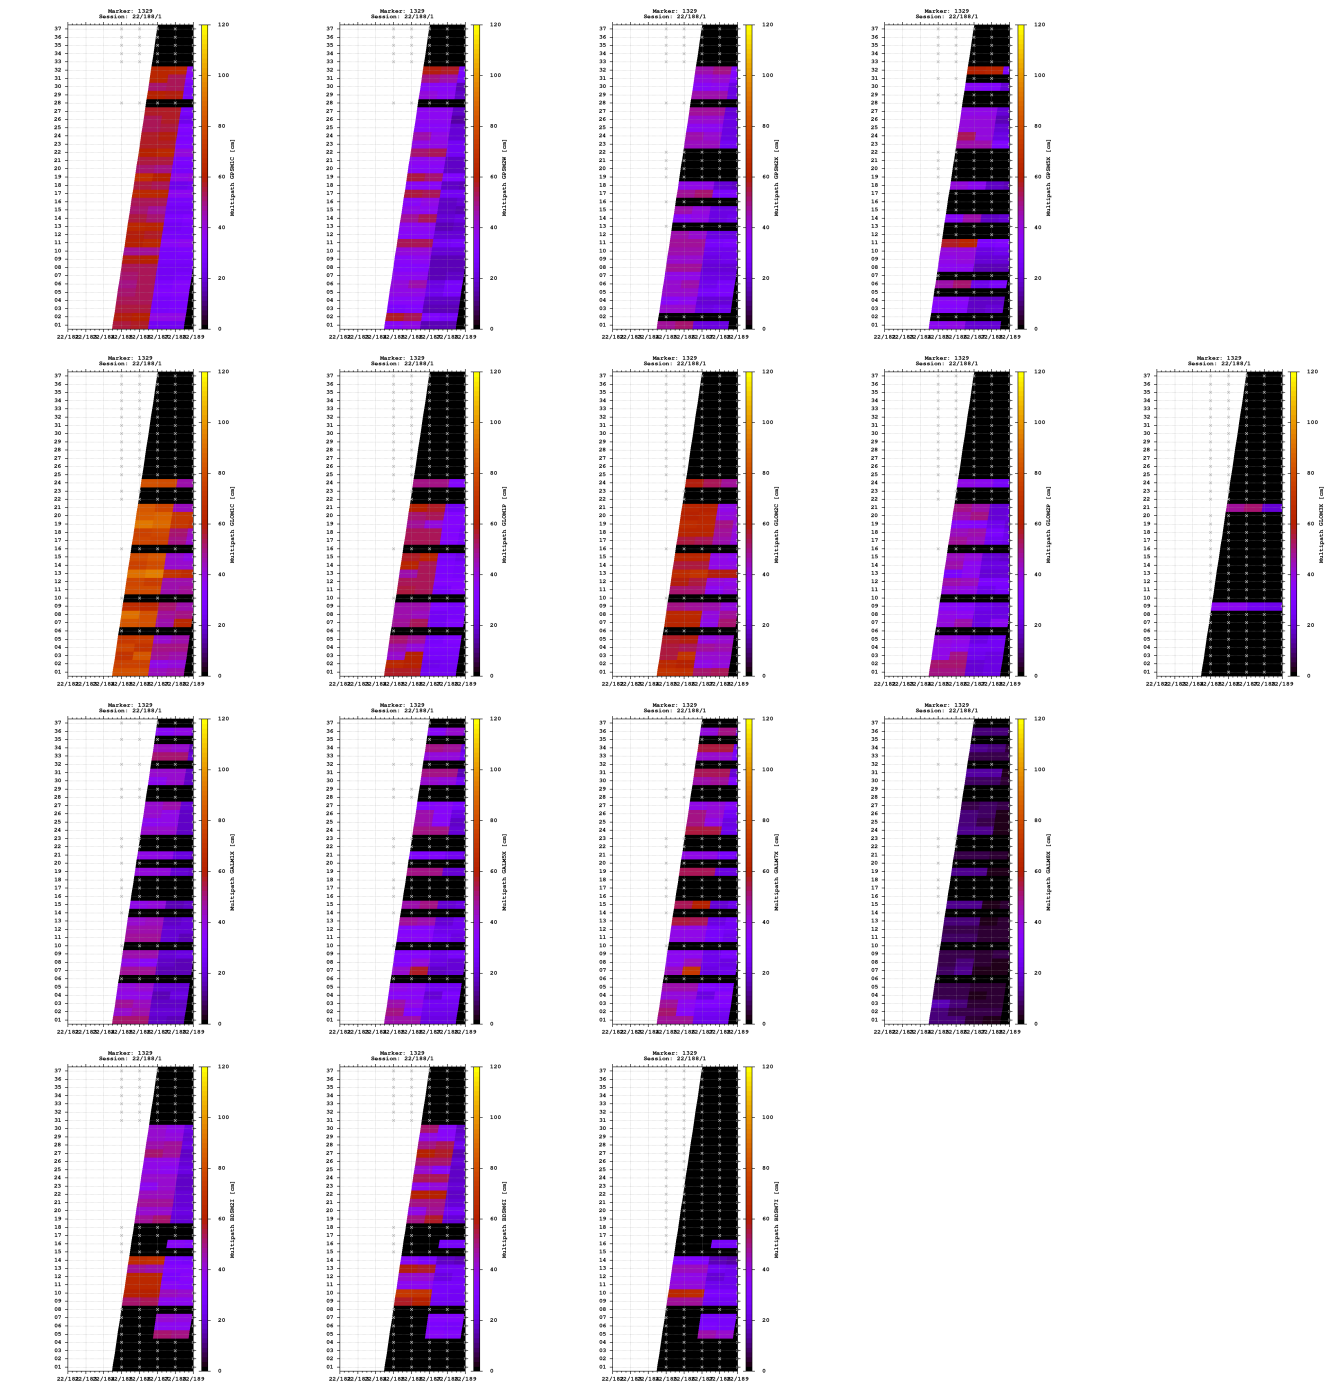

Signal-to-noise ratio

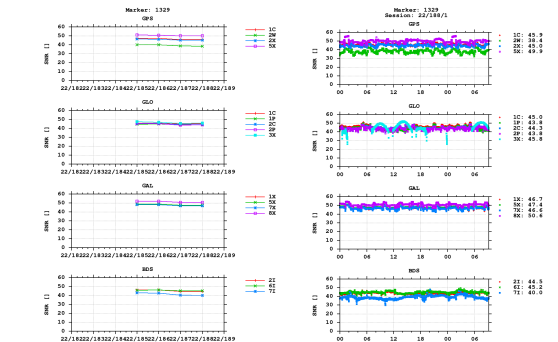


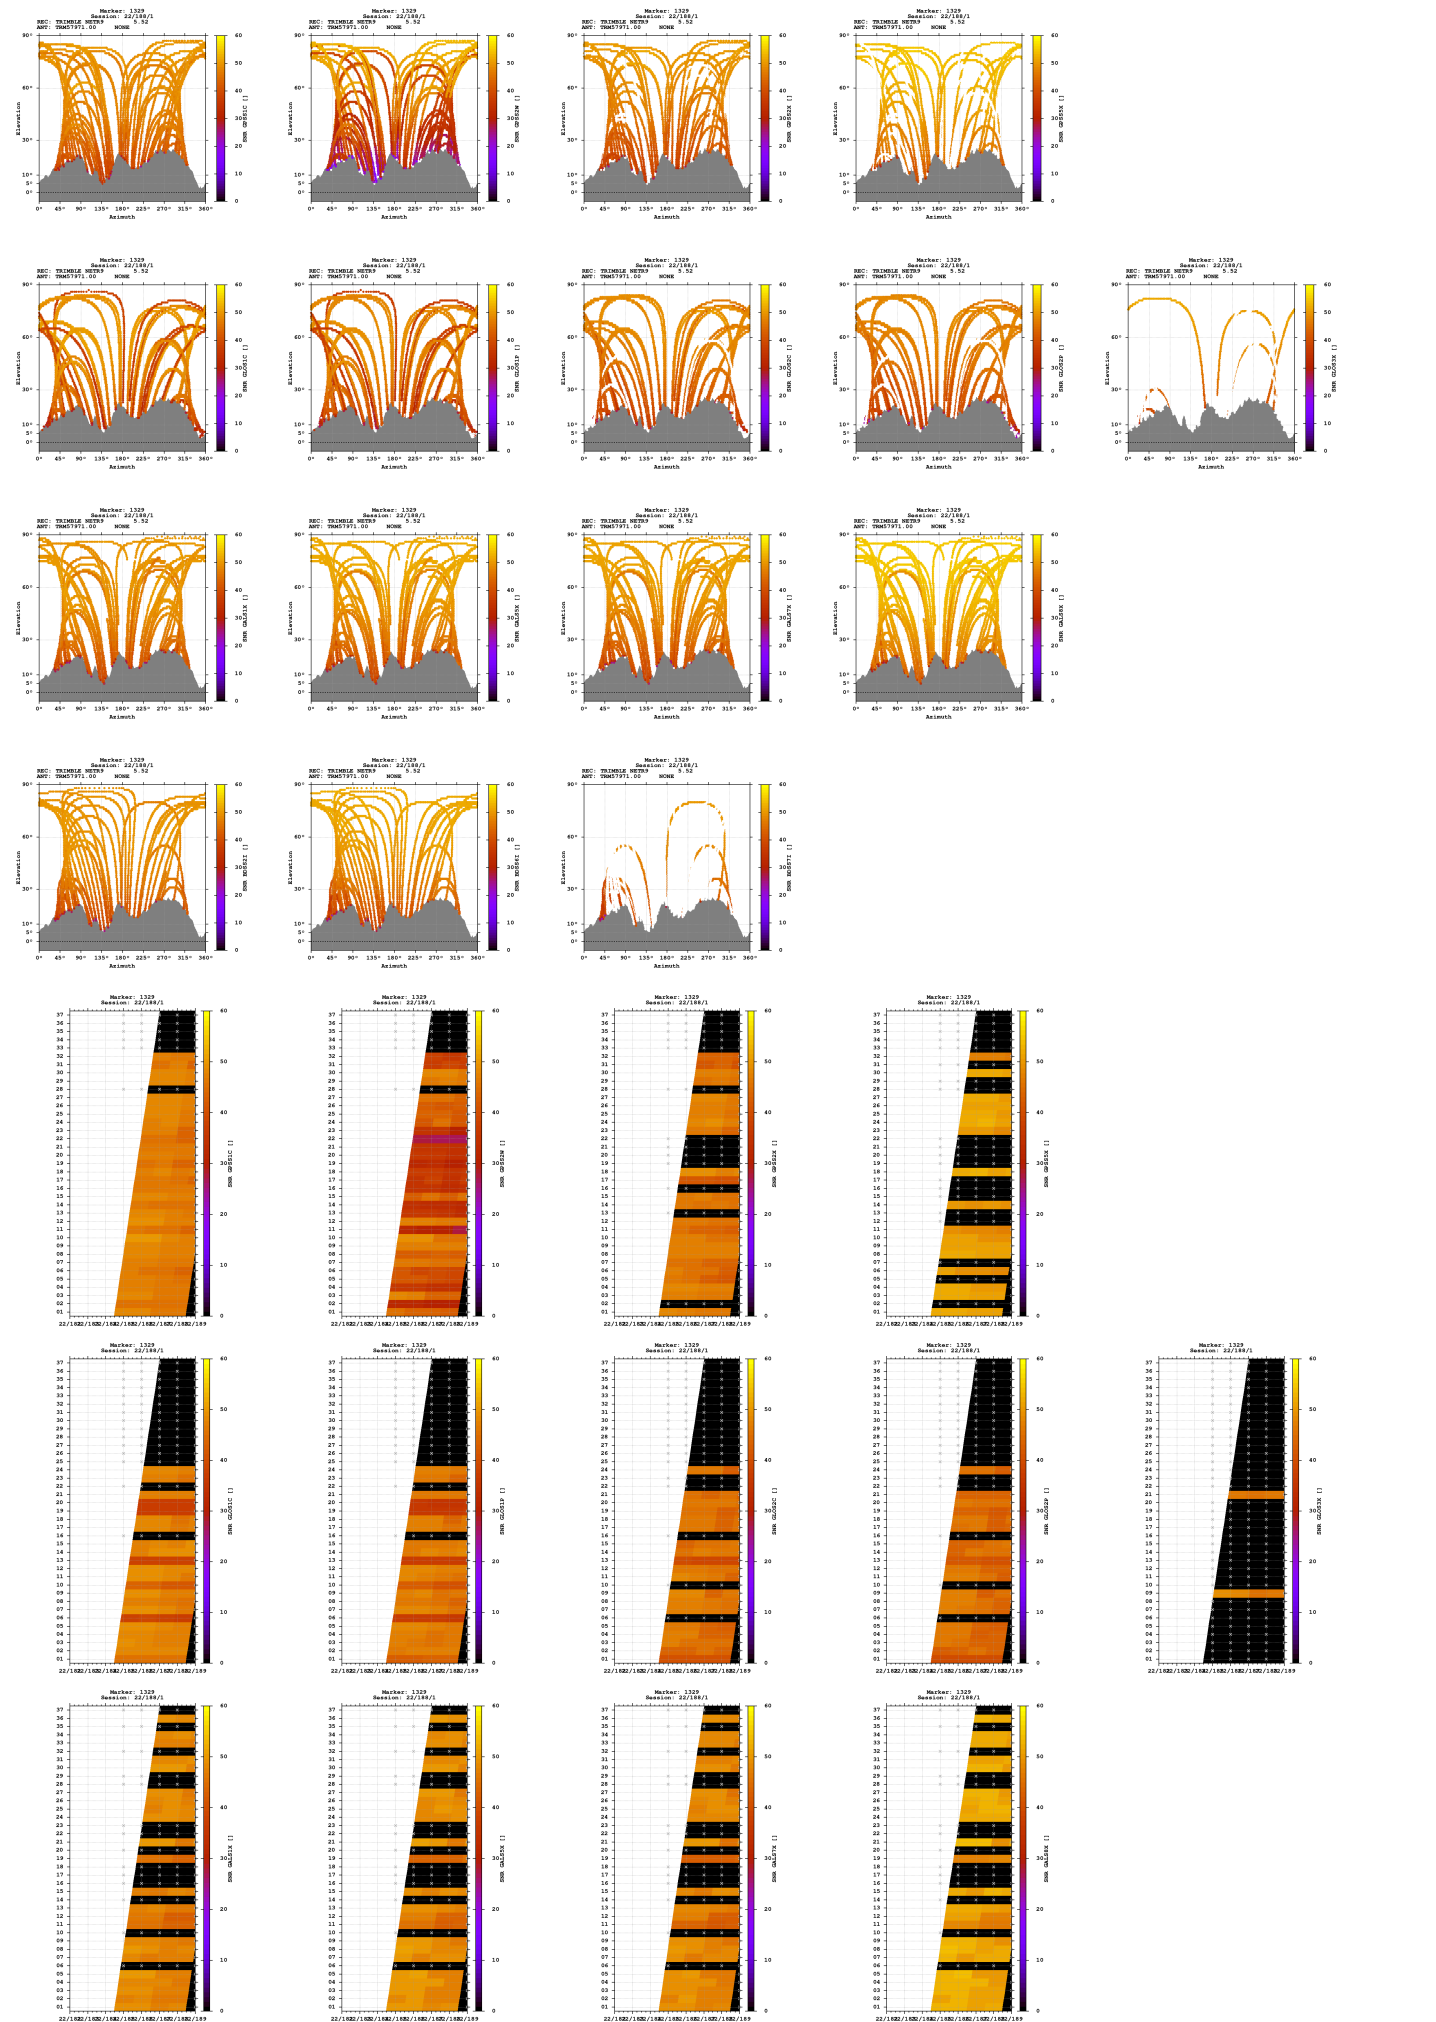

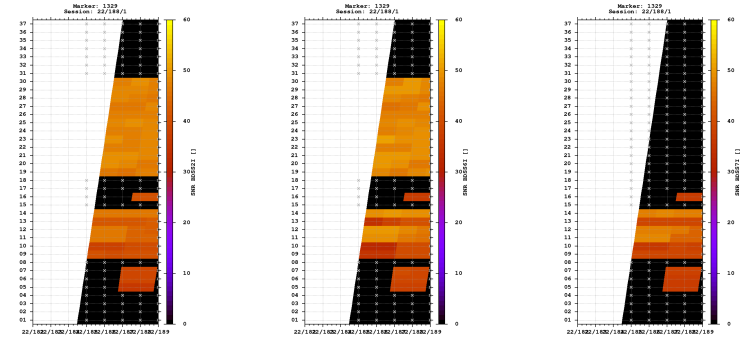



Estimates

2022-07-06 12:46:00	GPS	4388278.0397	611516.4982	4575205.1638	46.111634346	7.933208279	1868.6303
2022-07-06 12:46:00	GLO	4388279.3514	611517.3445	4575207.4588	46.111639477	7.933216778	1871.2658
2022-07-06 12:46:00	GAL	4388277.7095	611516.5619	4575204.8663	46.111634553	7.933209685	1868.1952
2022-07-06 12:46:00	BDS	4388273.9692	611516.1046	4575206.3633	46.111668309	7.933210503	1866.6621

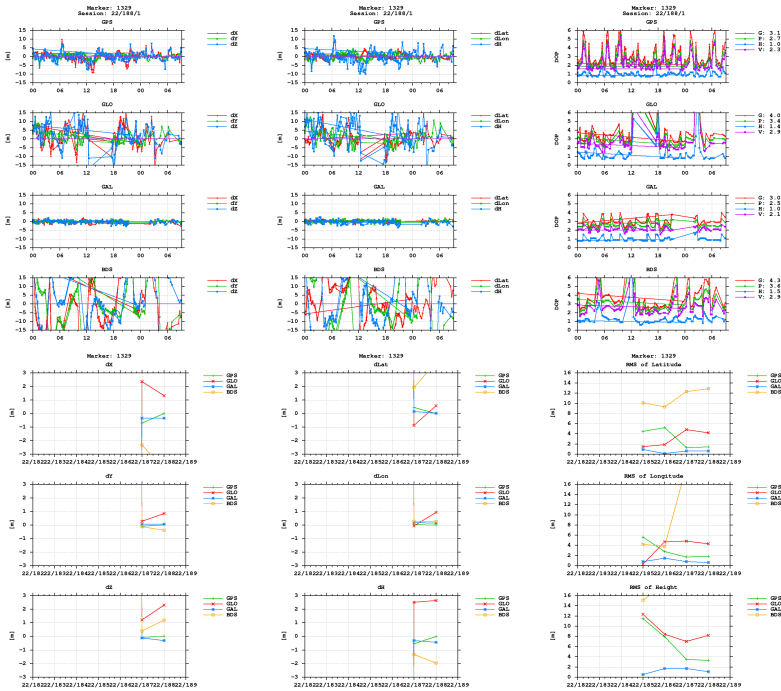

BNC

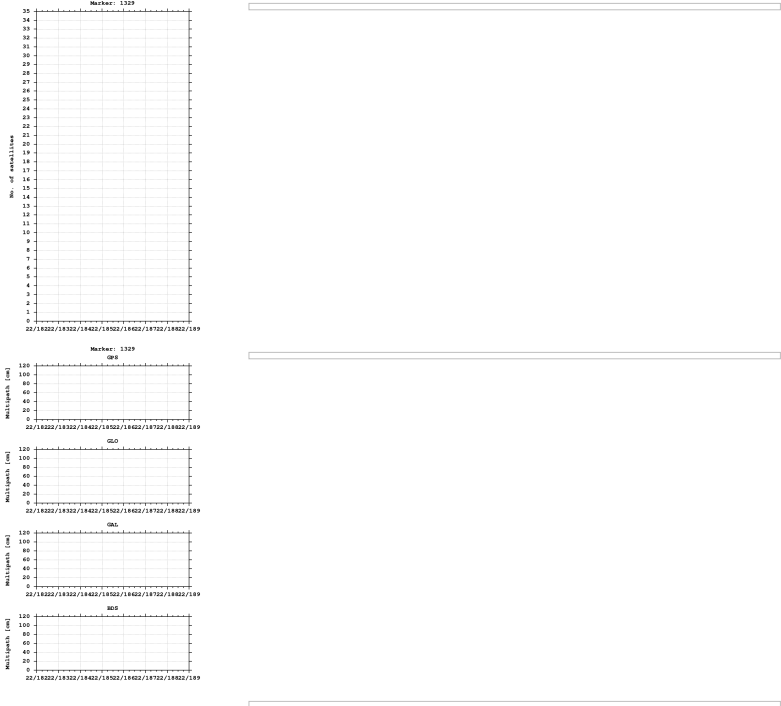

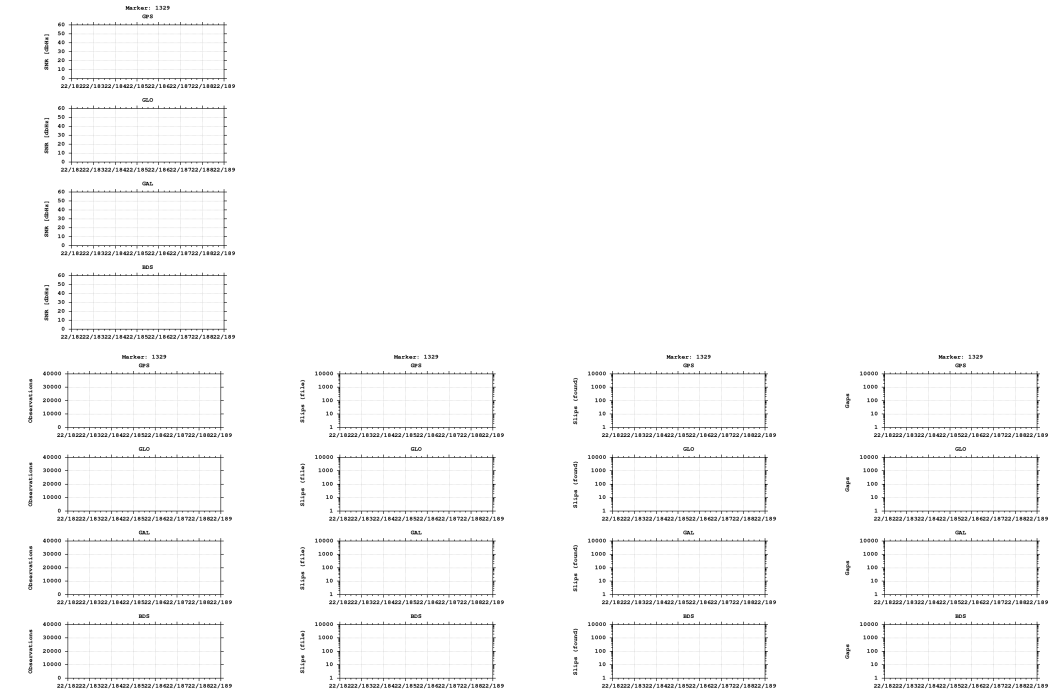

Equipment

2022-07-04 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)