


GNSS observation file monitoring for 0517


Last RINEX file: 05171851.22O
RINEX version: 3.02
Marker: 1289
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

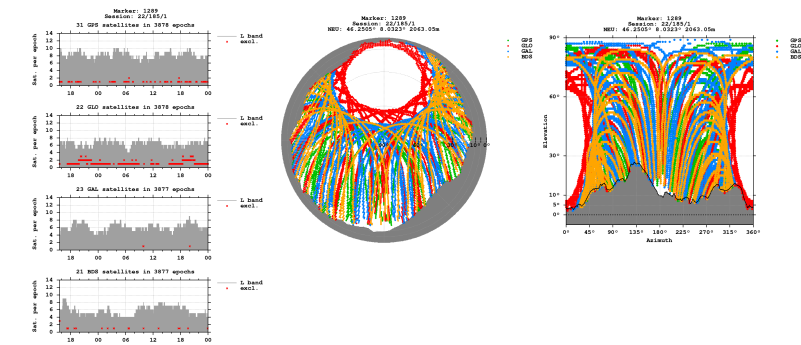


Bands

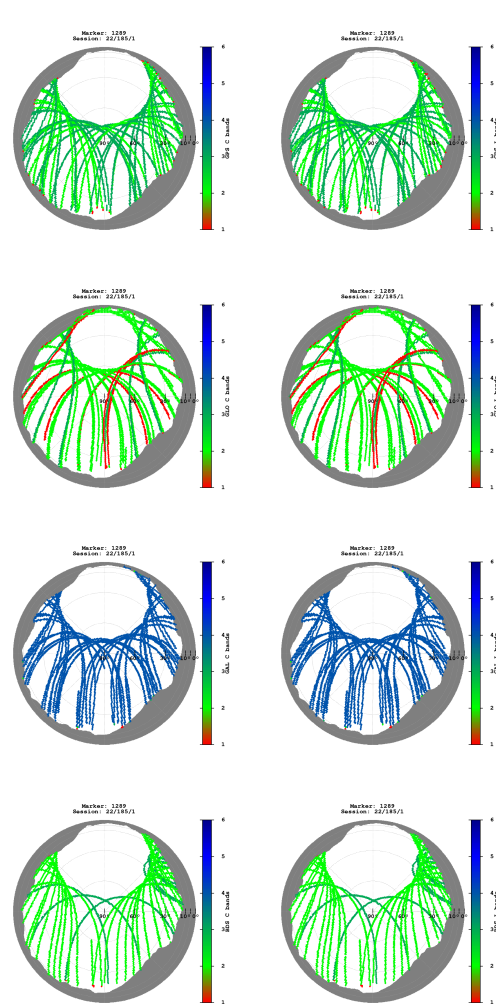

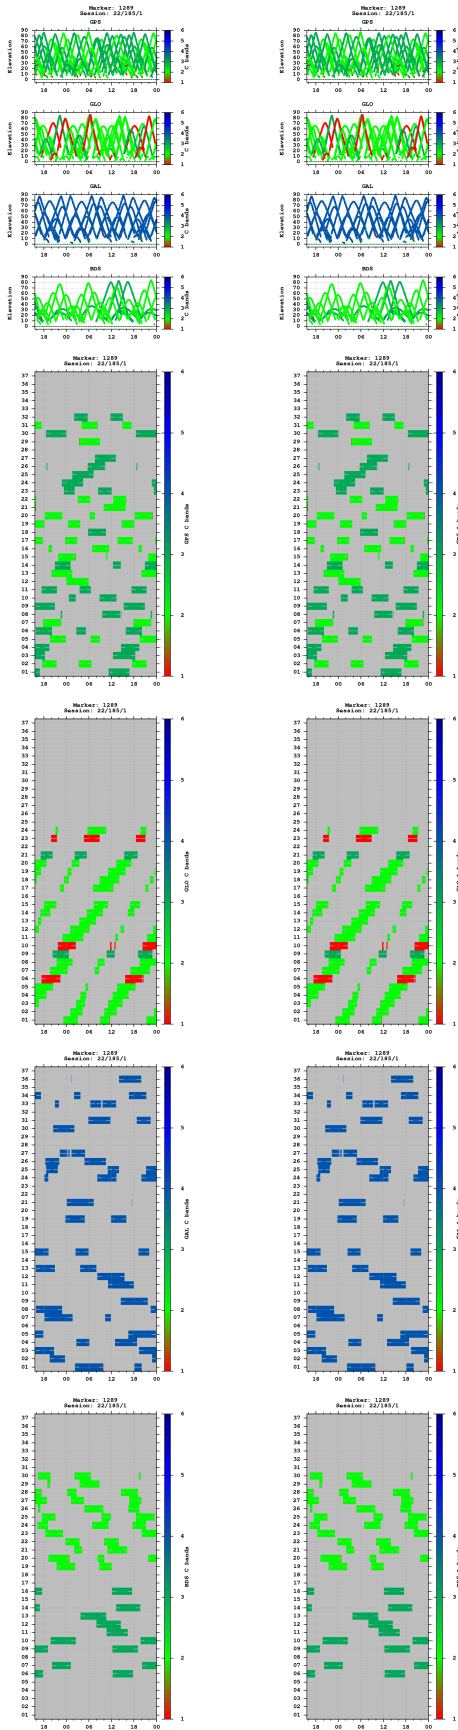



Multipath

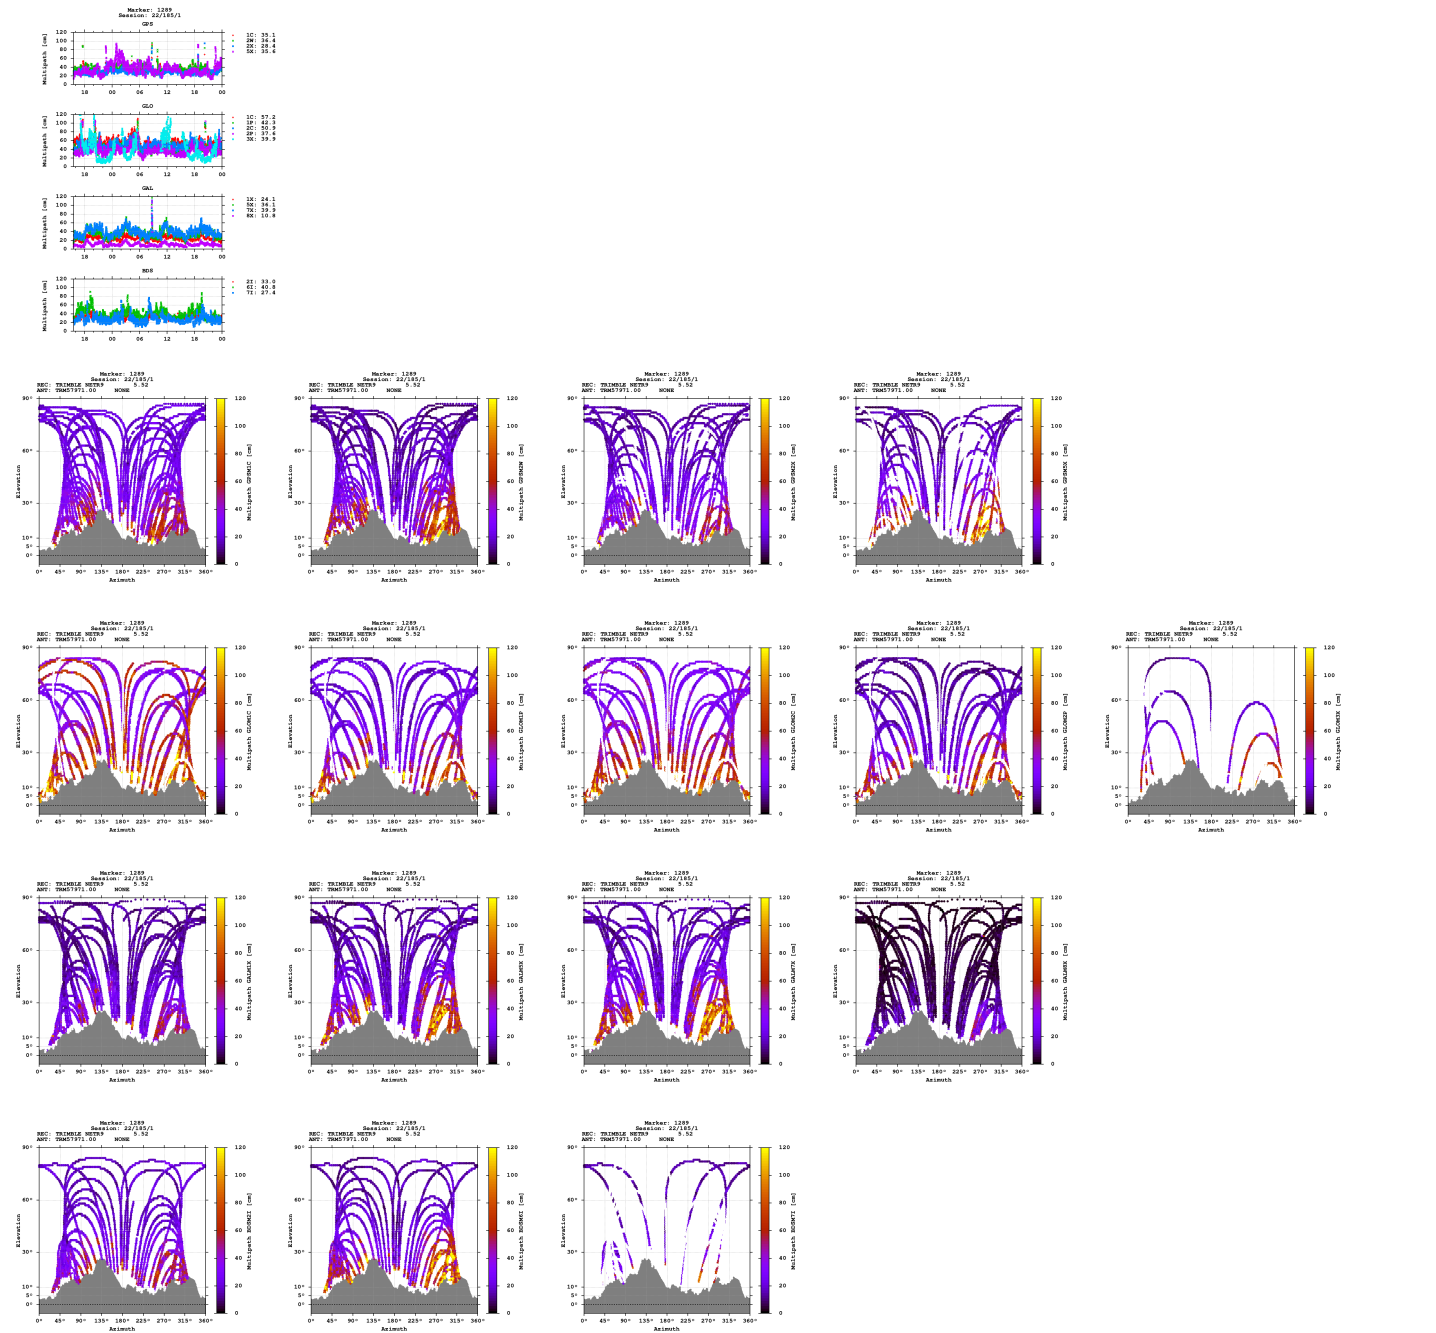

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

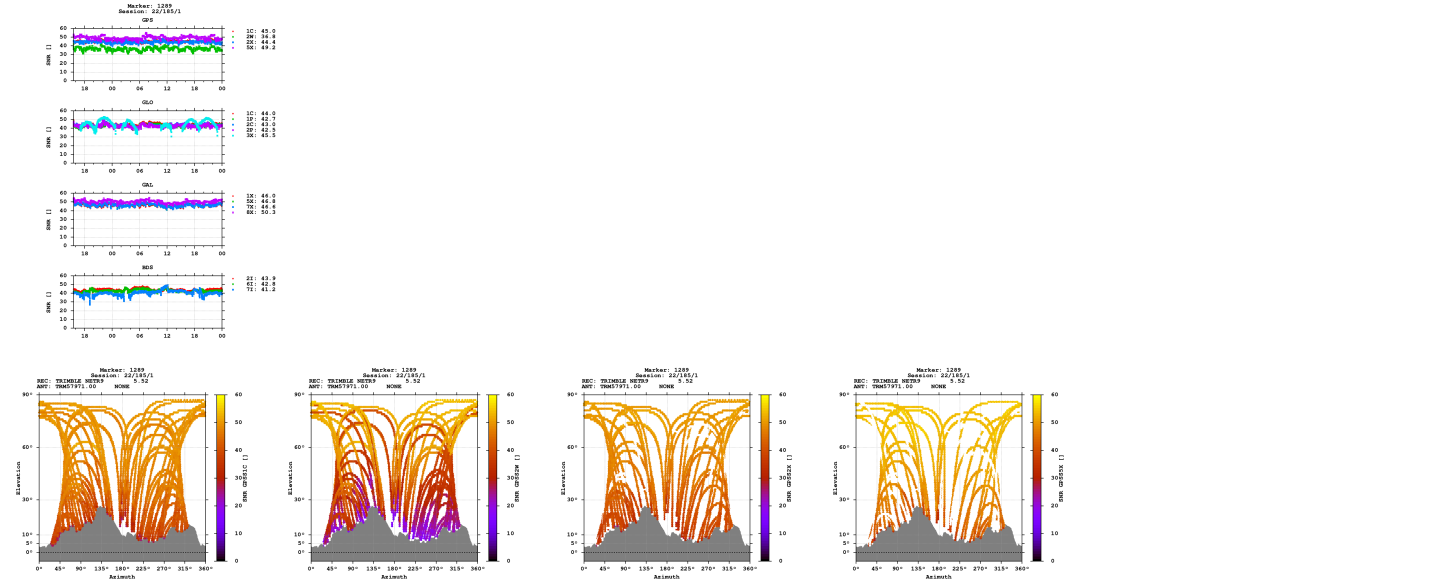

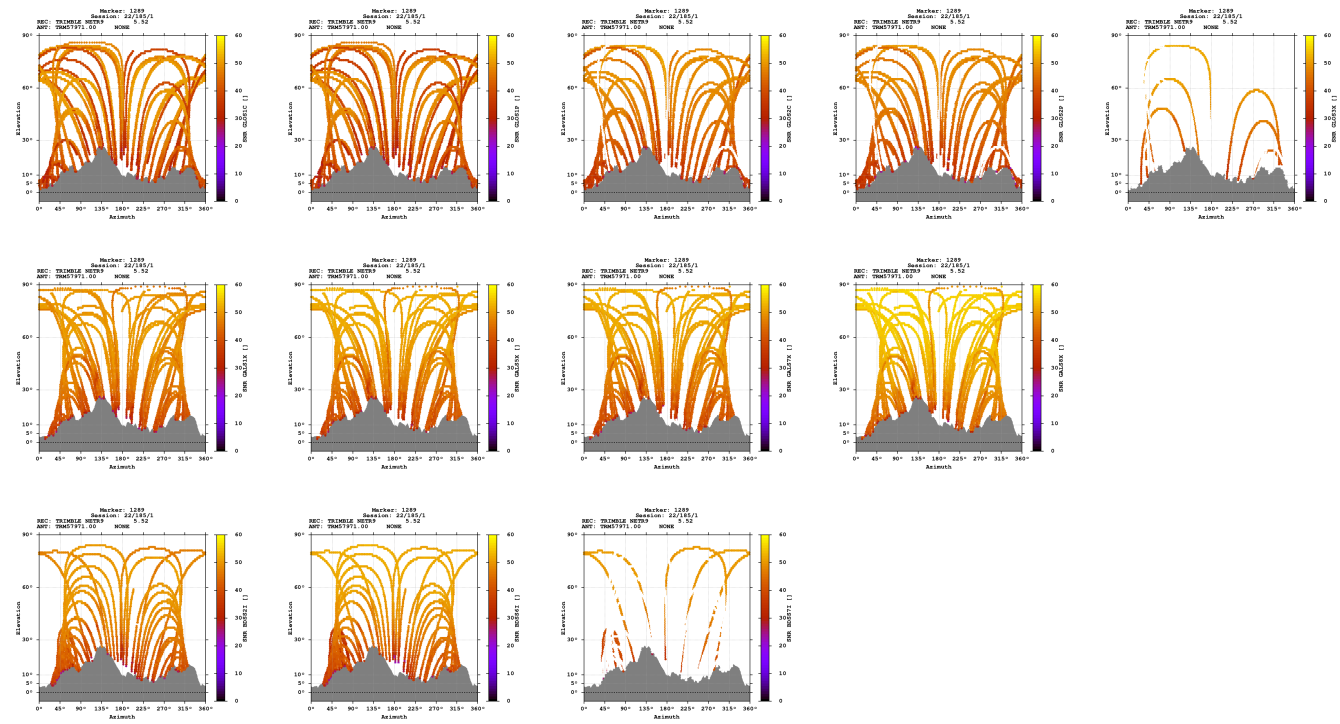

Estimates

2022-07-04 15:38:00	GPS	4376316.1202	617563.3146	4586036.2270	46.250502177	8.032250637	2063.0493
2022-07-04 15:38:00	GLO	4376315.4843	617562.2460	4586034.7987	46.250498354	8.032238072	2061.4789
2022-07-04 15:38:00	GAL	4376315.9877	617563.3012	4586035.6893	46.250499697	8.032250704	2062.5689
2022-07-04 15:38:00	BDS	4376319.1970	617559.0666	4586042.4027	46.250524646	8.032190533	2069.2068

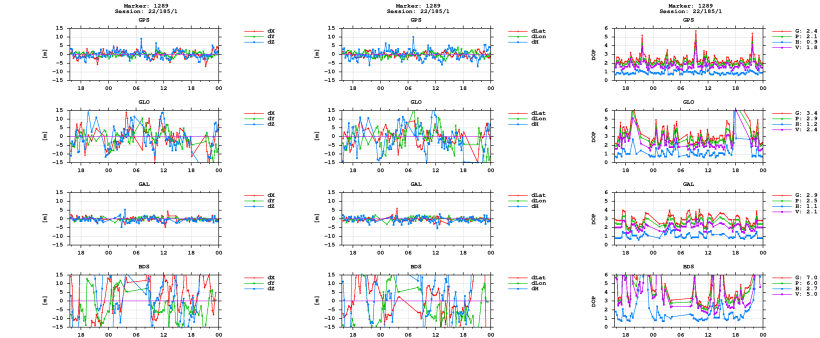

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)