


GNSS observation file monitoring for 0518


Last RINEX file: 05181861.22O
RINEX version: 3.02
Marker: 1288
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

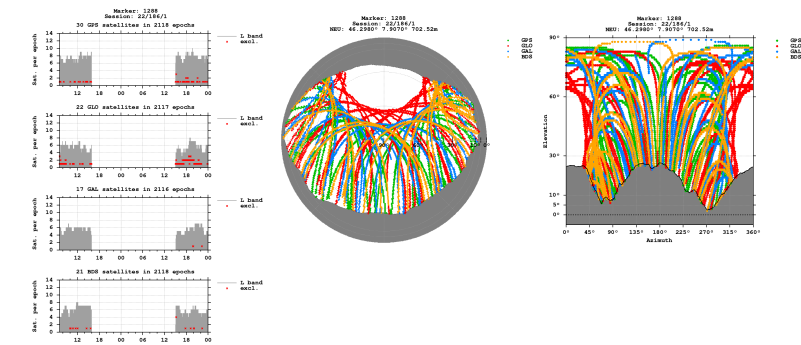


Bands

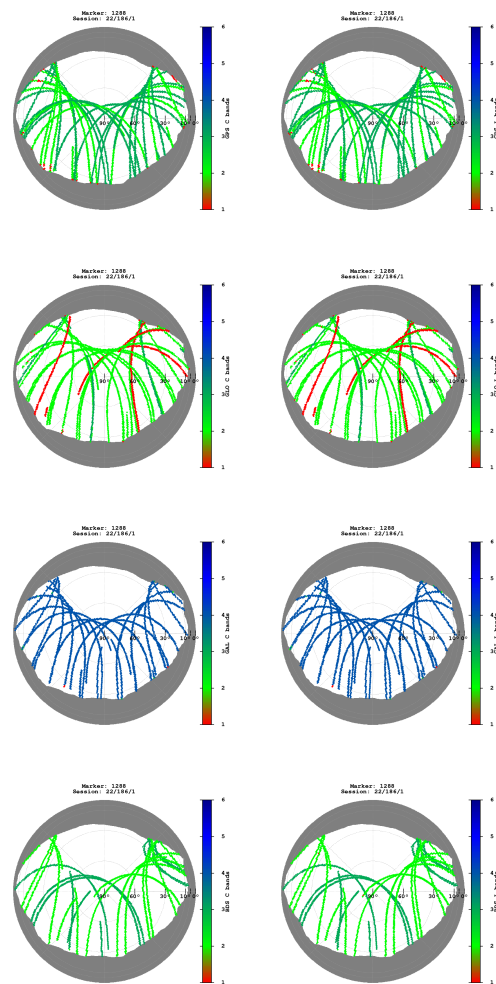

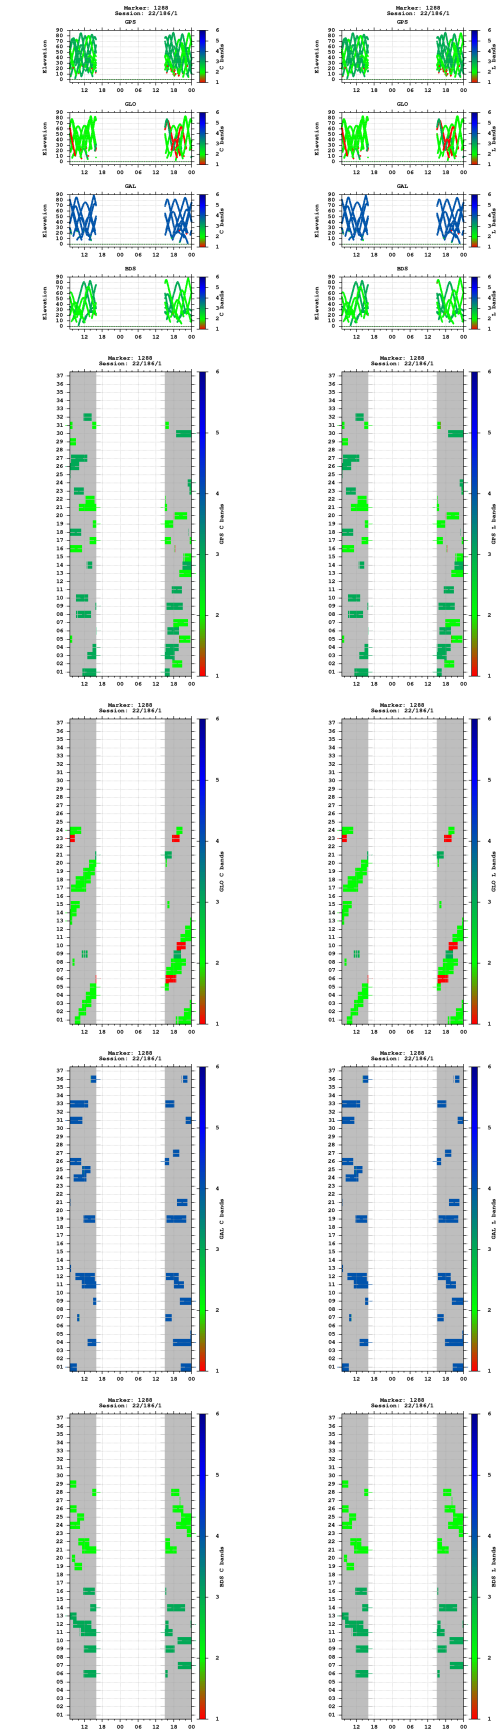



Multipath

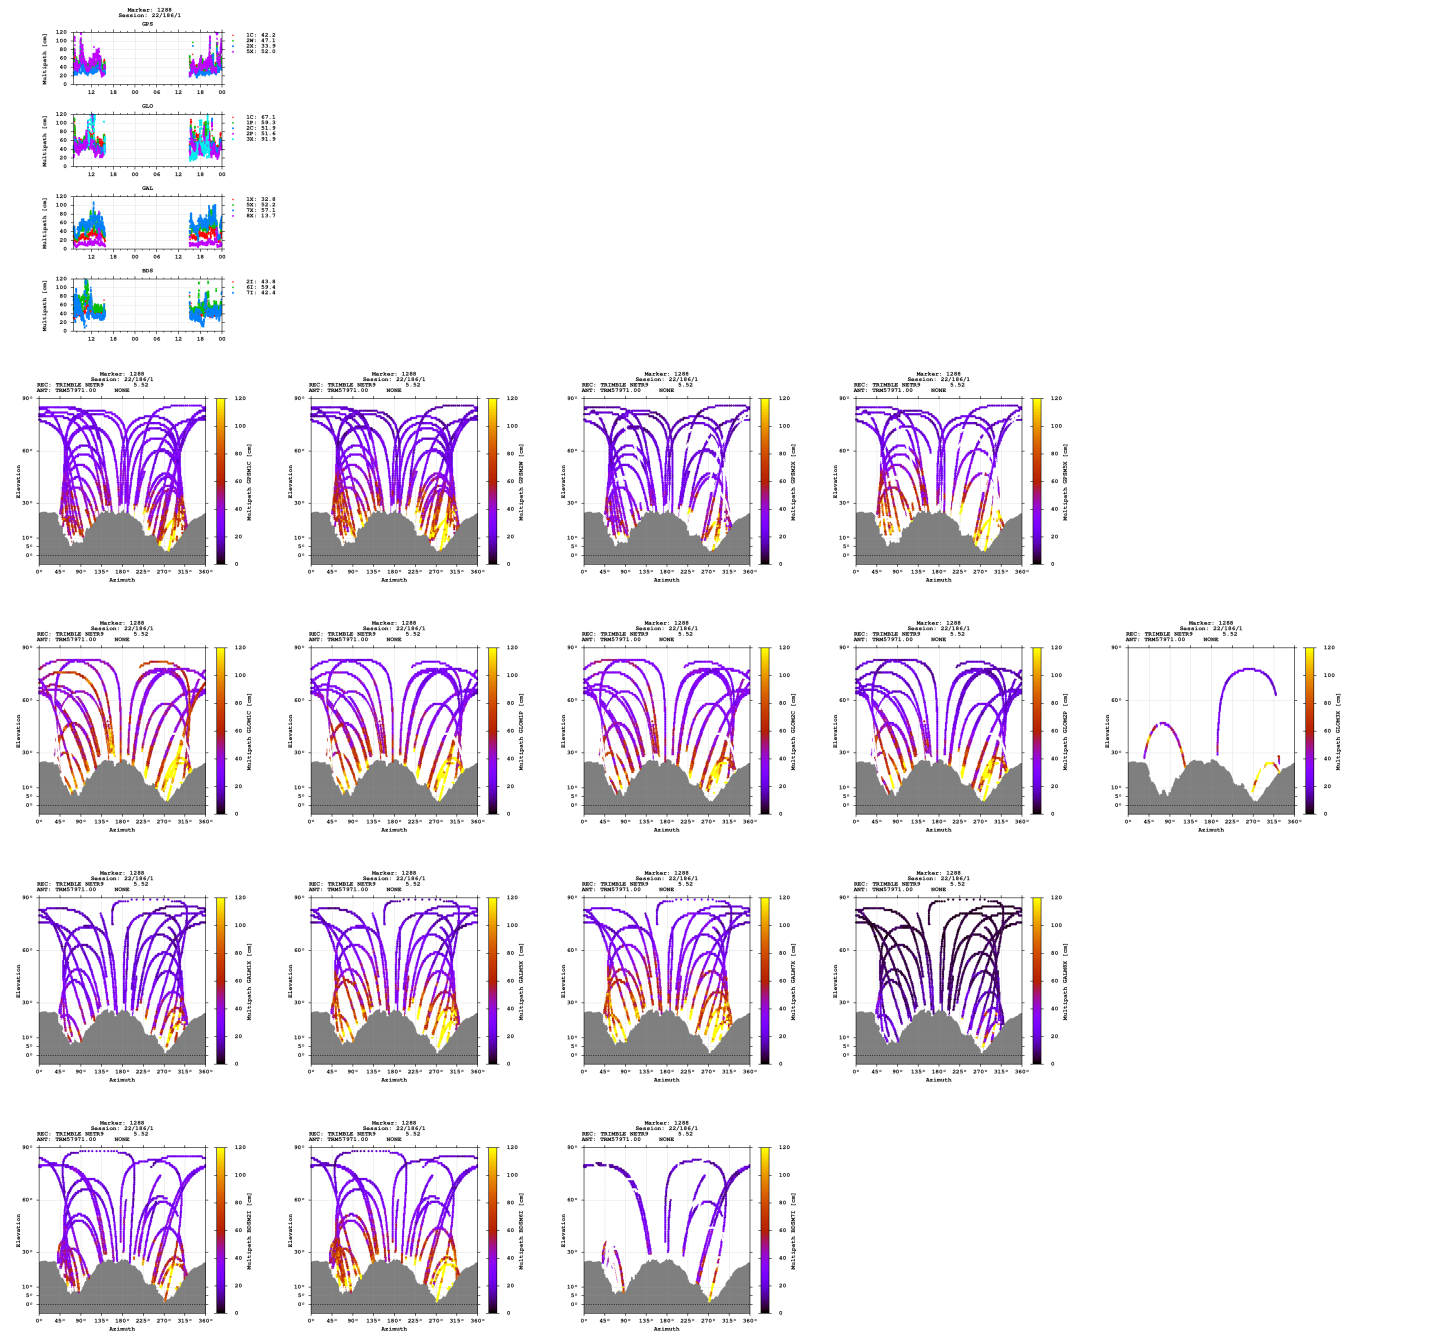

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

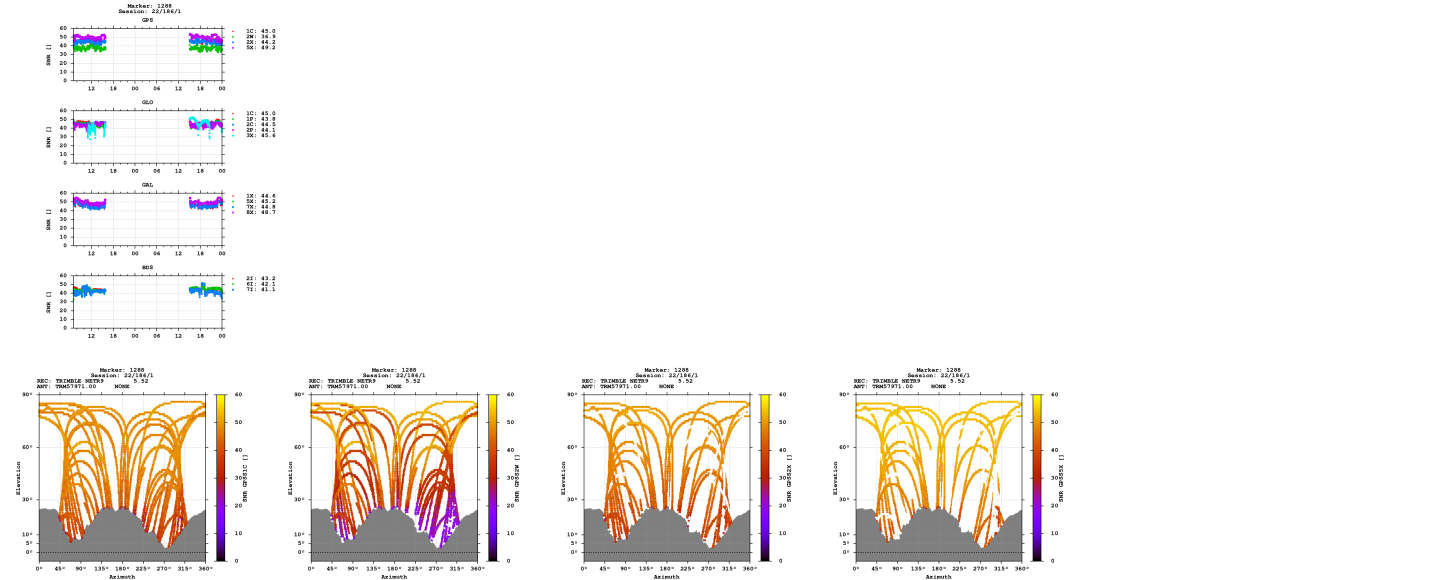

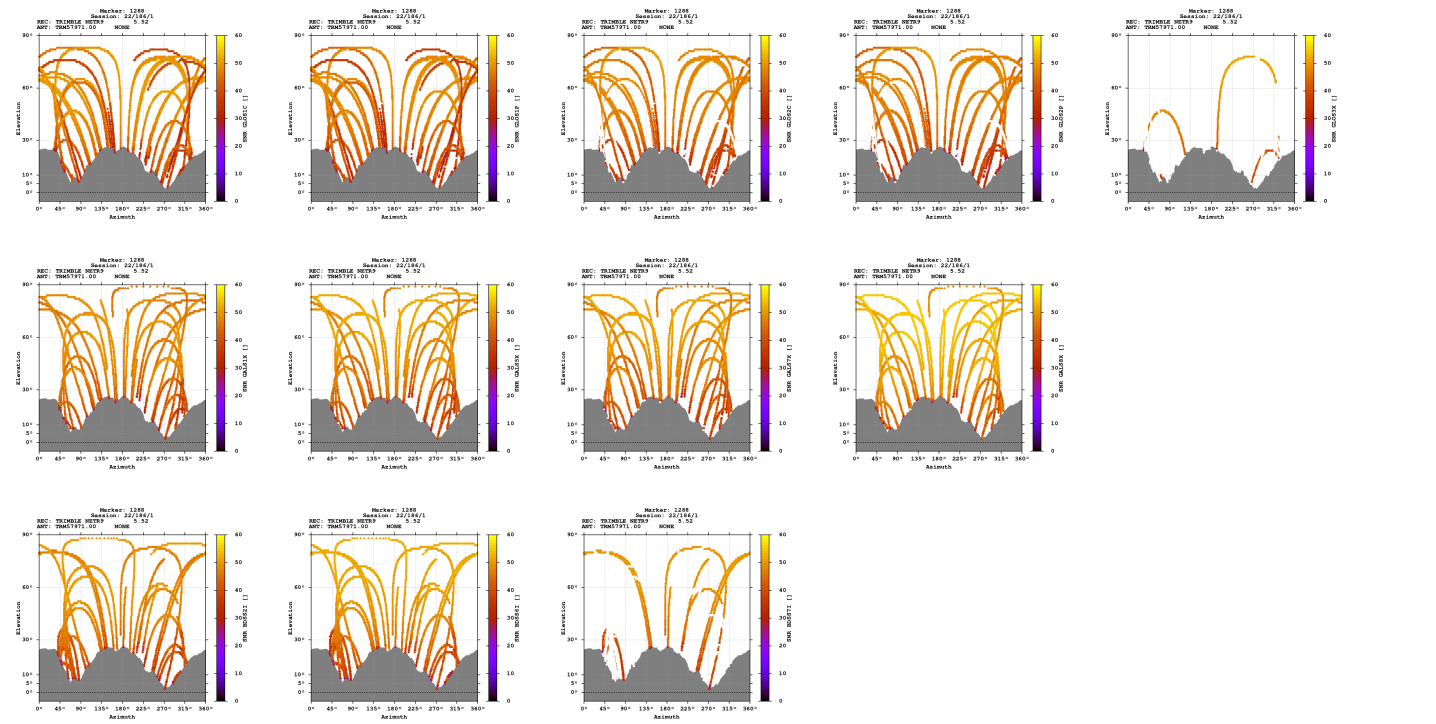

Estimates

2022-07-05 07:07:30	GPS	4372945.9014	607341.7104	4588701.4967	46.297977973	7.907009902	702.5168
2022-07-05 07:07:30	GLO	4372947.9315	607342.3320	4588701.5684	46.297964787	7.907014268	704.0171
2022-07-05 07:07:30	GAL	4372945.6611	607341.3844	4588701.0986	46.297977339	7.907006141	702.0336
2022-07-05 07:07:30	BDS	4372949.8729	607338.6492	4588702.7369	46.297962838	7.906963462	705.8403

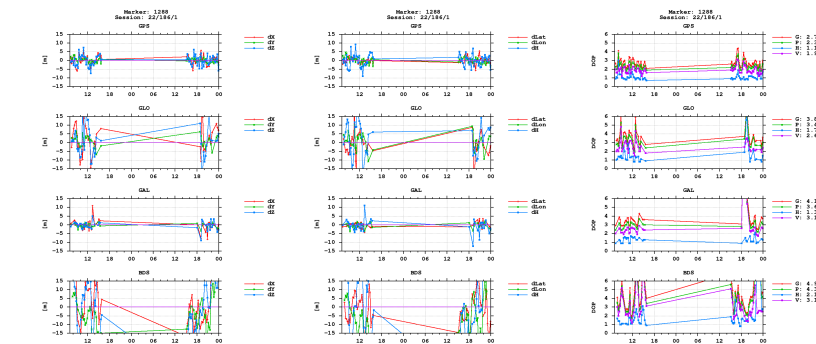

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)