

GNSS observation file monitoring for 0518

Last RINEX file: 05181871.220

RINEX version: 3.02

Marker: 1288

Receiver: 518

Antenna: 518


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

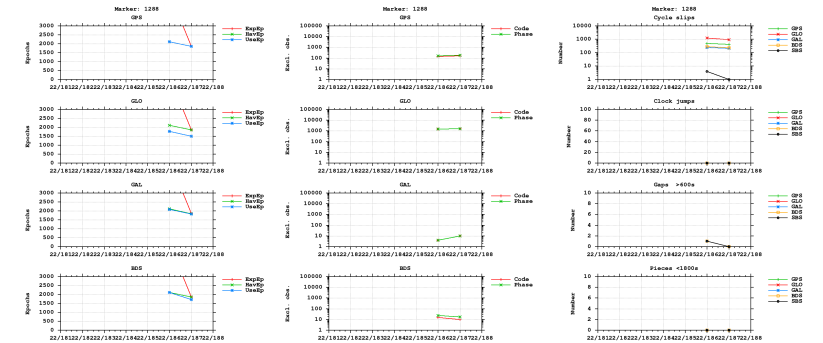



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

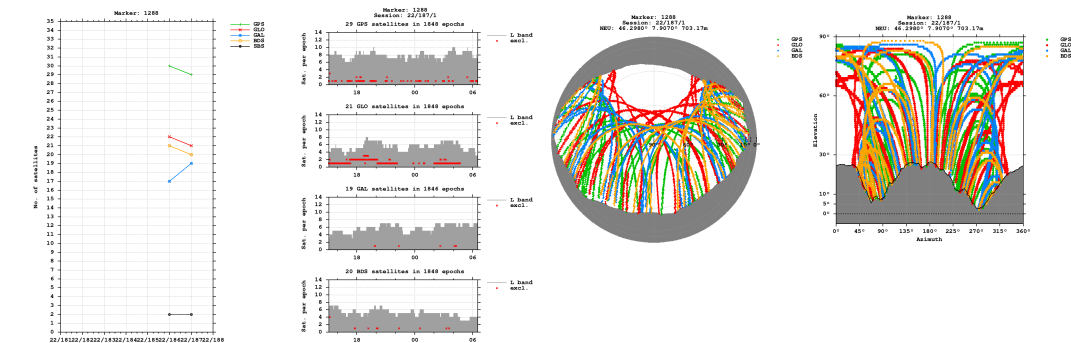


Bands

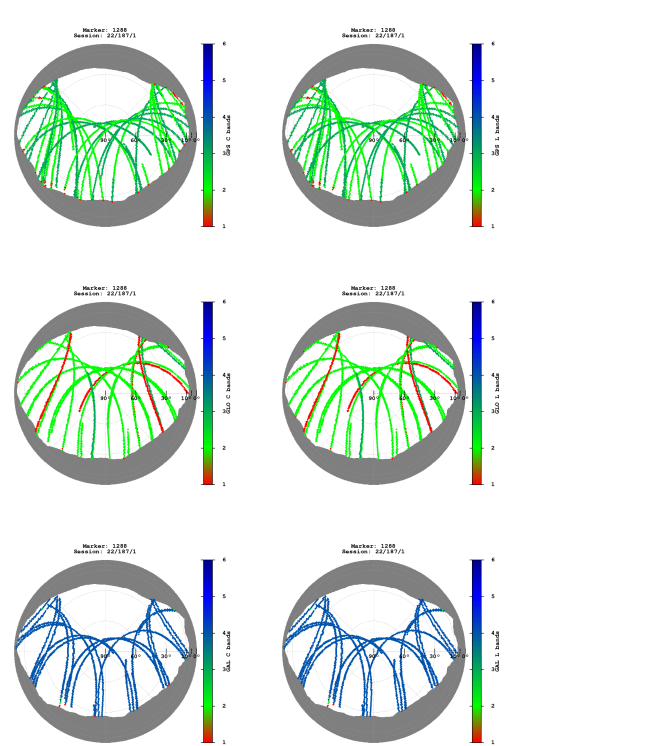

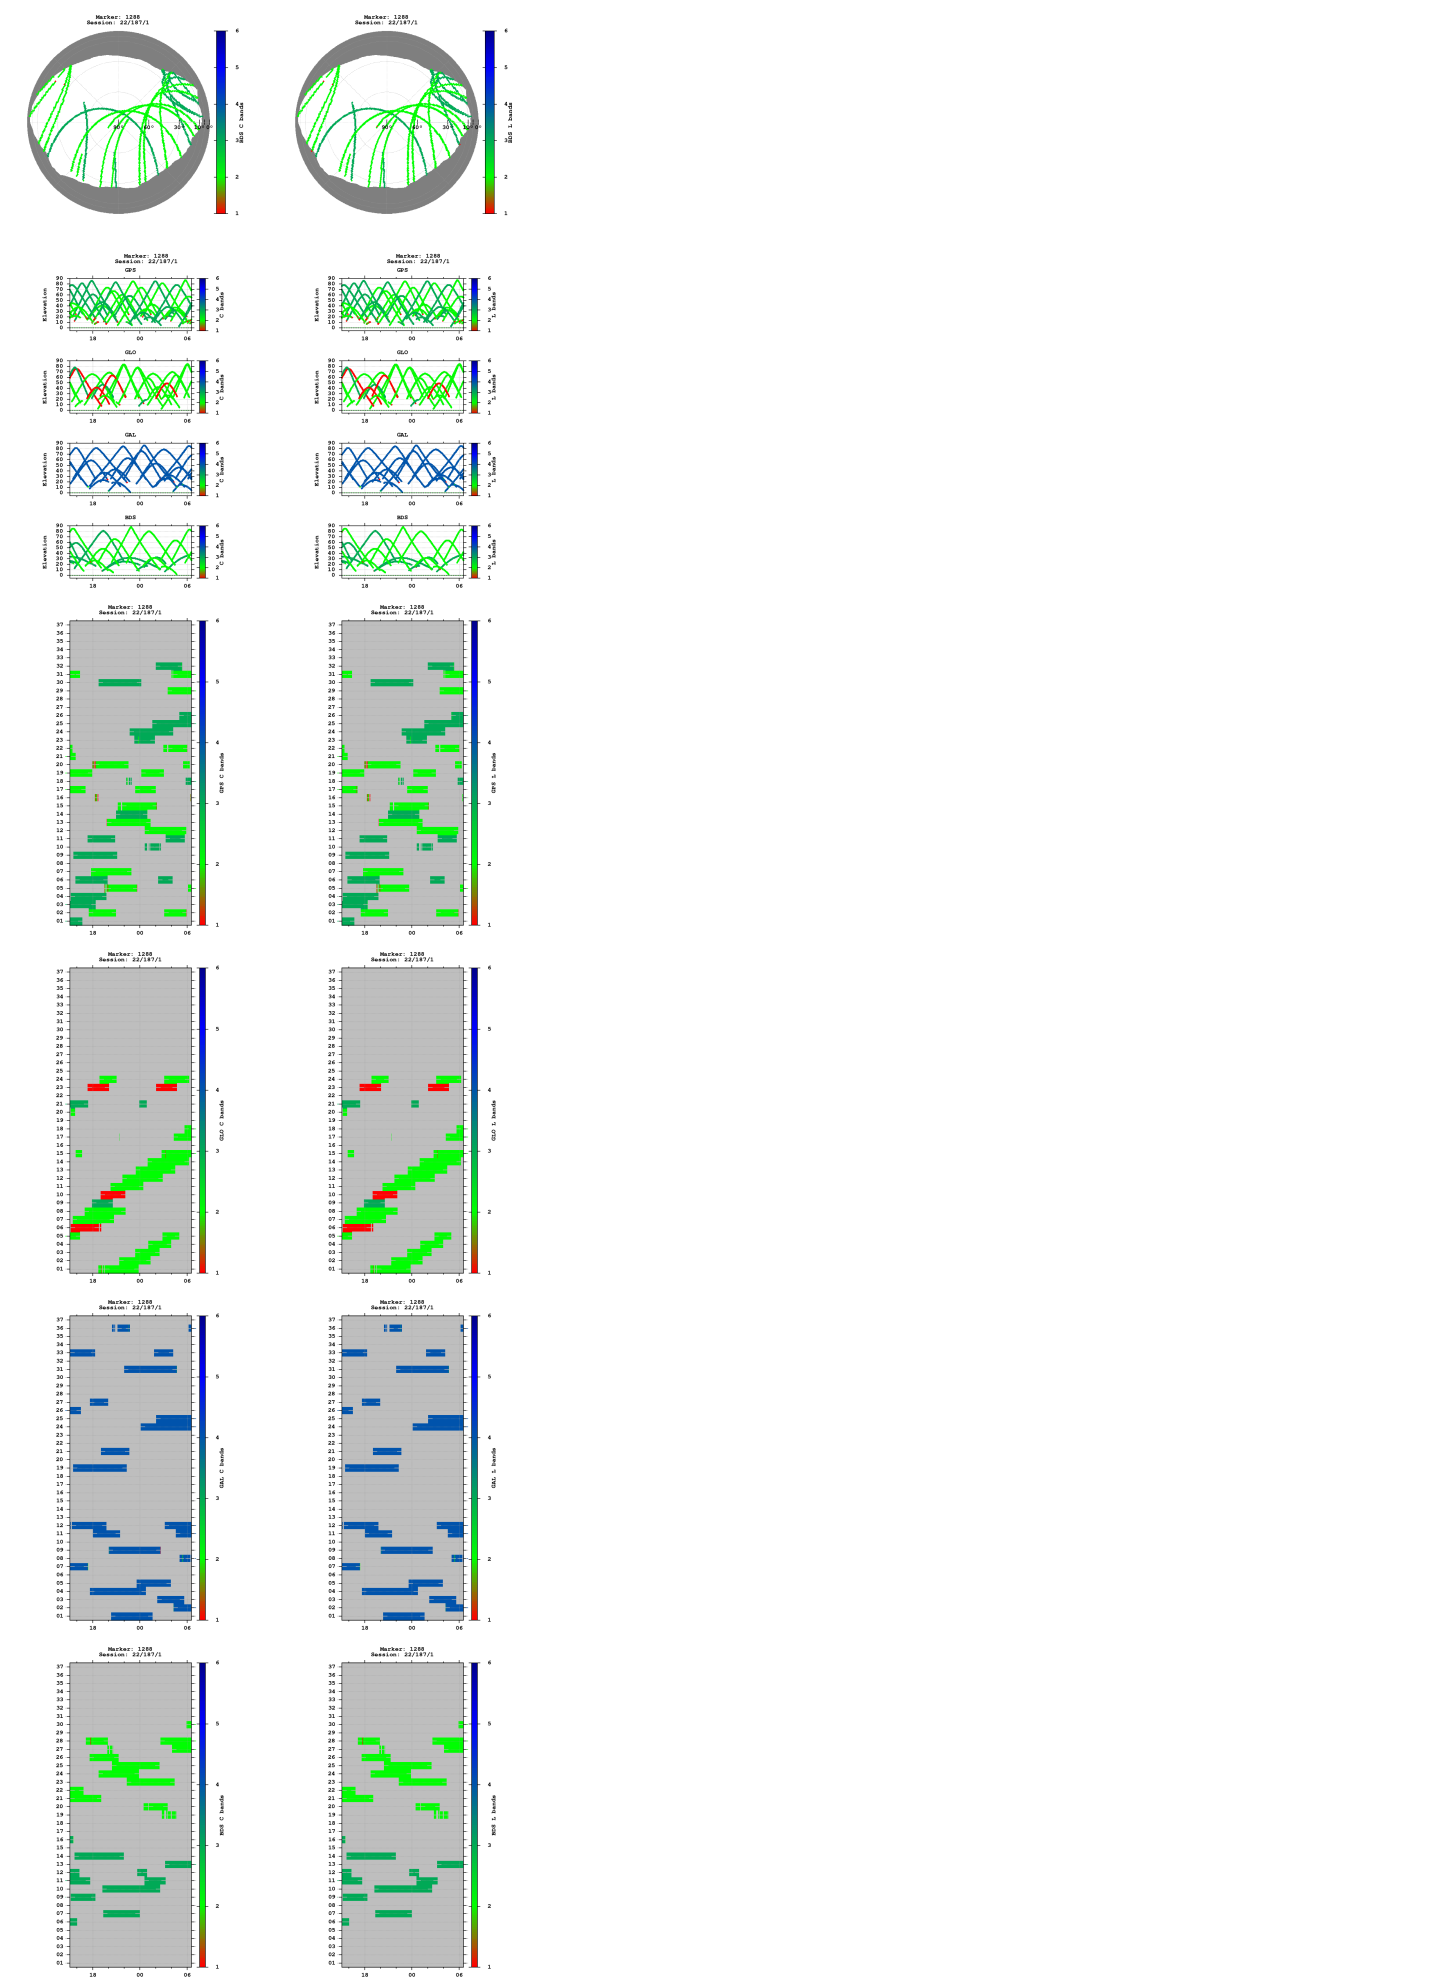





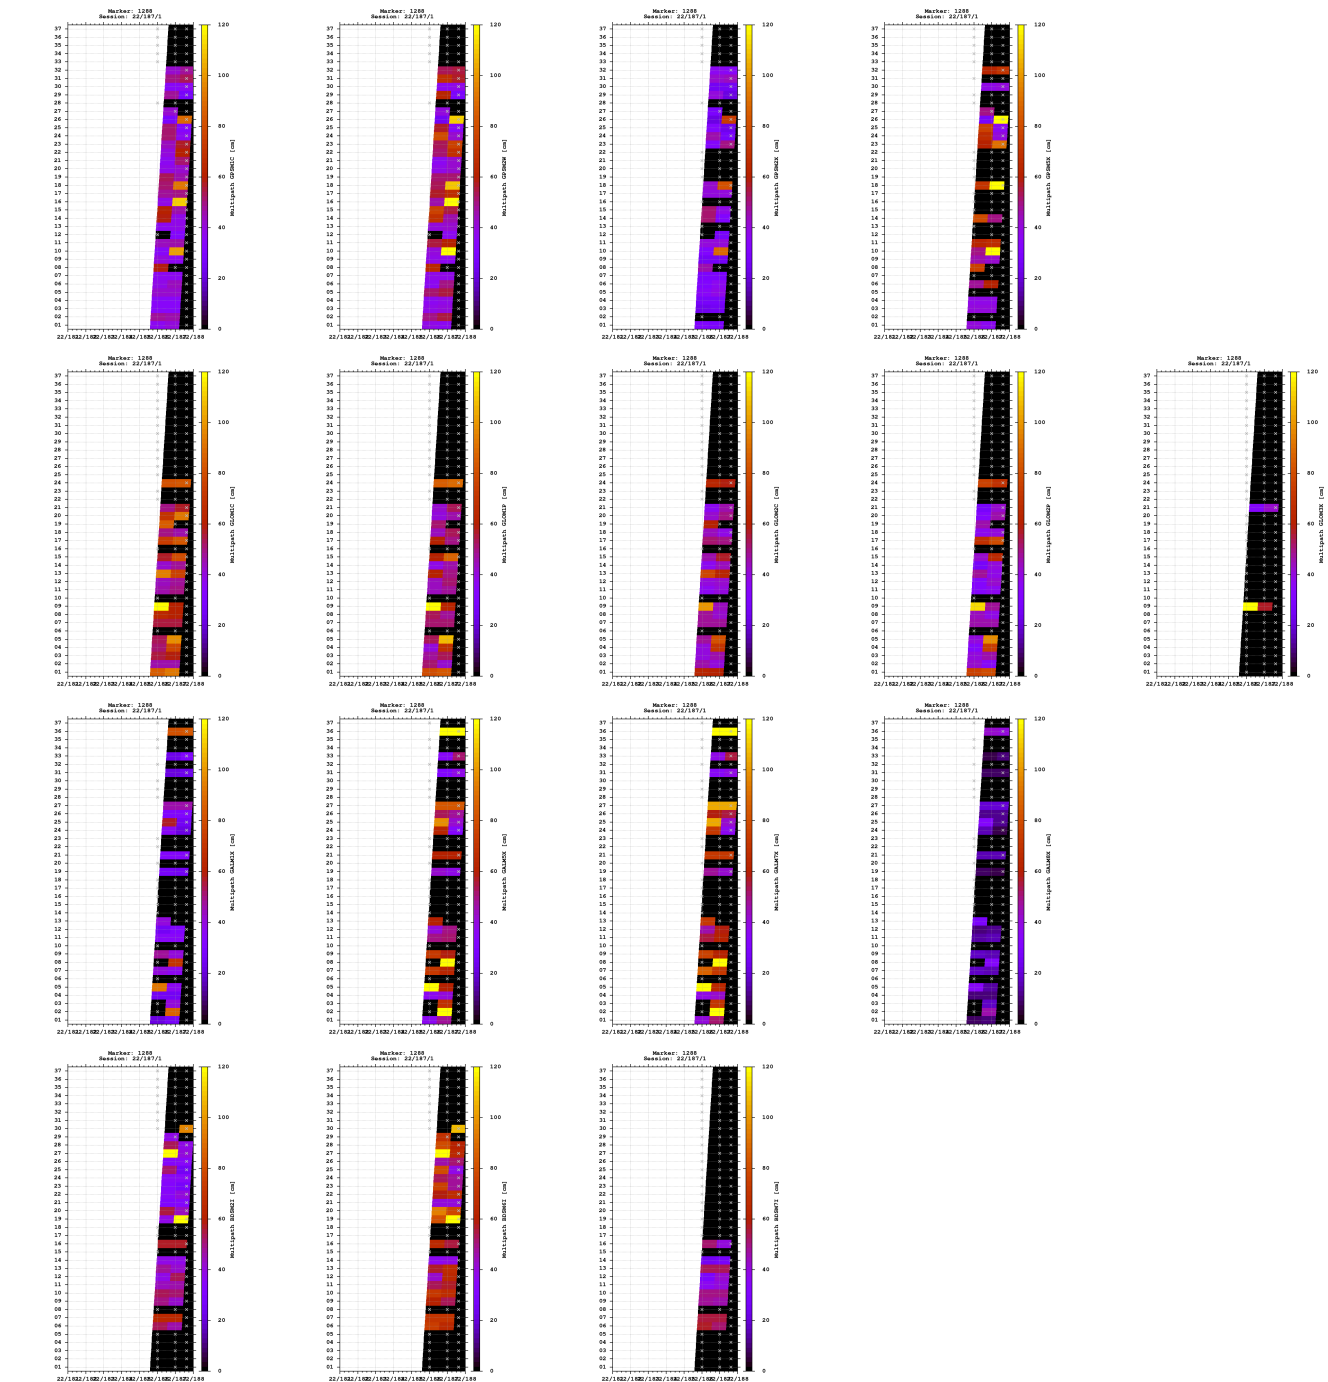


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

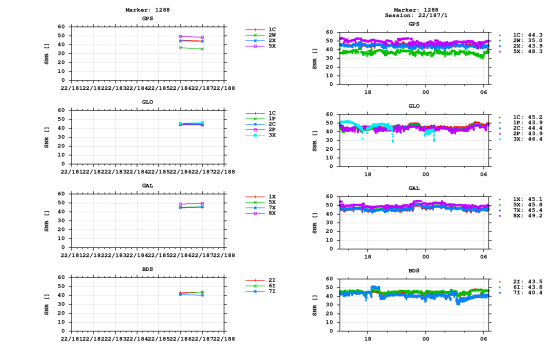


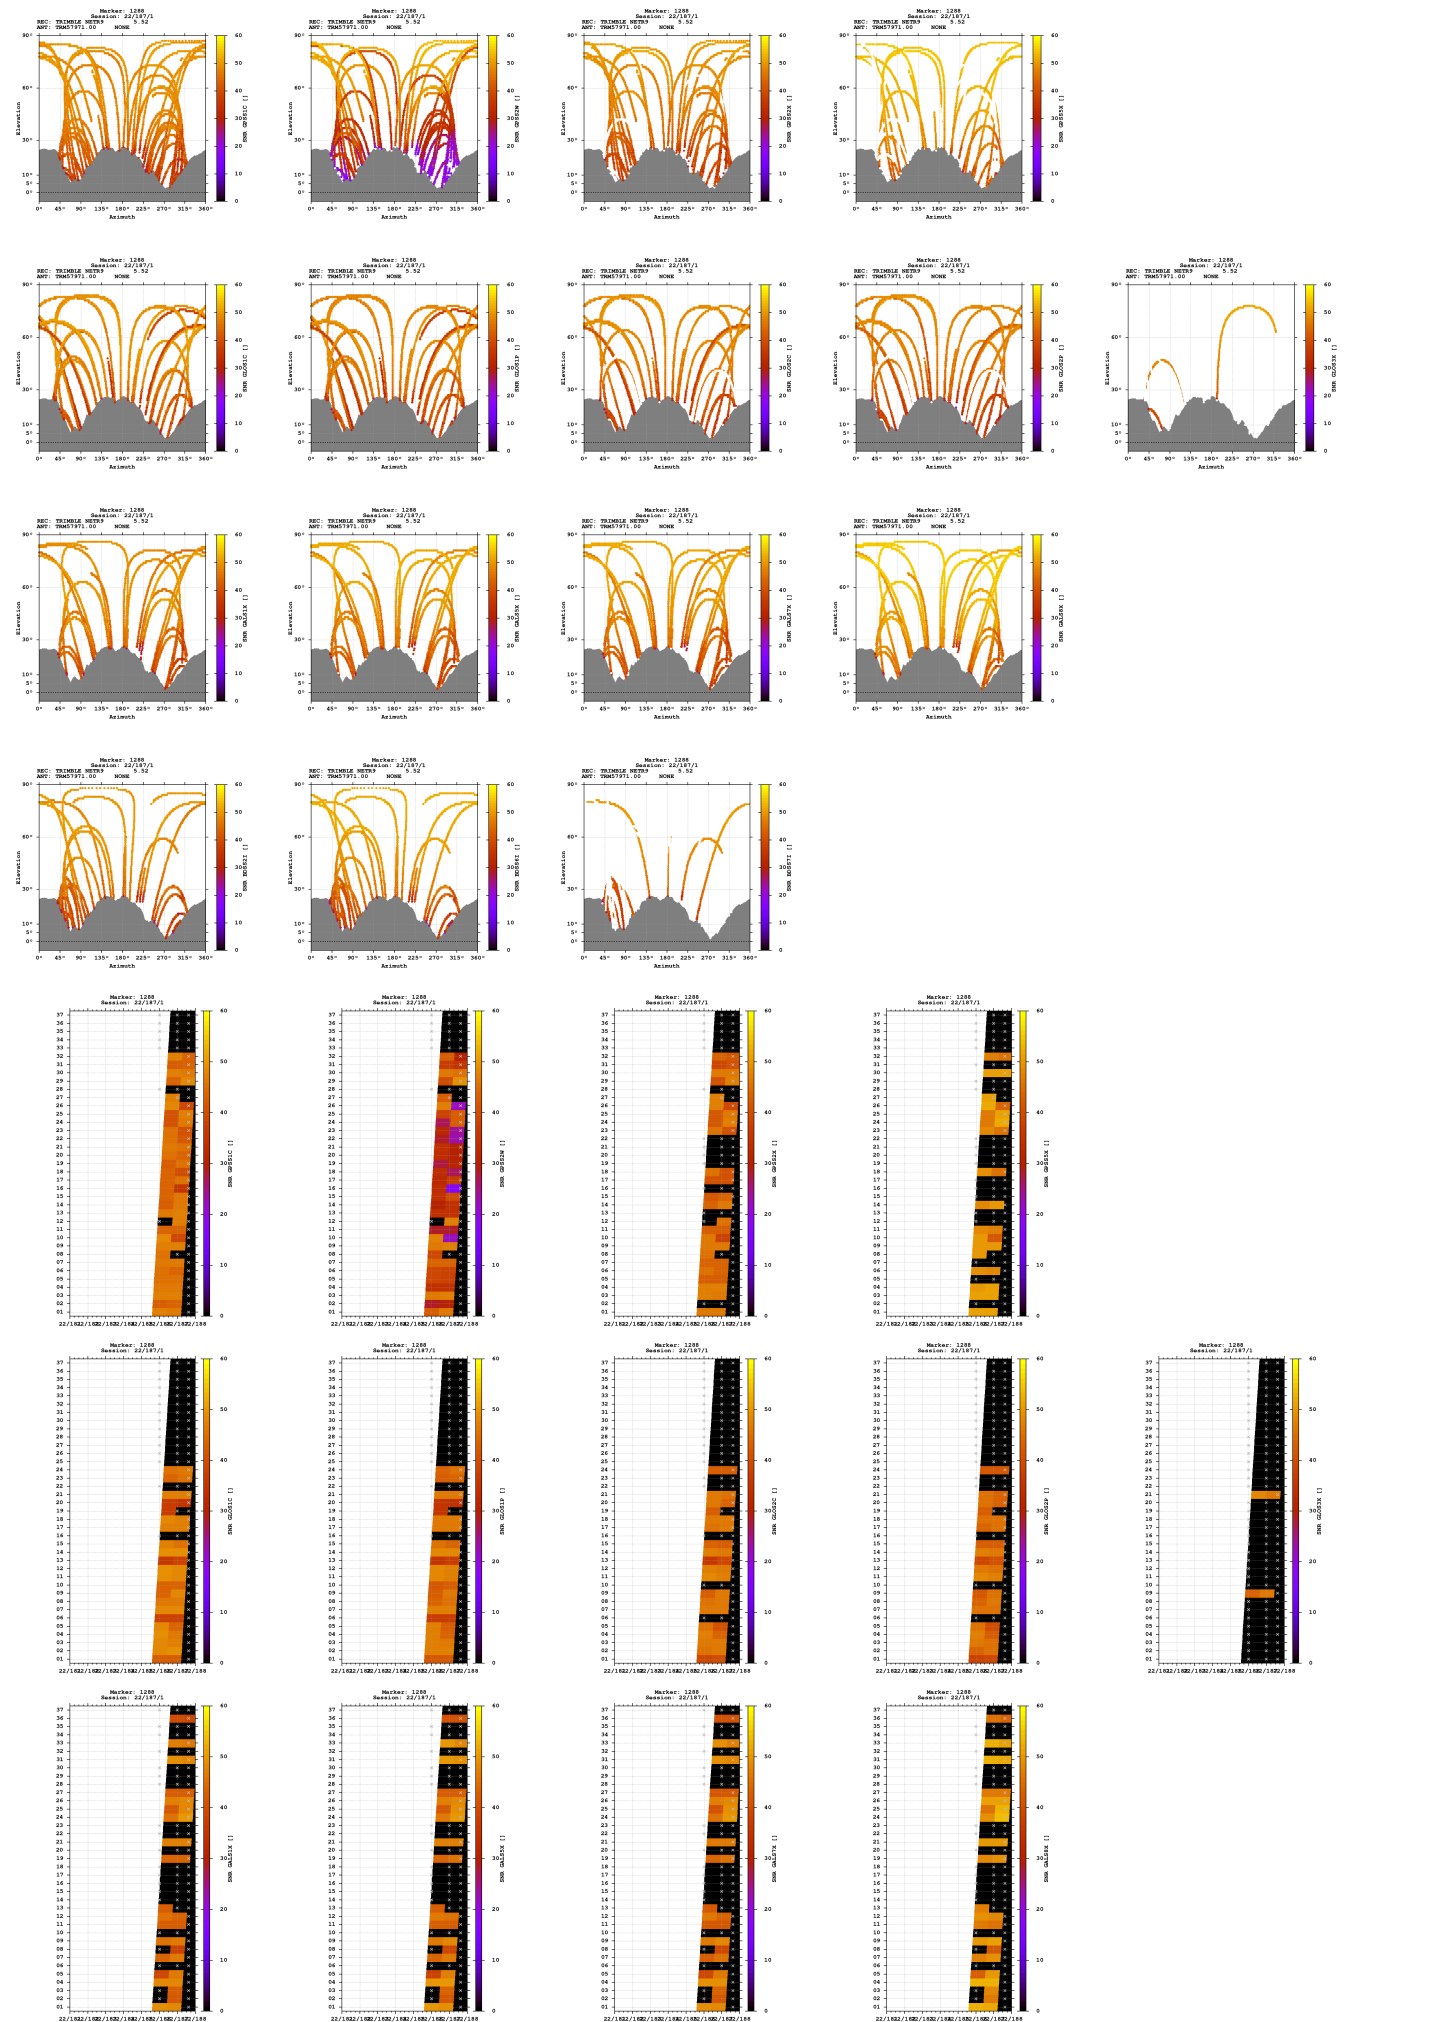

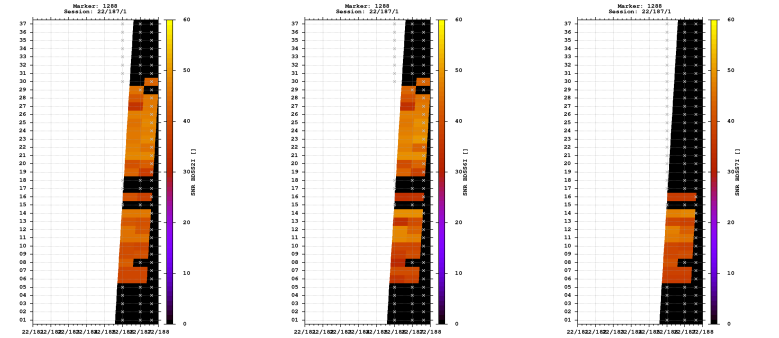



Estimates

2022-07-05 07:07:30	GPS	4372946.9455	607341.3362	4588701.4657	46.297971390	7.907003229	703.1734
2022-07-05 07:07:30	GLO	4372948.9451	607342.9470	4588703.6741	46.297970794	7.907020365	706.2914
2022-07-05 07:07:30	GAL	4372946.9240	607341.2932	4588701.8071	46.297973689	7.907002714	703.4014
2022-07-05 07:07:30	BDS	4372944.9232	607343.7094	4588696.5912	46.297951998	7.907037346	698.4910

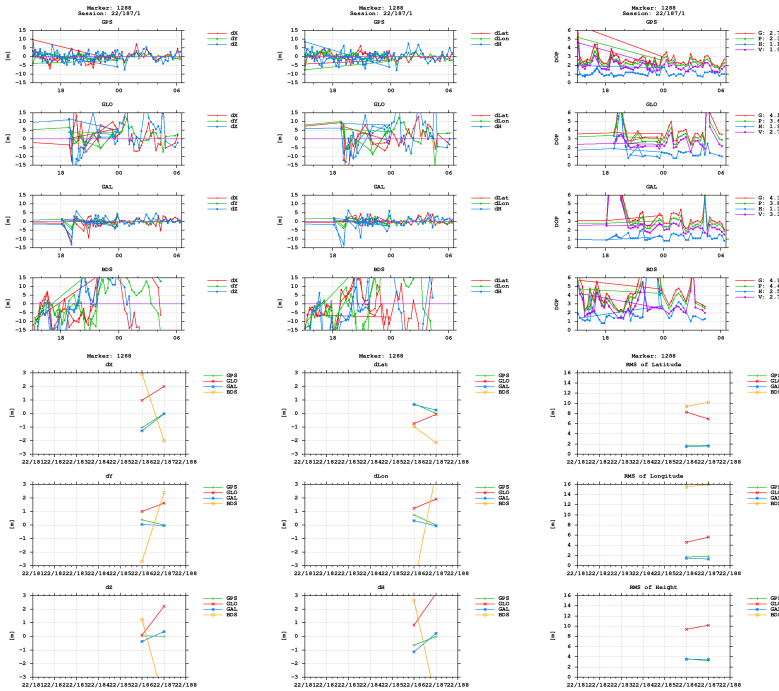

BNC

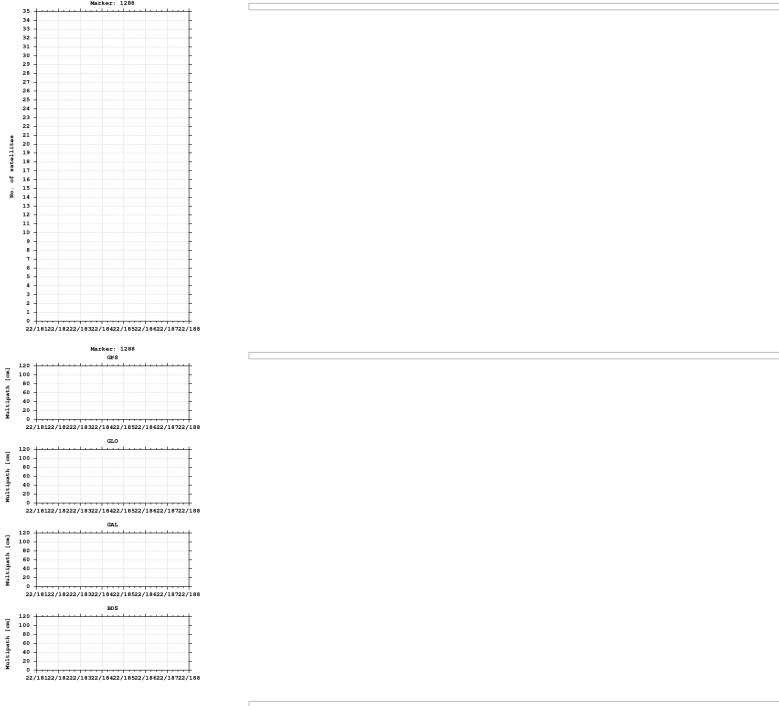

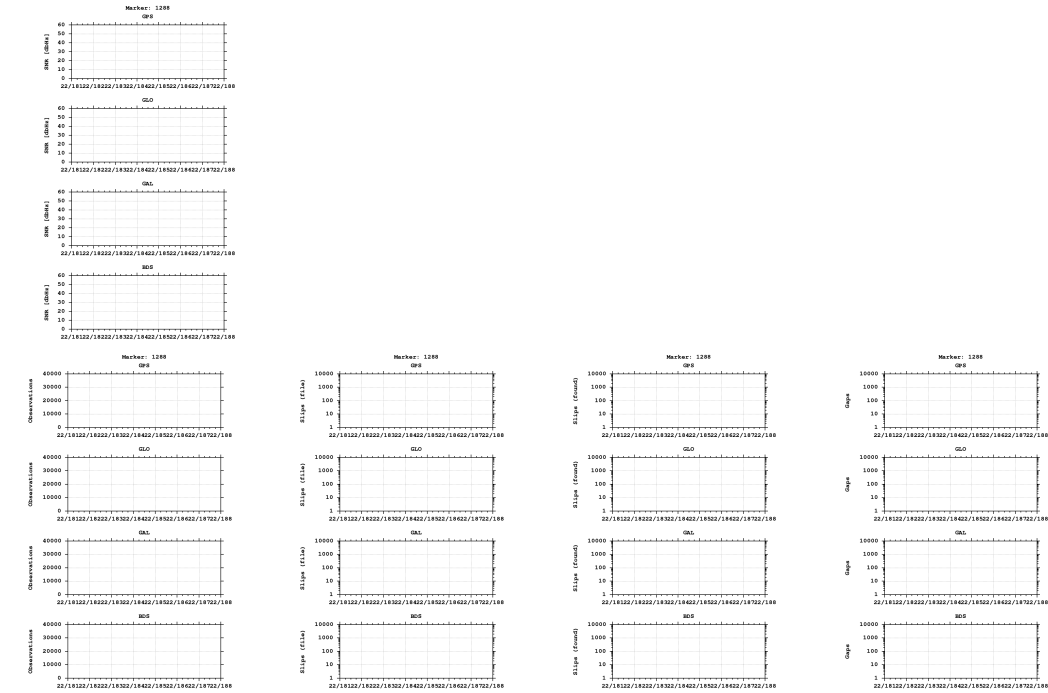

Equipment

2022-07-05 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)