


GNSS observation file monitoring for 0518


Last RINEX file: 05181881.220
RINEX version: 3.02
Marker: 1348
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

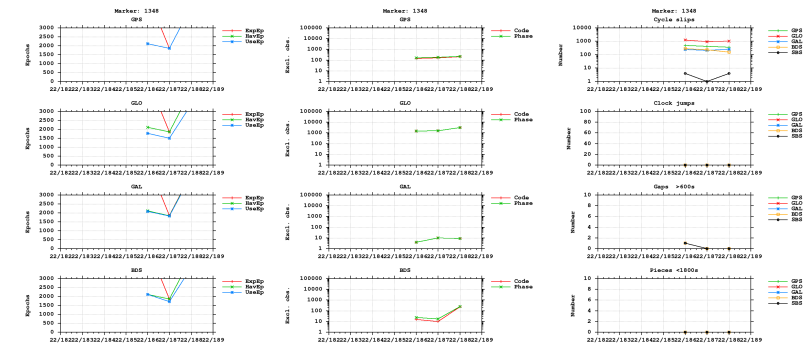



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

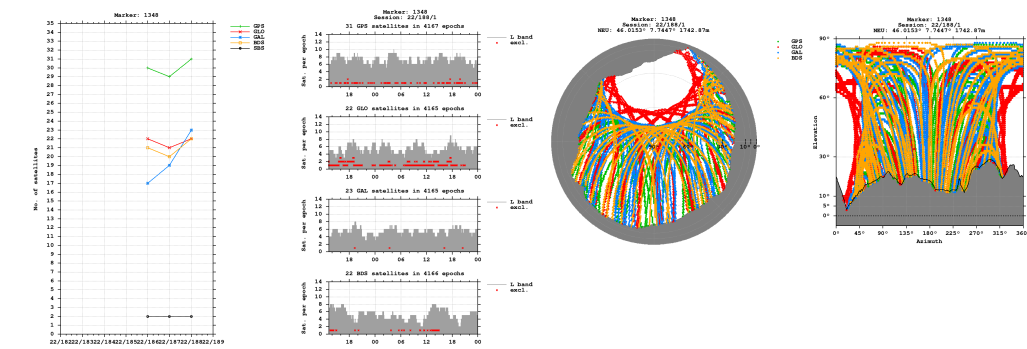



Bands

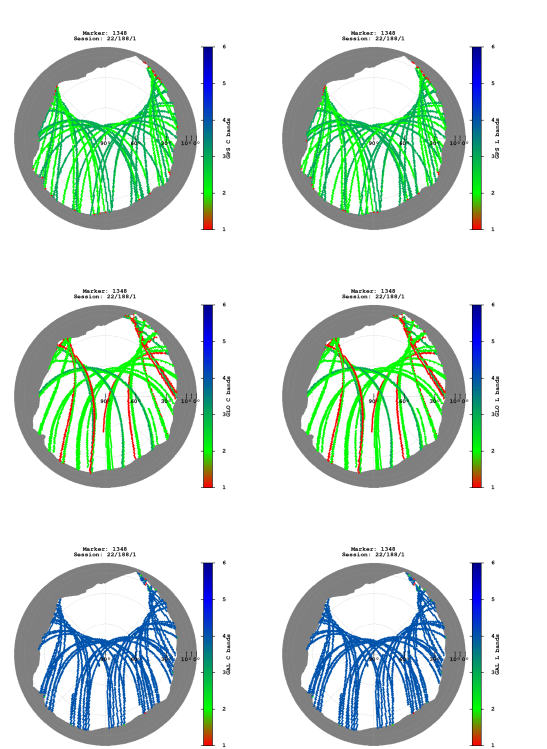


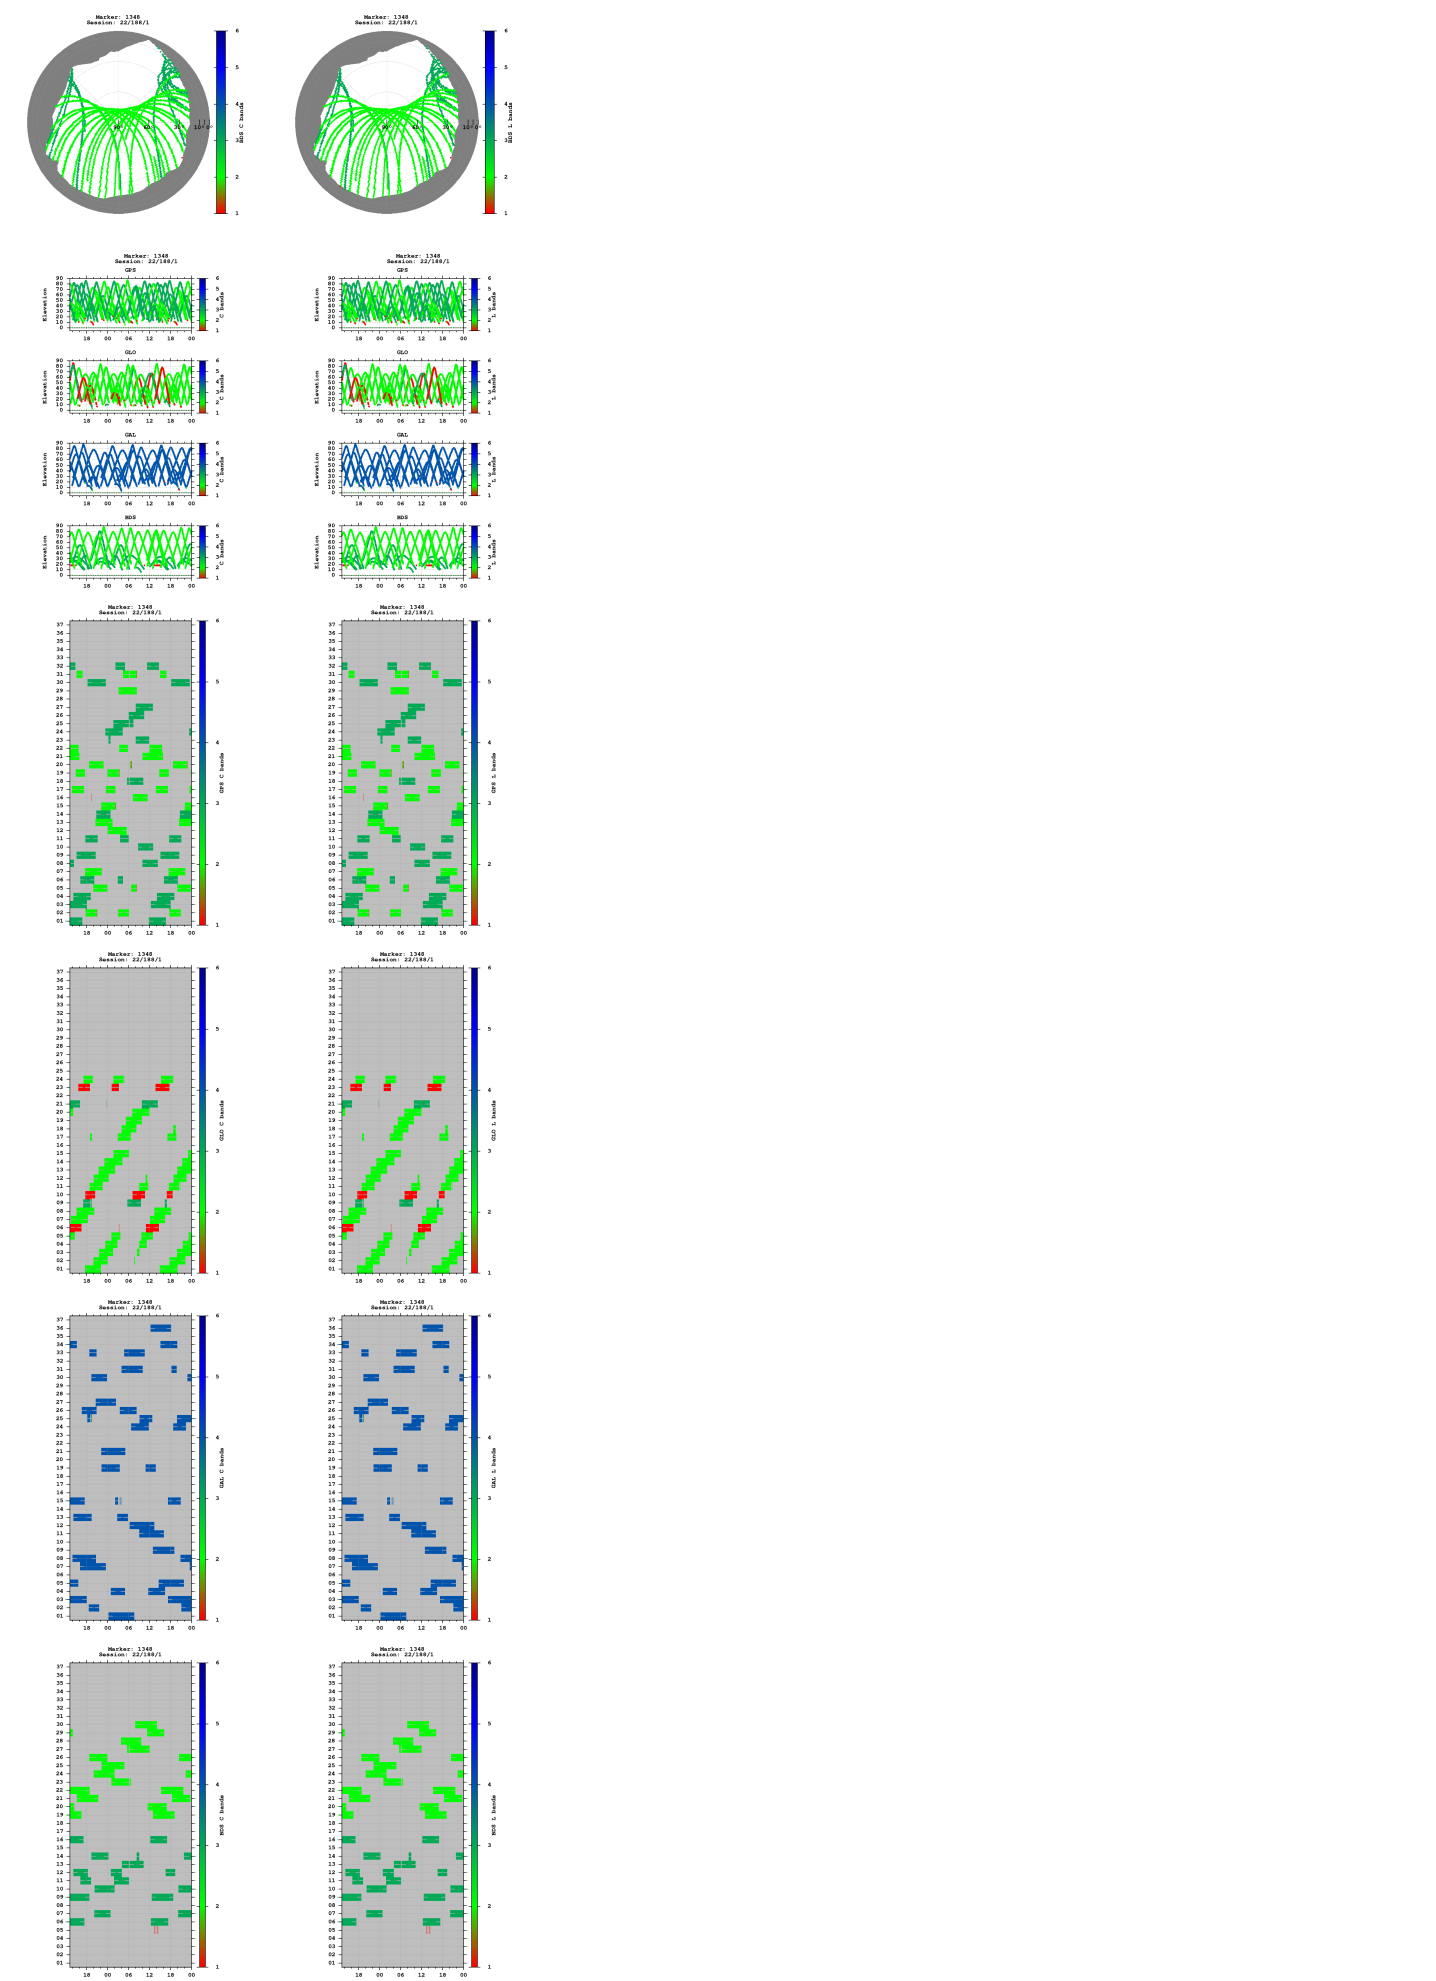

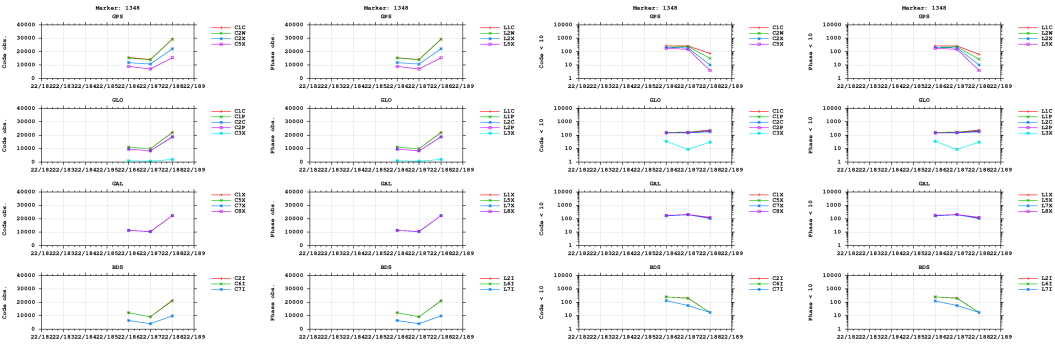


Multipath

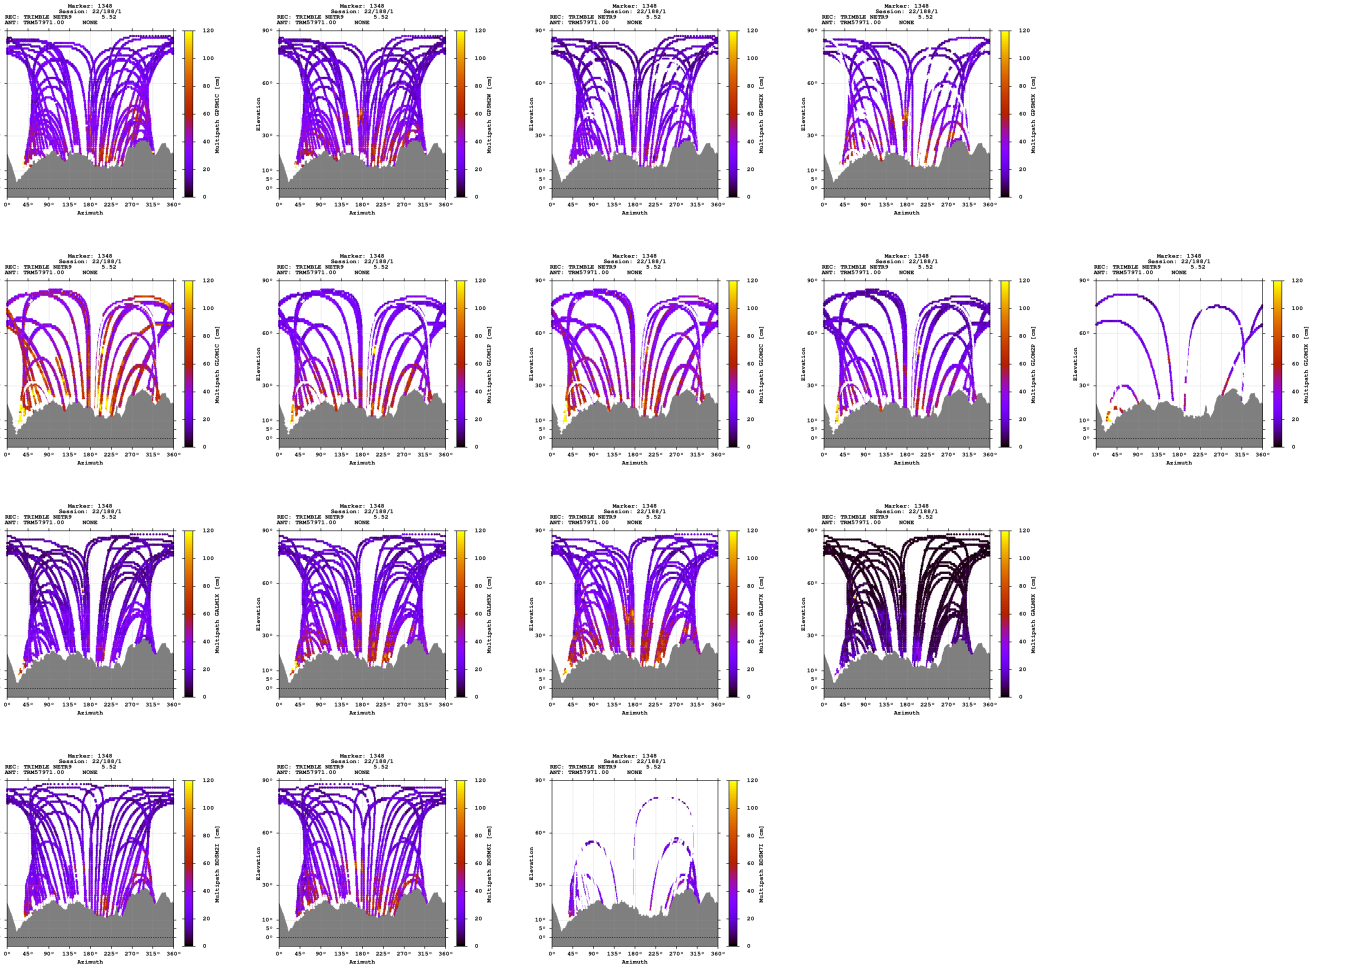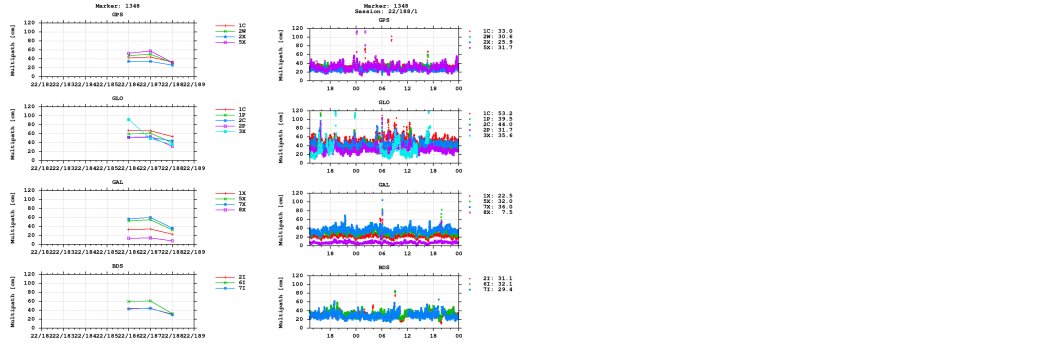


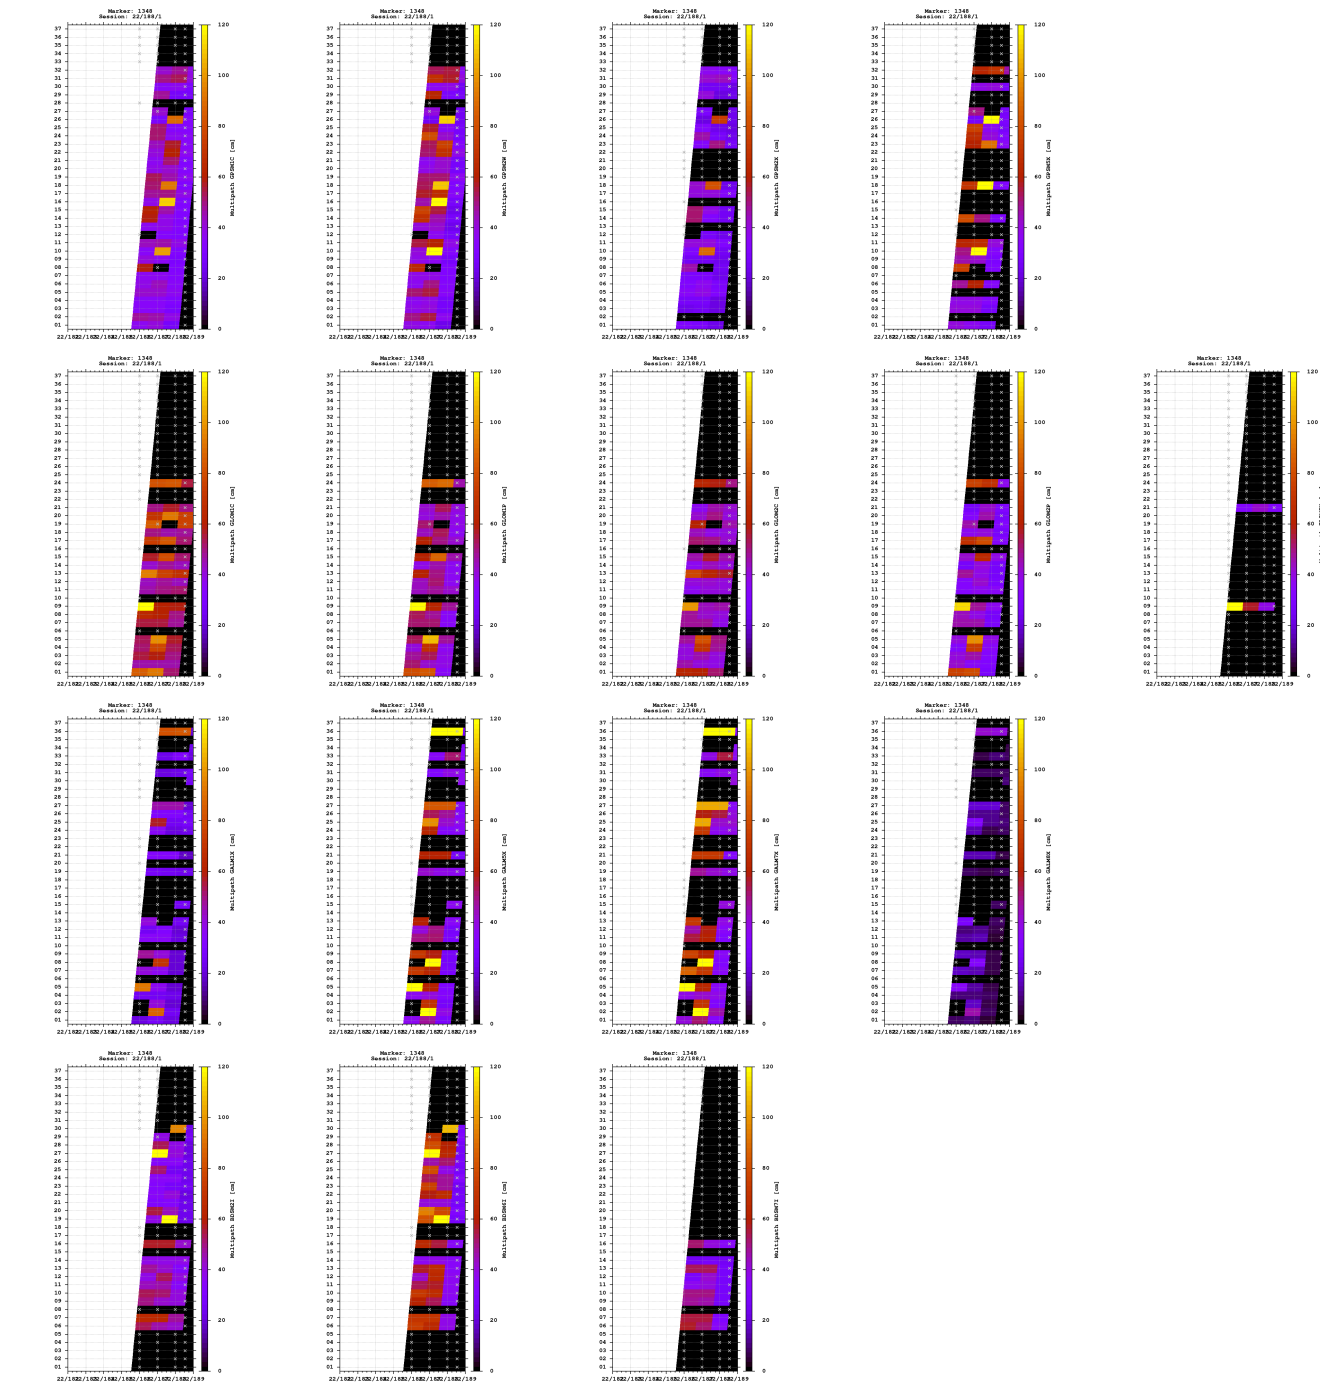


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

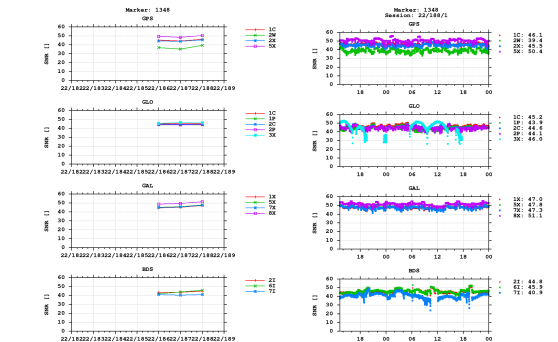


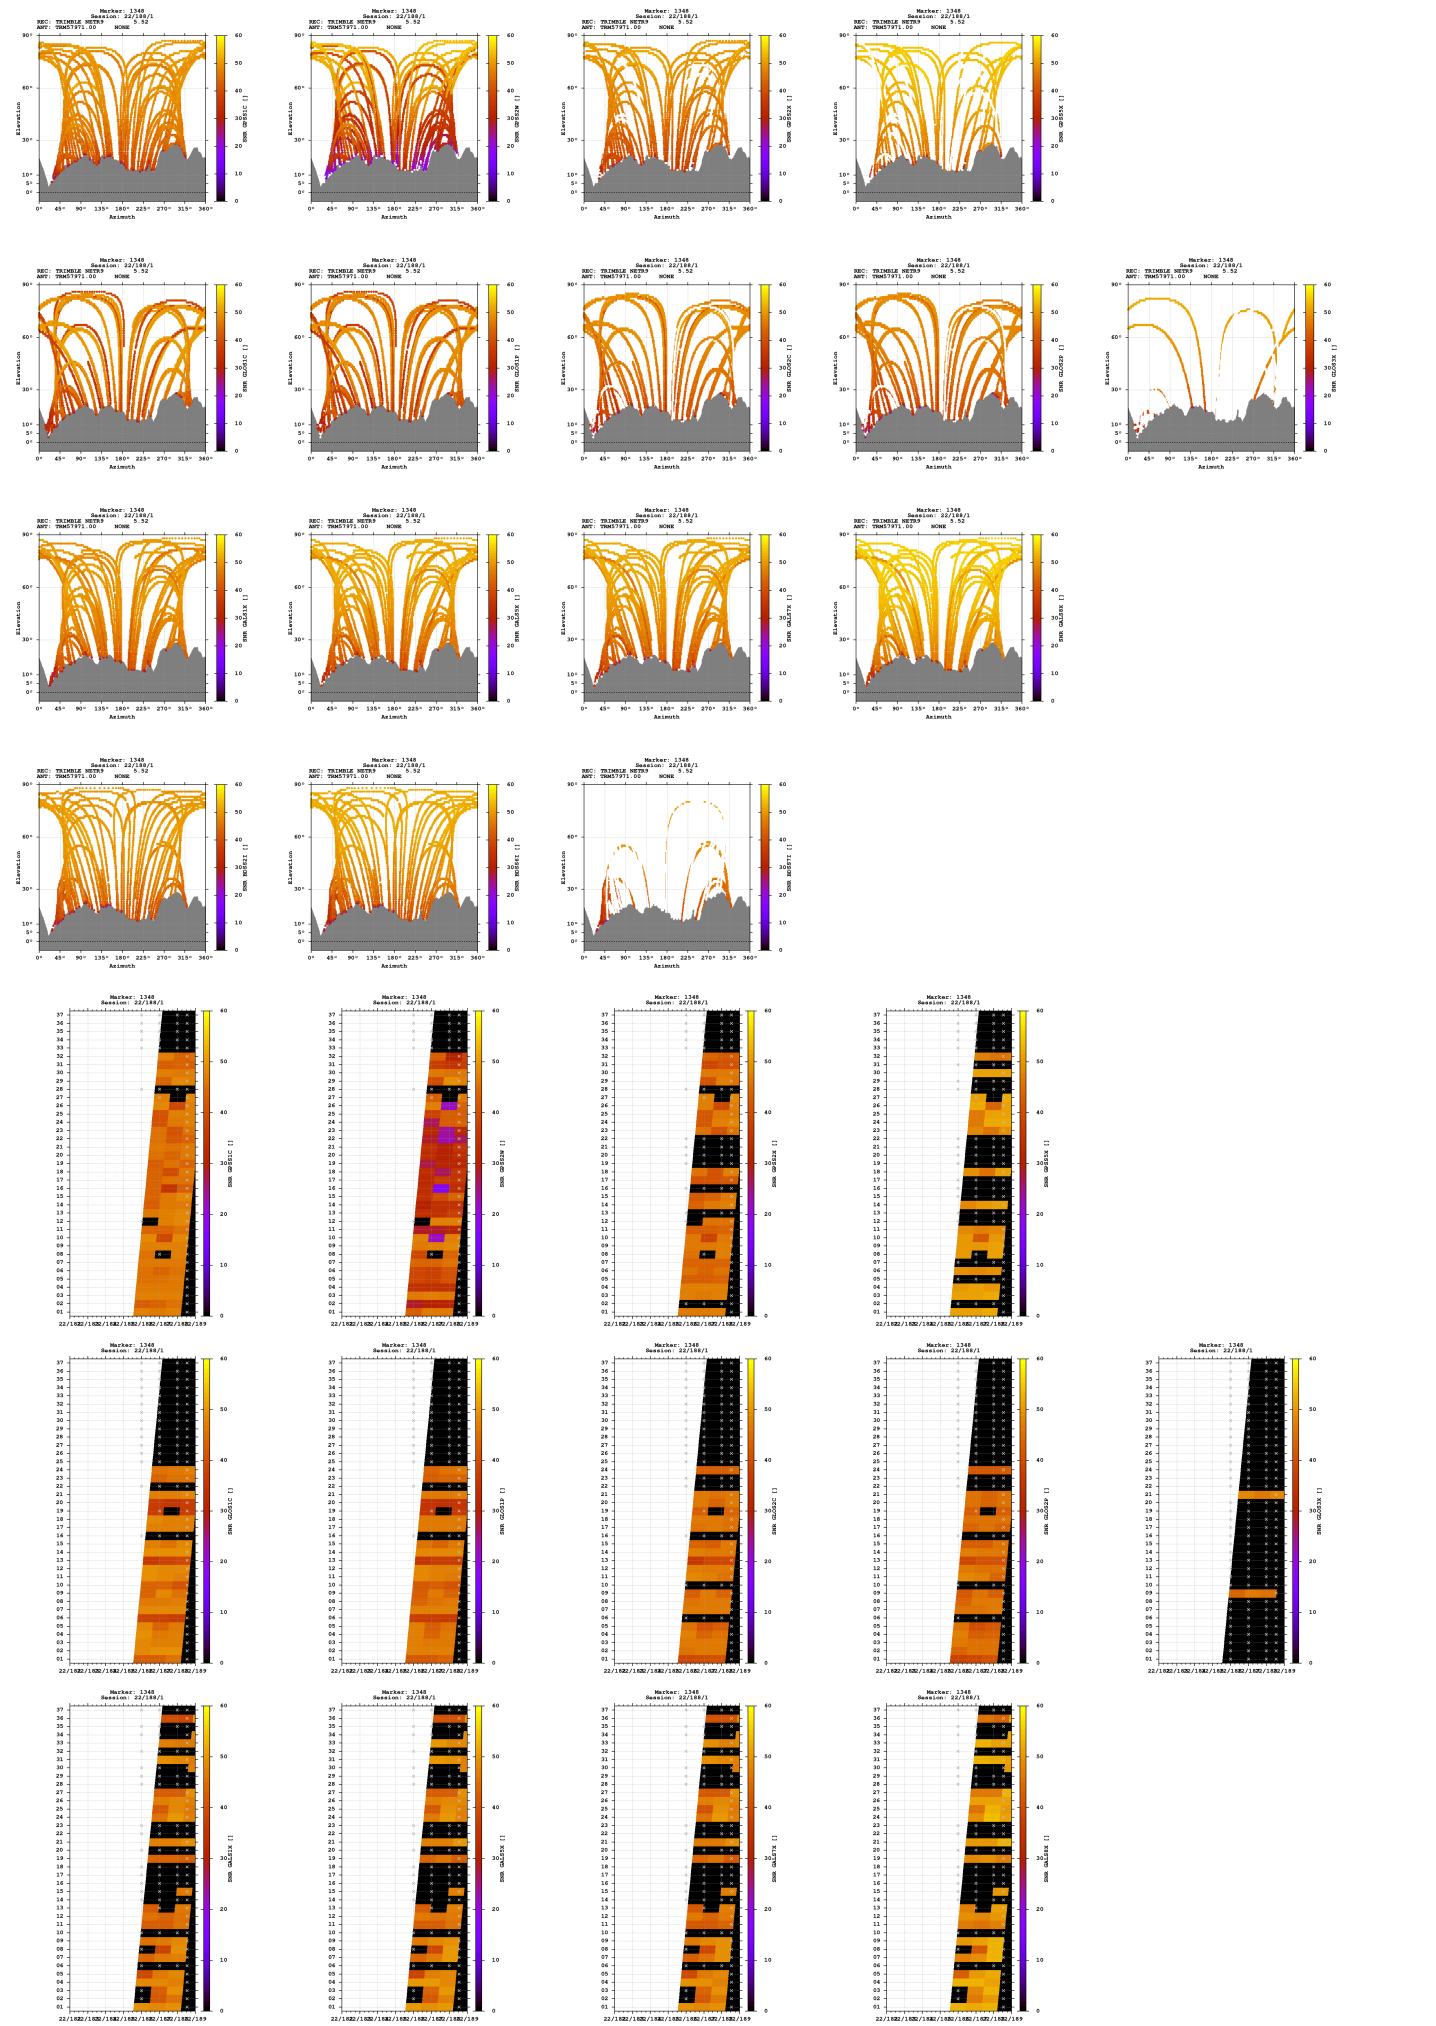

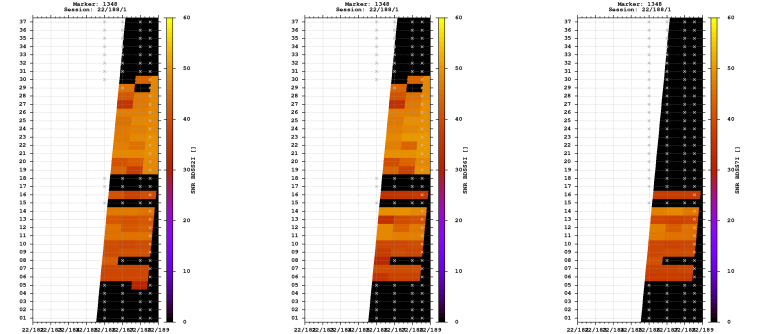



Estimates

2022-07-07 13:13:30	GPS	4397820.1759	598104.8559	4567684.6421	46.015324285	7.744727329	1742.8733
2022-07-07 13:13:30	GLO	4397821.2210	598104.2028	4567685.2829	46.015322155	7.744717157	1743.9924
2022-07-07 13:13:30	GAL	4397820.1980	598104.8847	4567684.1969	46.015321337	7.744727658	1742.5709
2022-07-07 13:13:30	BDS	4397820.7856	598104.9082	4567686.3231	46.015330829	7.744726937	1744.5074

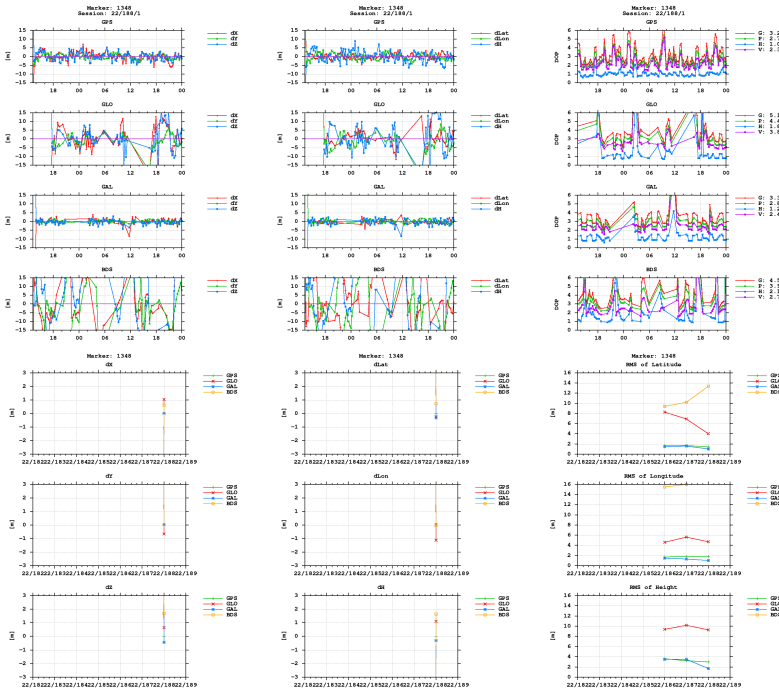

BNC

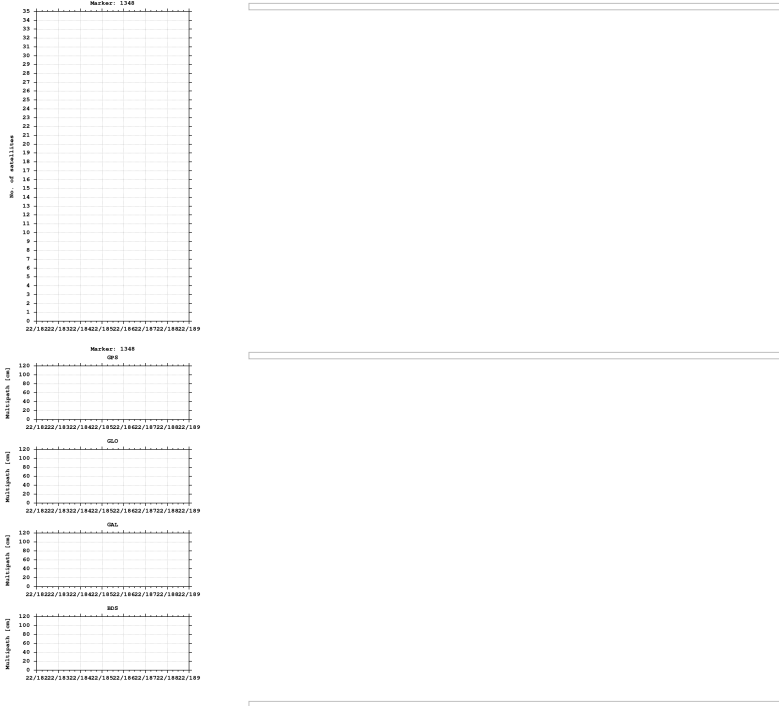

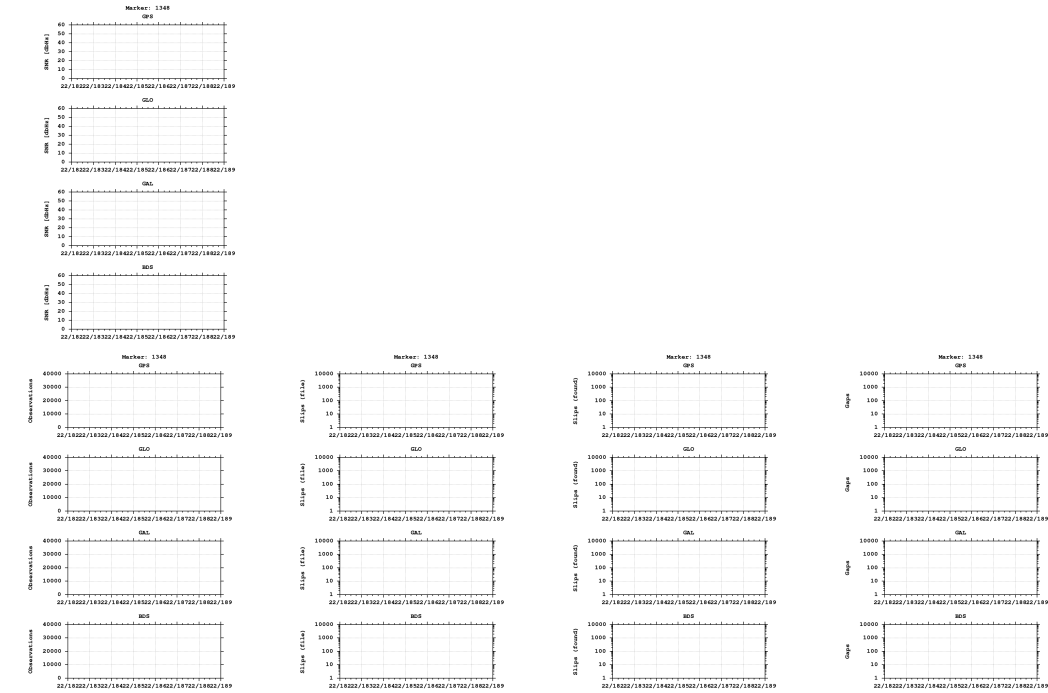

Equipment

2022-07-05 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)