

GNSS observation file monitoring for 0518

Last RINEX file: 05181891.220

RINEX version: 3.02

Marker: 1348

Receiver: 518

Antenna: 518


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

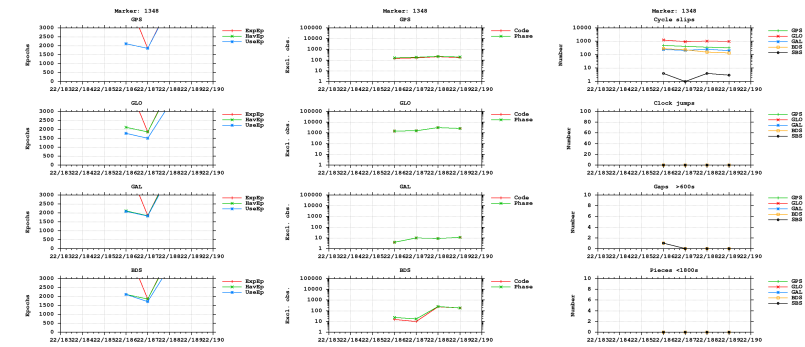



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

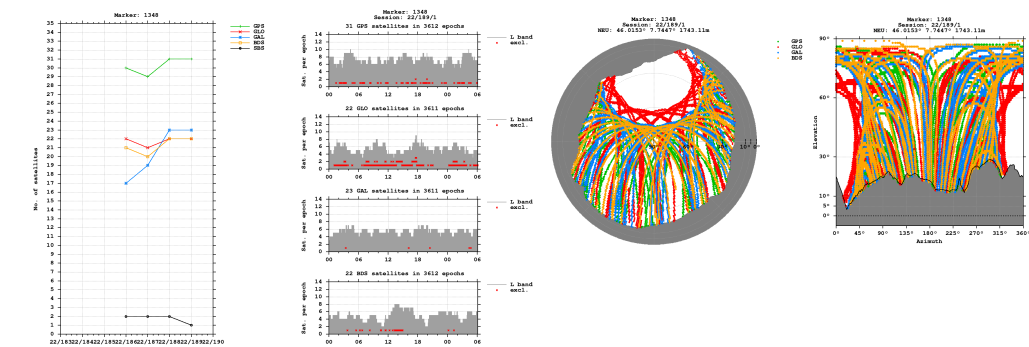


Bands

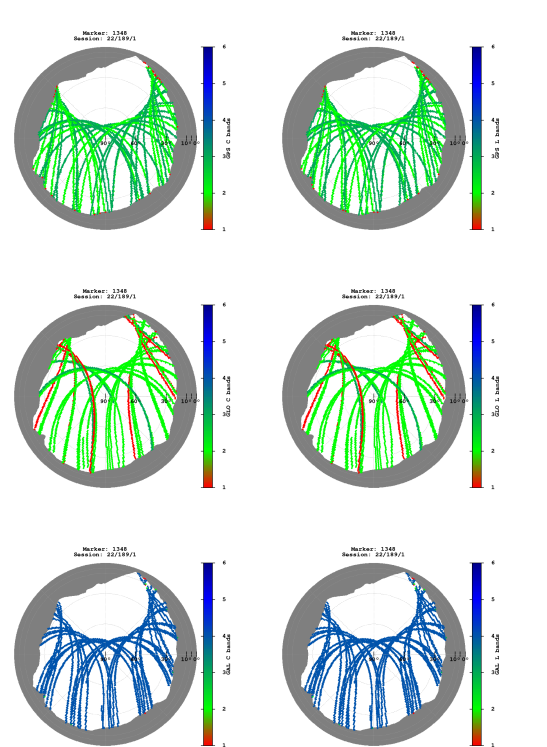


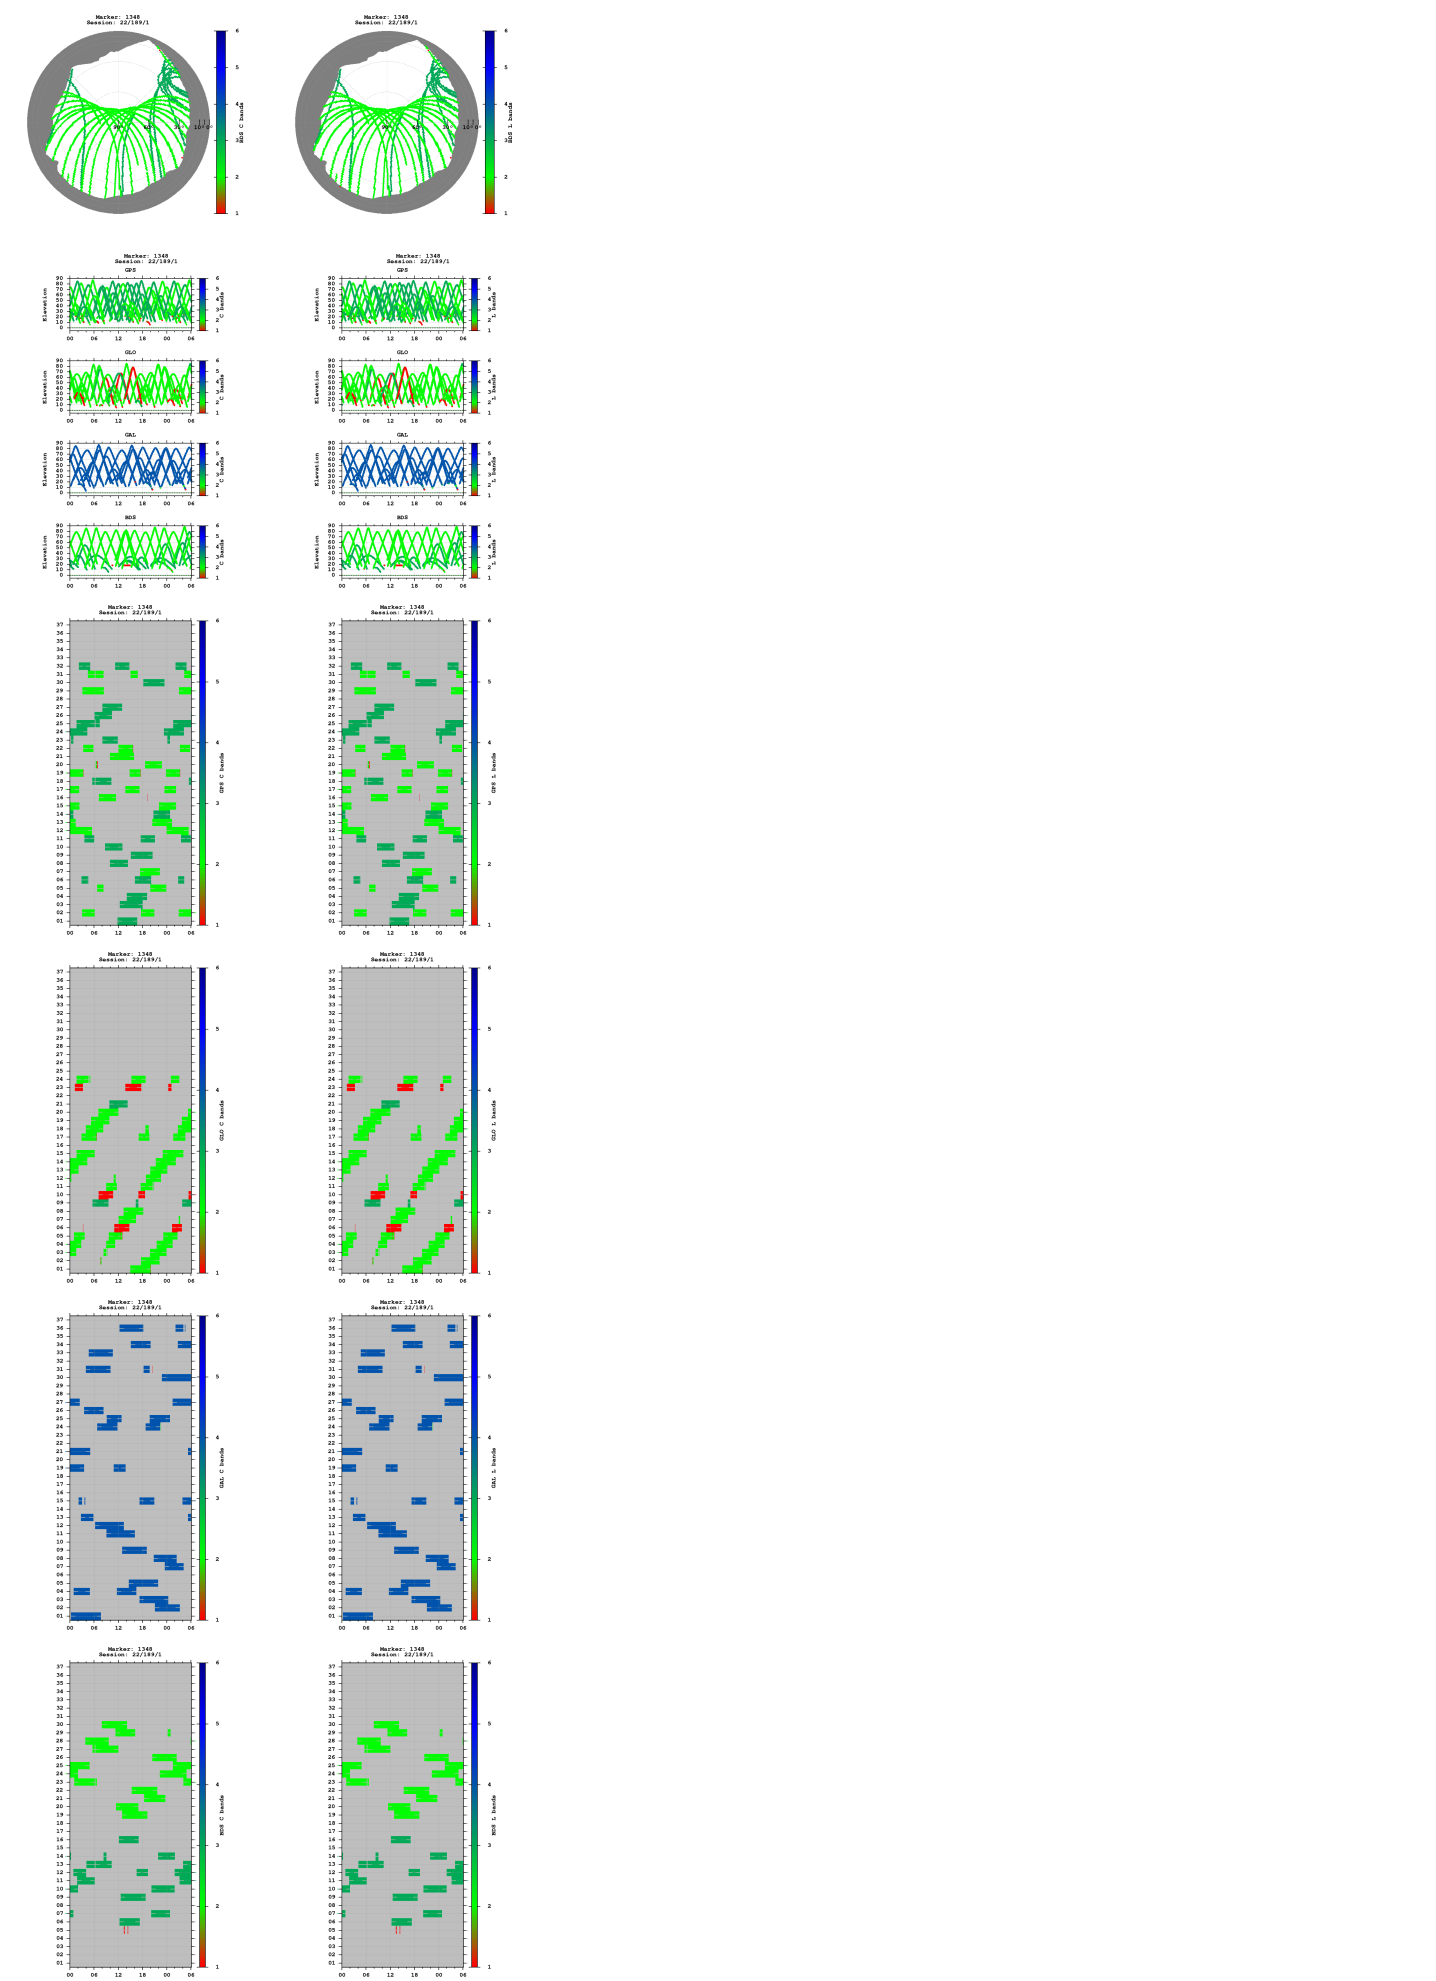

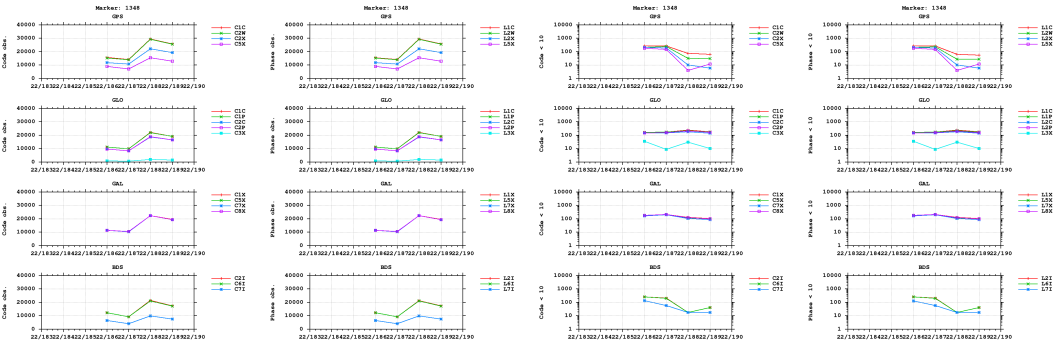


Multipath

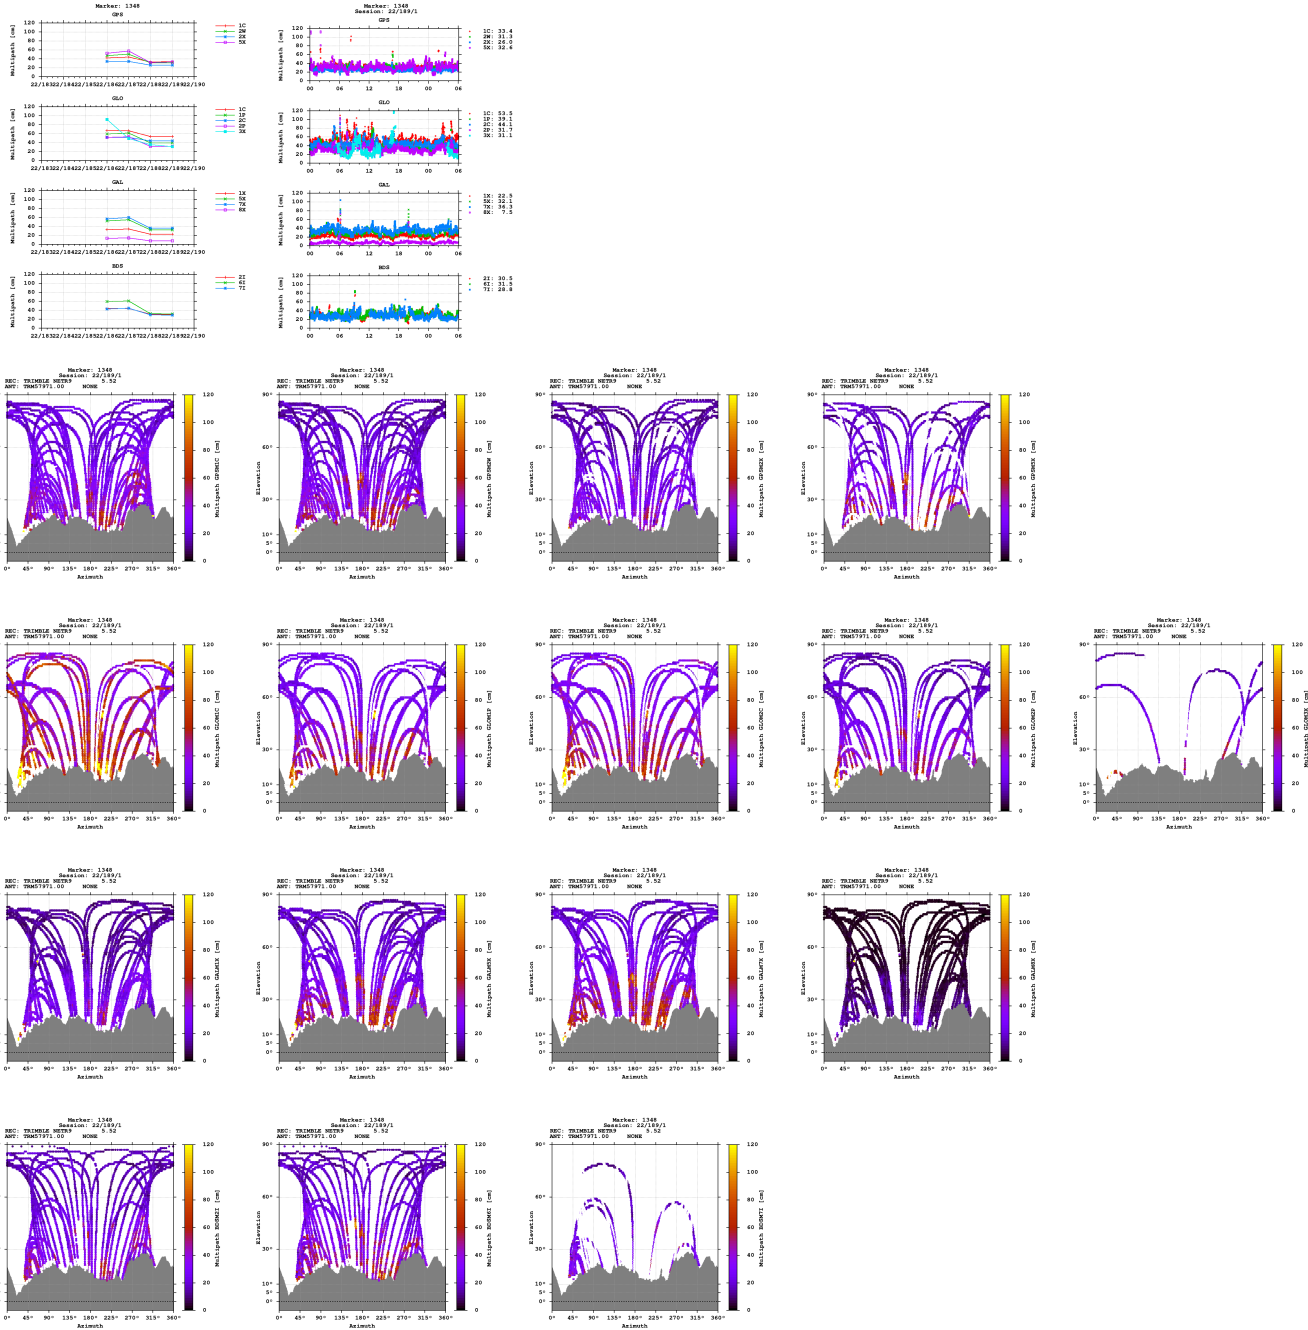


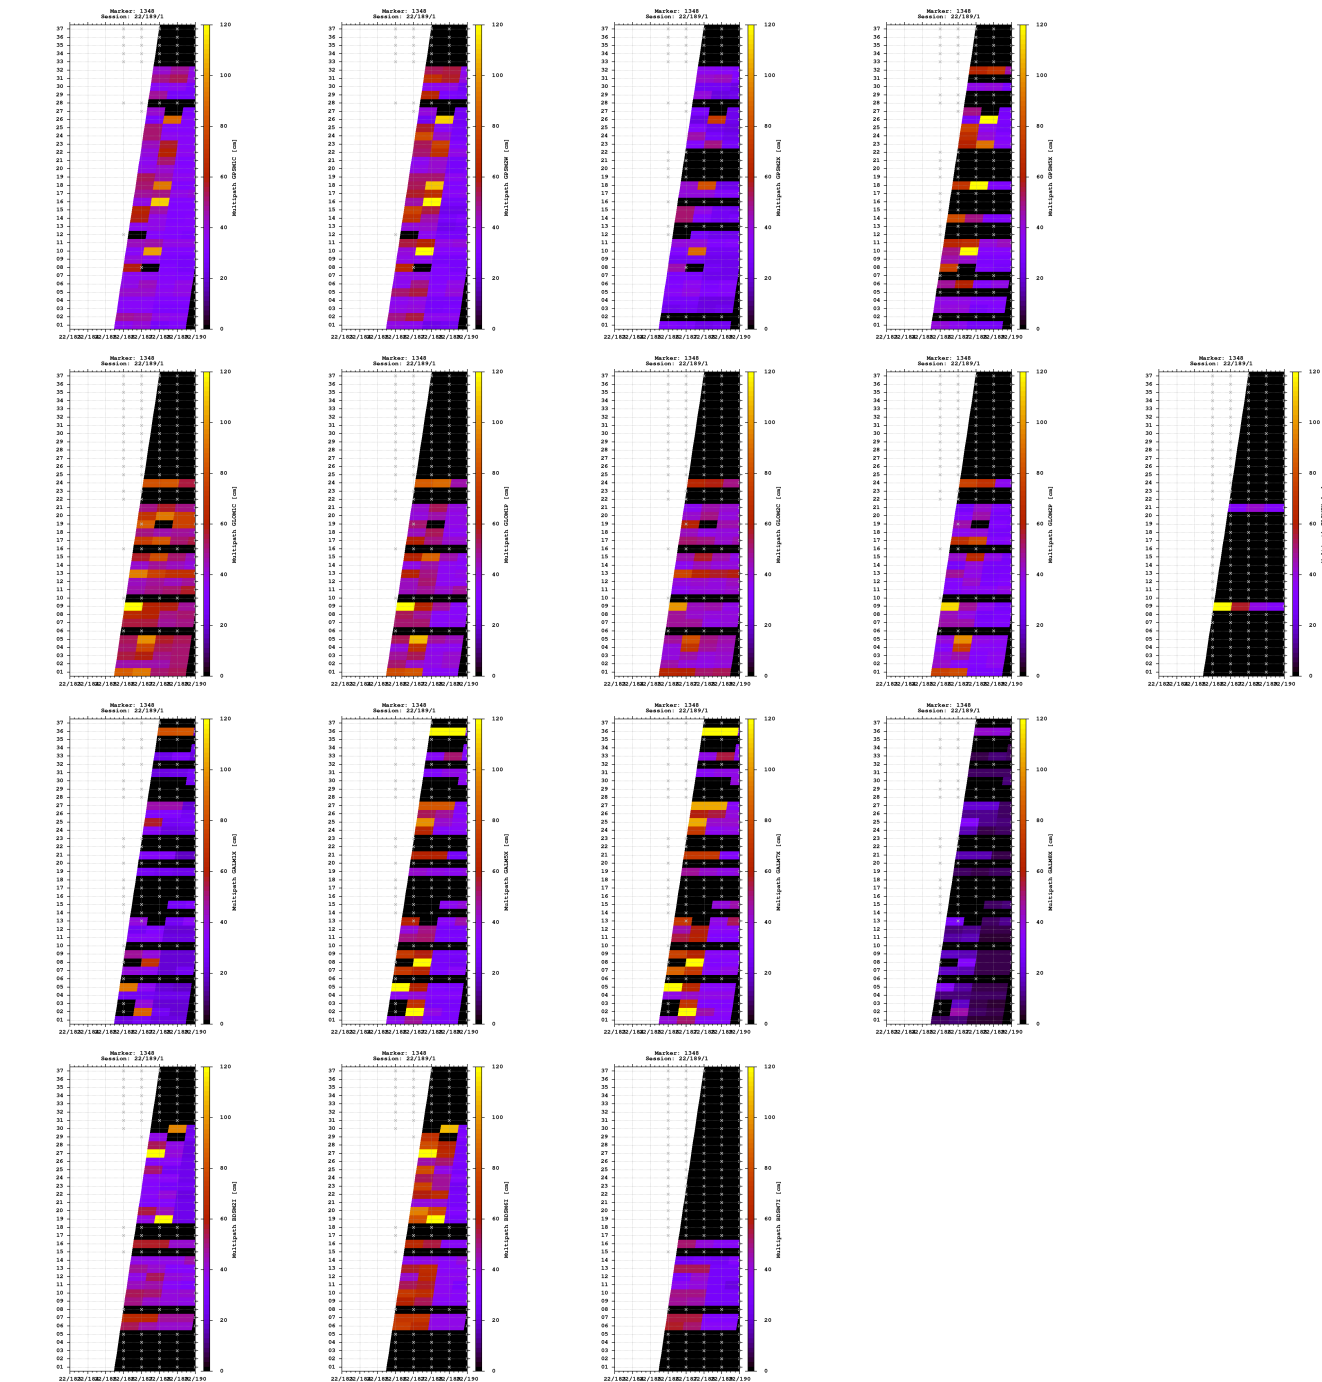

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

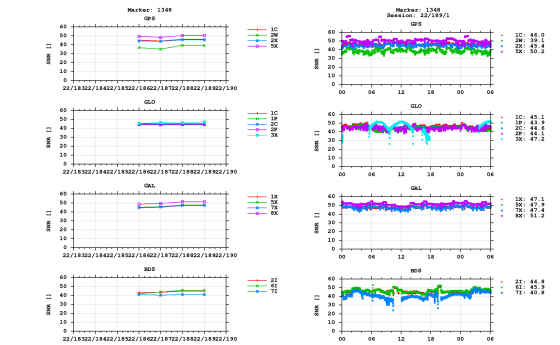

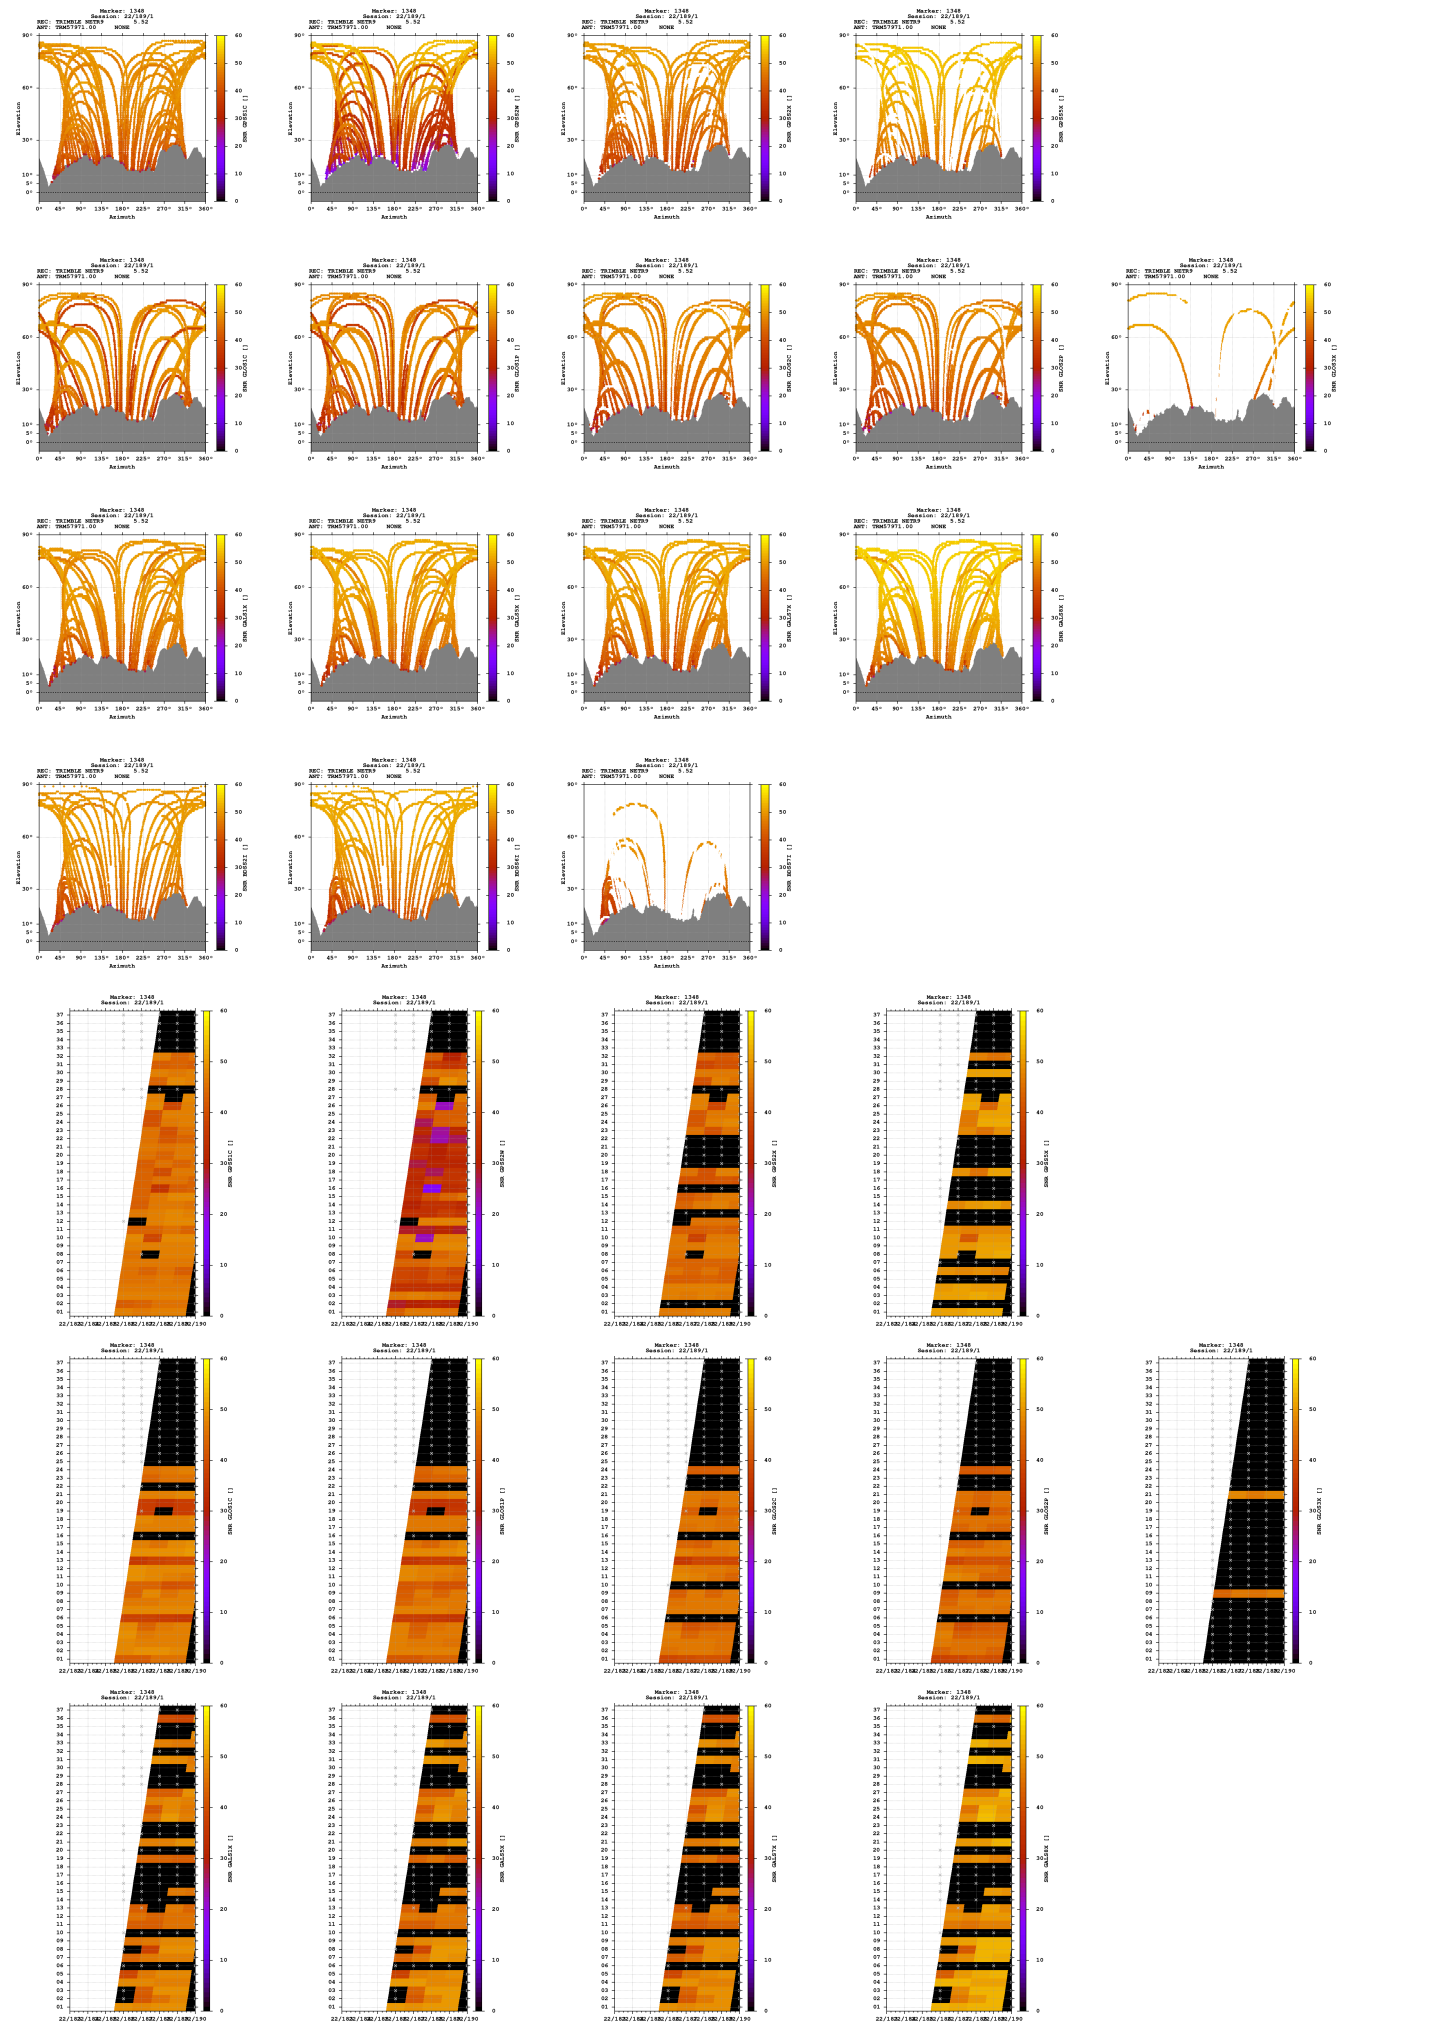




2022-07-07 13:13:30	GPS	4397820.4133	598104.5468	4567684.7831	46.015323912	7.744722961	1743.1092
2022-07-07 13:13:30	GLO	4397820.7923	598103.9905	4567685.9512	46.015329263	7.744715186	1744.1584
2022-07-07 13:13:30	GAL	4397820.3014	598104.8773	4567684.4806	46.015322452	7.744727385	1742.8455
2022-07-07 13:13:30	BDS	4397821.1416	598107.6449	4567684.8607	46.015317025	7.744761325	1743.9562

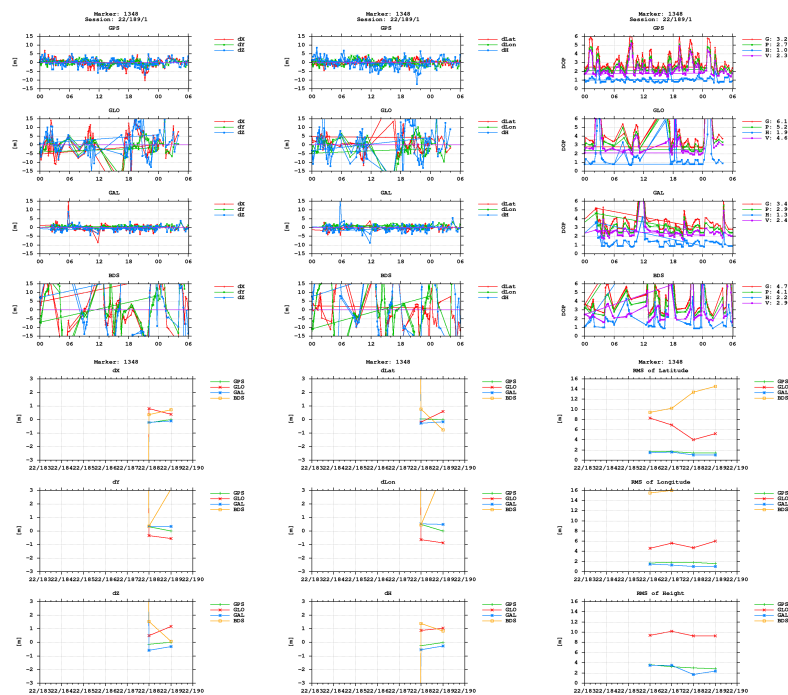

BNC



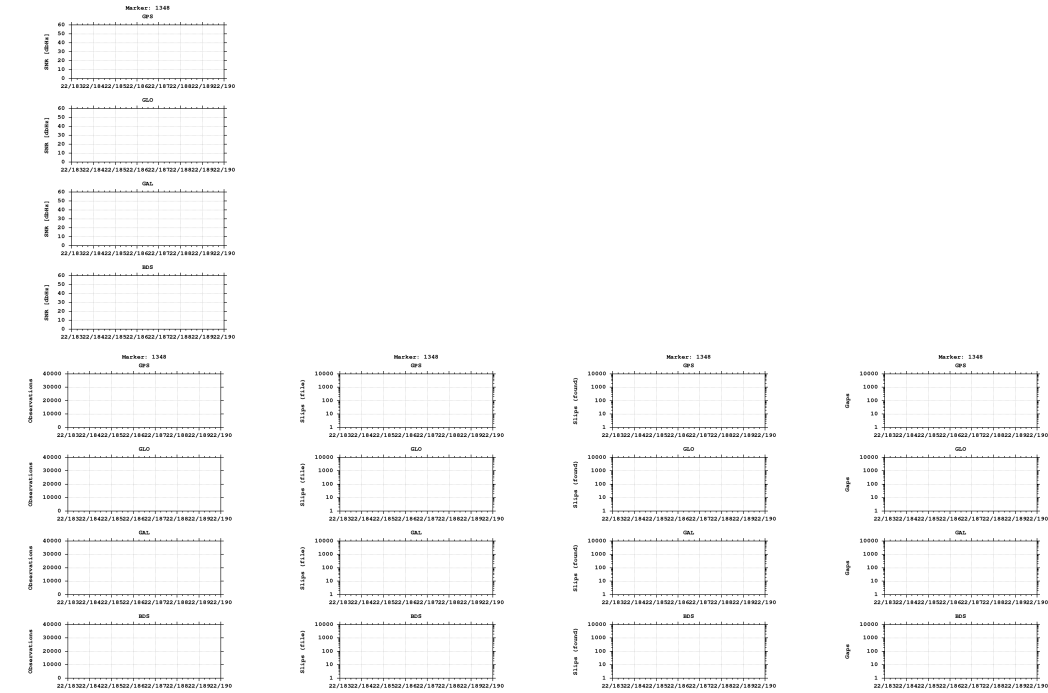

Equipment

2022-07-05 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)