


GNSS observation file monitoring for 0511


Last RINEX file: 05111931.220
RINEX version: 3.02
Marker: 1306
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

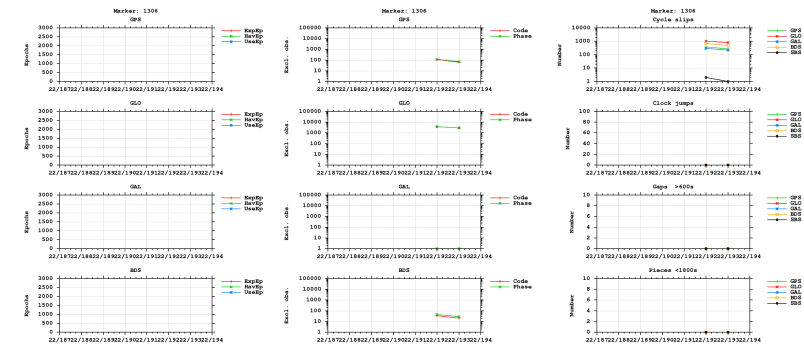



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

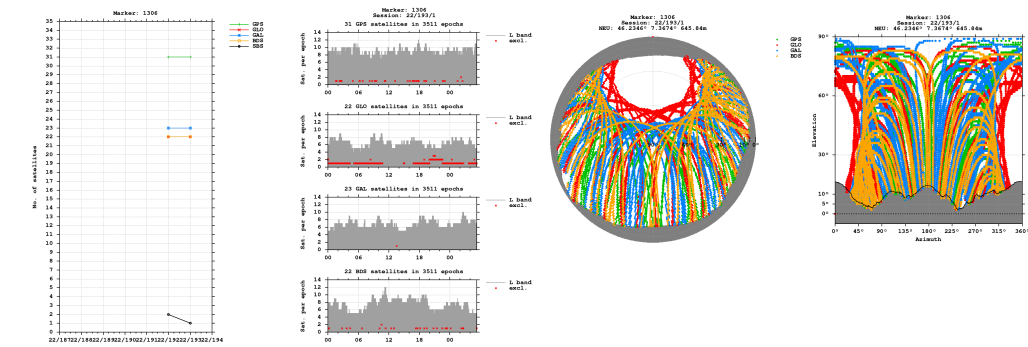


Bands

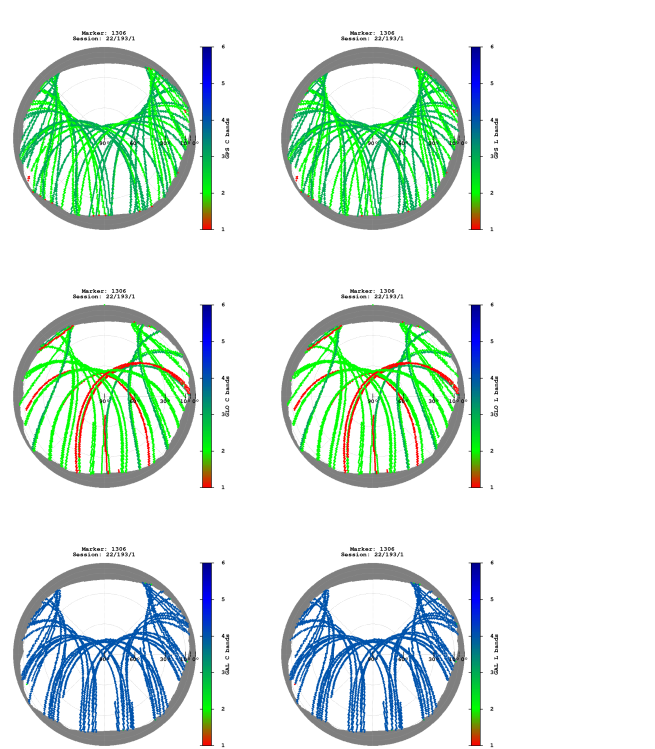


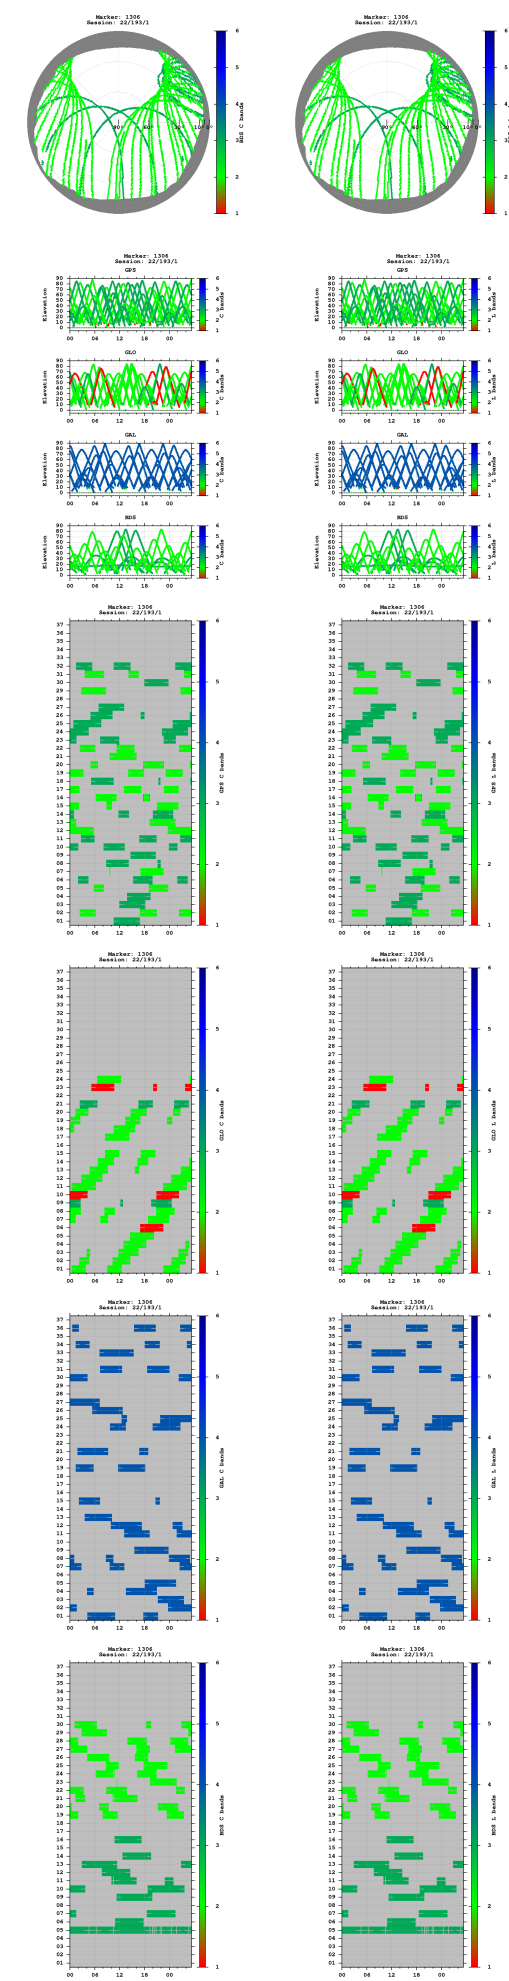


Observations

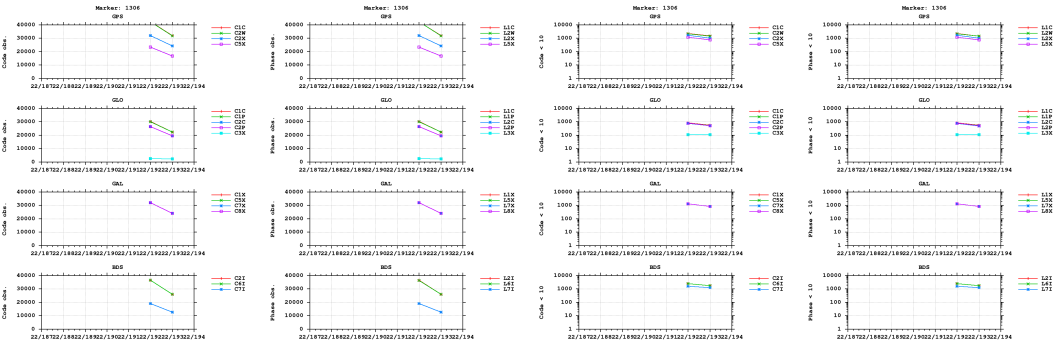


Multipath

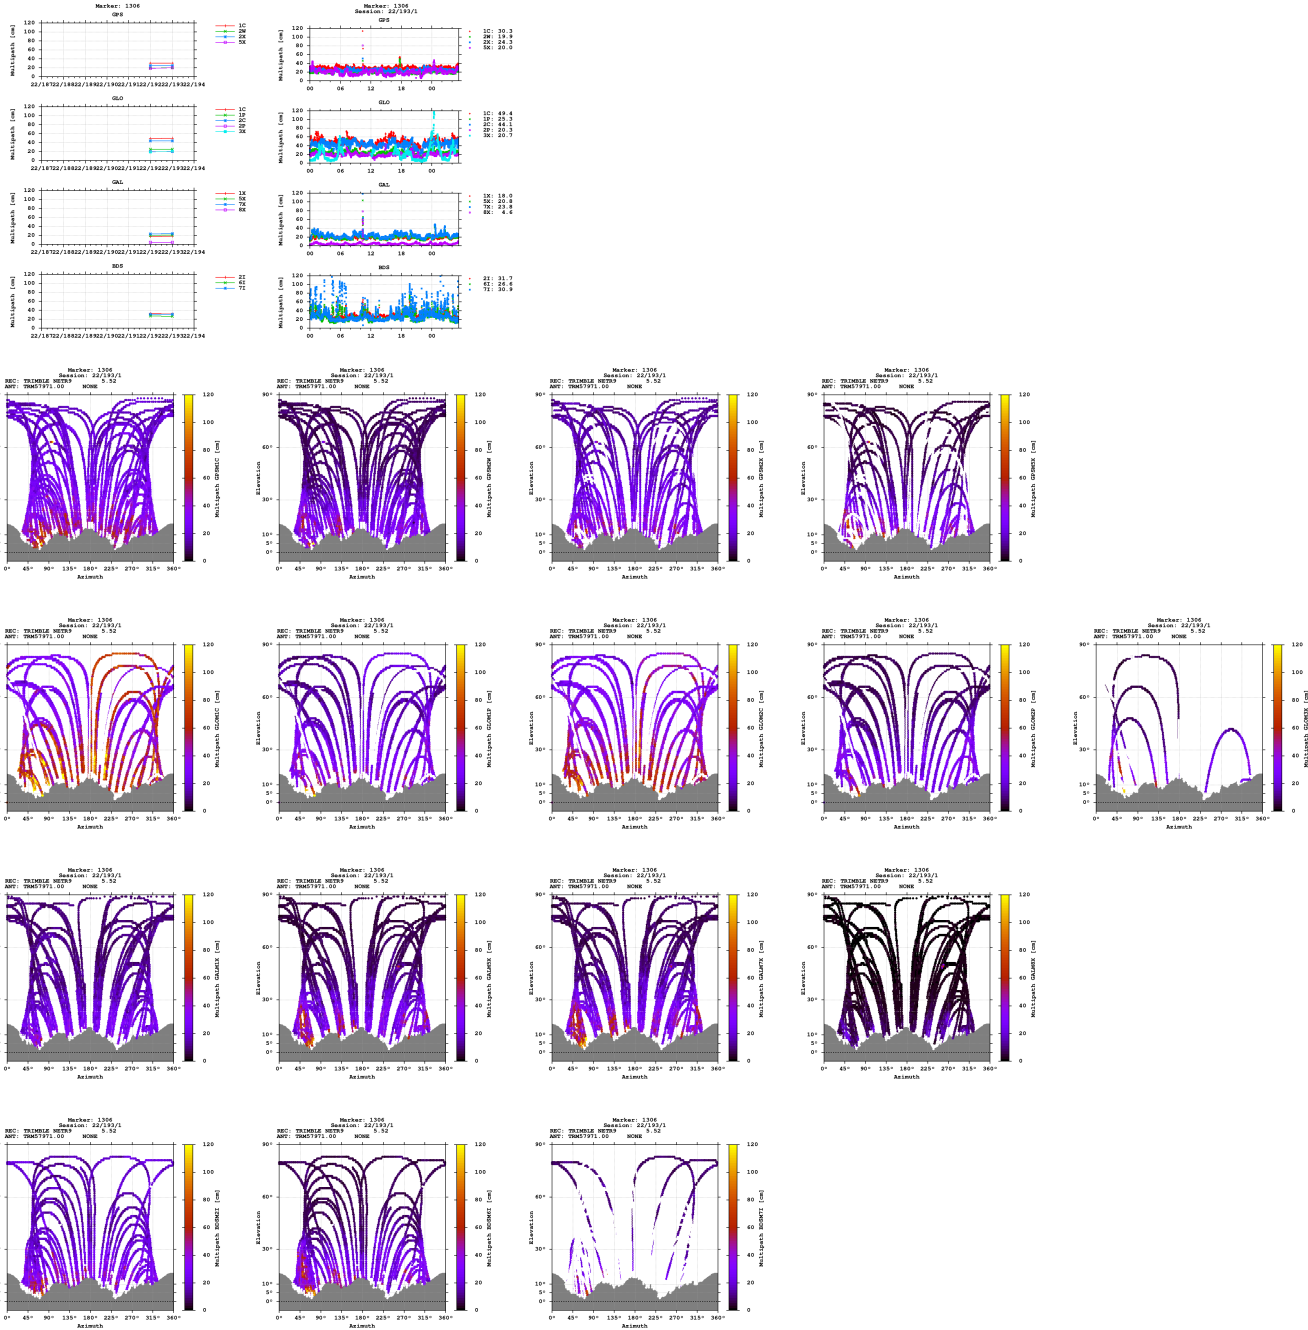

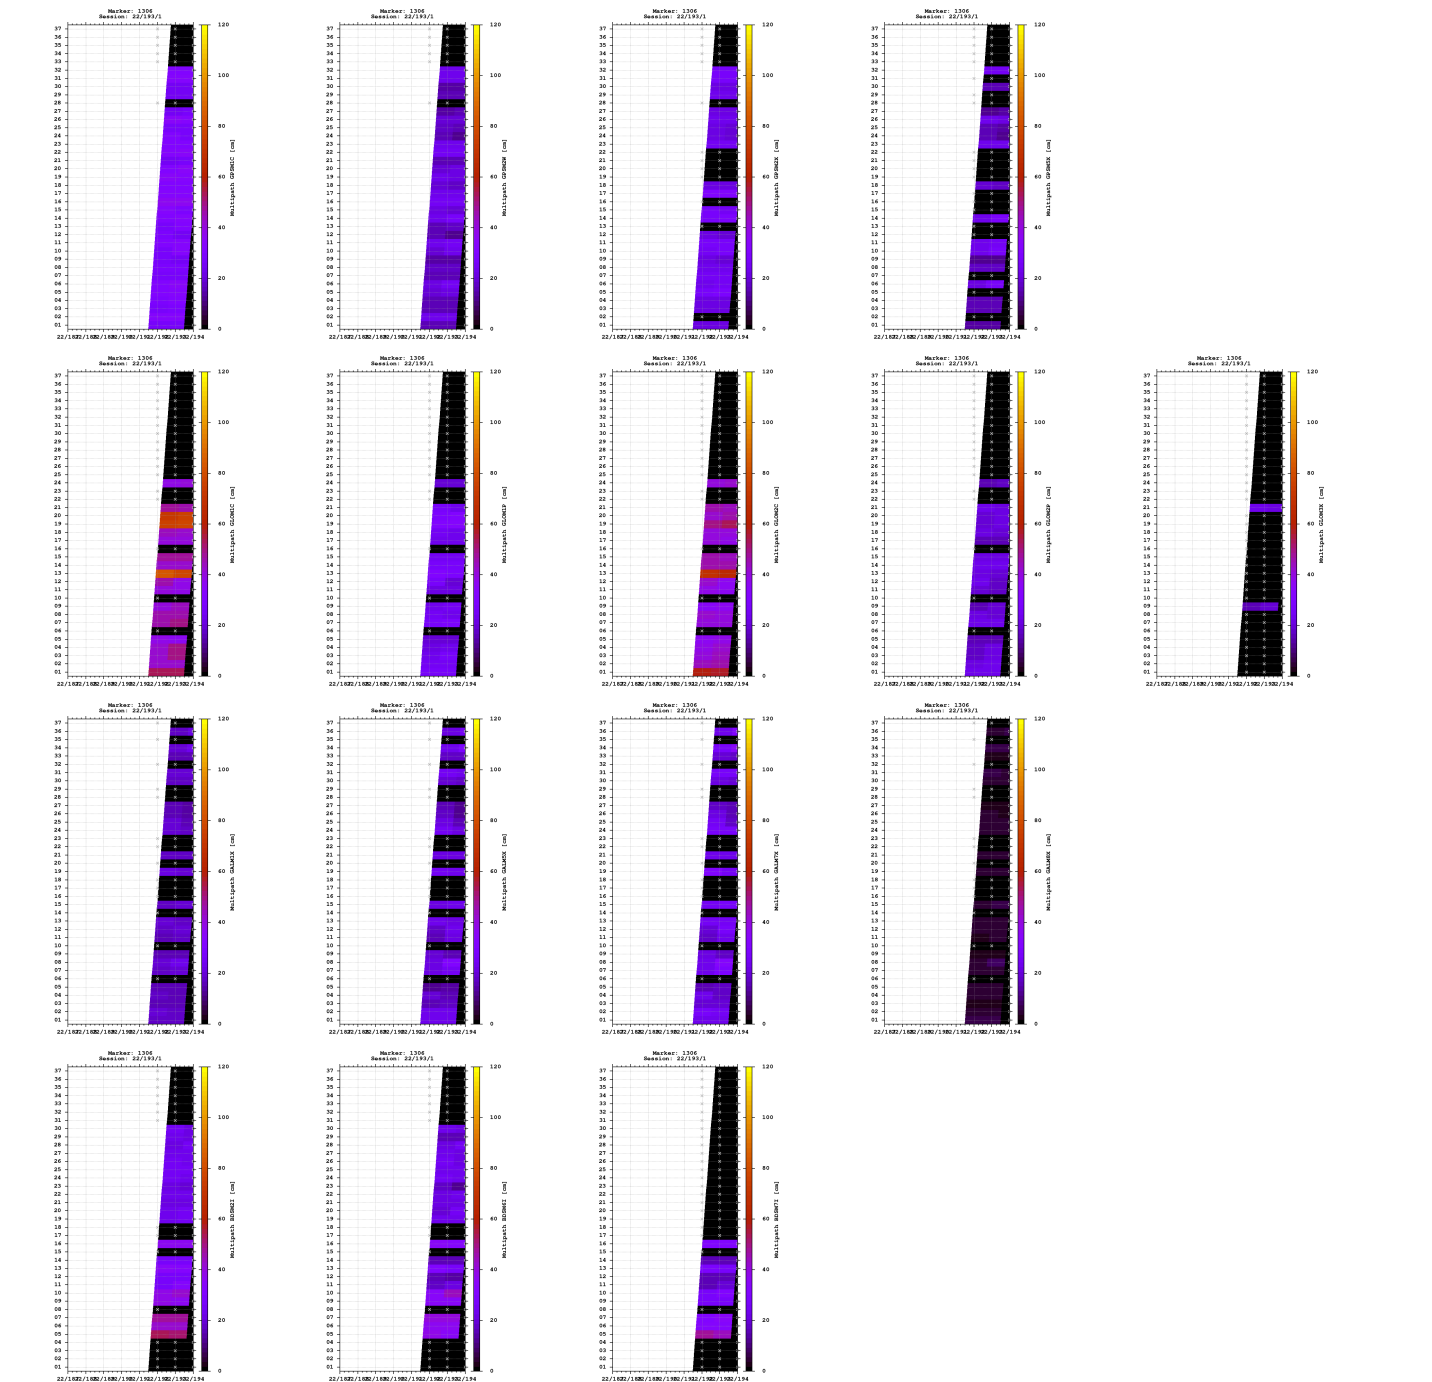


Signal-to-noise ratio



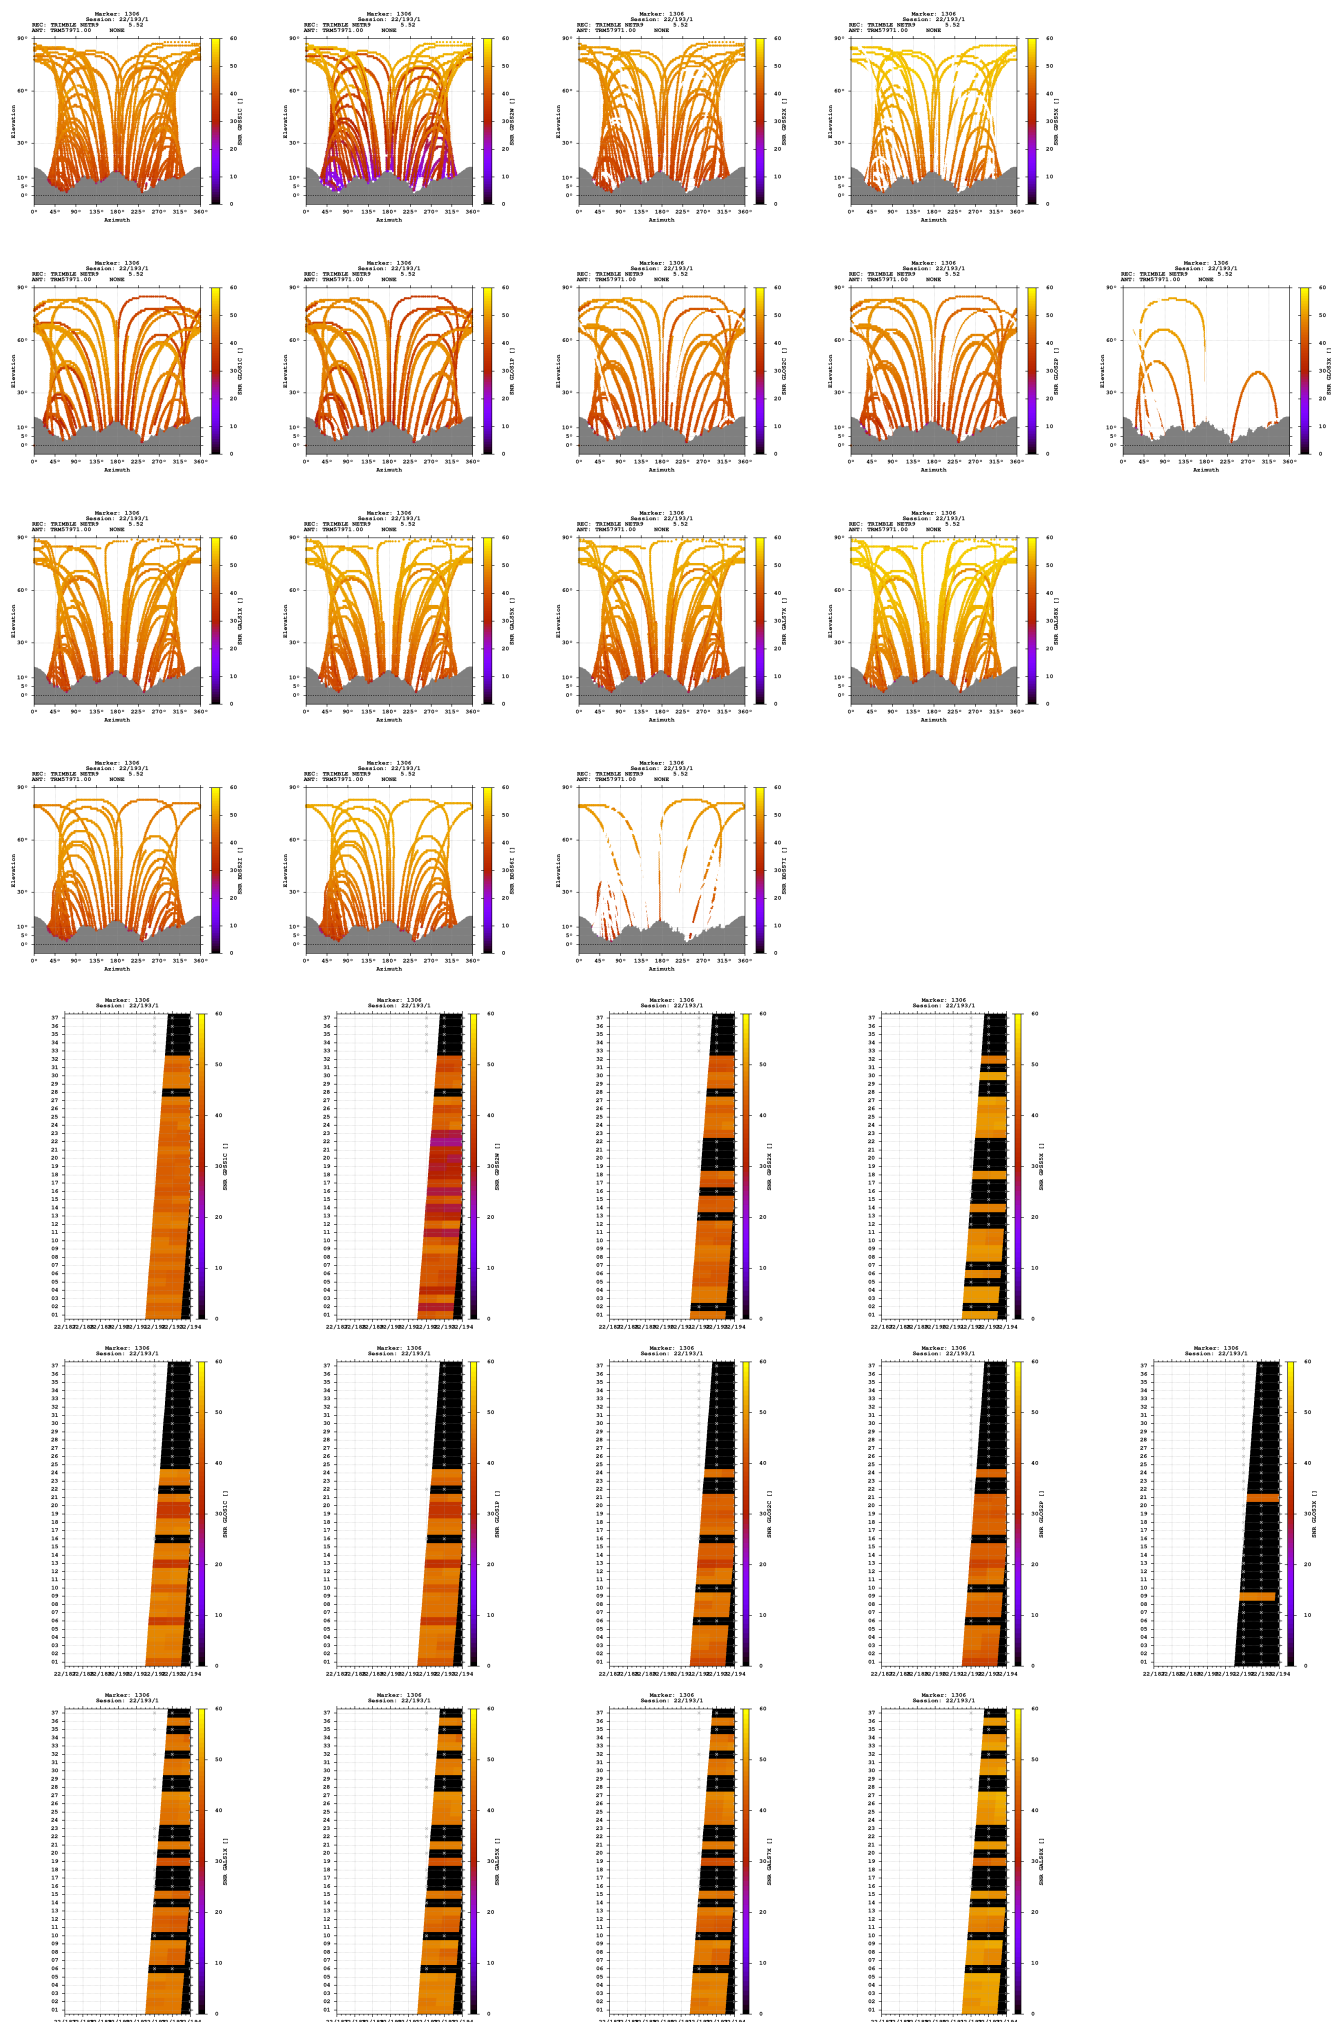





2022-07-11 08:38:00	GPS	4383482.2555	566775.4441	4583789.8537	46.234600003	7.367354824	645.8407
2022-07-11 08:38:00	GLO	4383481.3071	566774.5775	4583788.7400	46.234599906	7.367345259	644.3090
2022-07-11 08:38:00	GAL	4383481.9102	566775.5058	4583789.4977	46.234599962	7.367356191	645.3522
2022-07-11 08:38:00	BDS	4383483.3953	566777.1303	4583792.7358	46.234609189	7.367374606	648.8535

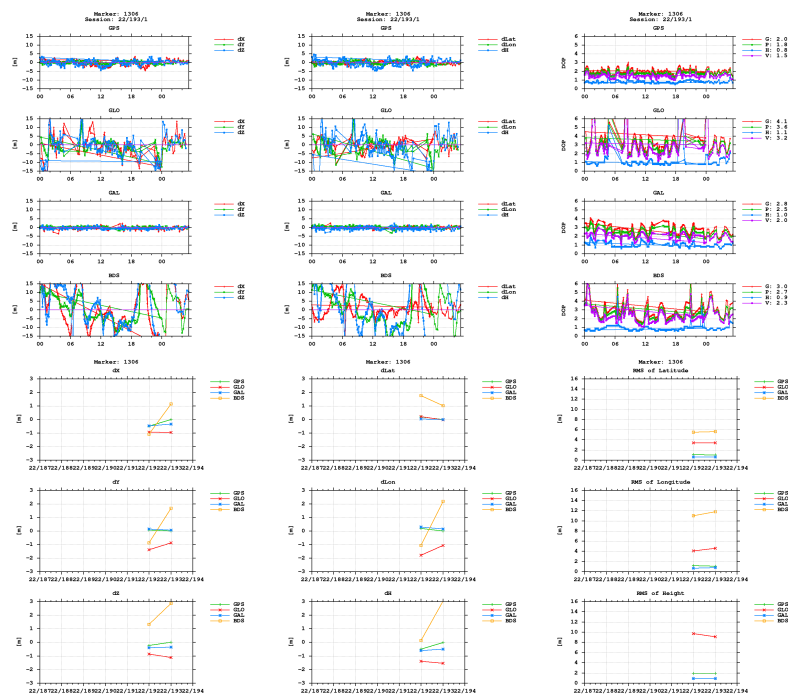

BNC

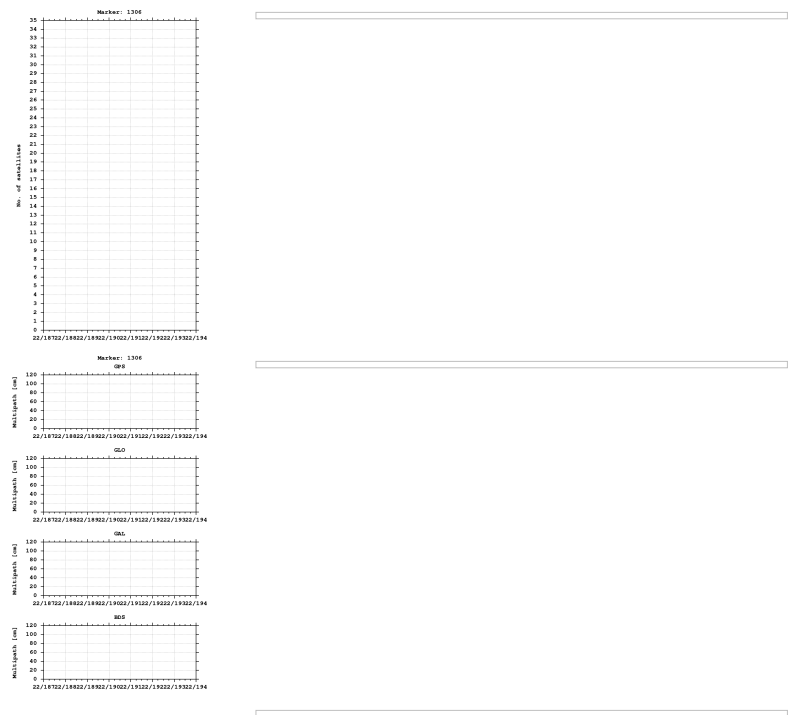

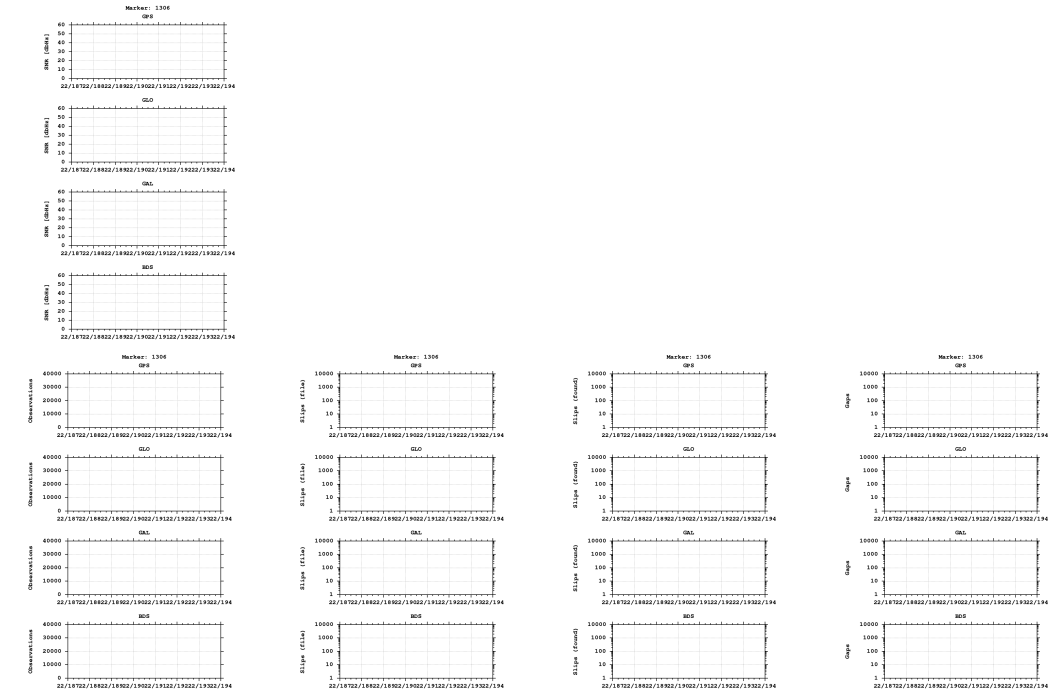

Equipment

2022-07-11 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)