


GNSS observation file monitoring for 0512


Last RINEX file: 05121931.22O
RINEX version: 3.02
Marker: 1286
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

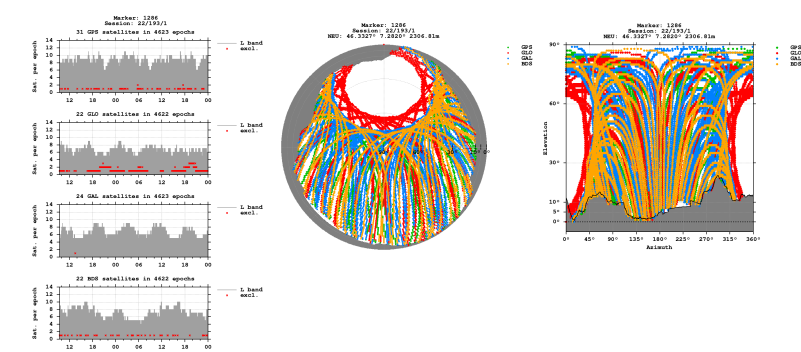


Bands

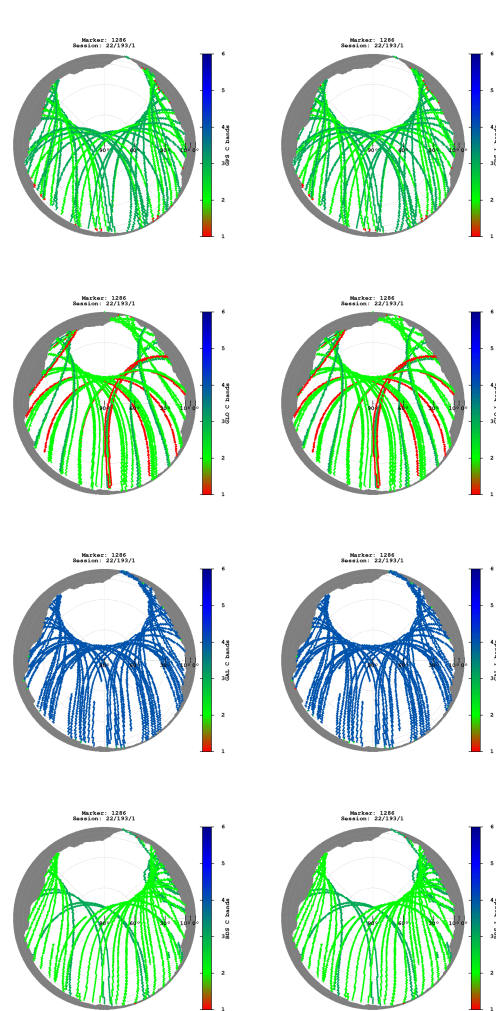

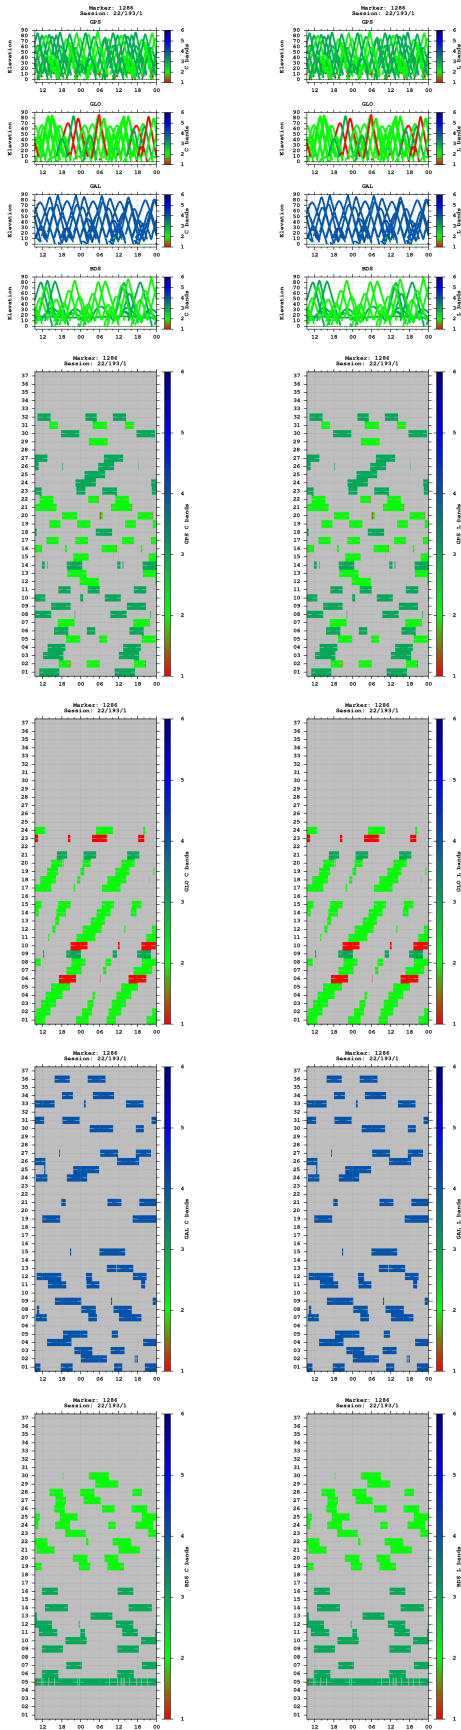



Multipath

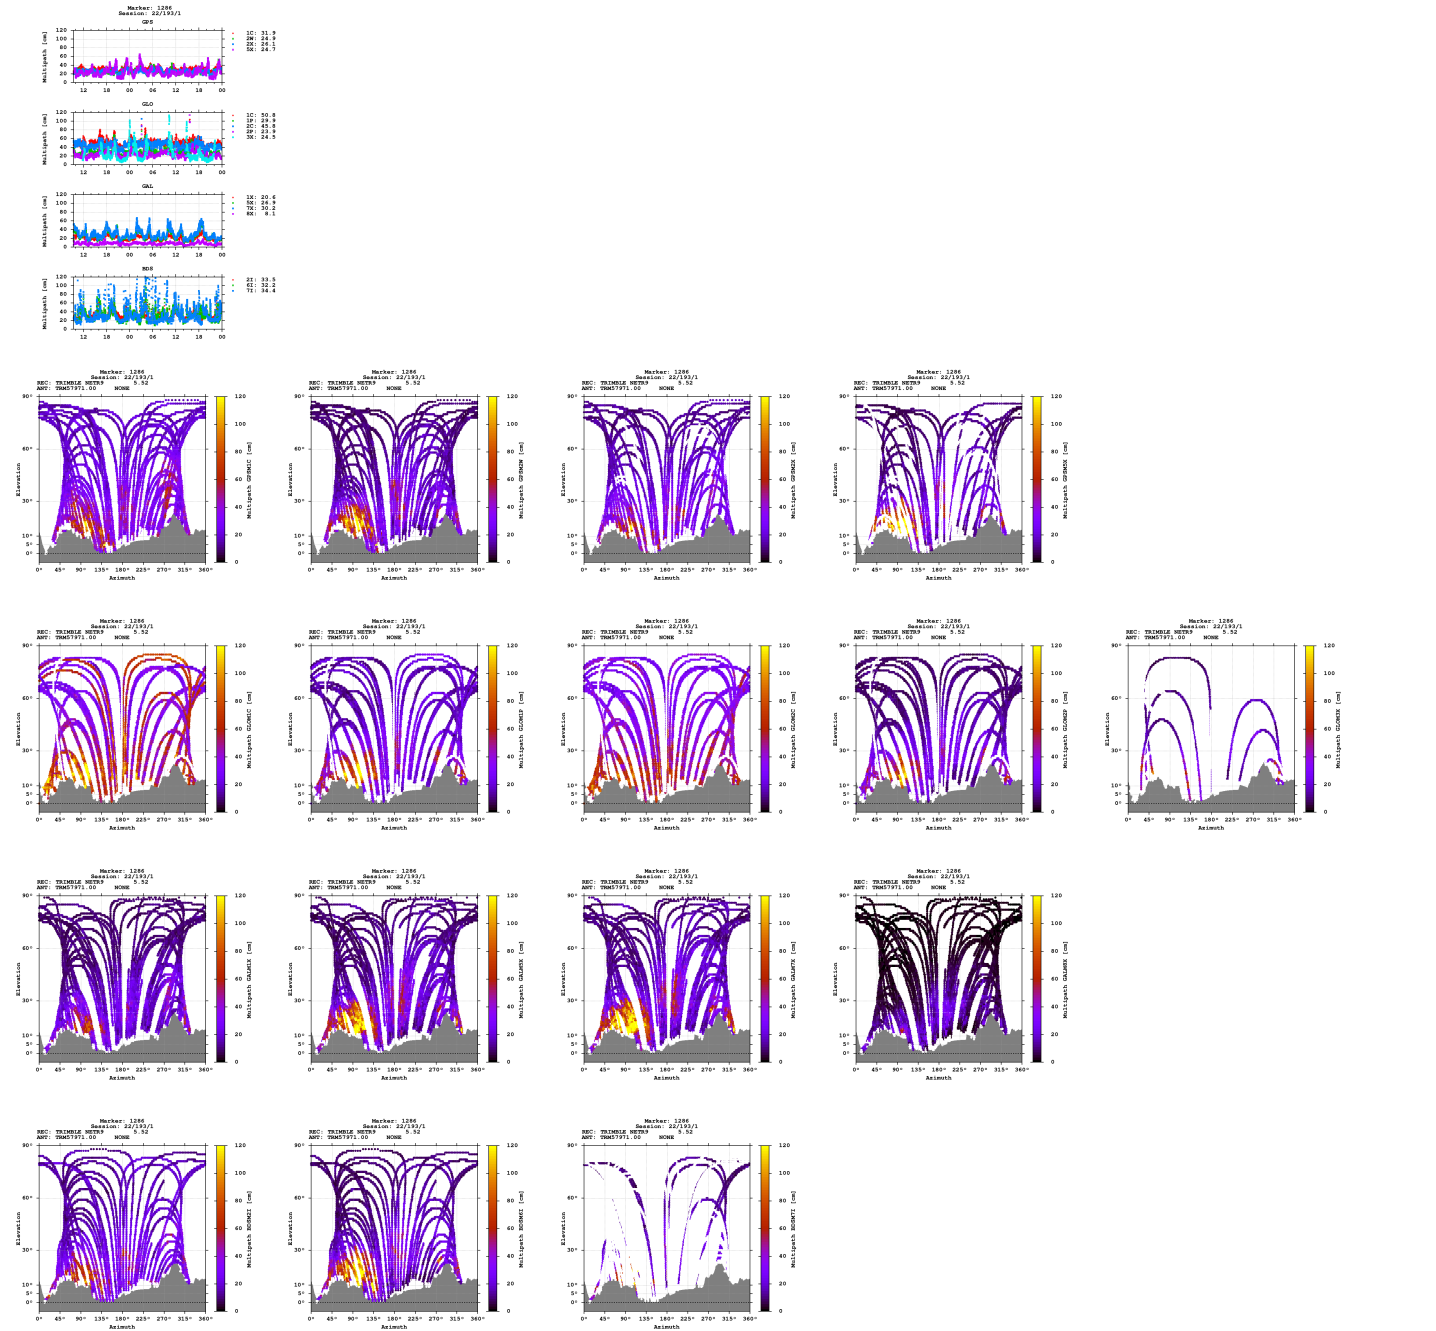

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

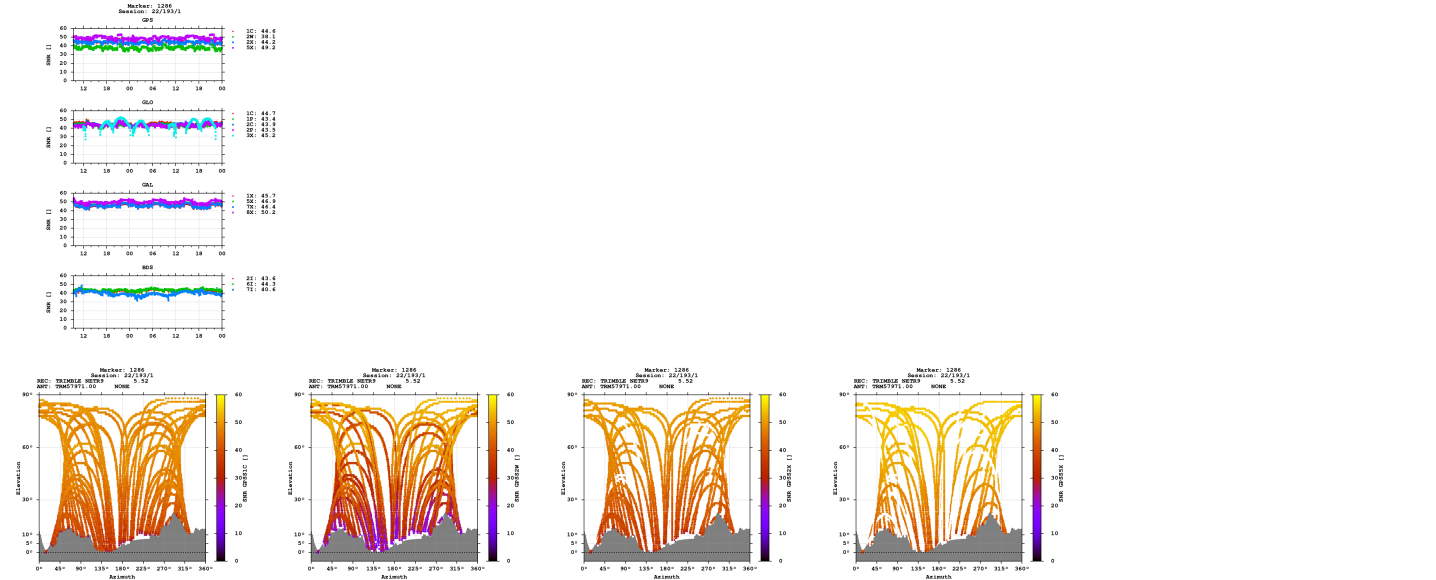

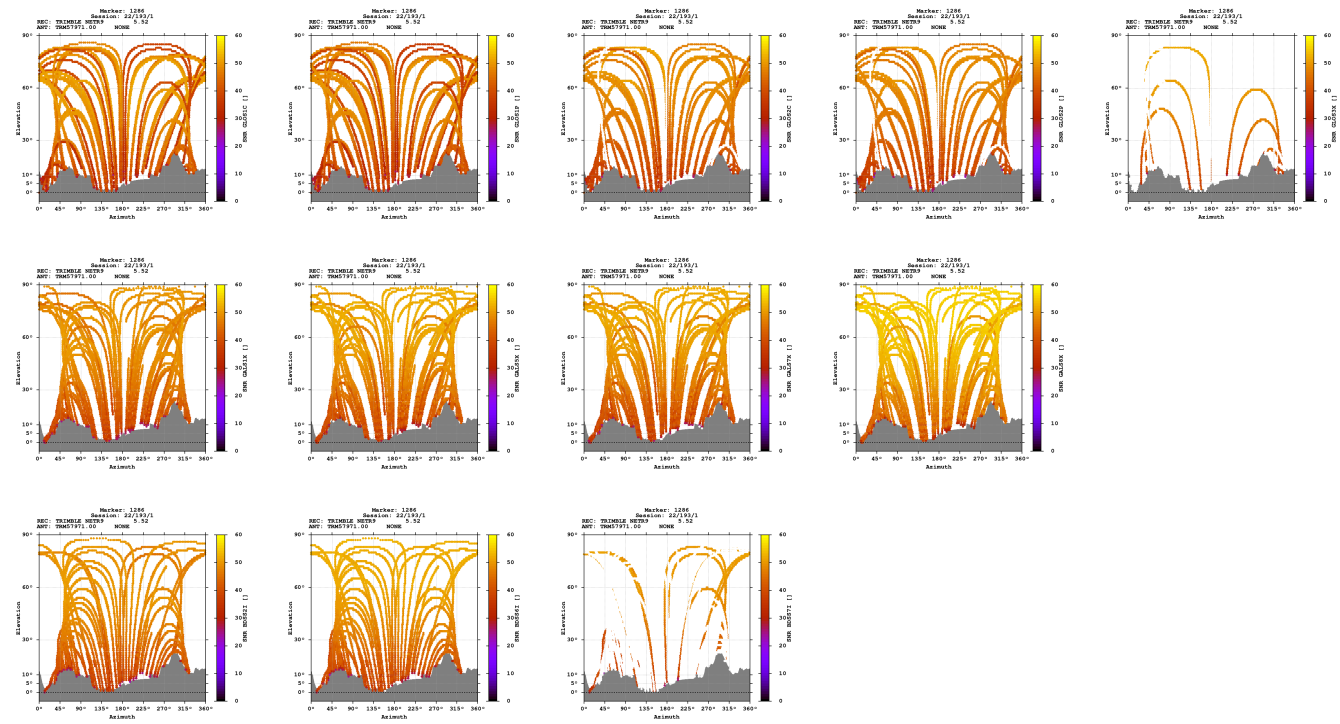

Estimates

2022-07-12 09:28:30	GPS	4377643.3510	559388.1587	4592525.8648	46.332671303	7.281960100	2306.8132
2022-07-12 09:28:30	GLO	4377642.6844	559387.2766	4592524.6087	46.332668531	7.281949838	2305.3708
2022-07-12 09:28:30	GAL	4377643.3046	559388.1462	4592525.6777	46.332670450	7.281960016	2306.6449
2022-07-12 09:28:30	BDS	4377642.2014	559388.0954	4592526.7486	46.332684260	7.281961176	2306.6596

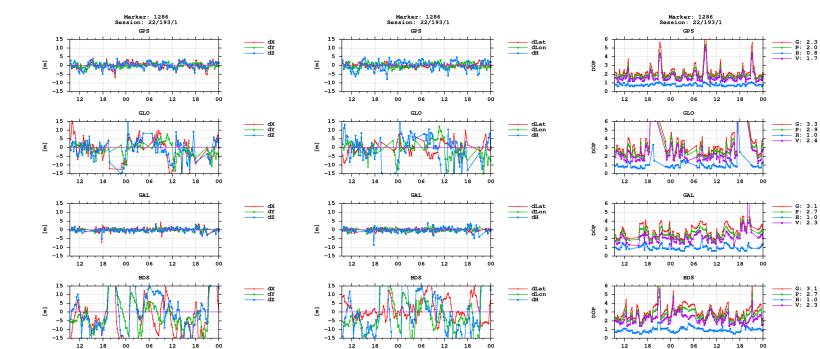

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)