


GNSS observation file monitoring for 0512


Last RINEX file: 05121941.220
RINEX version: 3.02
Marker: 1286
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

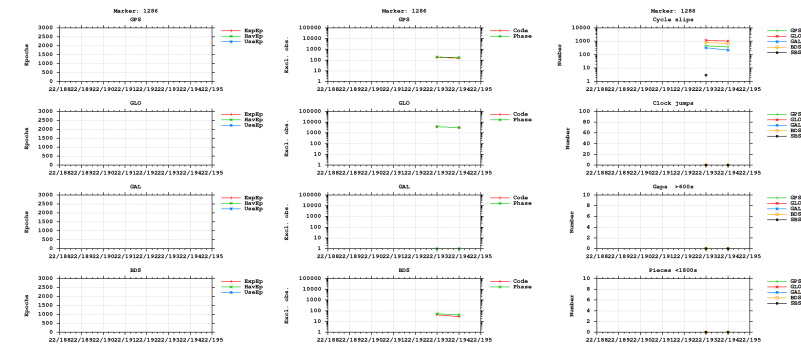



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

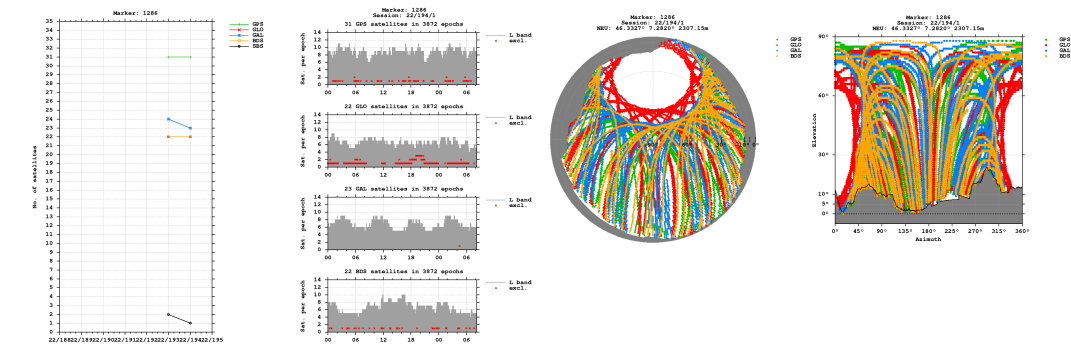


Bands

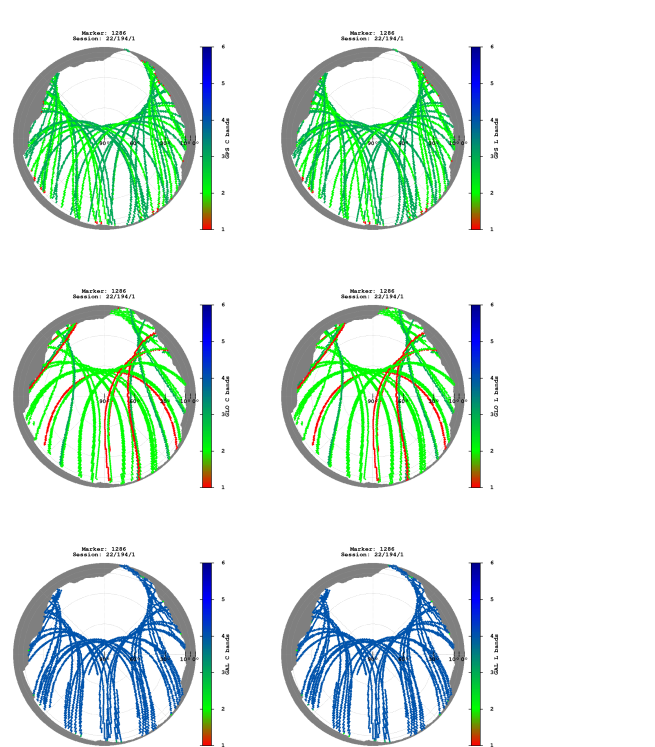

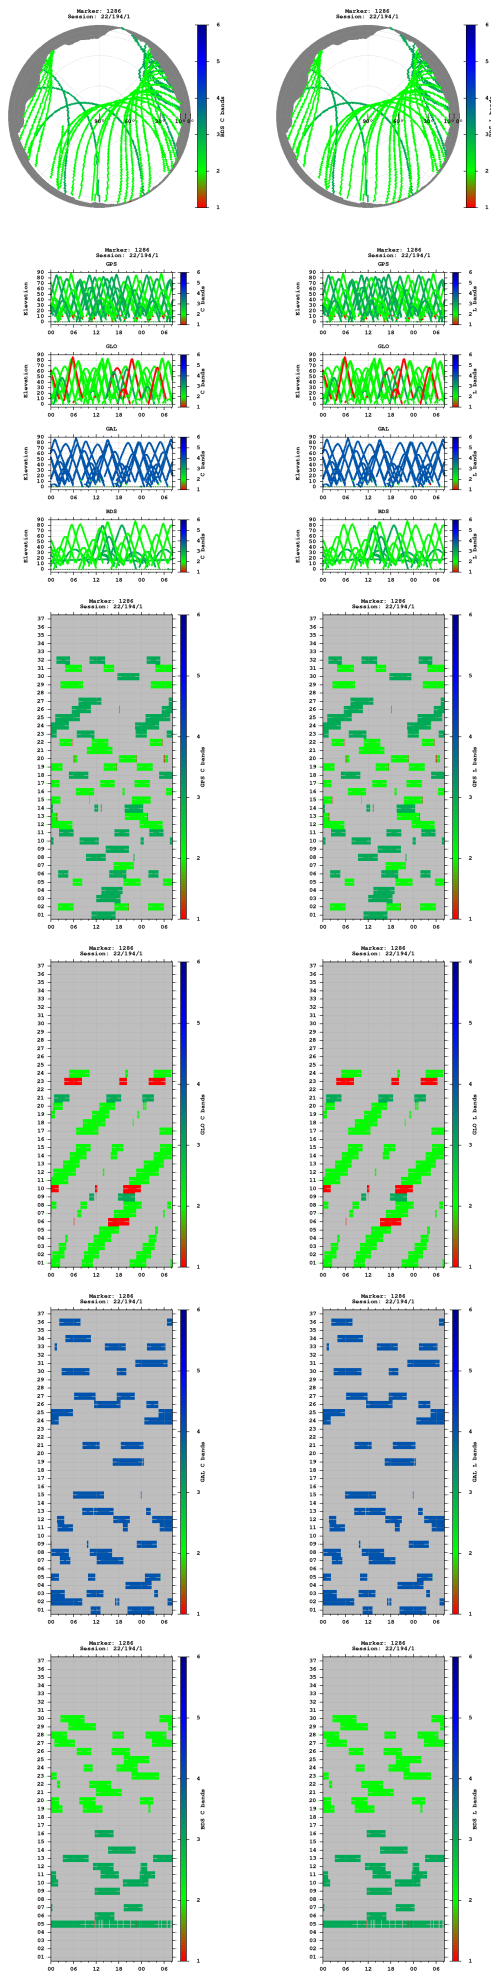


Observations




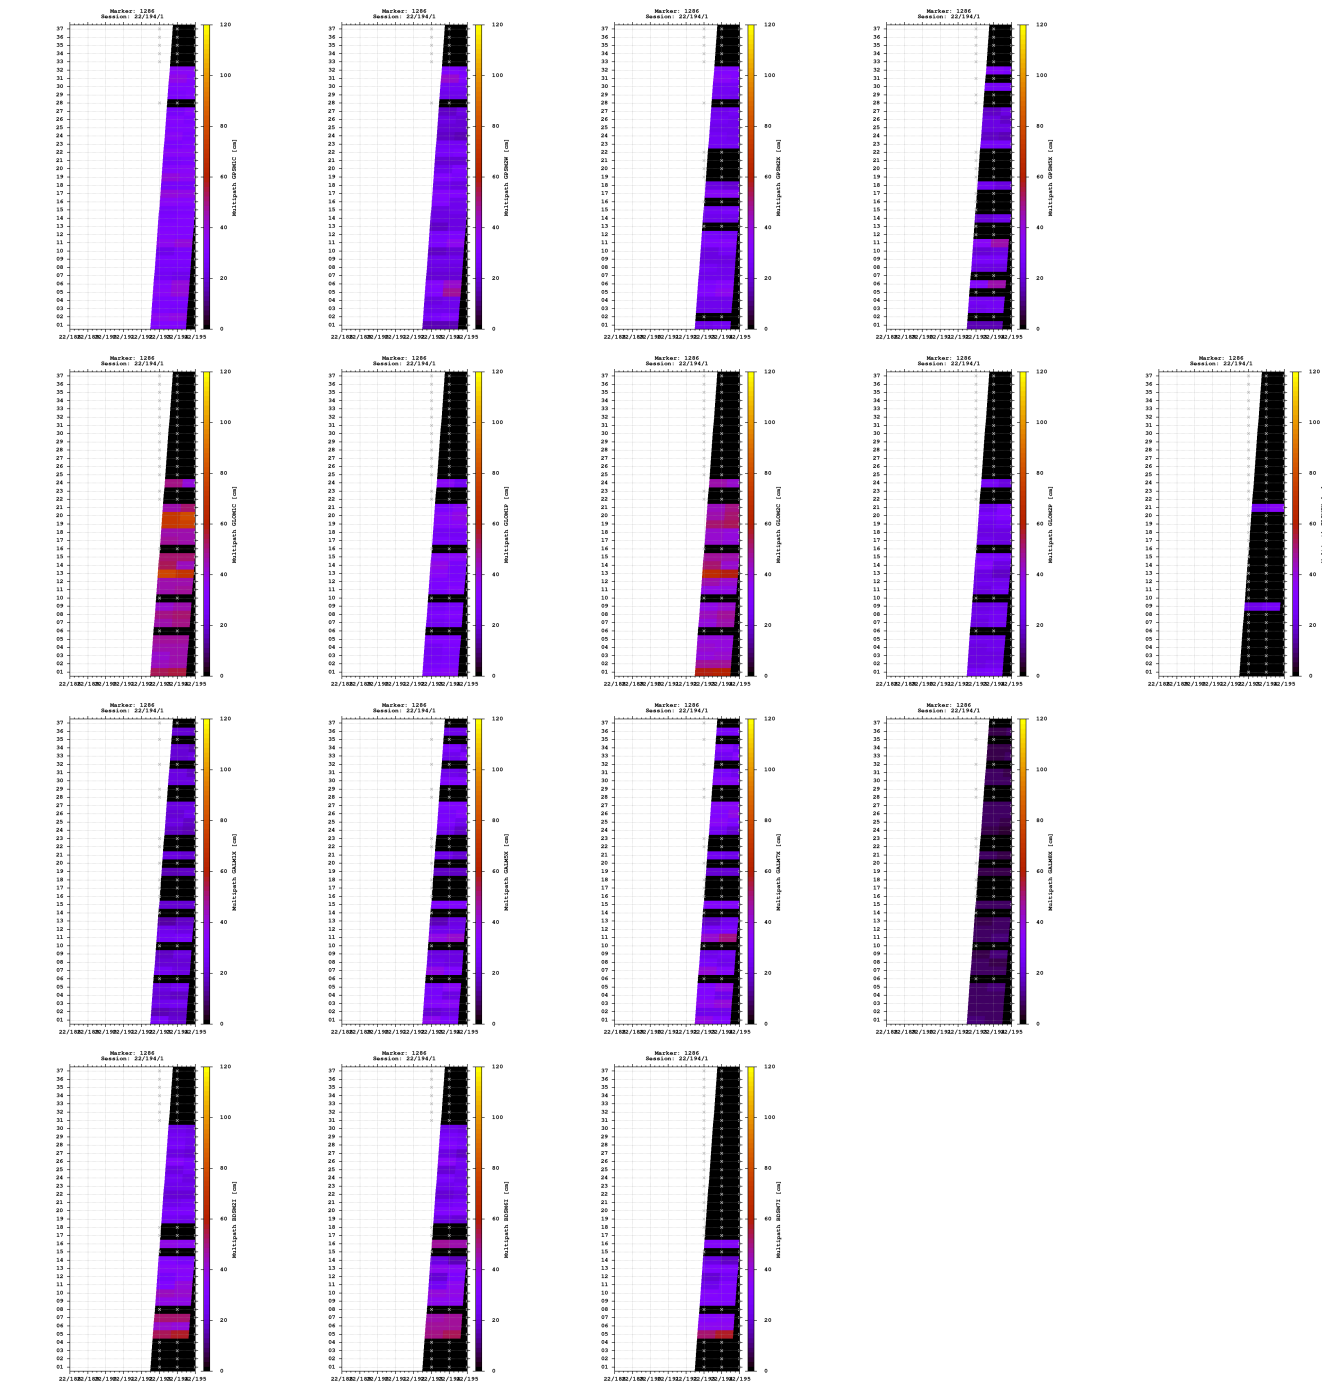


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

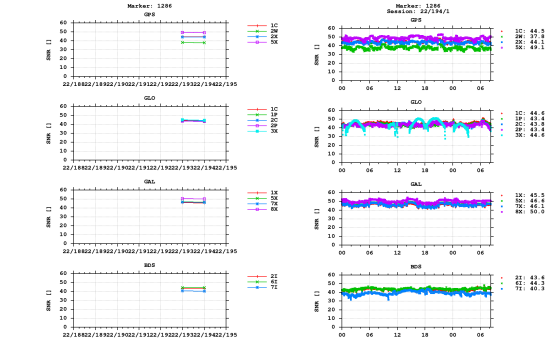


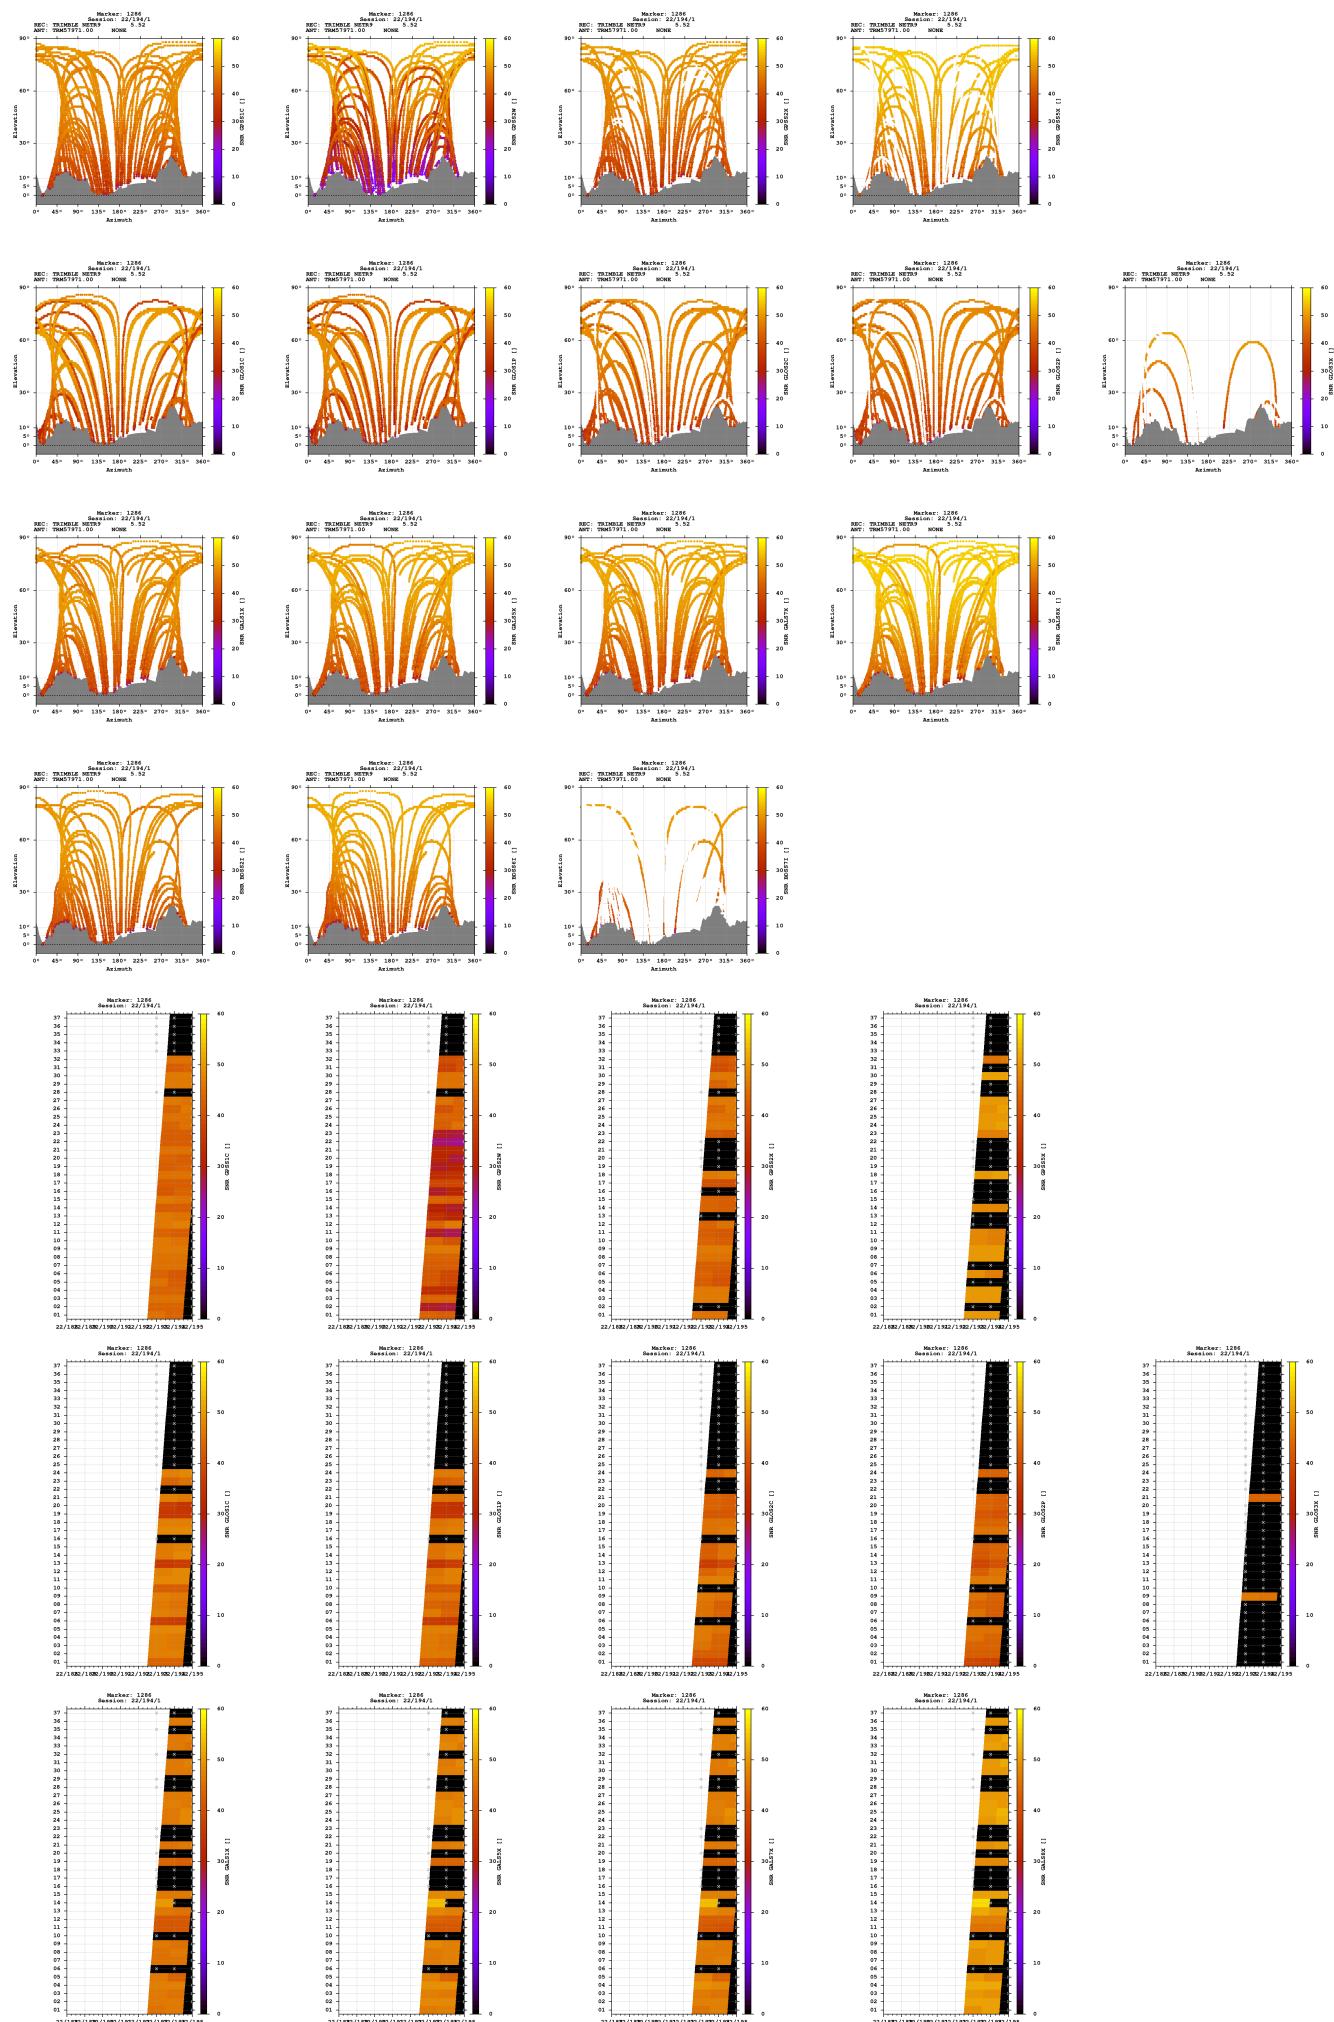

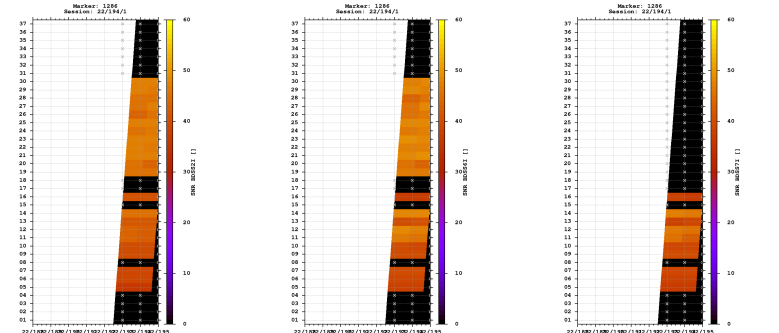



Estimates

2022-07-12 09:28:30	GPS	4377643.8004	559388.1330	4592525.9029	46.332668659	7.281959030	2307.1463
2022-07-12 09:28:30	GLO	4377643.7614	559388.0605	4592525.6208	46.332667220	7.281958160	2306.9092
2022-07-12 09:28:30	GAL	4377643.1004	559388.0436	4592525.5896	46.332671306	7.281959030	2306.4324
2022-07-12 09:28:30	BDS	4377640.0591	559386.1861	4592526.3801	46.332697370	7.281940114	2304.7587

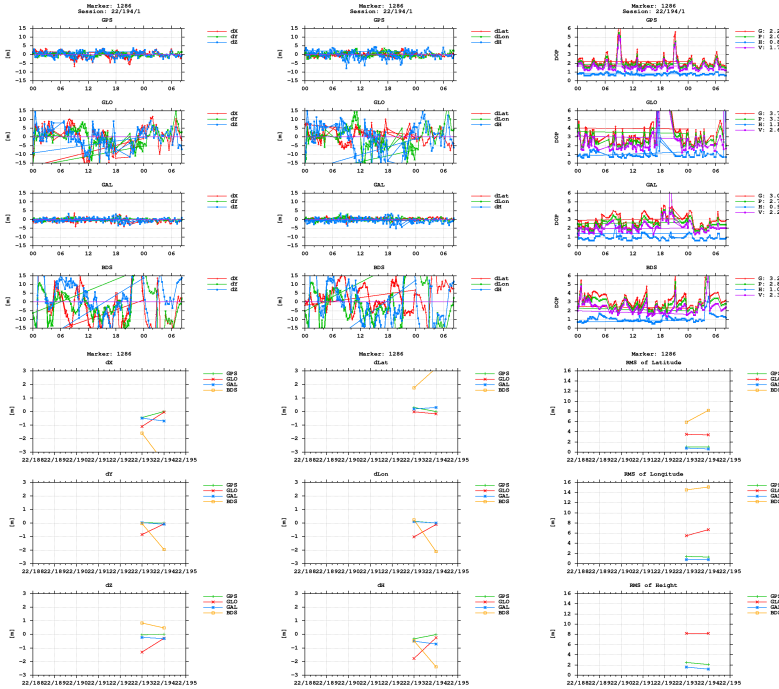

BNC

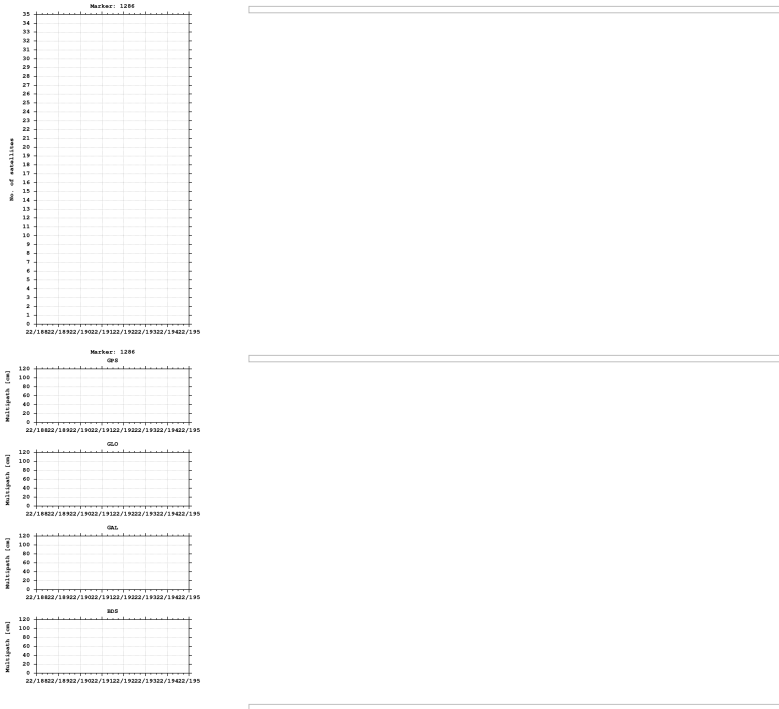

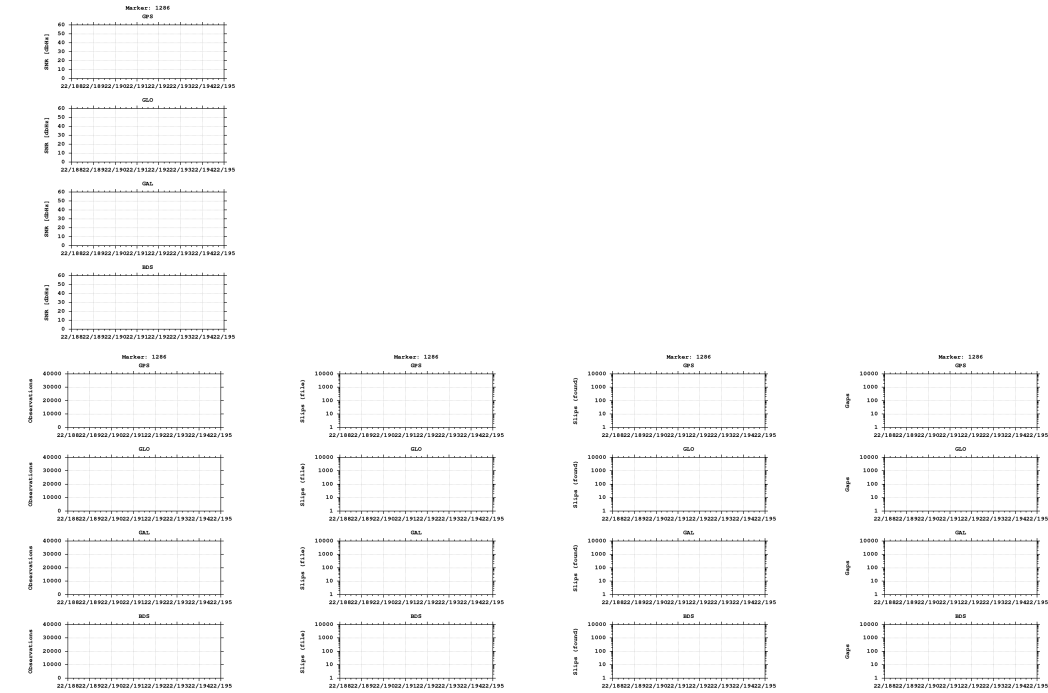

Equipment

2022-07-12 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)