


GNSS observation file monitoring for 0513


Last RINEX file: 05131931.22O
RINEX version: 3.02
Marker: 1287
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

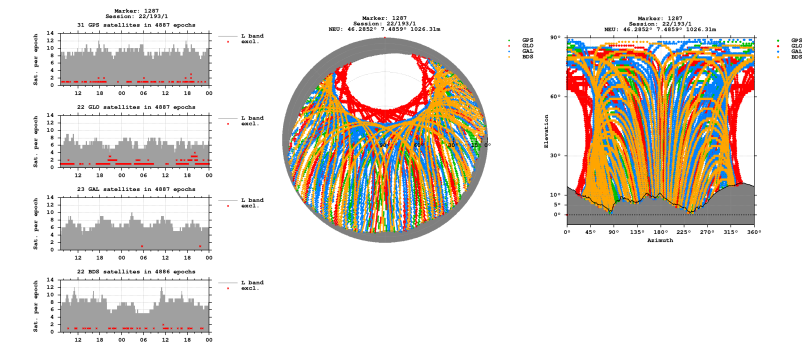


Bands

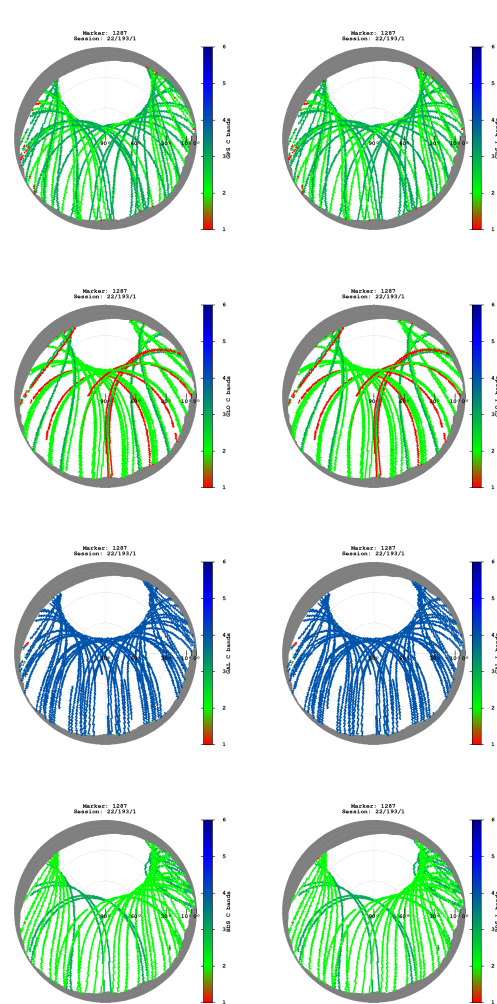


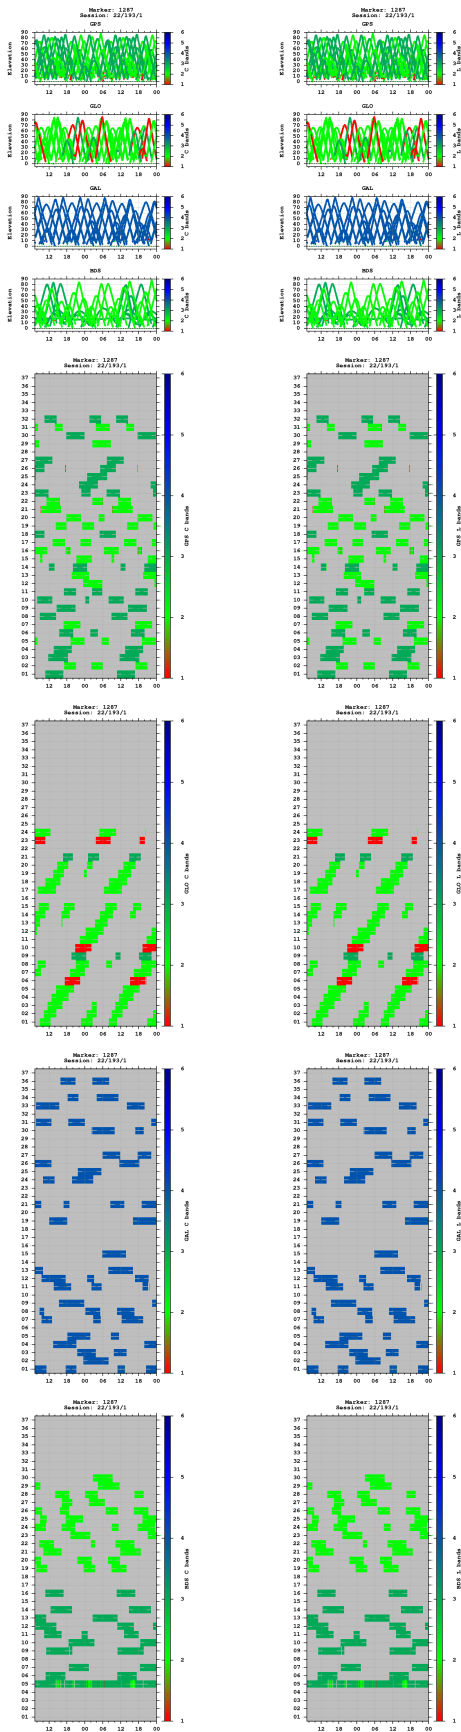


Multipath

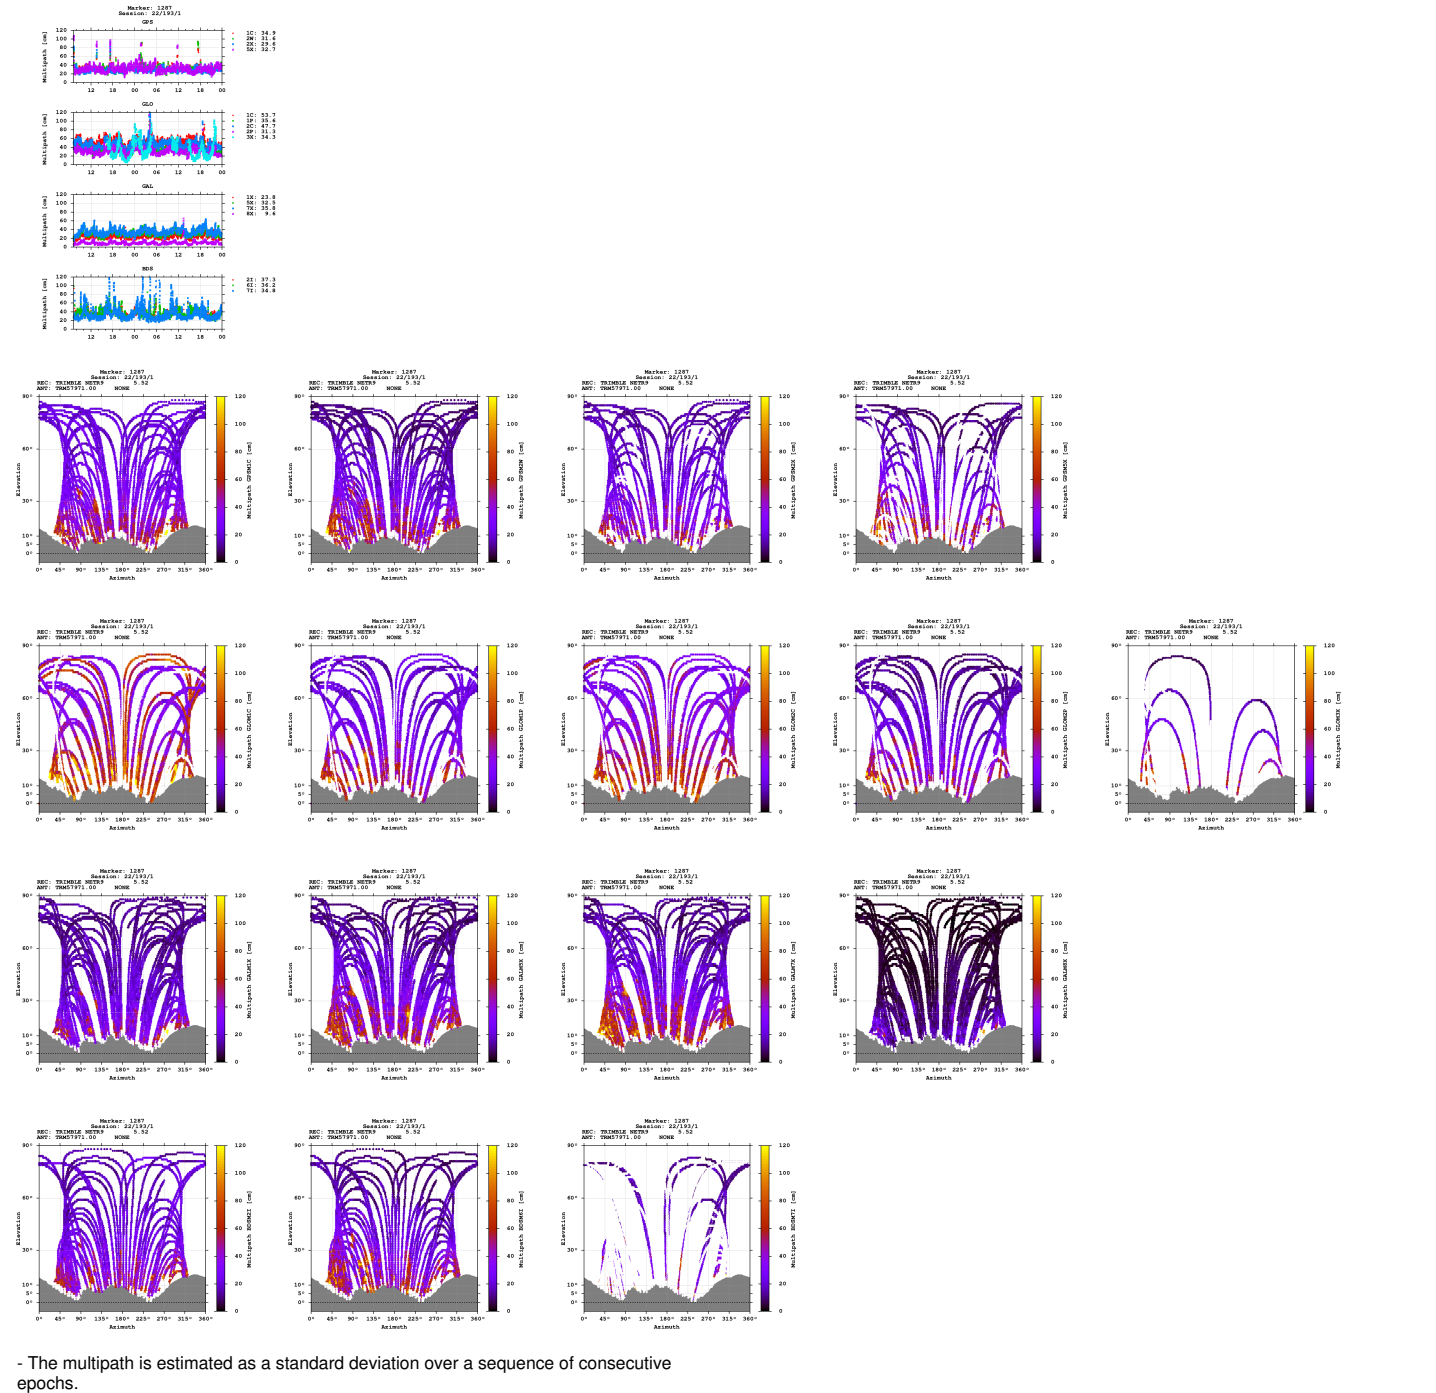


Signal-to-noise ratio

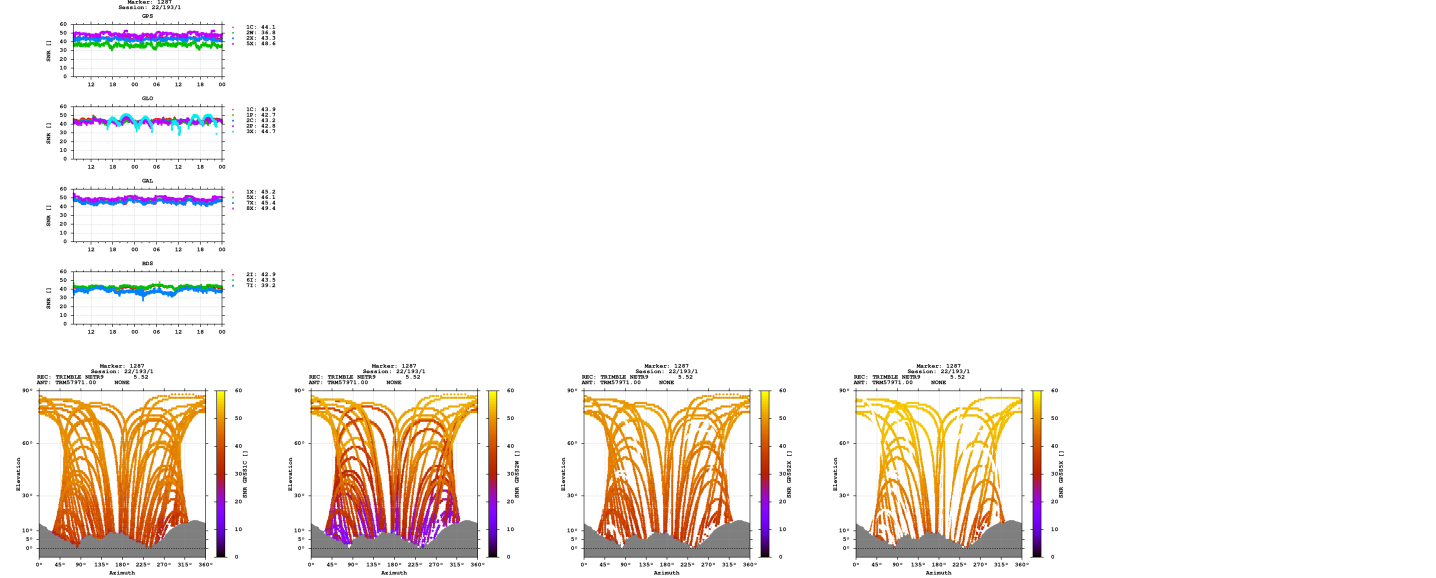

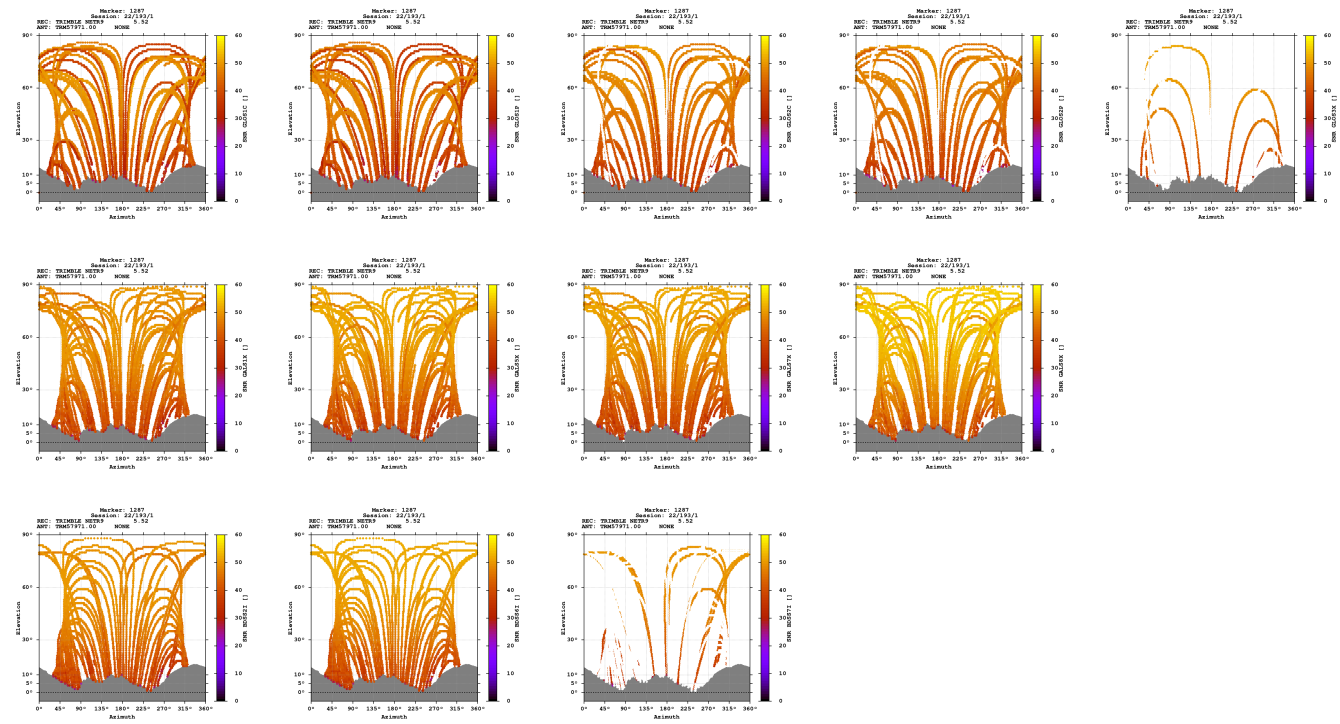

Estimates

2022-07-12 07:16:30	GPS	4378535.2750	575347.4095	4587950.5279	46.285155232	7.485880257	1026.3077
2022-07-12 07:16:30	GLO	4378534.6760	575346.6928	4587949.3371	46.285152298	7.485872050	1024.9721
2022-07-12 07:16:30	GAL	4378535.4002	575347.2957	4587950.5619	46.285154732	7.485878582	1026.4079
2022-07-12 07:16:30	BDS	4378535.5283	575348.1760	4587952.1228	46.285162864	7.485889690	1027.7031

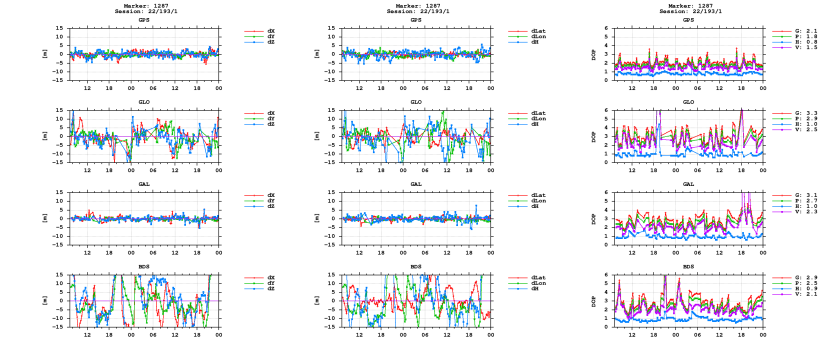

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)