


GNSS observation file monitoring for 0514


Last RINEX file: 05141921.22O
RINEX version: 3.02
Marker: 1288
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

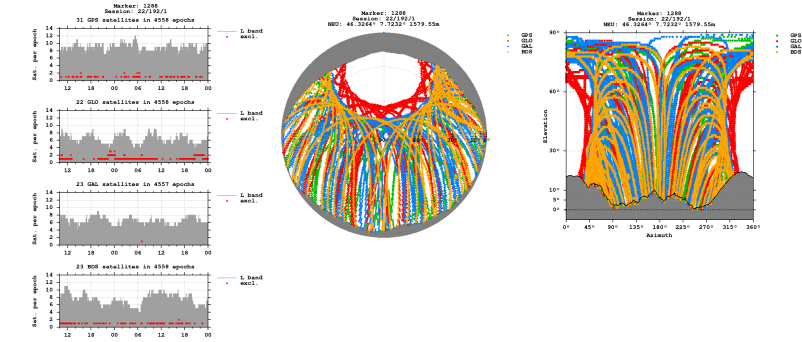


Bands

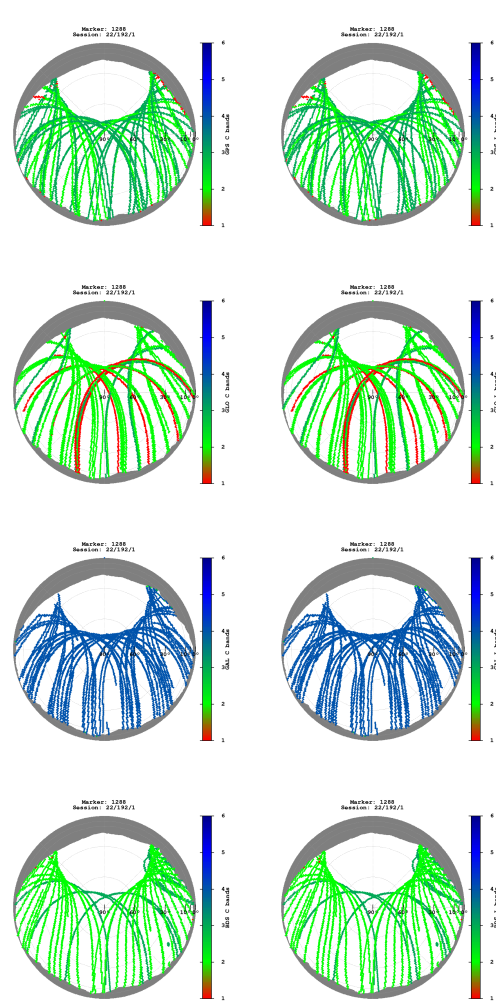

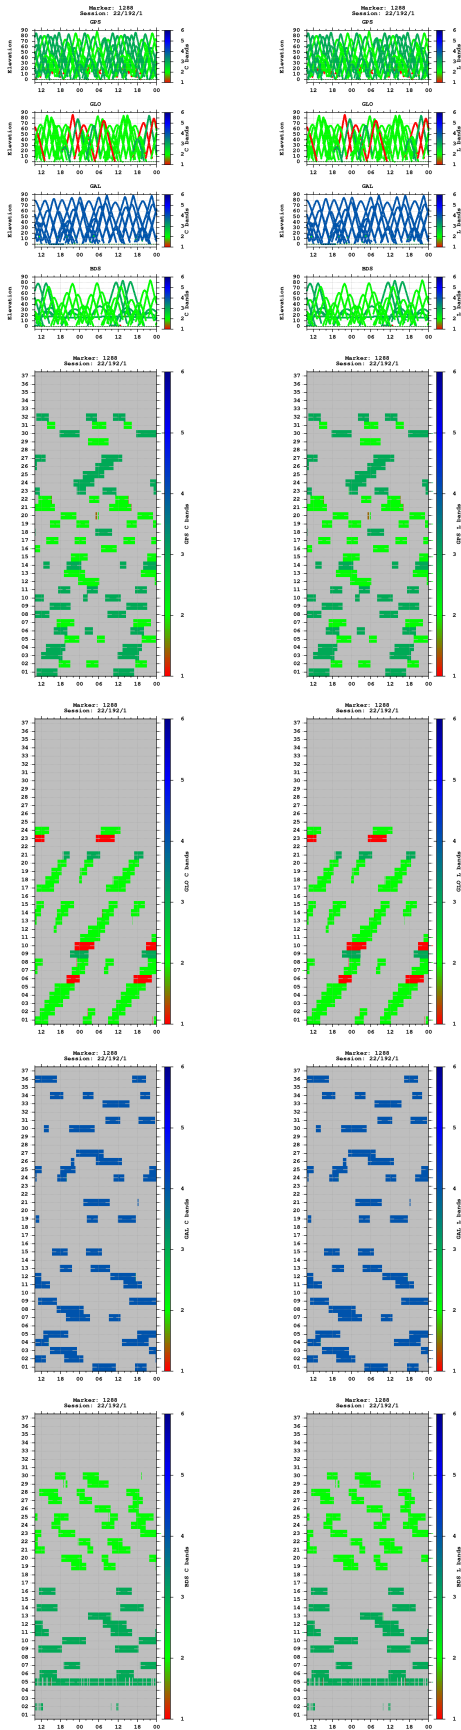



Multipath

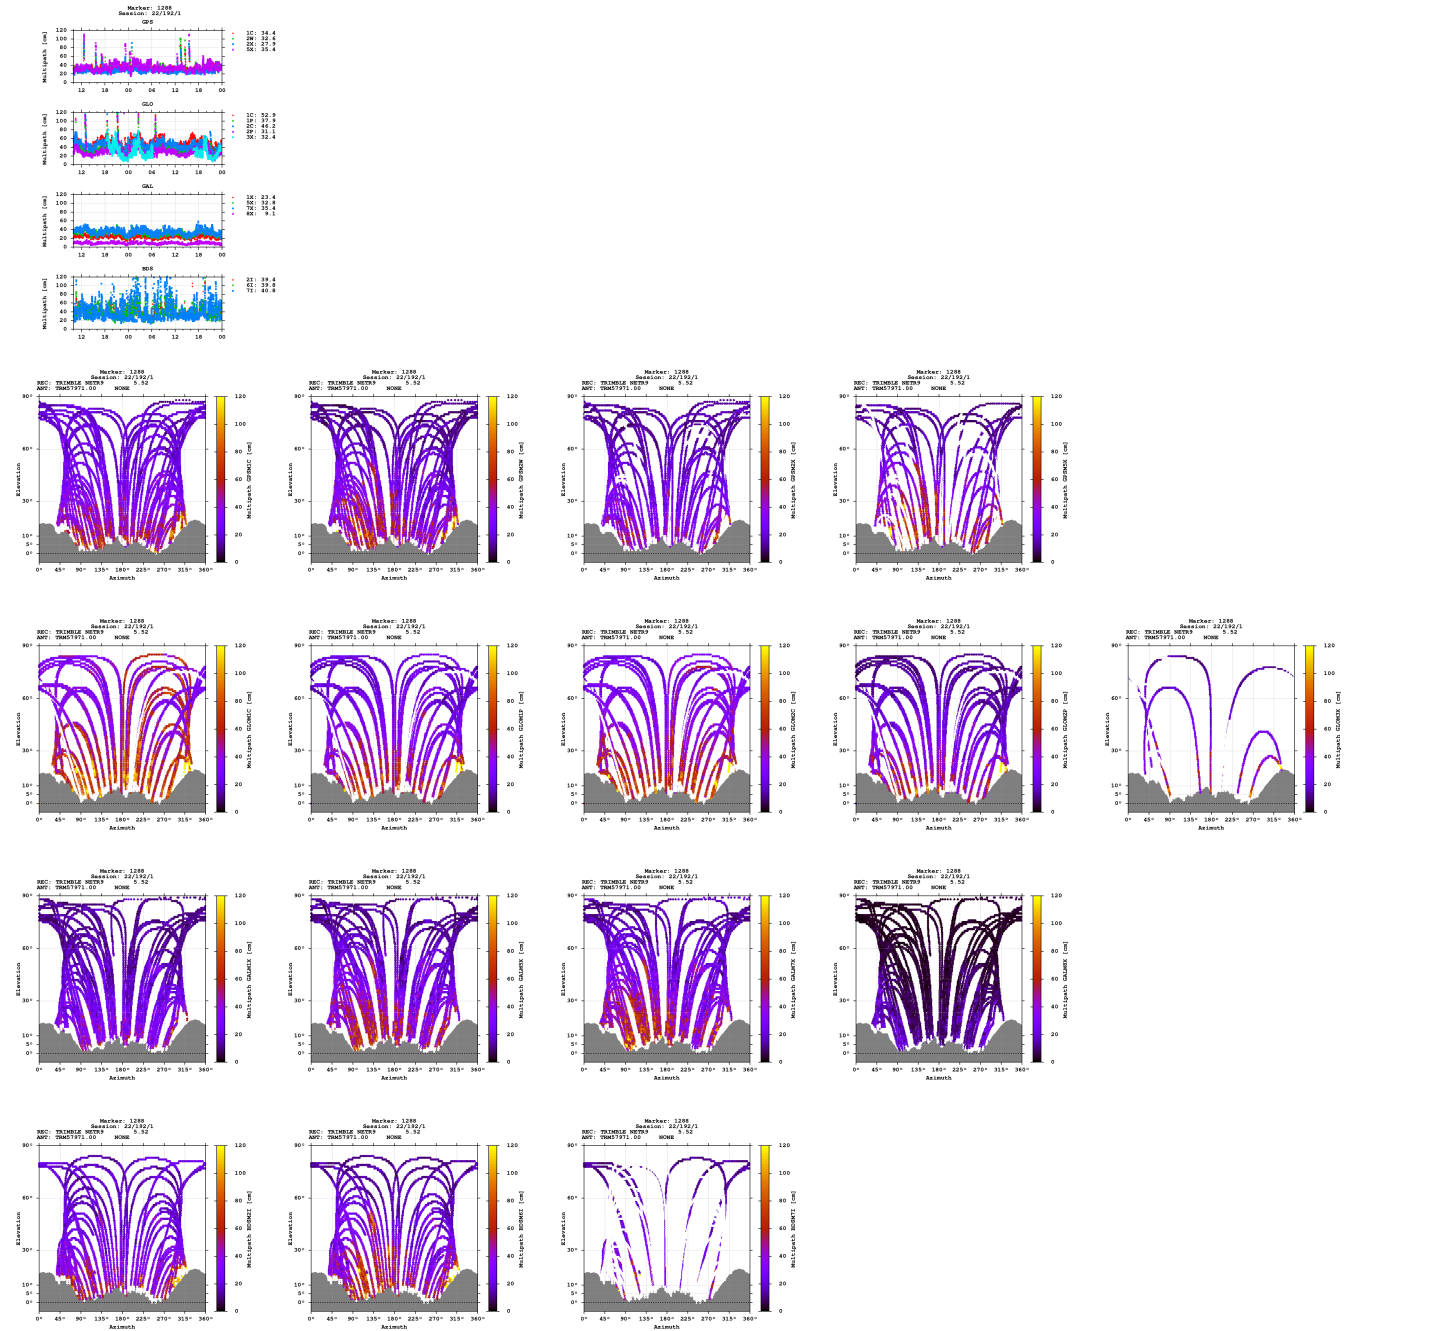

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

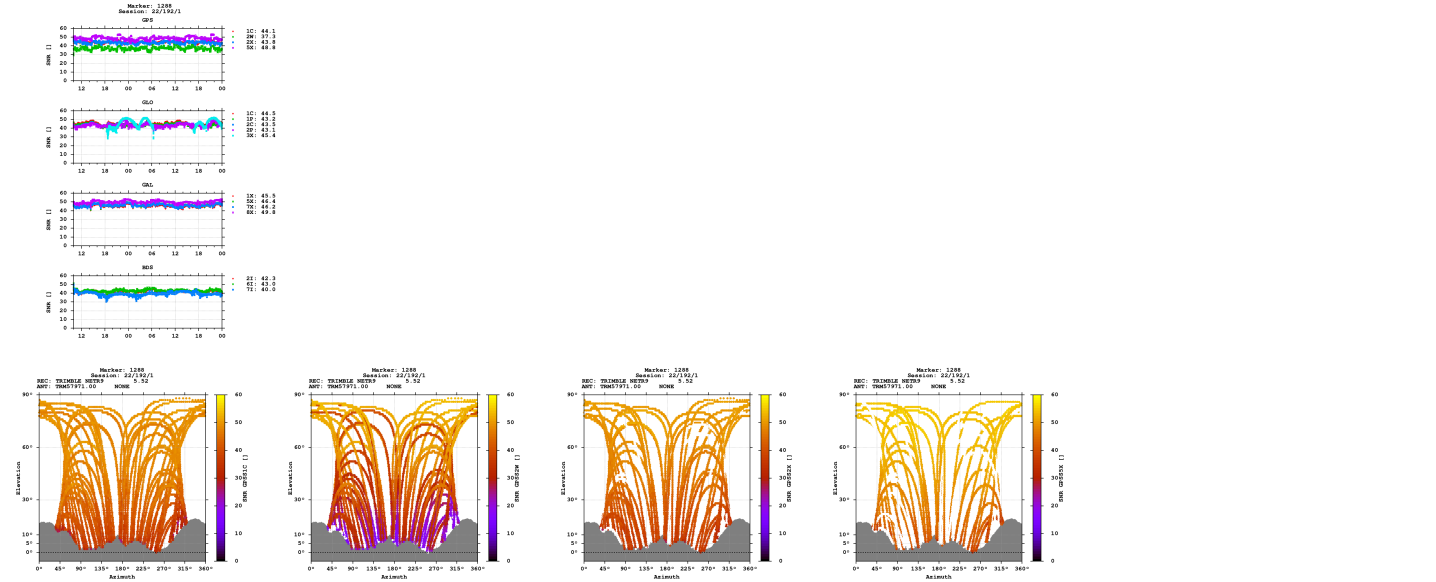

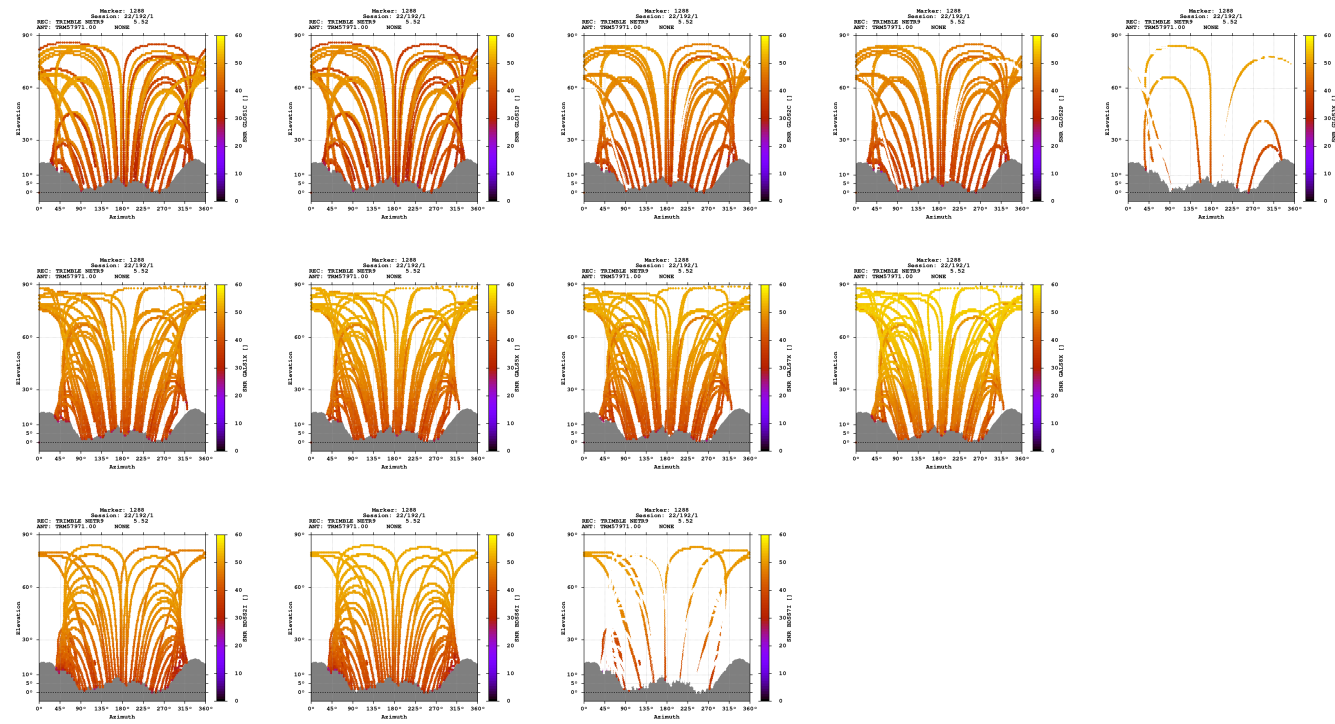

Estimates

2022-07-11 10:01:00	GPS	4373204.8763	593082.2195	4591521.3986	46.326440126	7.723180318	1579.5543
2022-07-11 10:01:00	GLO	4373205.5939	593081.1442	4591520.8402	46.326432972	7.723165231	1579.5417
2022-07-11 10:01:00	GAL	4373204.6602	593082.1788	4591521.0875	46.326439623	7.723180170	1579.1776
2022-07-11 10:01:00	BDS	4373203.9159	593081.6864	4591521.4778	46.326447275	7.723175134	1578.9049

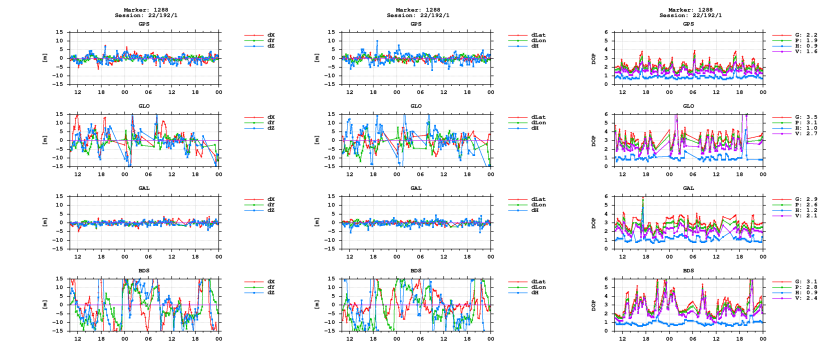

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)