


GNSS observation file monitoring for 0514


Last RINEX file: 05141941.220
RINEX version: 3.02
Marker: 1268
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

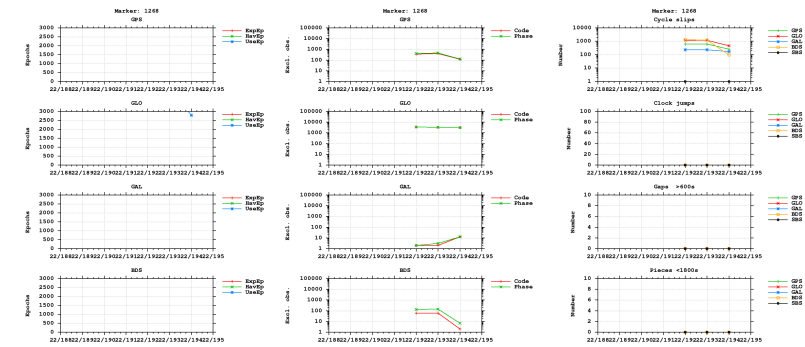



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

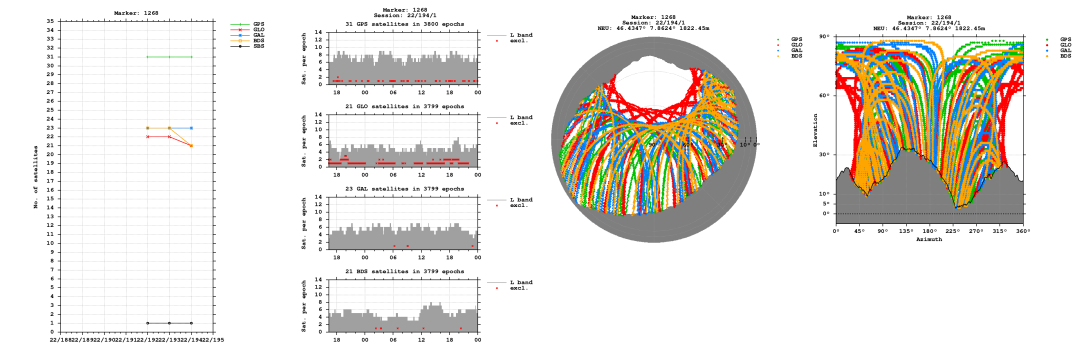


Bands

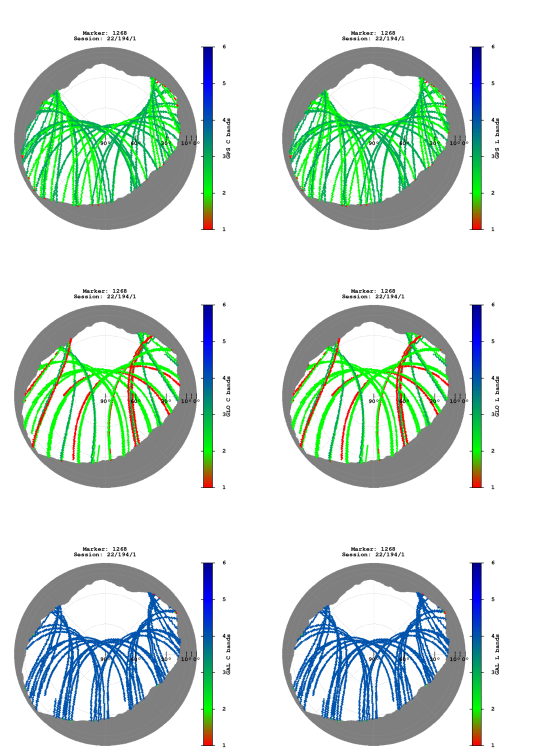


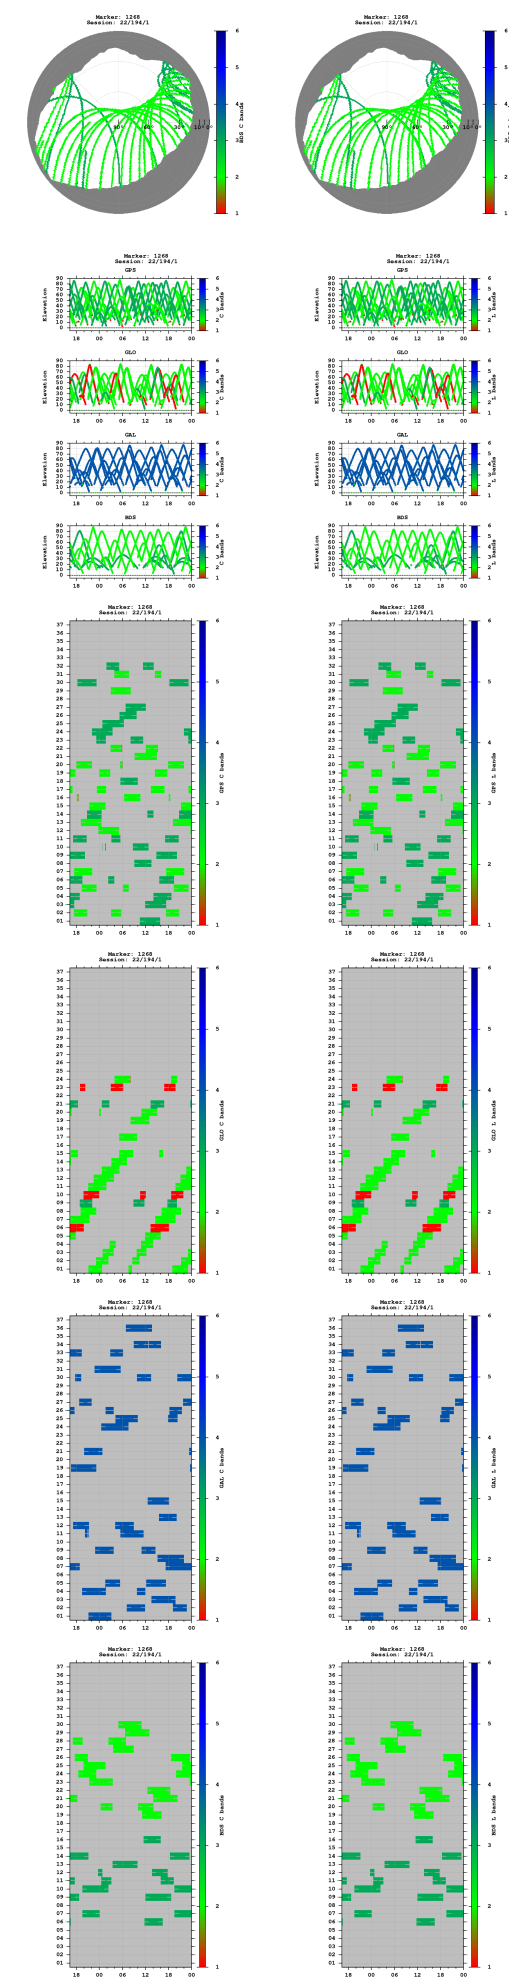


Observations

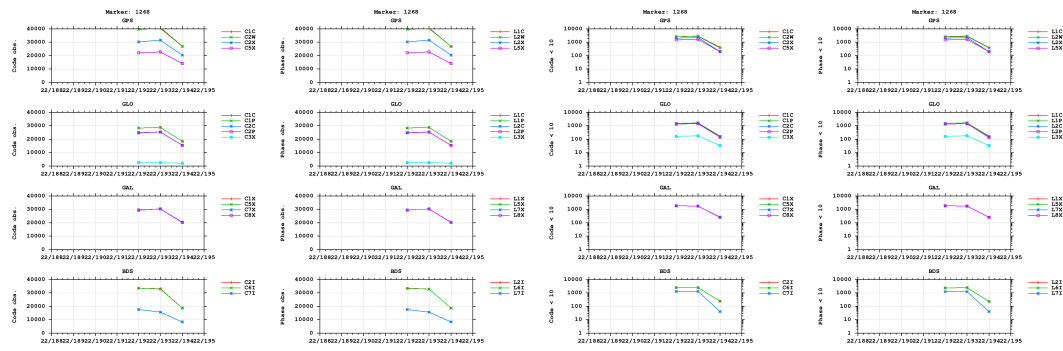



Multipath

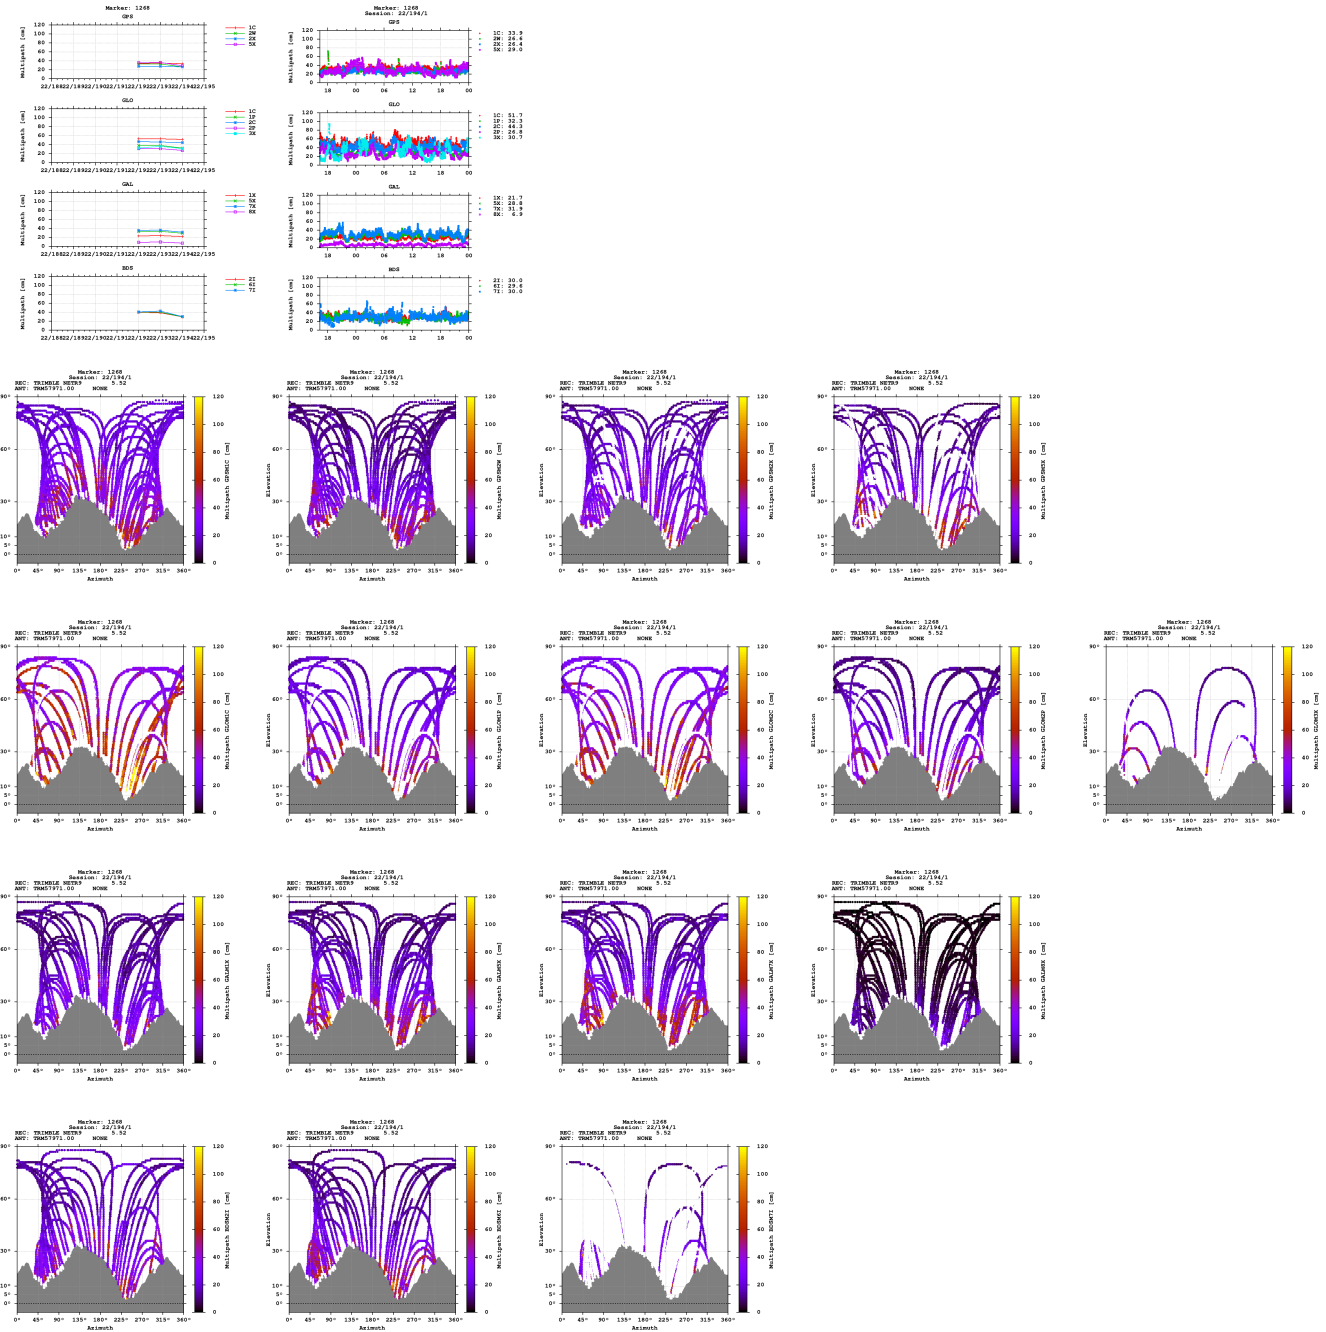


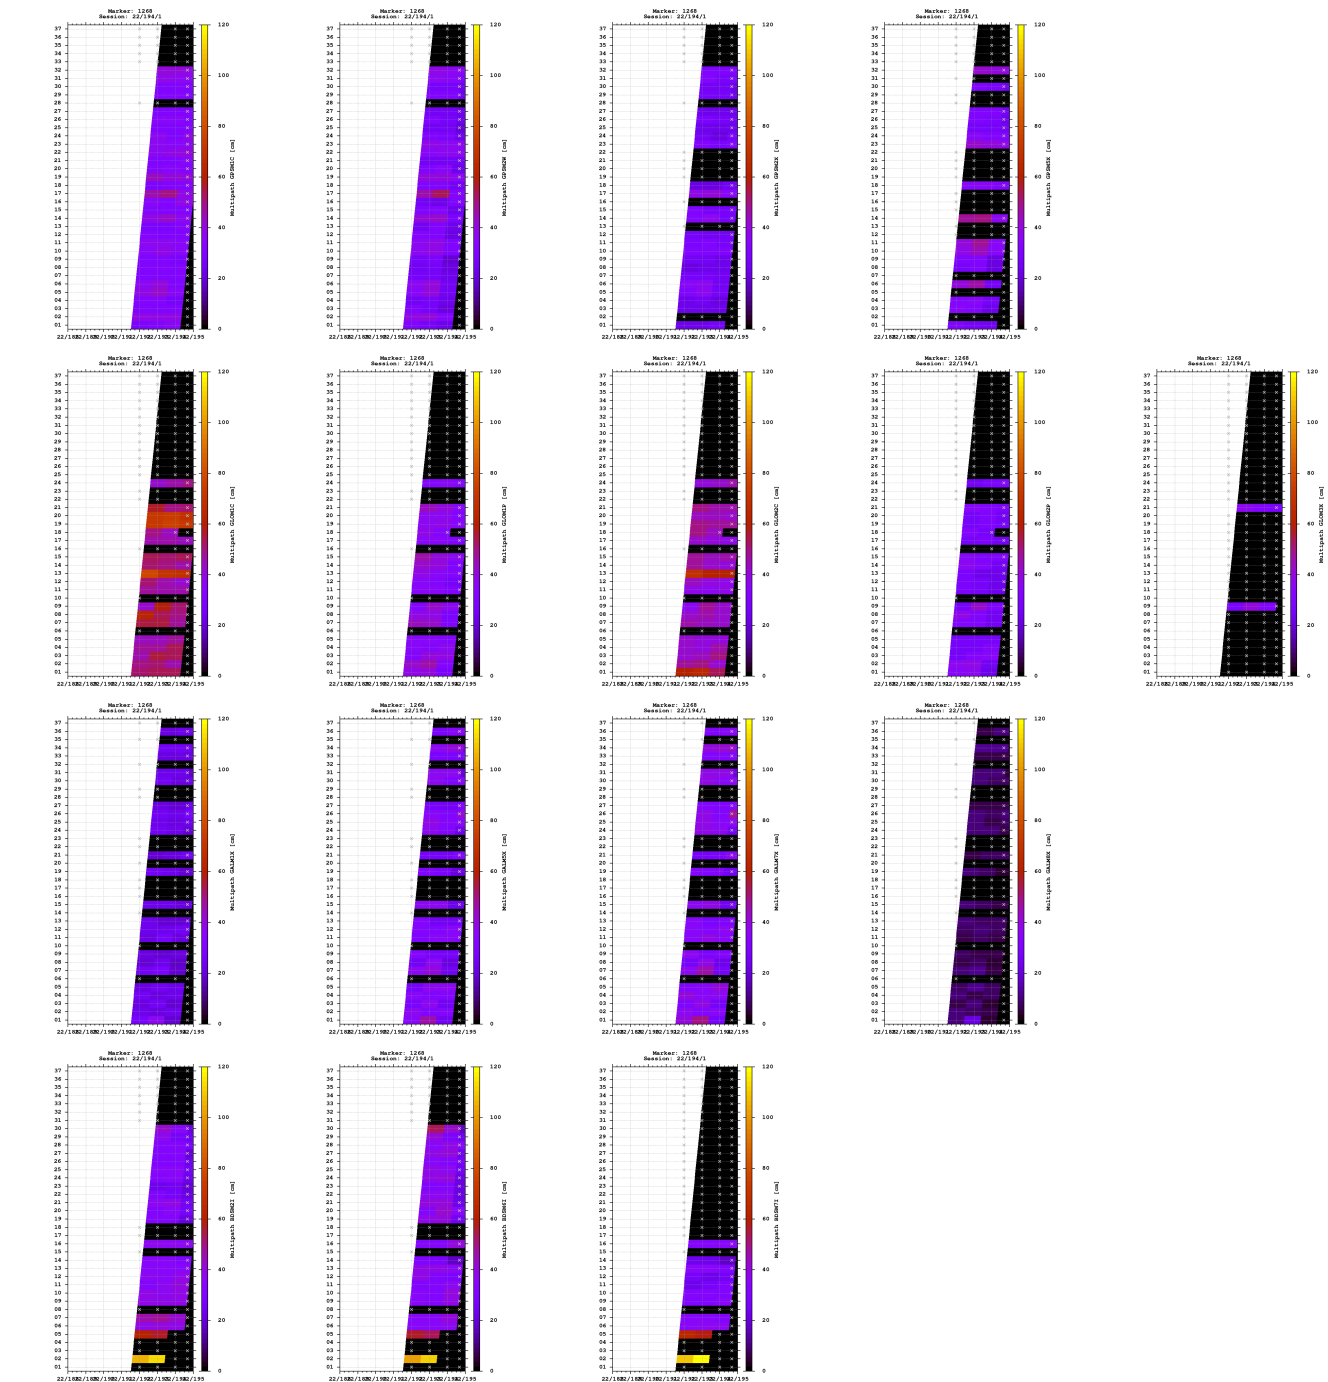

Signal-to-noise ratio

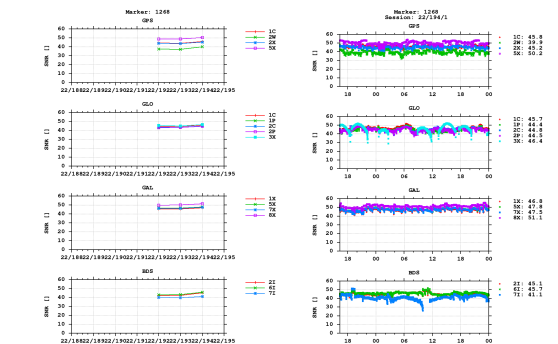


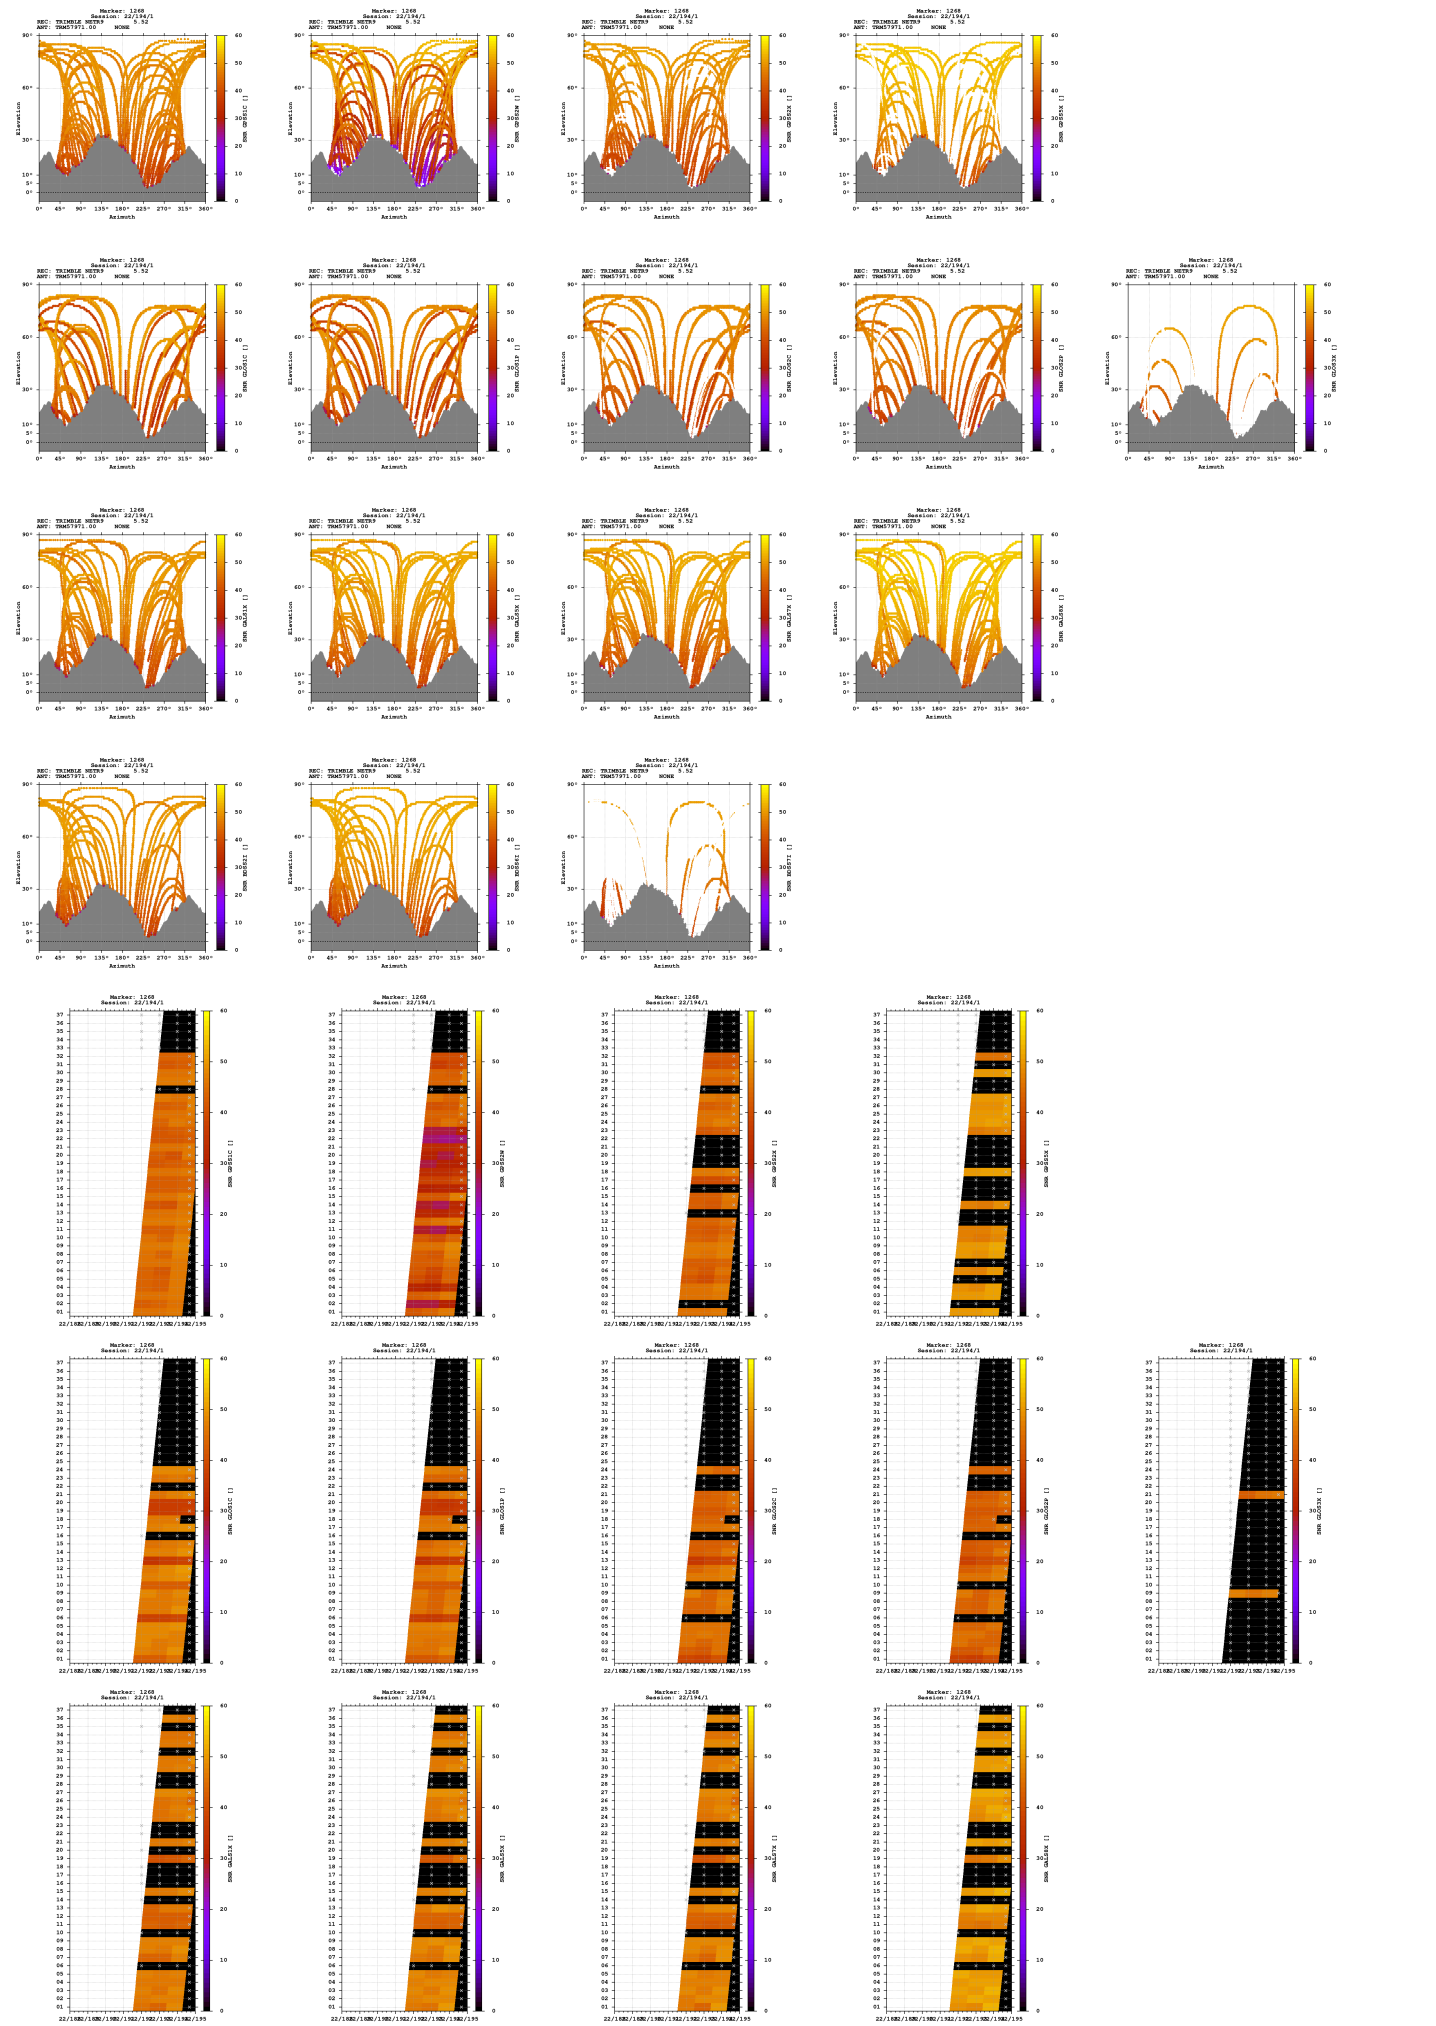

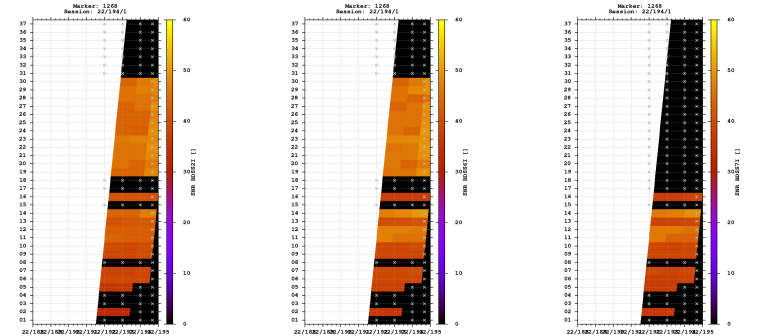



Estimates

2022-07-13 16:20:00	GPS	4363288.6031	602535.3691	4599997.7838	46.434653944	7.862365103	1822.4478
2022-07-13 16:20:00	GLO	4363291.2596	602536.3840	4599998.1102	46.434637914	7.862373453	1824.5935
2022-07-13 16:20:00	GAL	4363288.7236	602535.3674	4599997.7358	46.434652871	7.862364867	1822.4951
2022-07-13 16:20:00	BDS	4363291.0854	602538.4616	4599996.6448	46.434628103	7.862400534	1823.6086

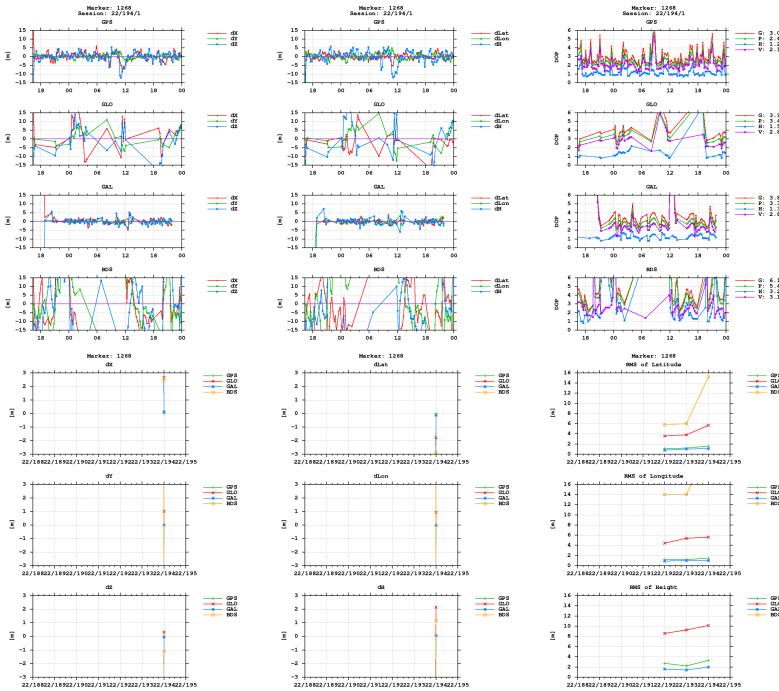

BNC

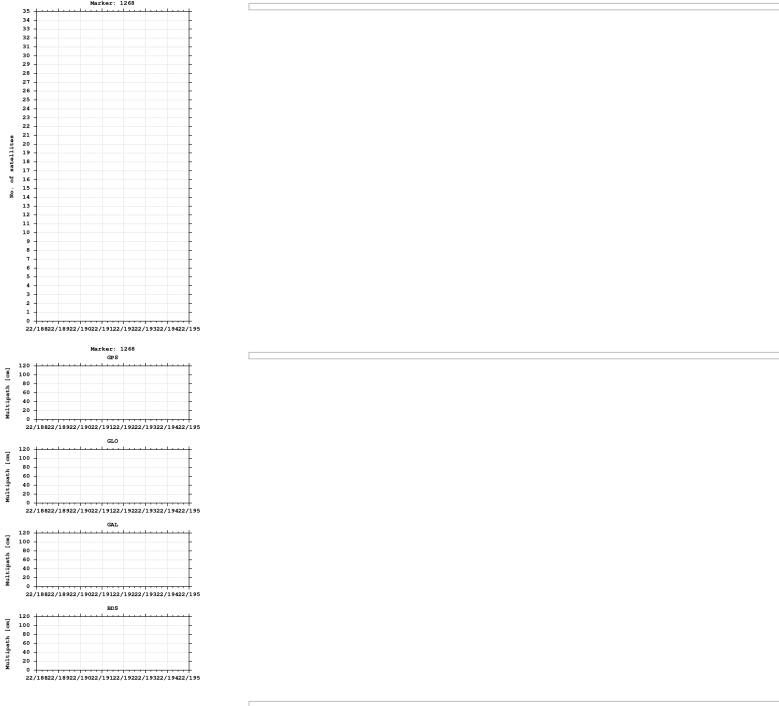

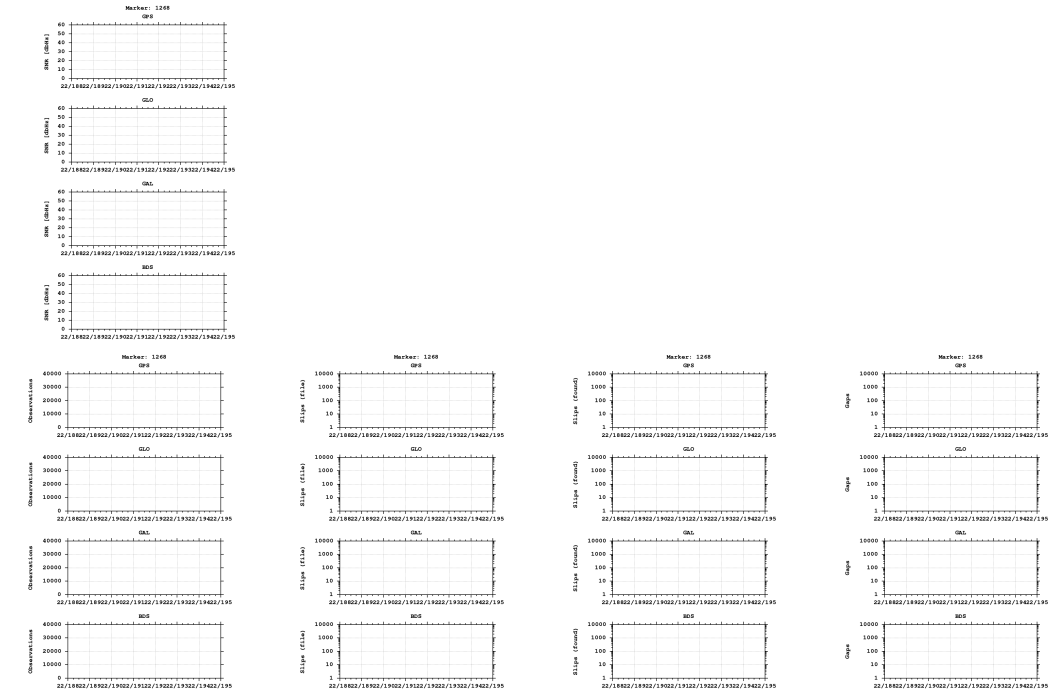

Equipment

2022-07-11 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)