


GNSS observation file monitoring for 0515


Last RINEX file: 05151921.22O
RINEX version: 3.02
Marker: 1206
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

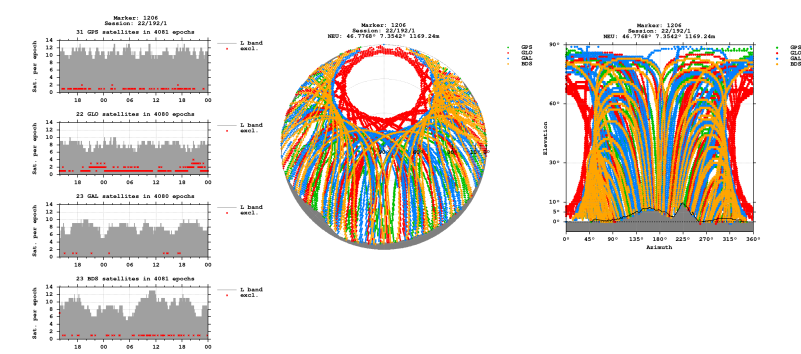


Bands

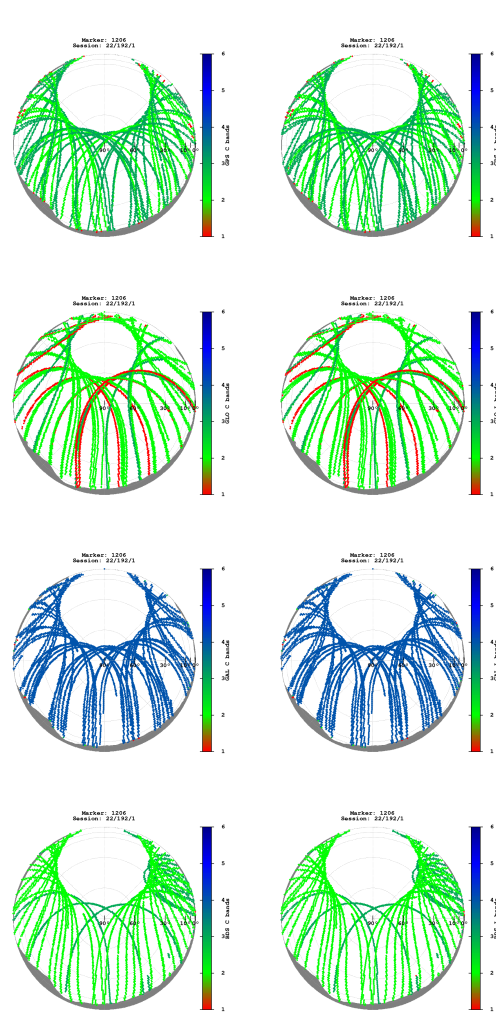


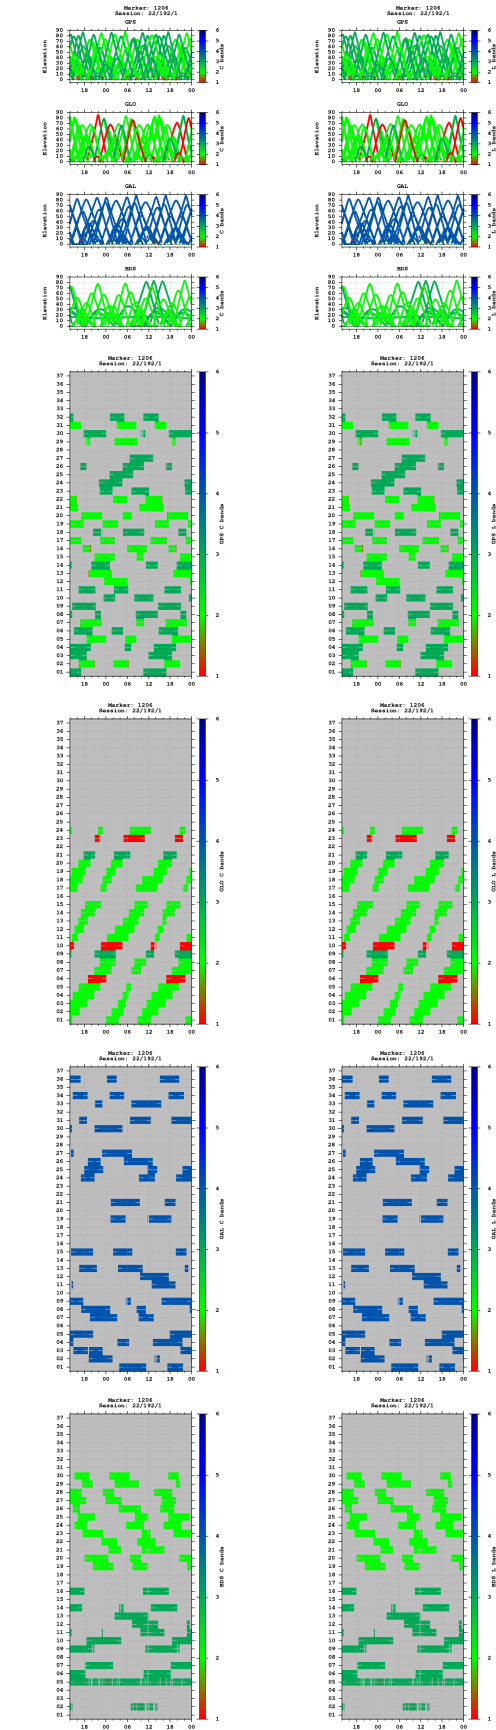


Multipath

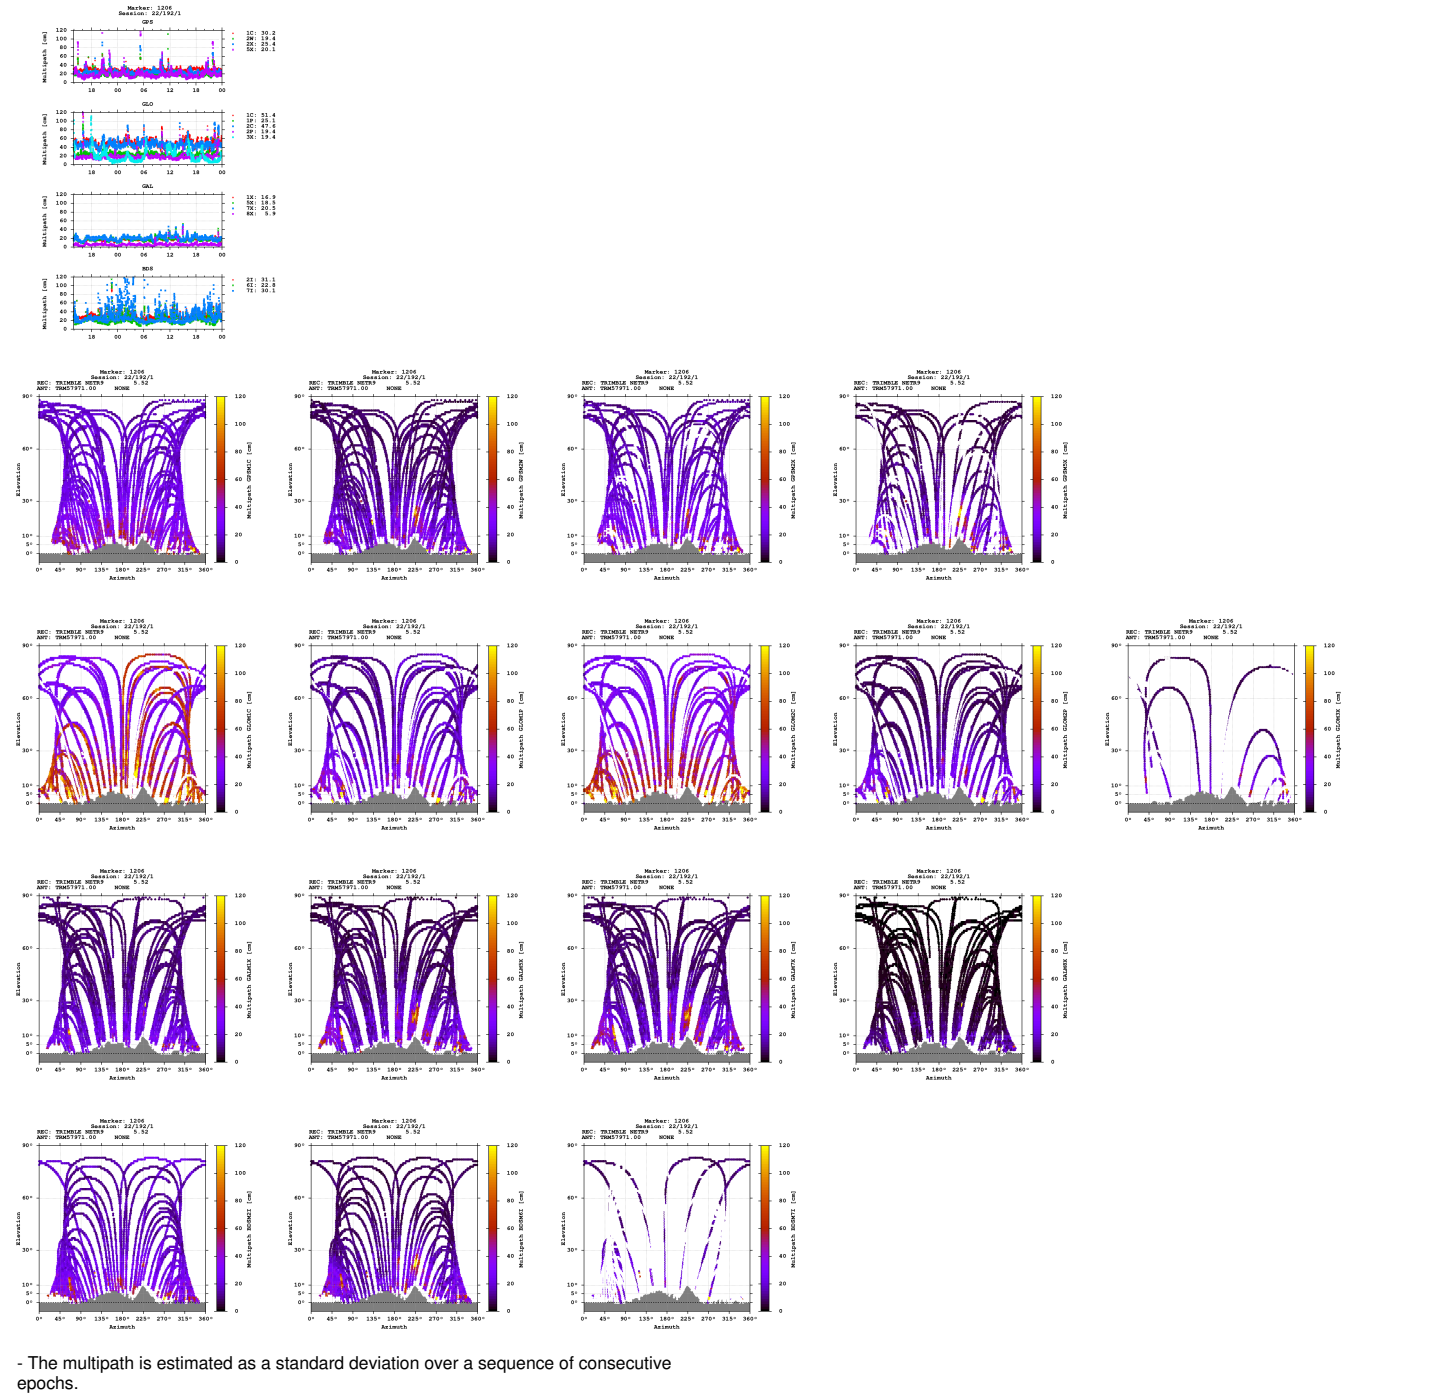


Signal-to-noise ratio

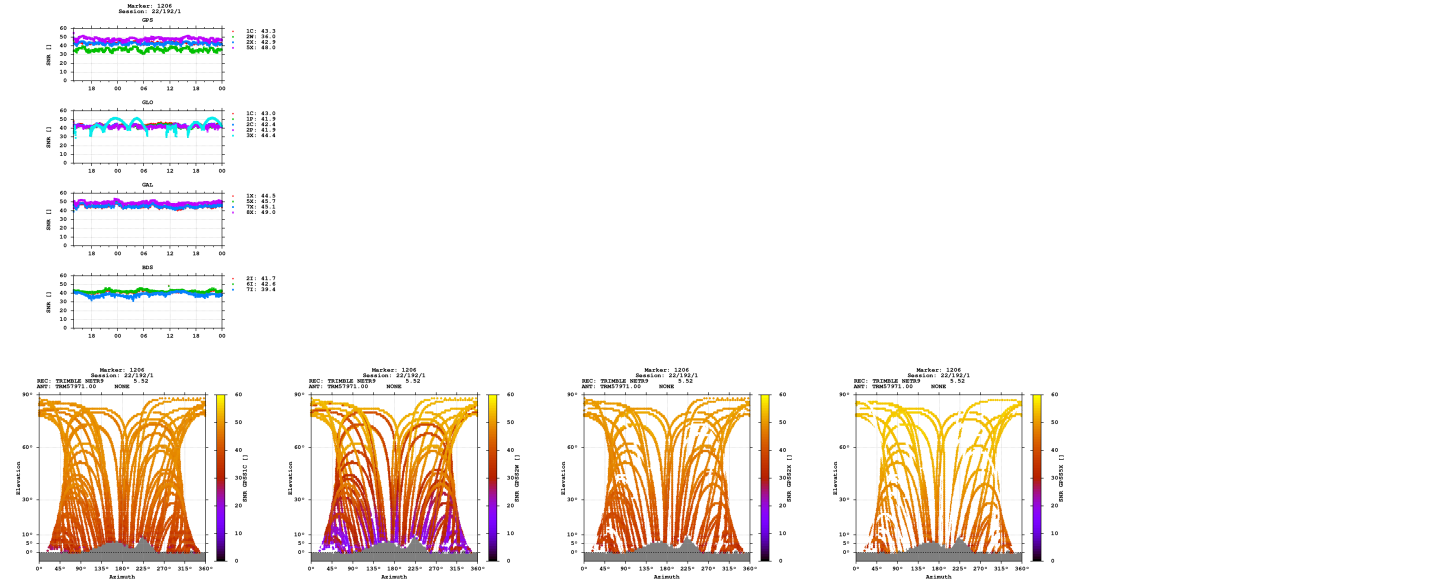

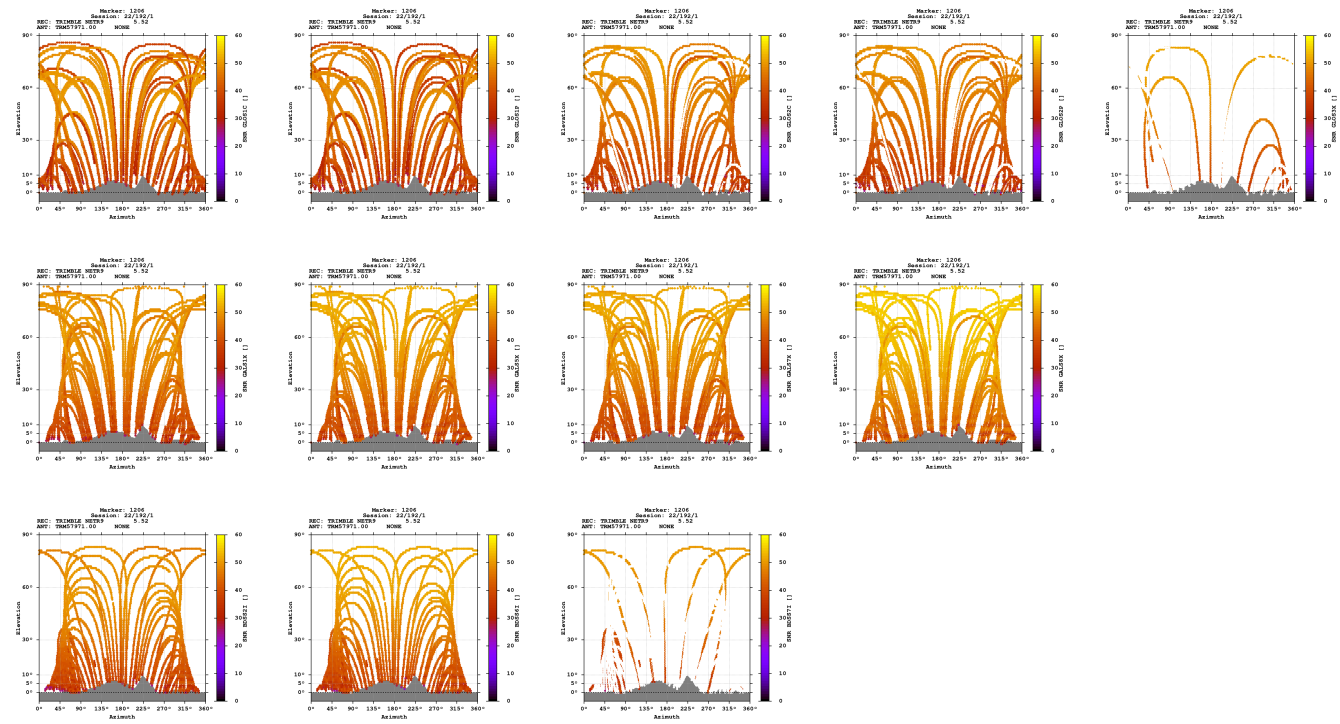

Estimates

2022-07-11 13:54:30	GPS	4340600.3296	560214.9641	4625658.8251	46.776795314	7.354164653	1169.2421
2022-07-11 13:54:30	GLO	4340600.0541	560214.4191	4625658.6095	46.776796234	7.354158039	1168.8501
2022-07-11 13:54:30	GAL	4340600.1776	560214.8825	4625658.4331	46.776793956	7.354163849	1168.8460
2022-07-11 13:54:30	BDS	4340598.3256	560214.2291	4625659.7838	46.776814862	7.354158468	1168.5151

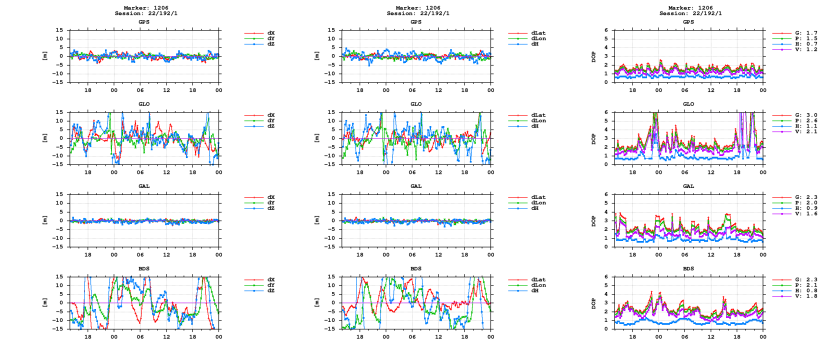

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)