


GNSS observation file monitoring for 0516


Last RINEX file: 05161921.22O
RINEX version: 3.02
Marker: 1208
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

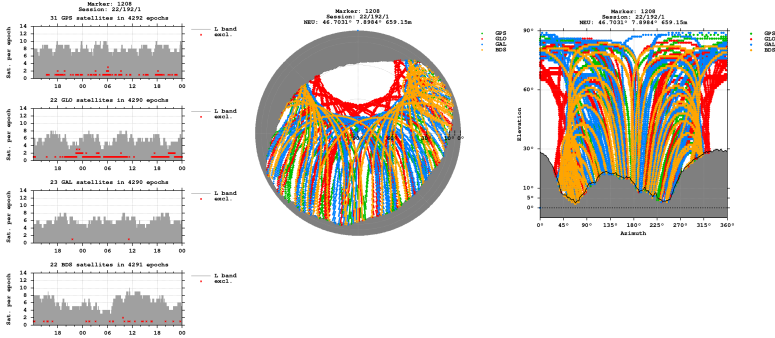


Bands

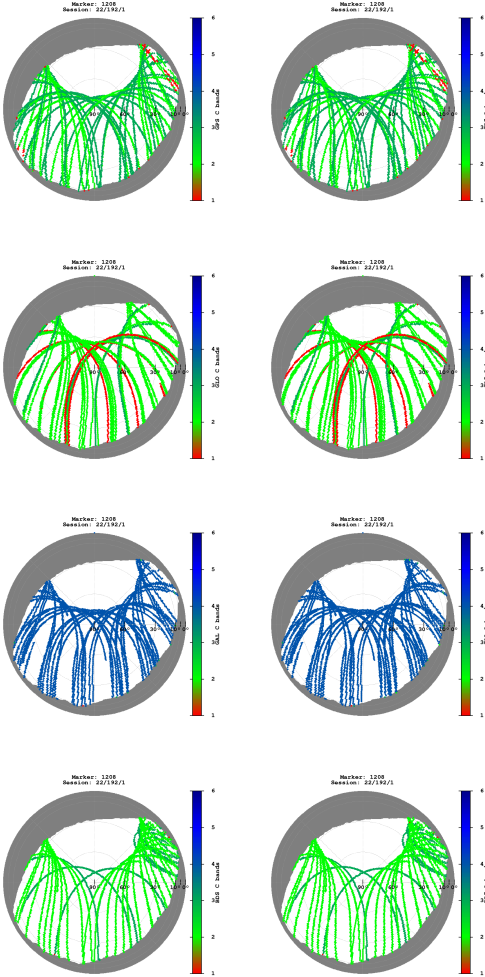

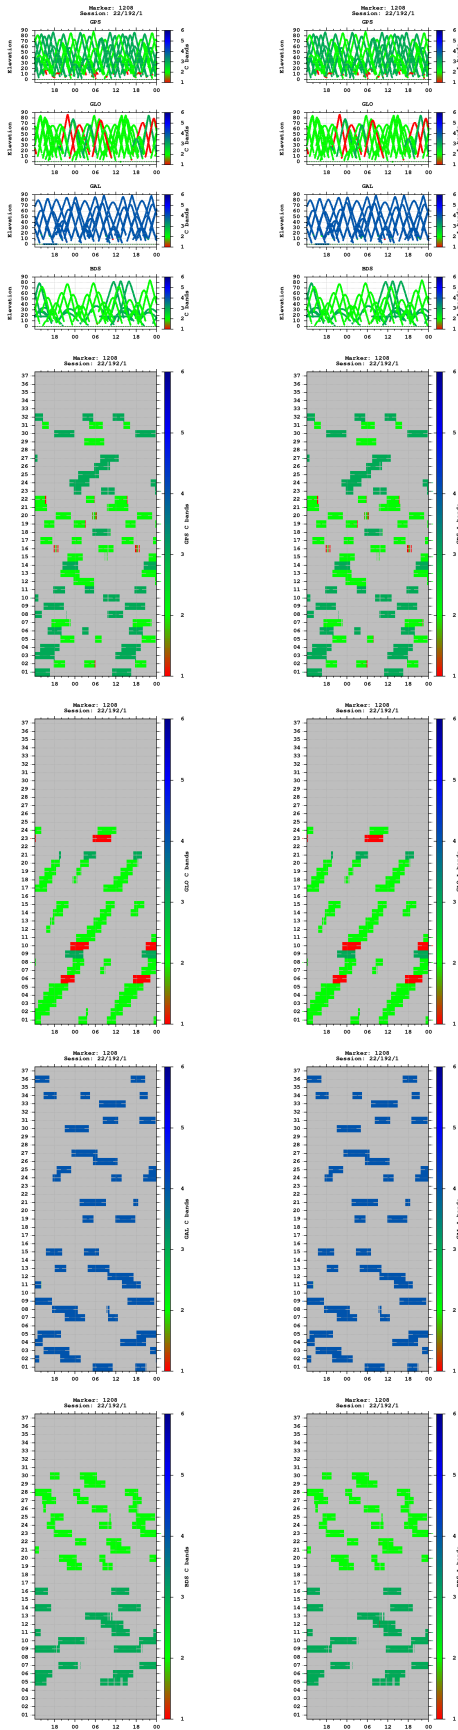



Multipath

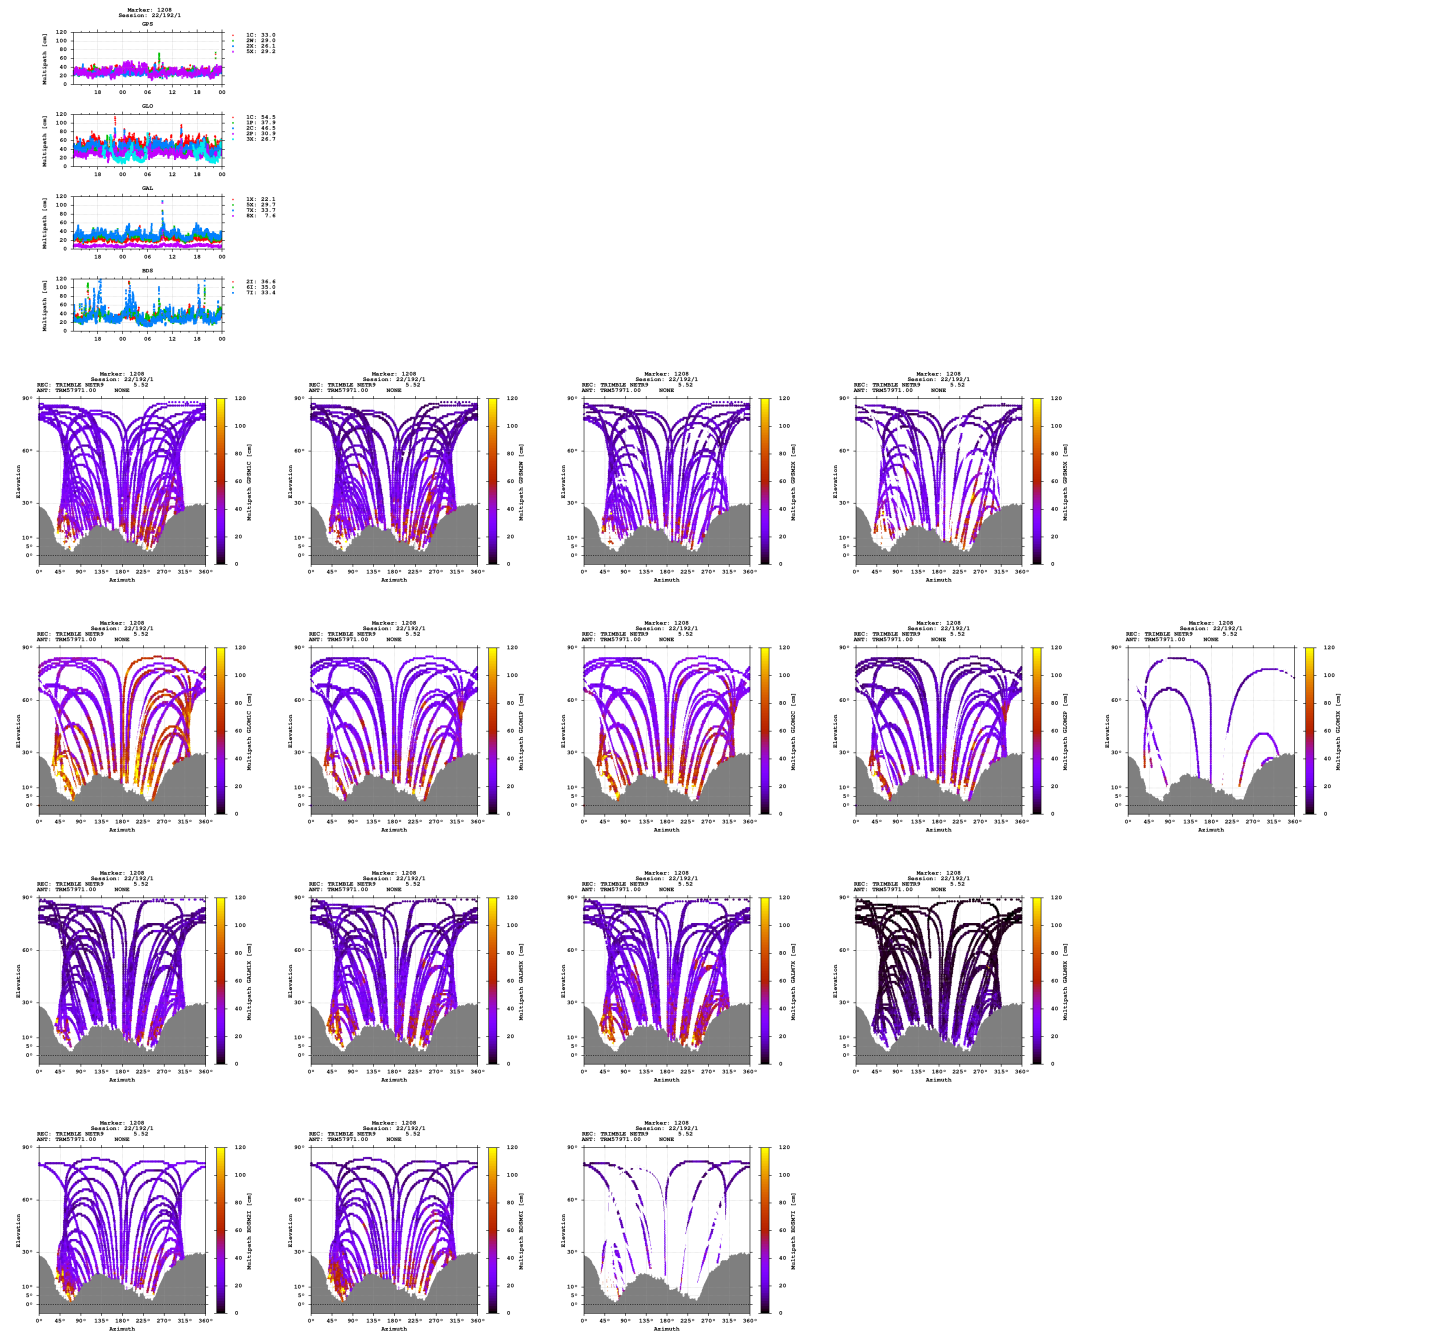

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

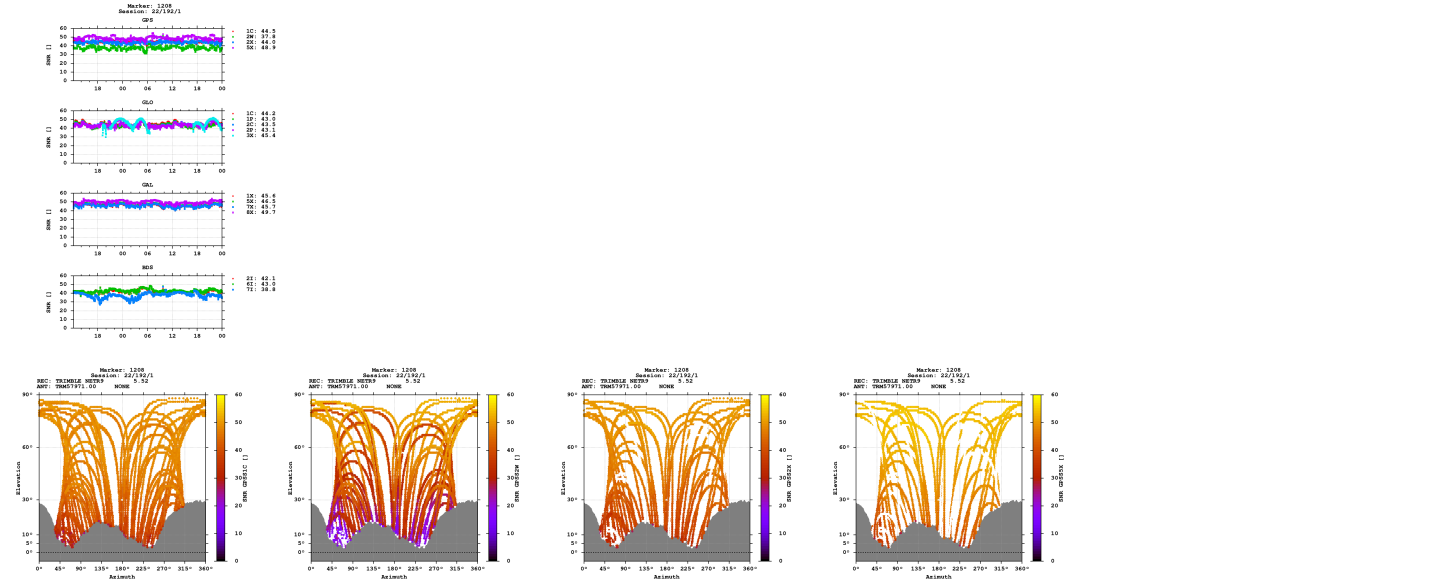

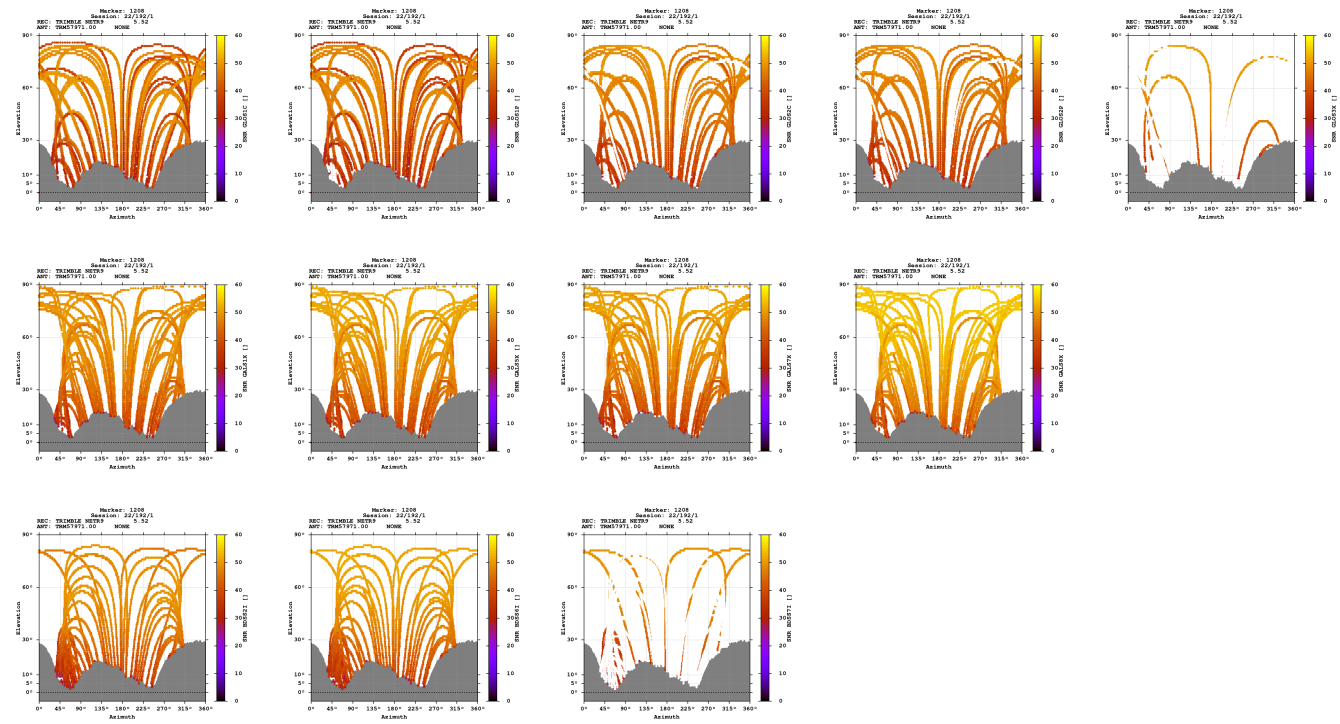

Estimates

2022-07-11 12:11:00	GPS	4340650.8946	602191.2546	4619668.9173	46.703056826	7.898396332	659.1520
2022-07-11 12:11:00	GLO	4340650.6573	602190.7103	4619668.4038	46.703055687	7.898389708	658.5658
2022-07-11 12:11:00	GAL	4340651.1041	602191.4708	4619668.9574	46.703055521	7.898398755	659.3439
2022-07-11 12:11:00	BDS	4340649.8715	602189.2255	4619670.4433	46.703074699	7.898371891	659.3765

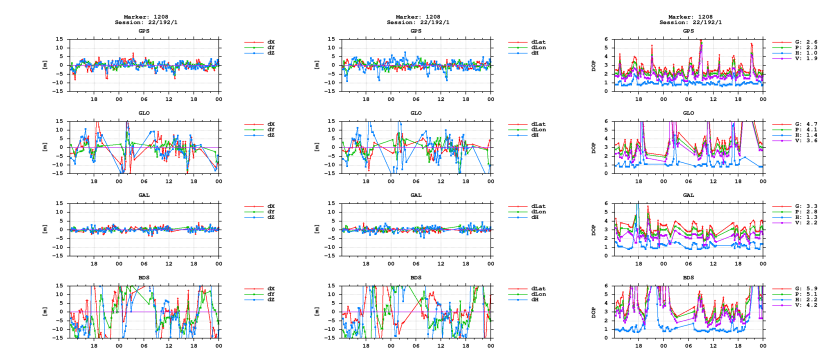

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)