


GNSS observation file monitoring for 0516


Last RINEX file: 05161931.220
RINEX version: 3.02
Marker: 1208
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

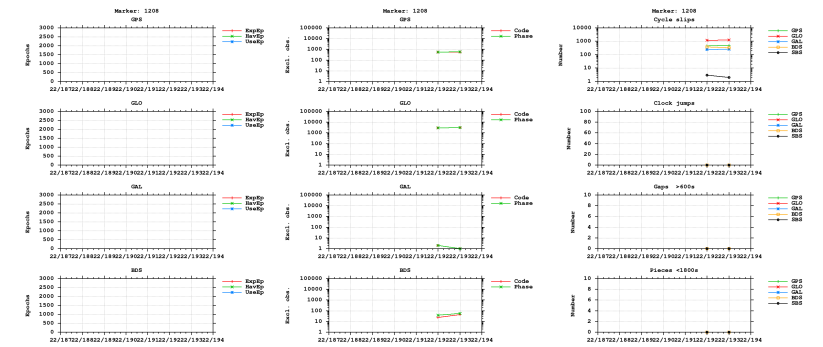



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

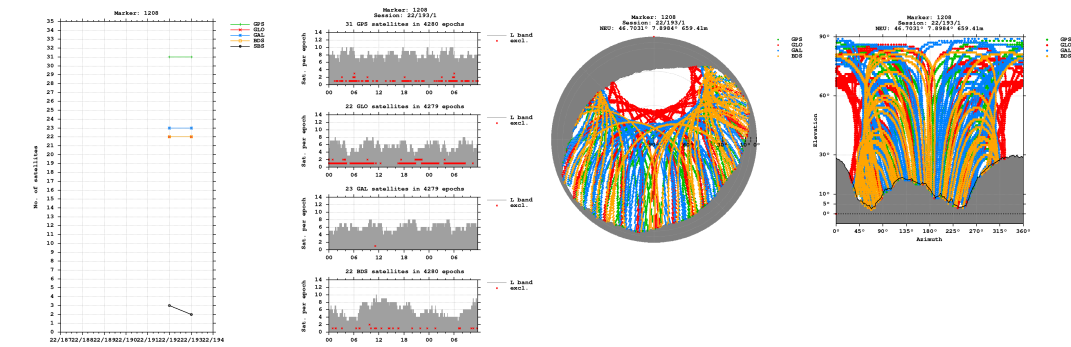


Bands

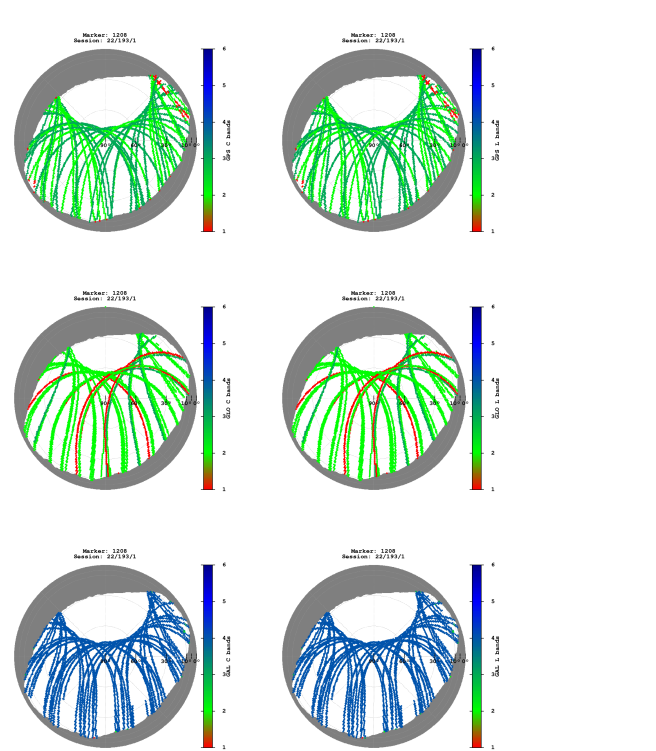


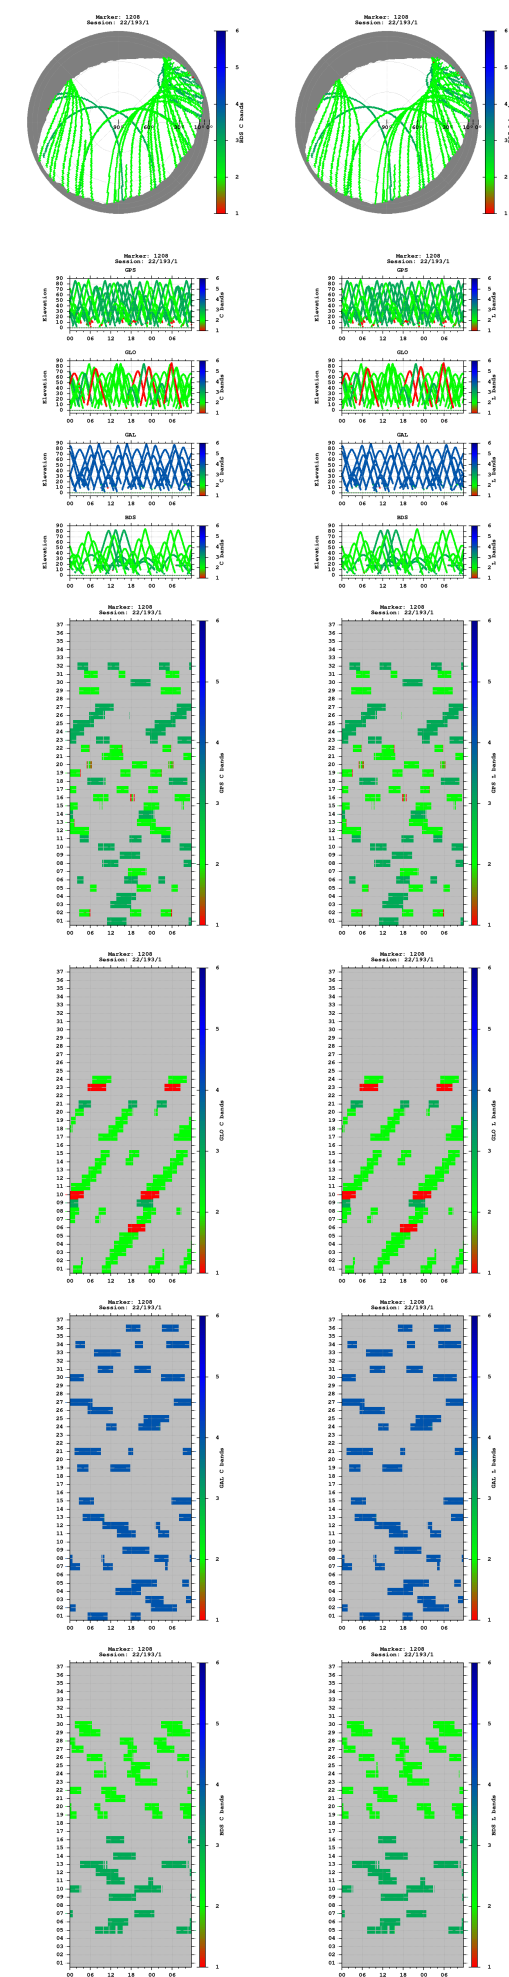


Observations

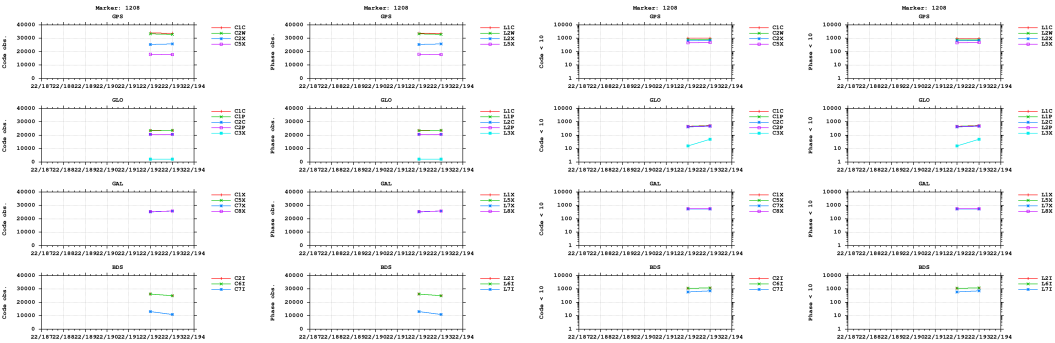


Multipath

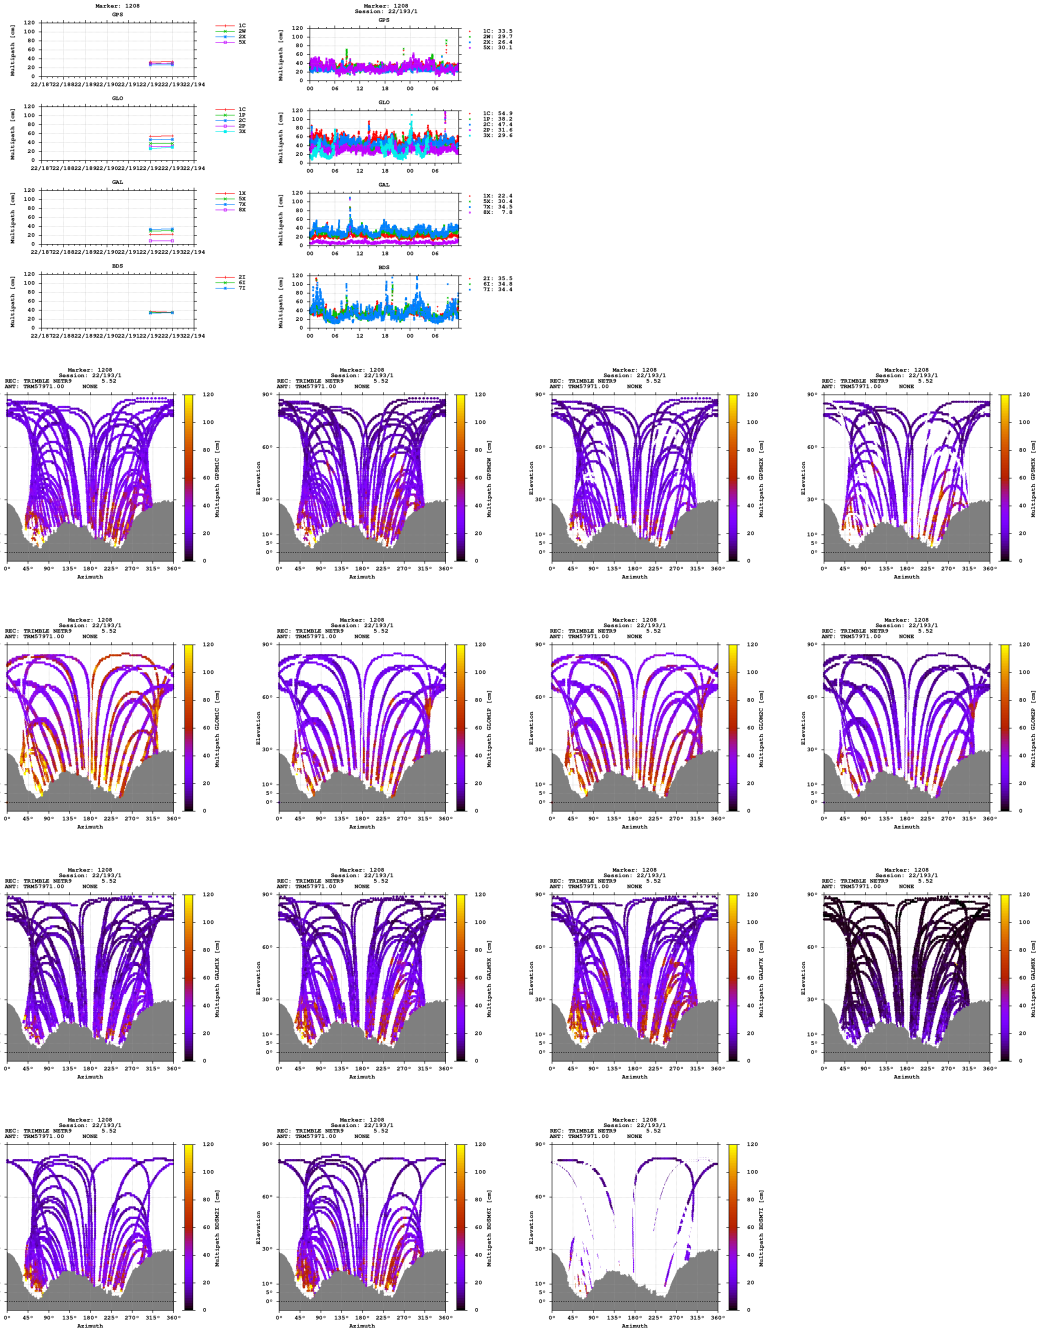


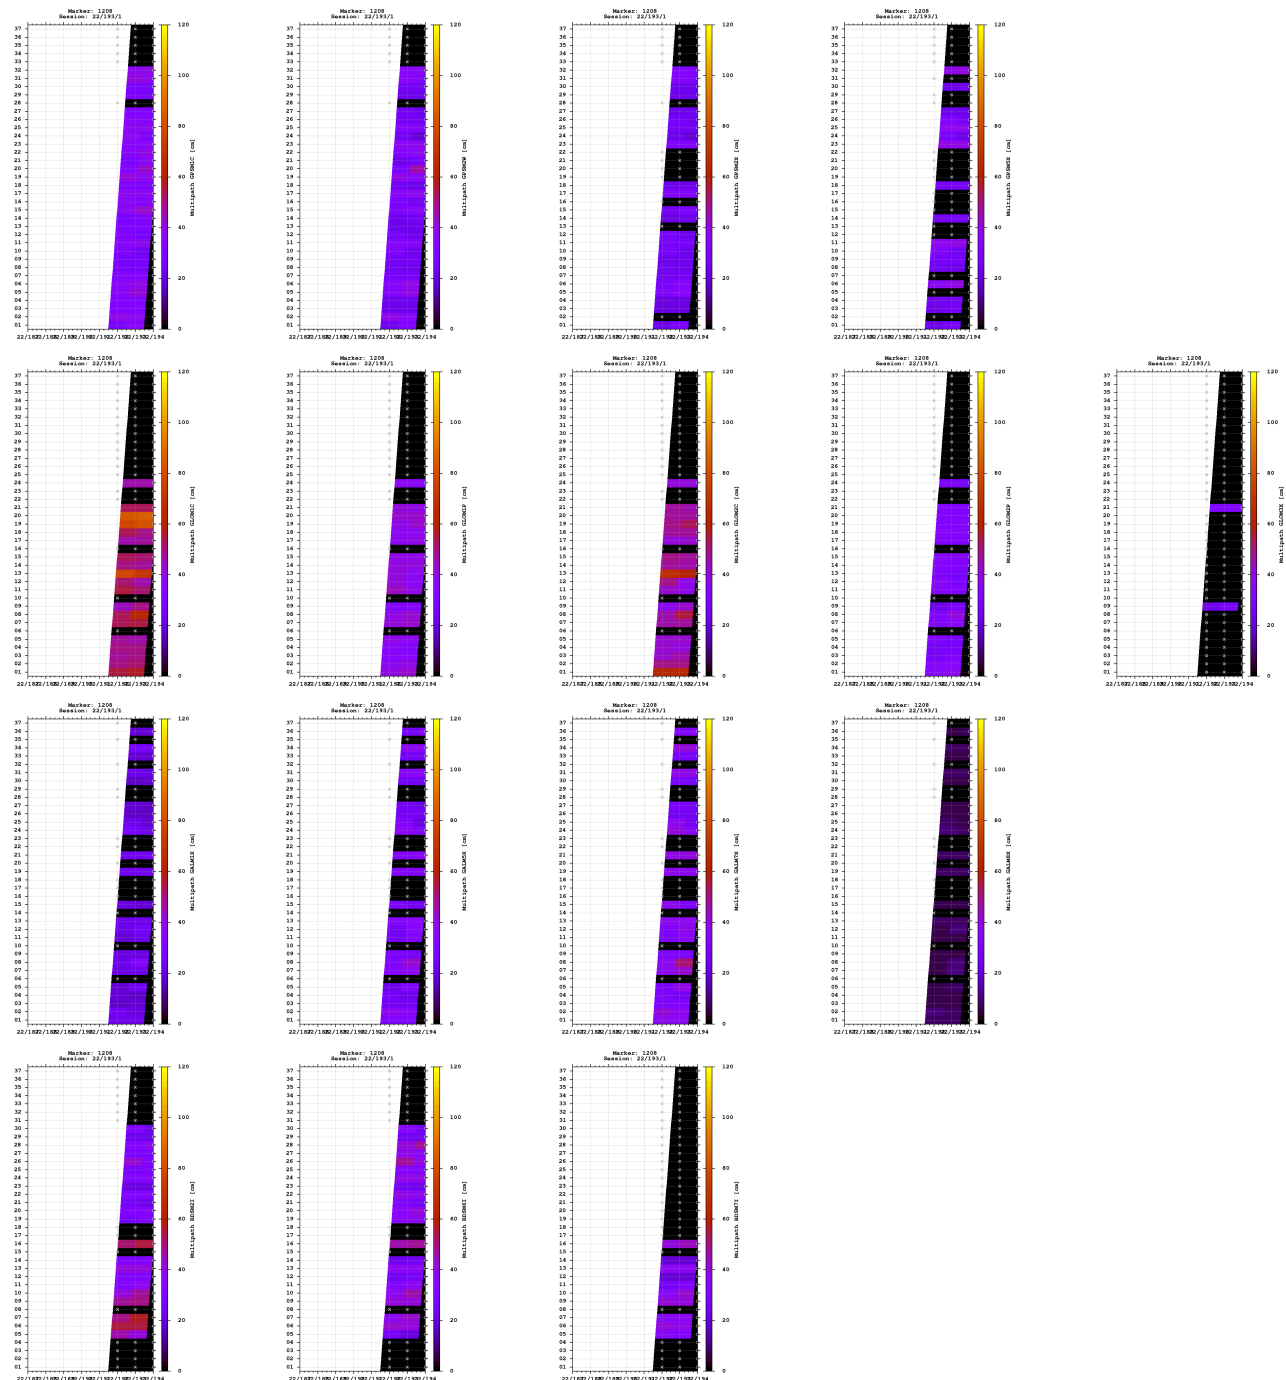


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

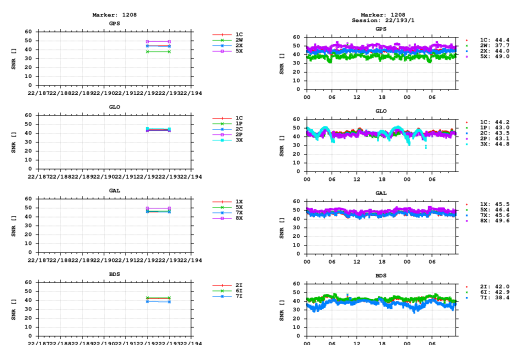


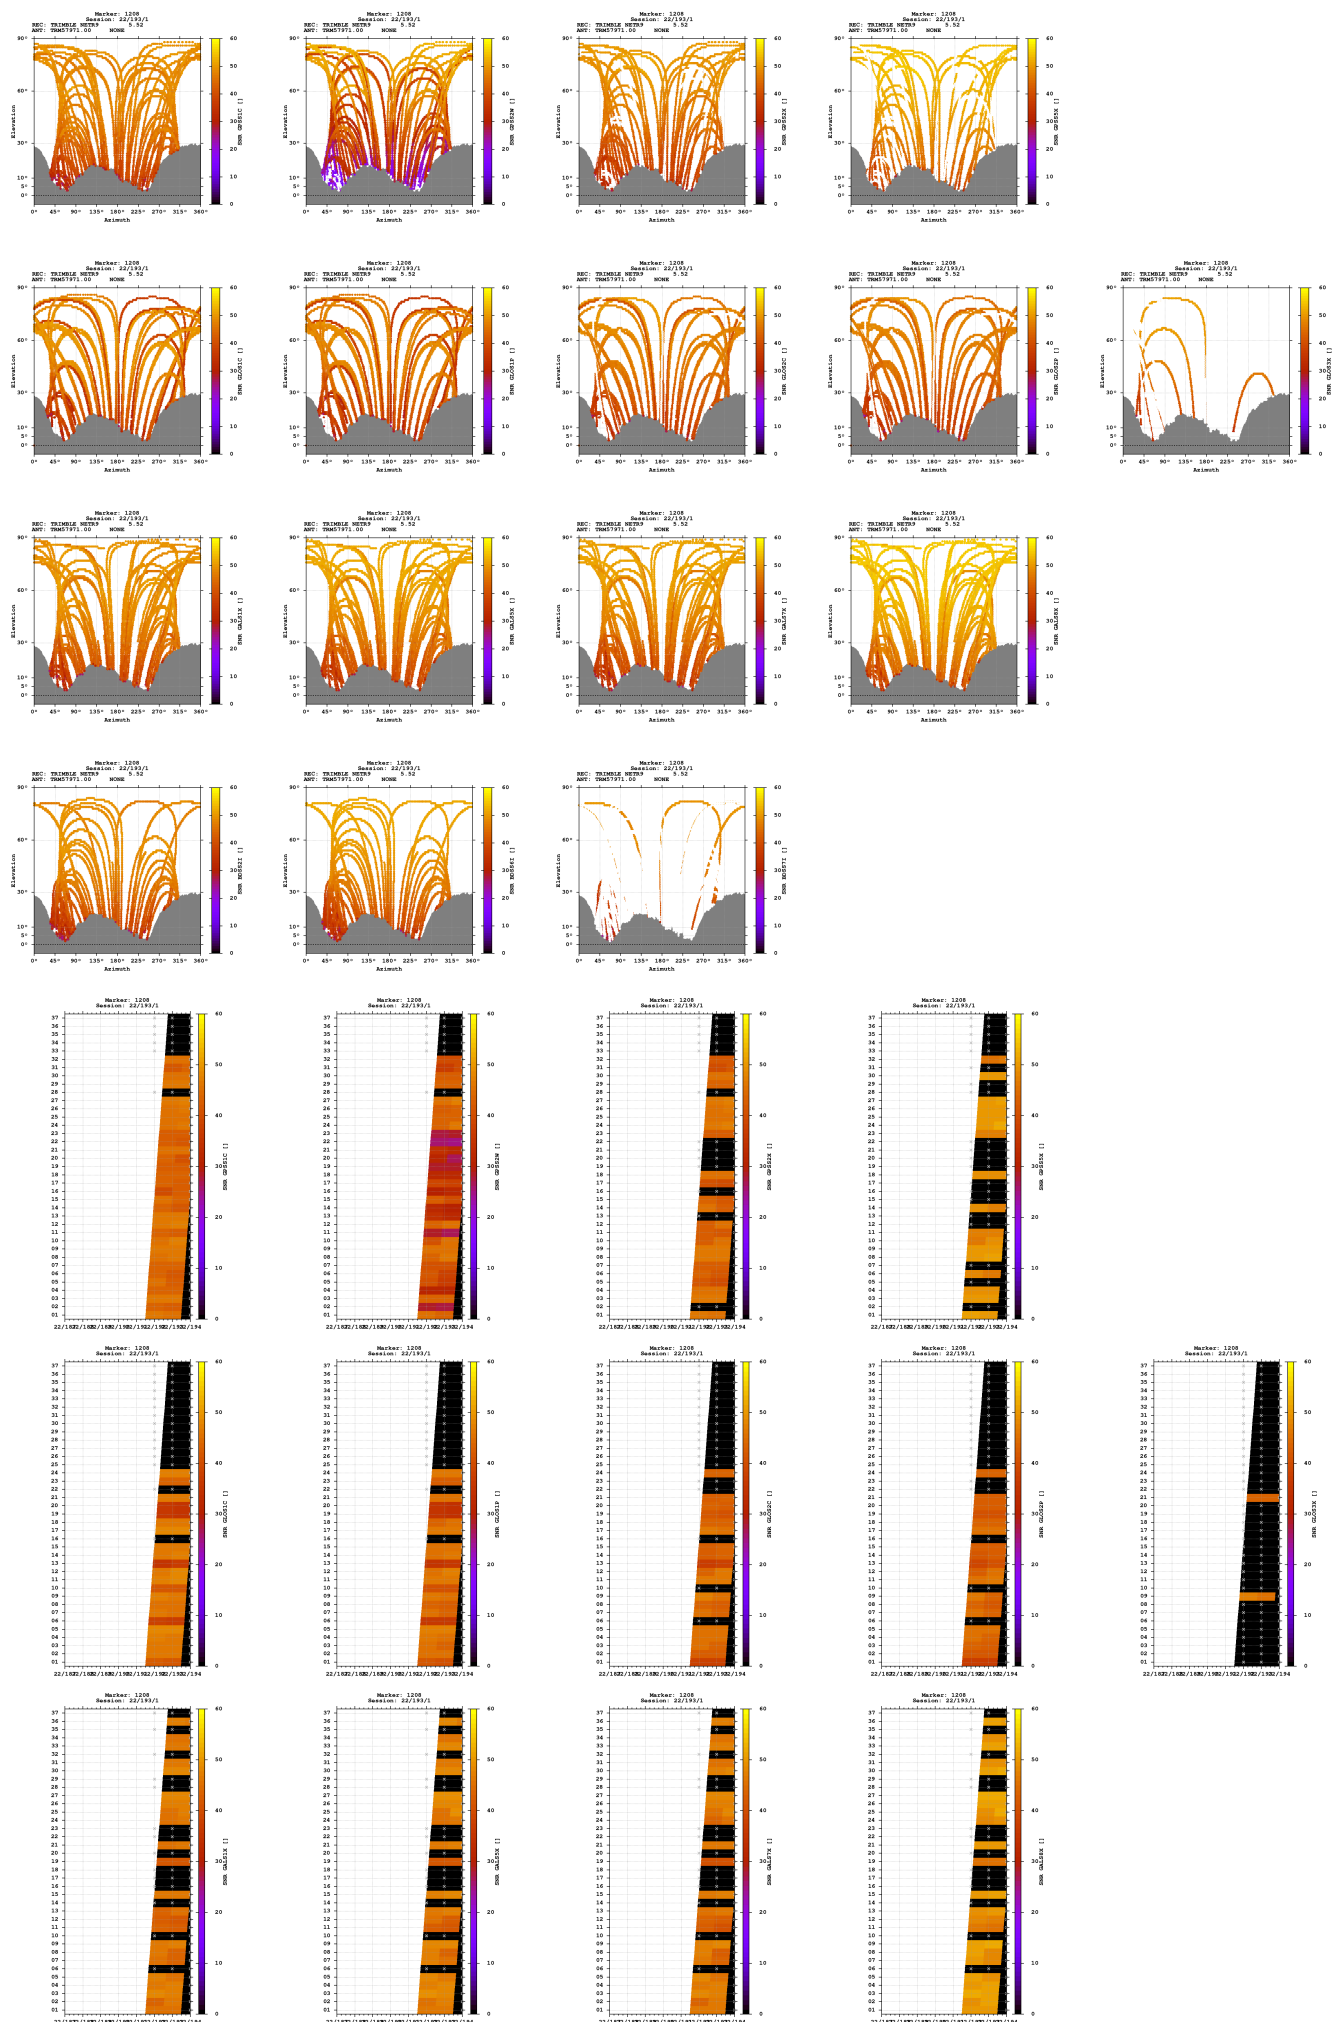

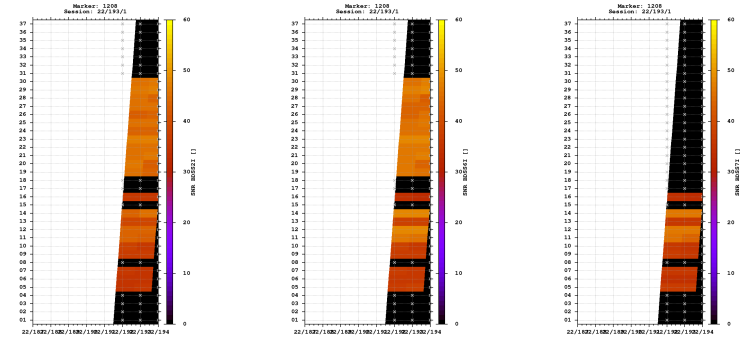



Estimates

2022-07-11 12:11:00	GPS	4340651.0778	602191.3783	4619669.0840	46.703056556	7.898397605	659.4094
2022-07-11 12:11:00	GLO	4340650.7173	602191.6317	4619667.9532	46.703051690	7.898401533	658.3655
2022-07-11 12:11:00	GAL	4340651.1963	602191.5137	4619669.0452	46.703055426	7.898399145	659.4745
2022-07-11 12:11:00	BDS	4340651.1543	602192.0318	4619670.9483	46.703066971	7.898405930	660.8799

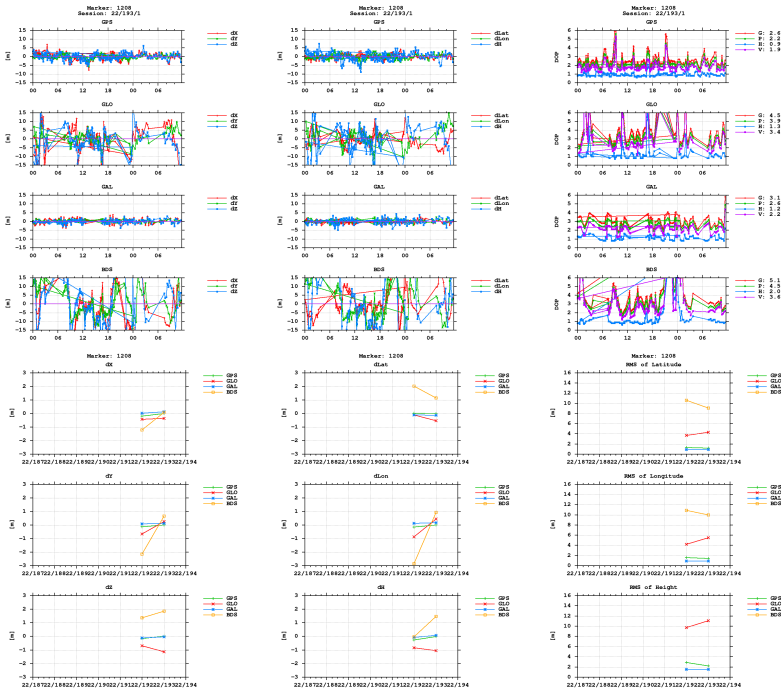

BNC

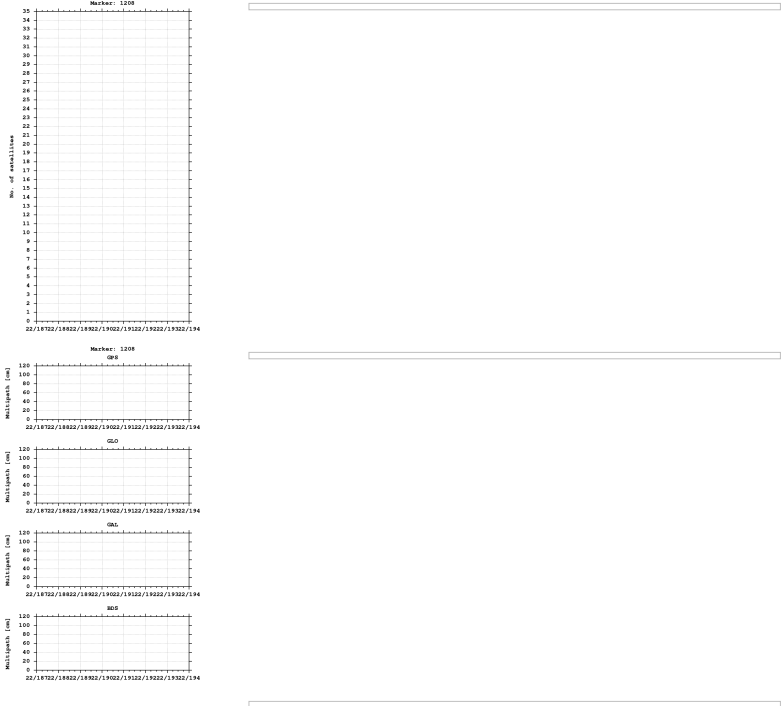

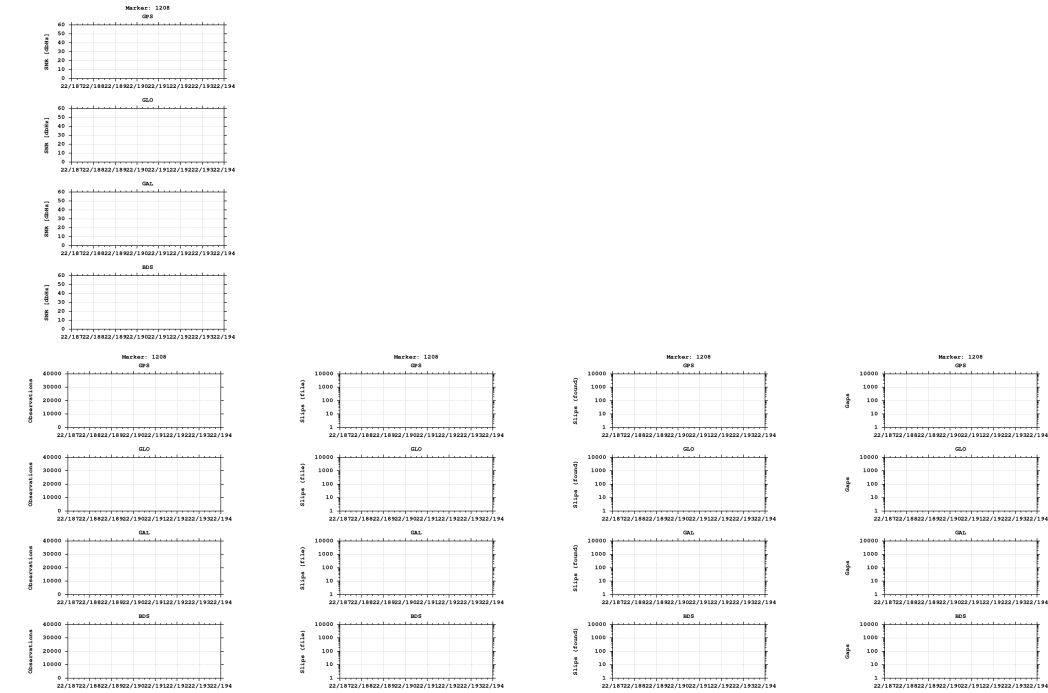

Equipment

2022-07-11 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)