

GNSS observation file monitoring for 0516

Last RINEX file: 05161951.220

RINEX version: 3.02

Marker: 1209

Receiver: 516

Antenna: 516


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

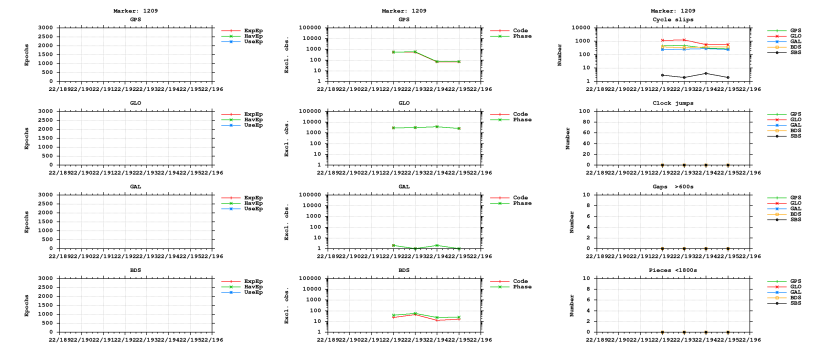



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

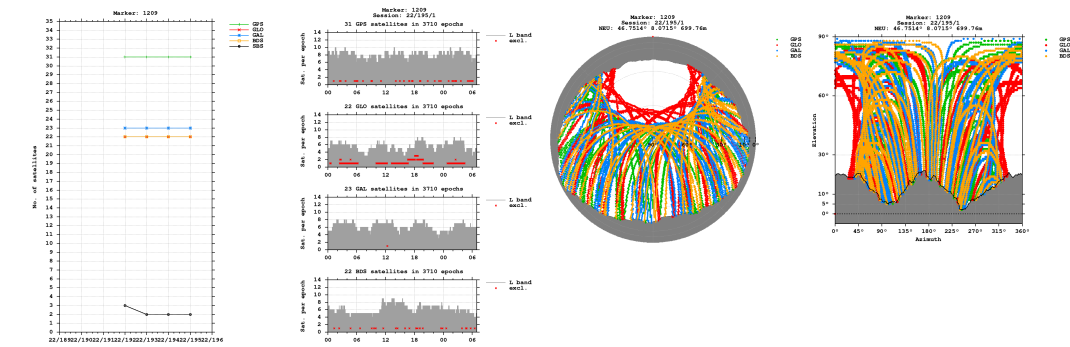


Bands

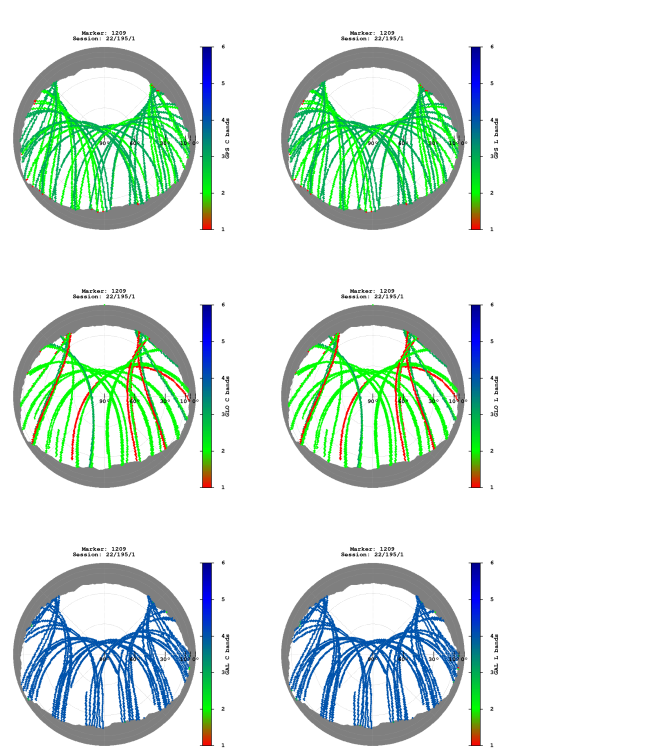


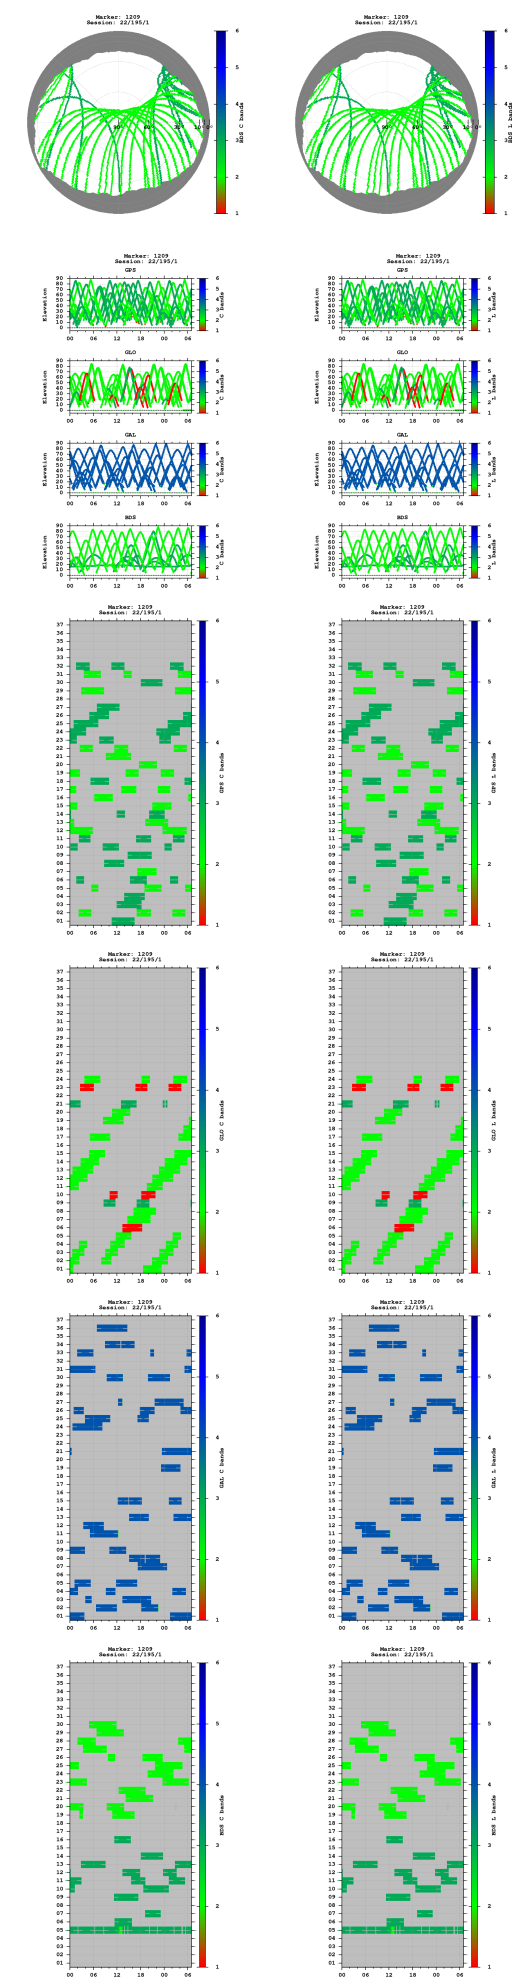


Observations

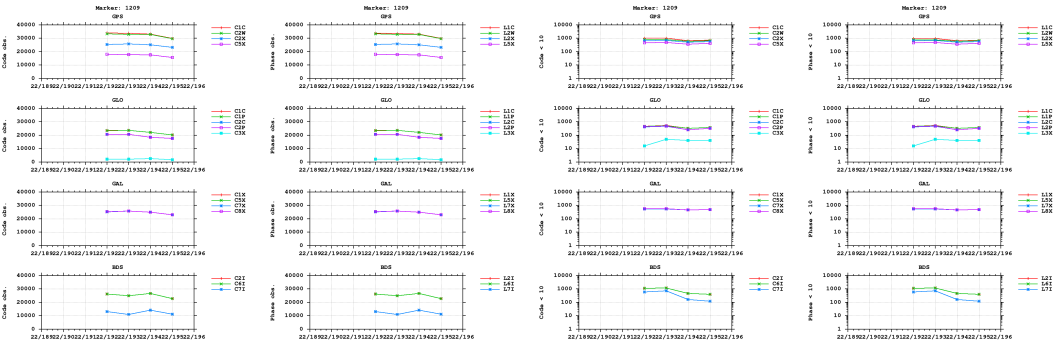



Multipath

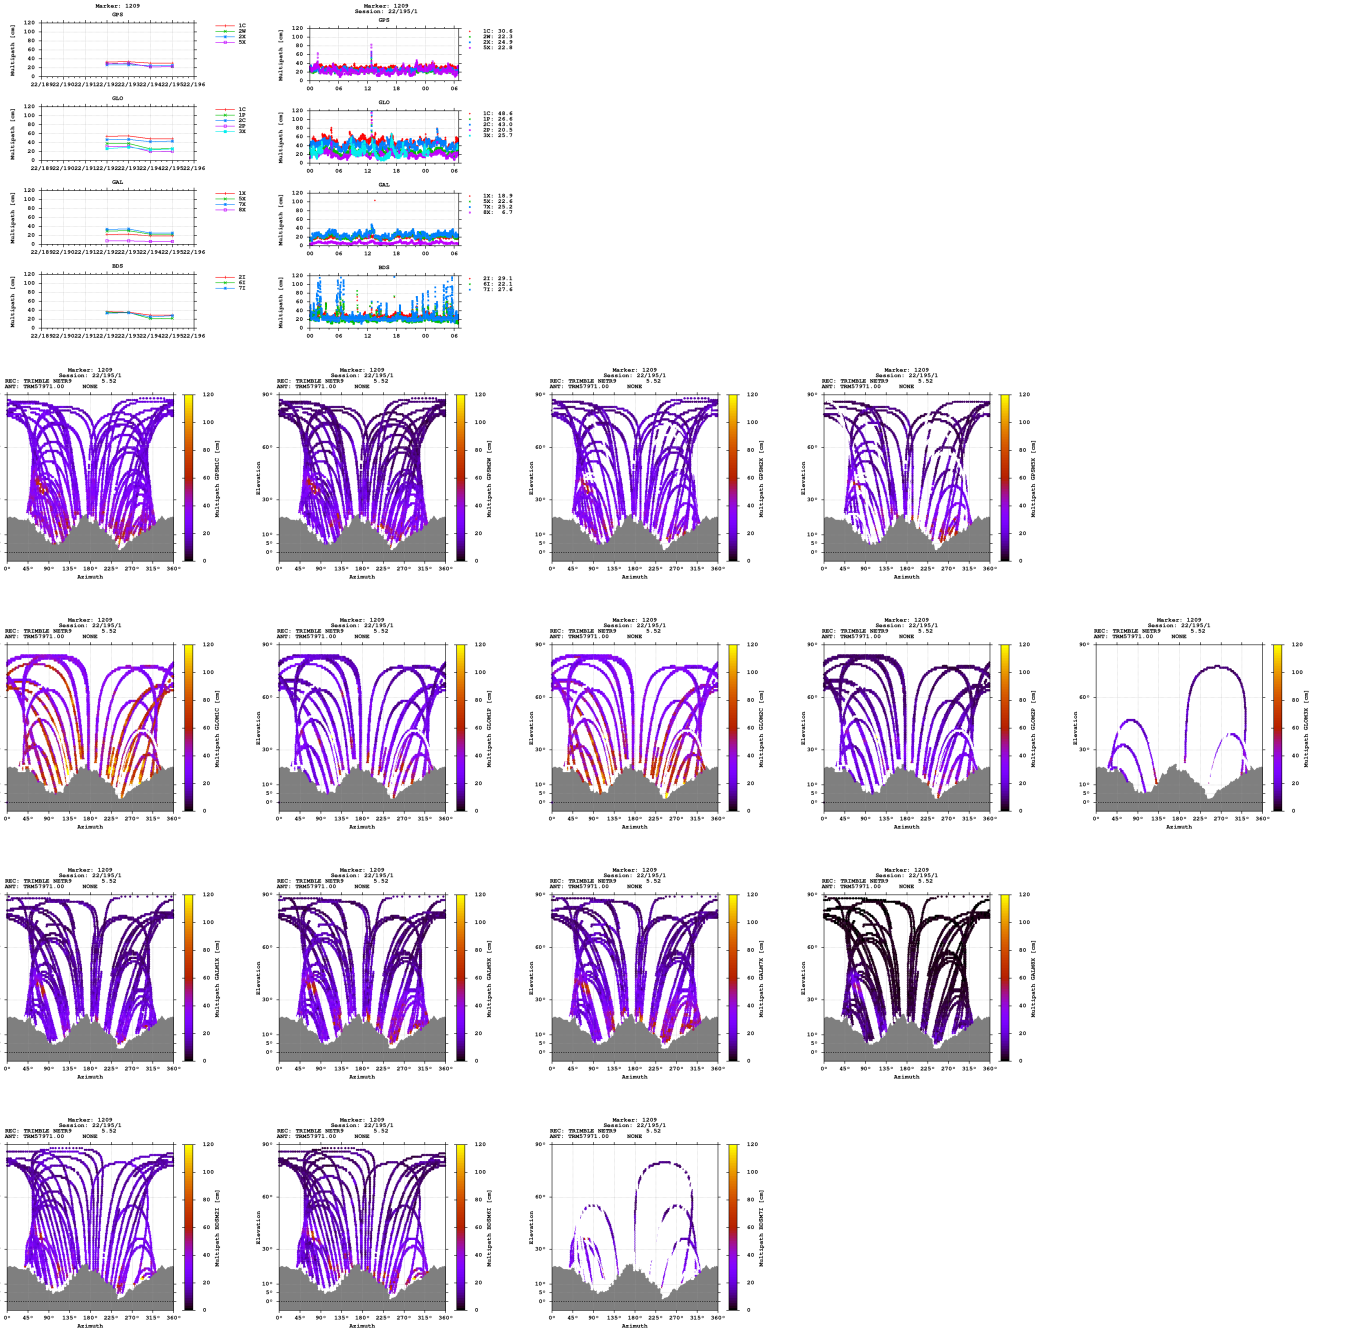


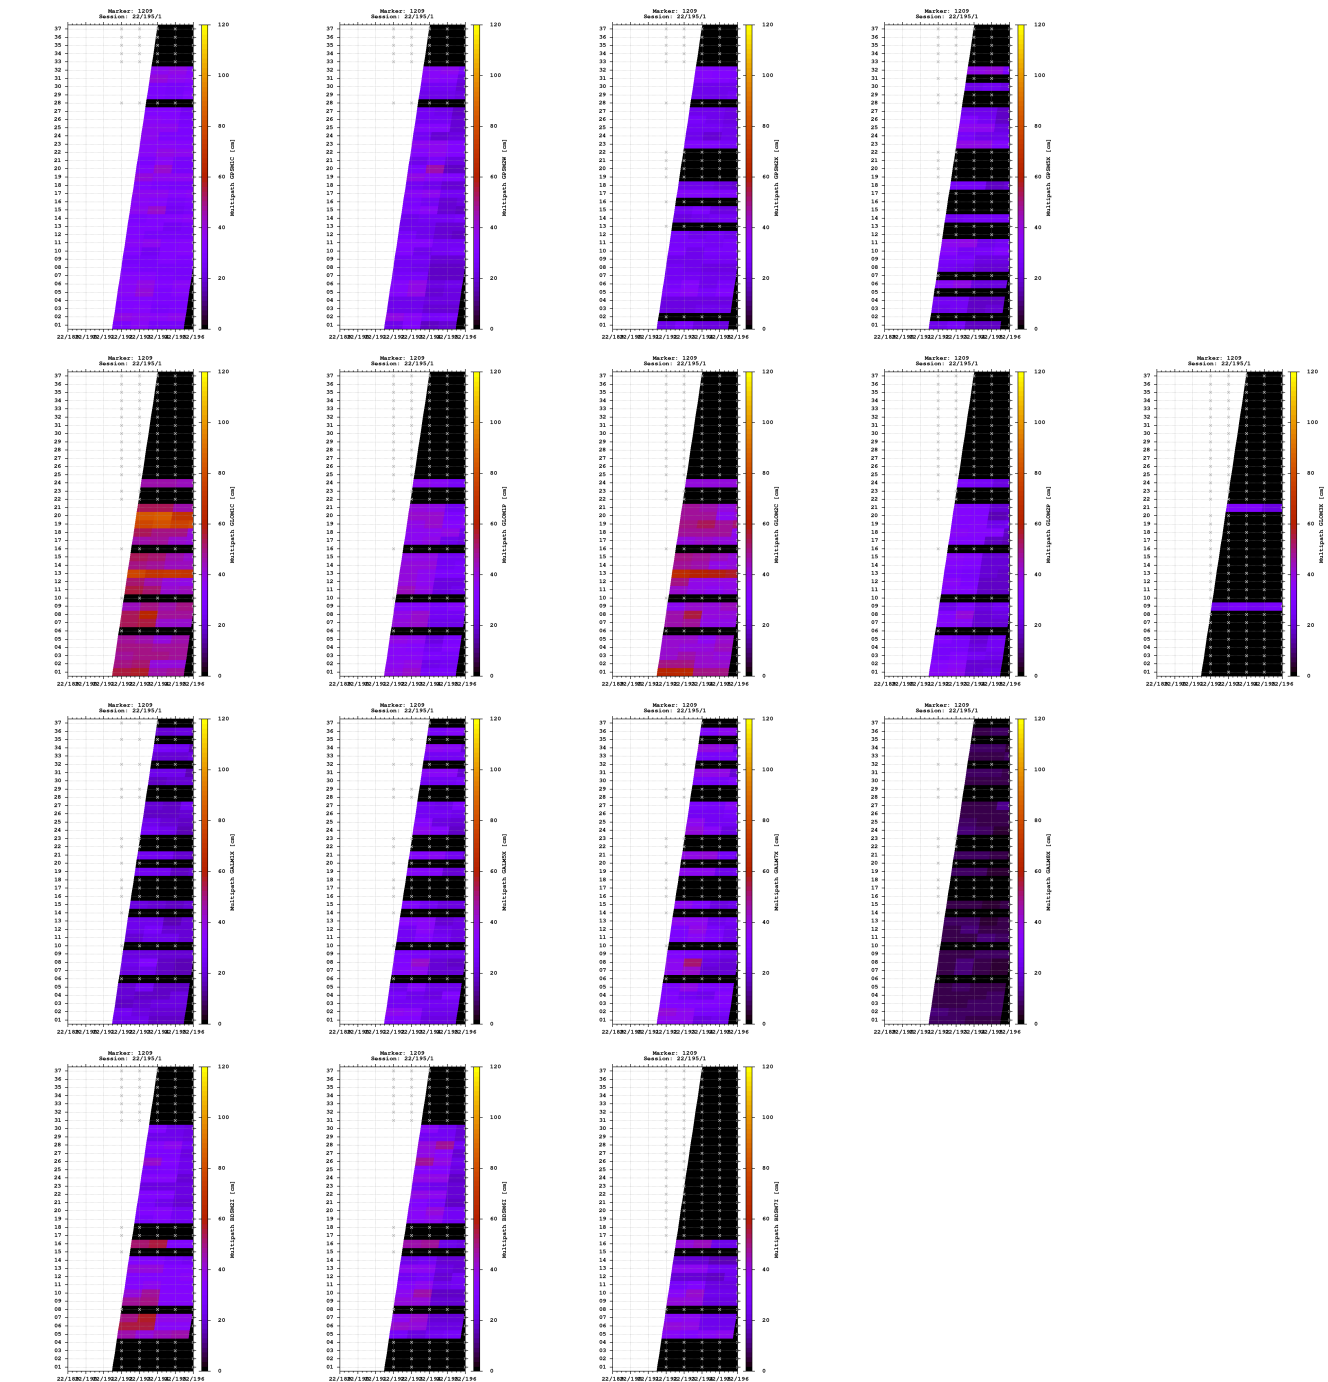

Signal-to-noise ratio

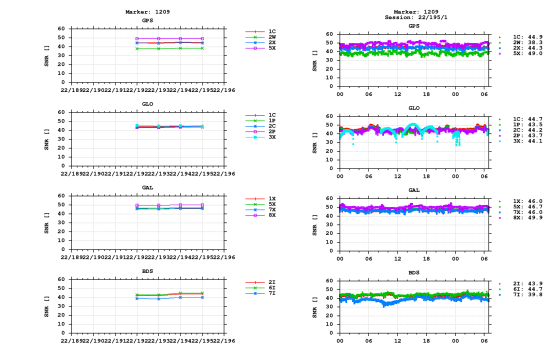


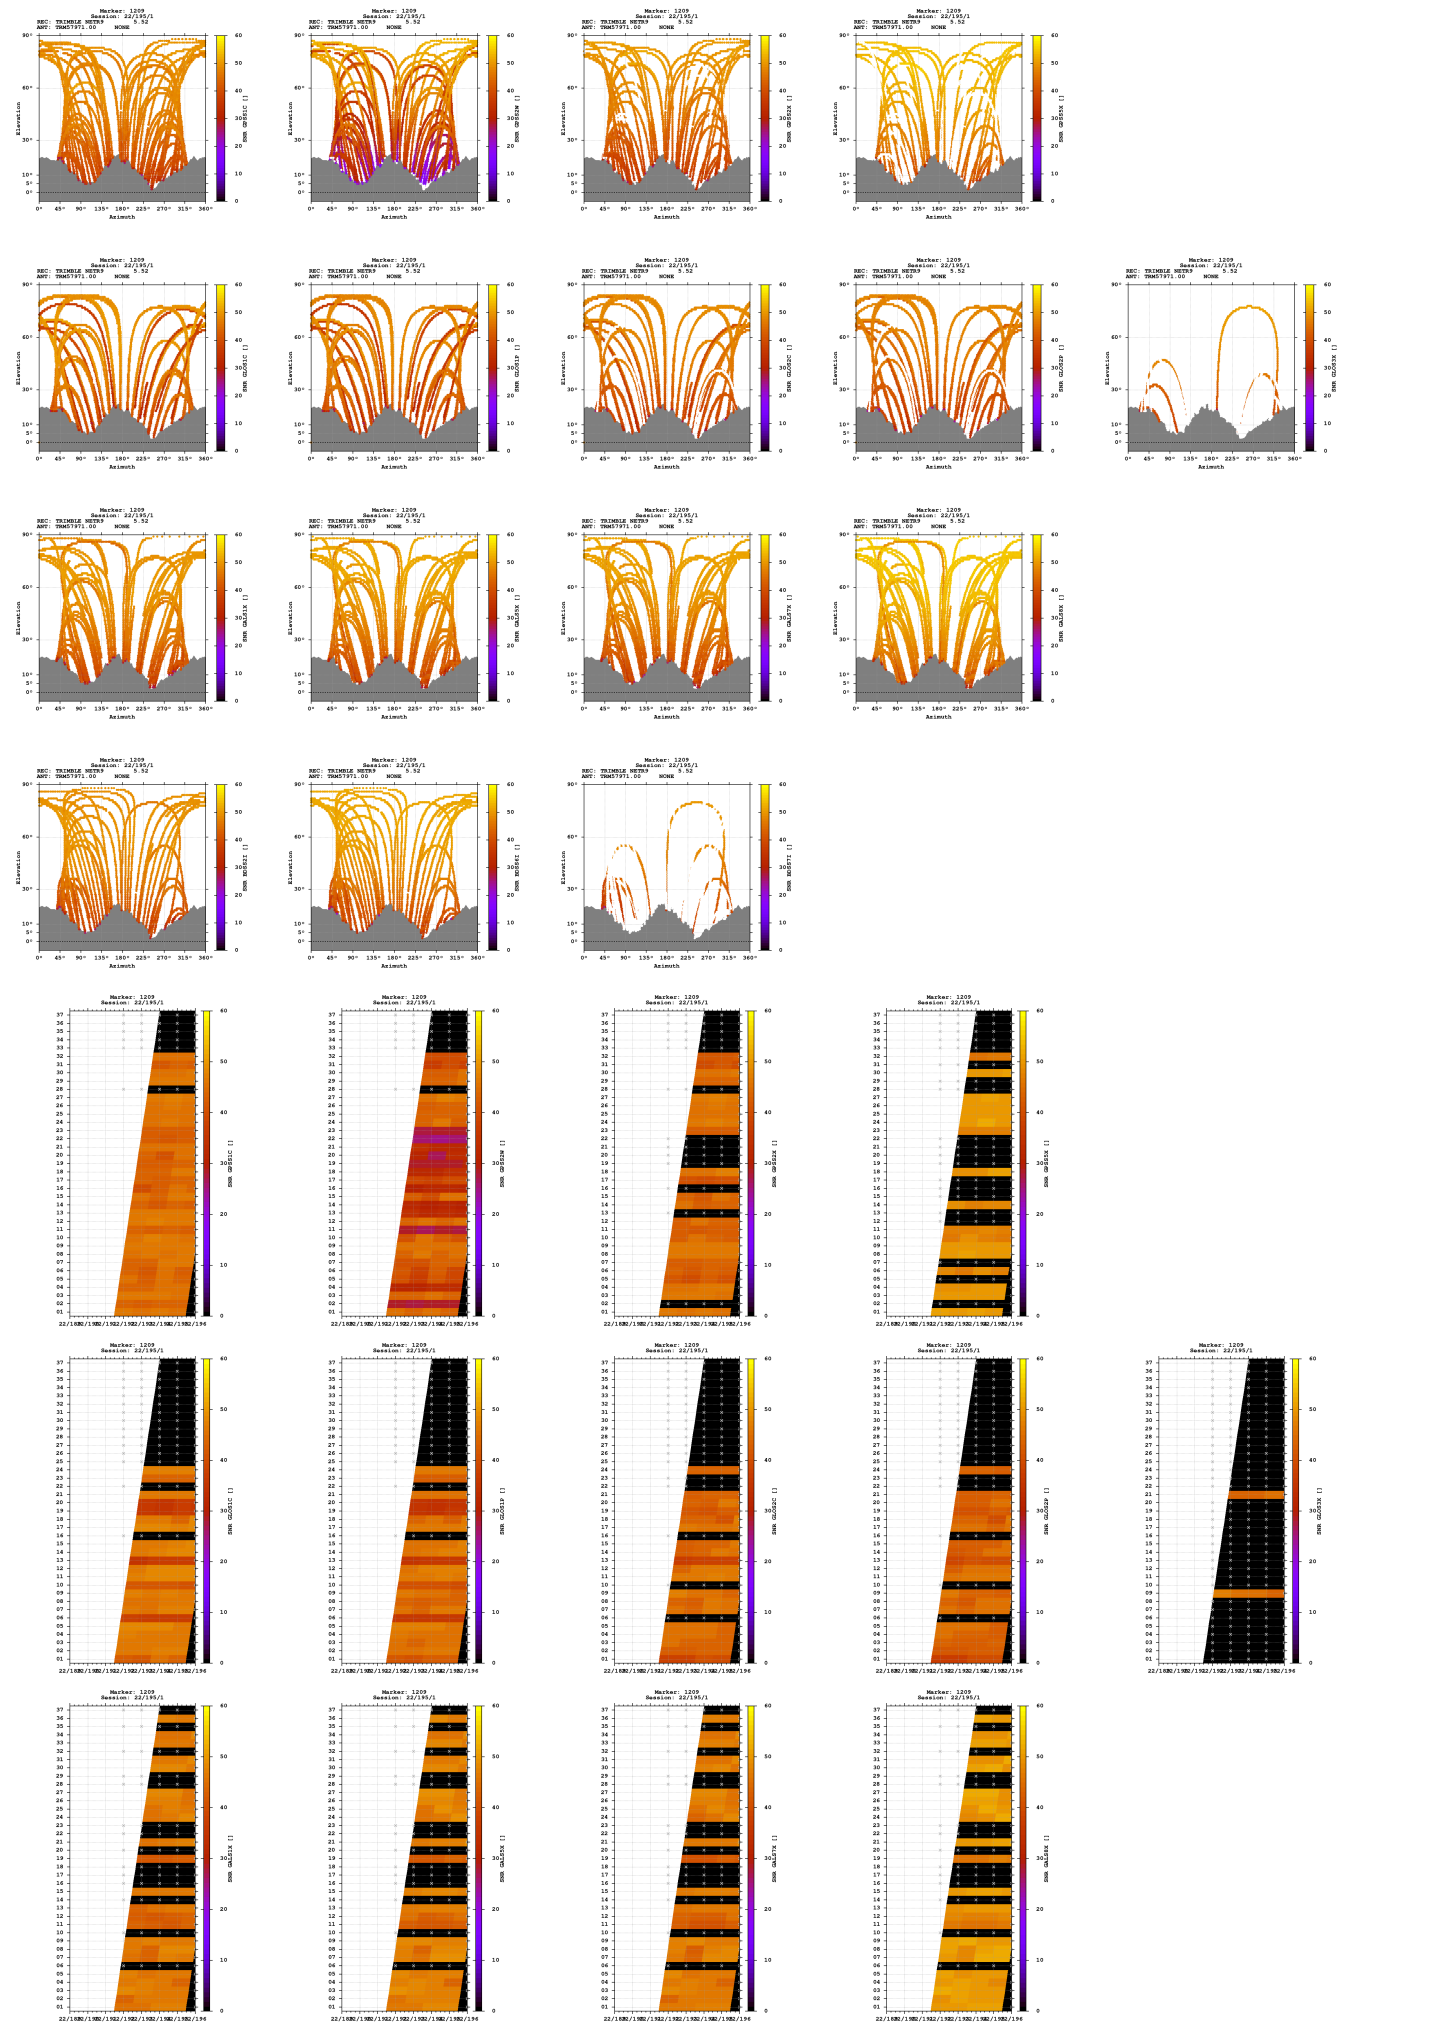

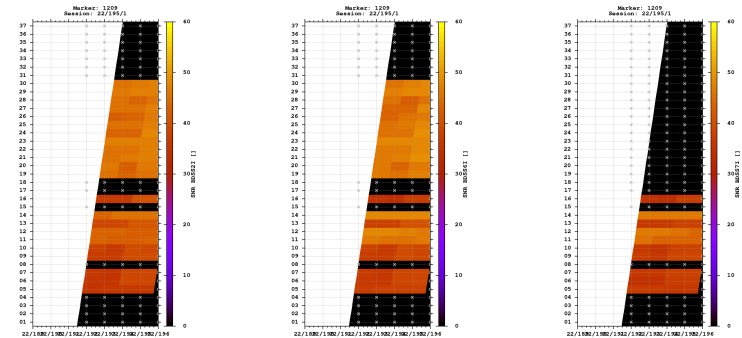



Estimates

2022-07-13 13:22:00	GPS	4334965.3636	614759.9916	4623381.7188	46.751387557	8.071537213	699.7556
2022-07-13 13:22:00	GLO	4334967.0641	614760.4419	4623383.1473	46.751384915	8.071539924	701.9929
2022-07-13 13:22:00	GAL	4334965.0684	614760.0085	4623381.2288	46.751386436	8.071537975	699.2000
2022-07-13 13:22:00	BDS	4334961.0143	614759.7441	4623382.3415	46.751419833	8.071541998	697.2348

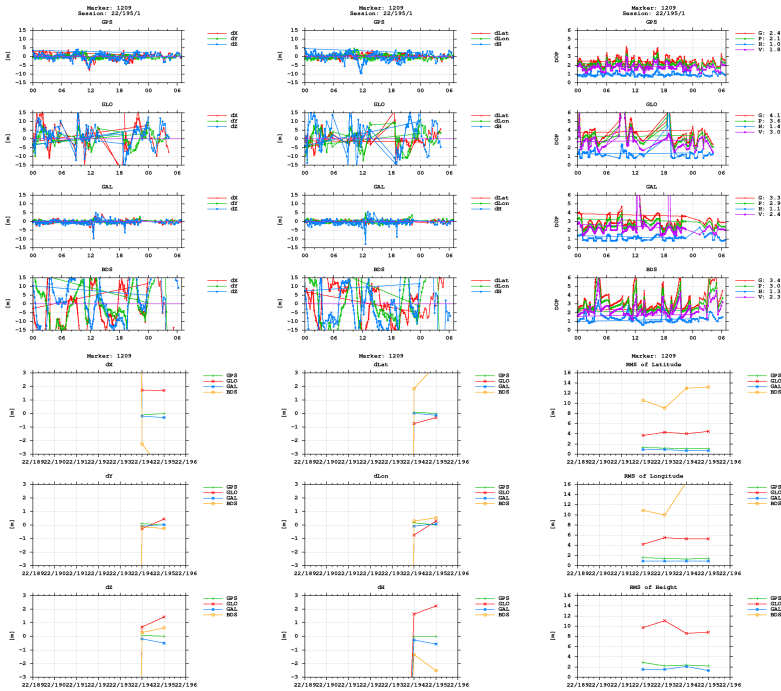

BNC

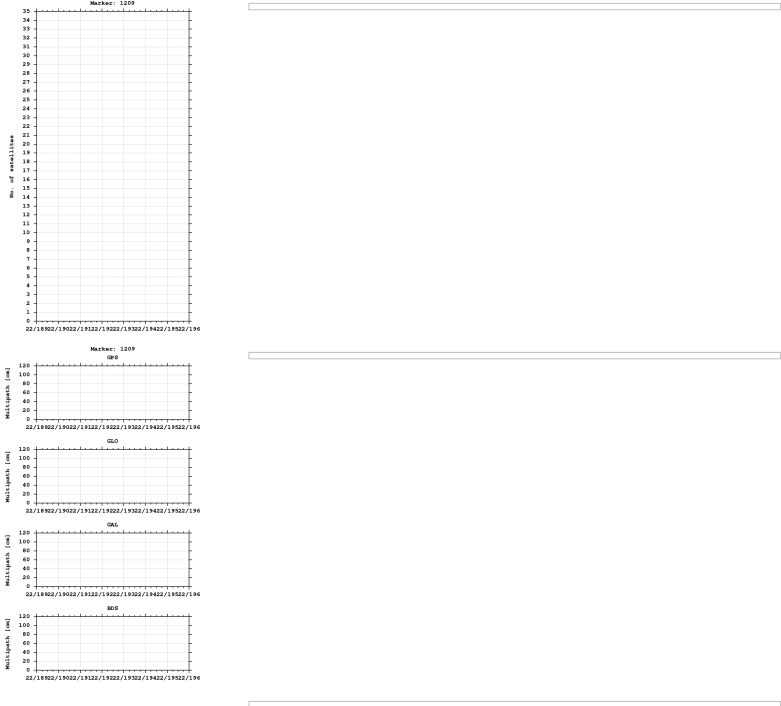

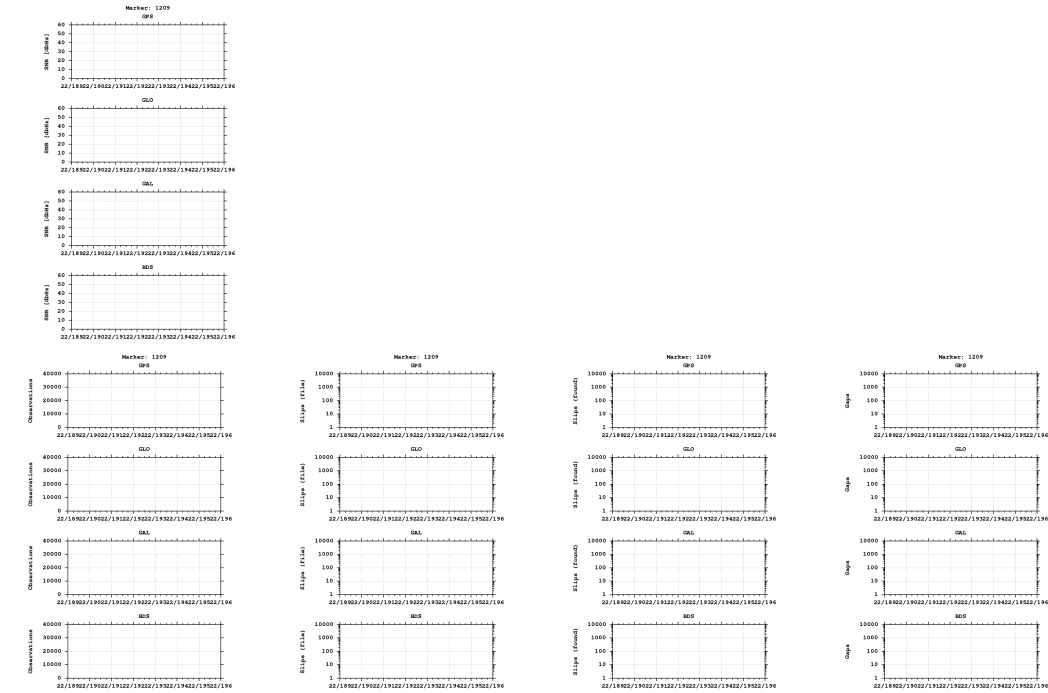

Equipment

2022-07-11 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)