


GNSS observation file monitoring for 0517


Last RINEX file: 05171931.22O
RINEX version: 3.02
Marker: 1229
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

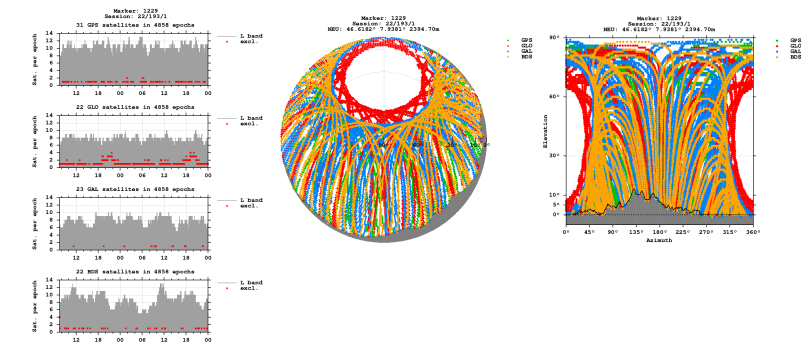


Bands

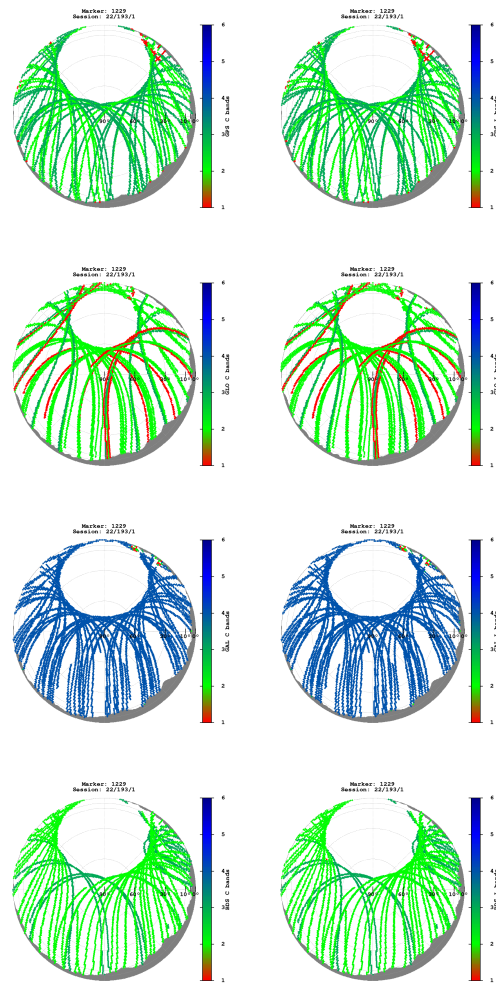

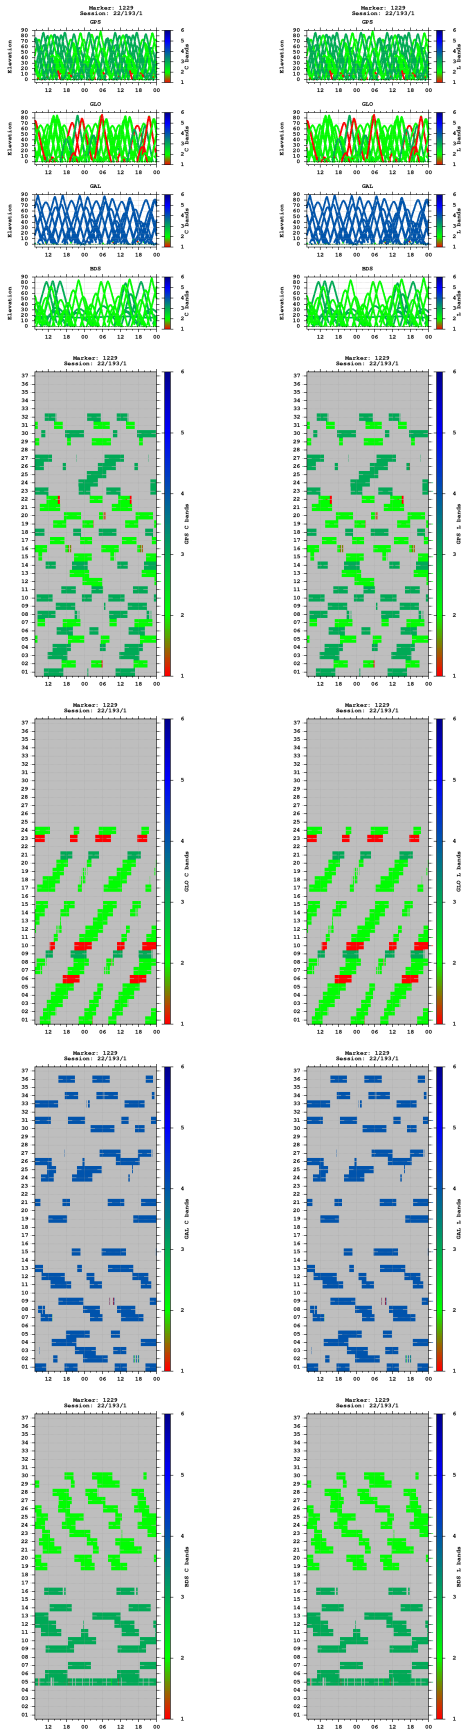



Multipath

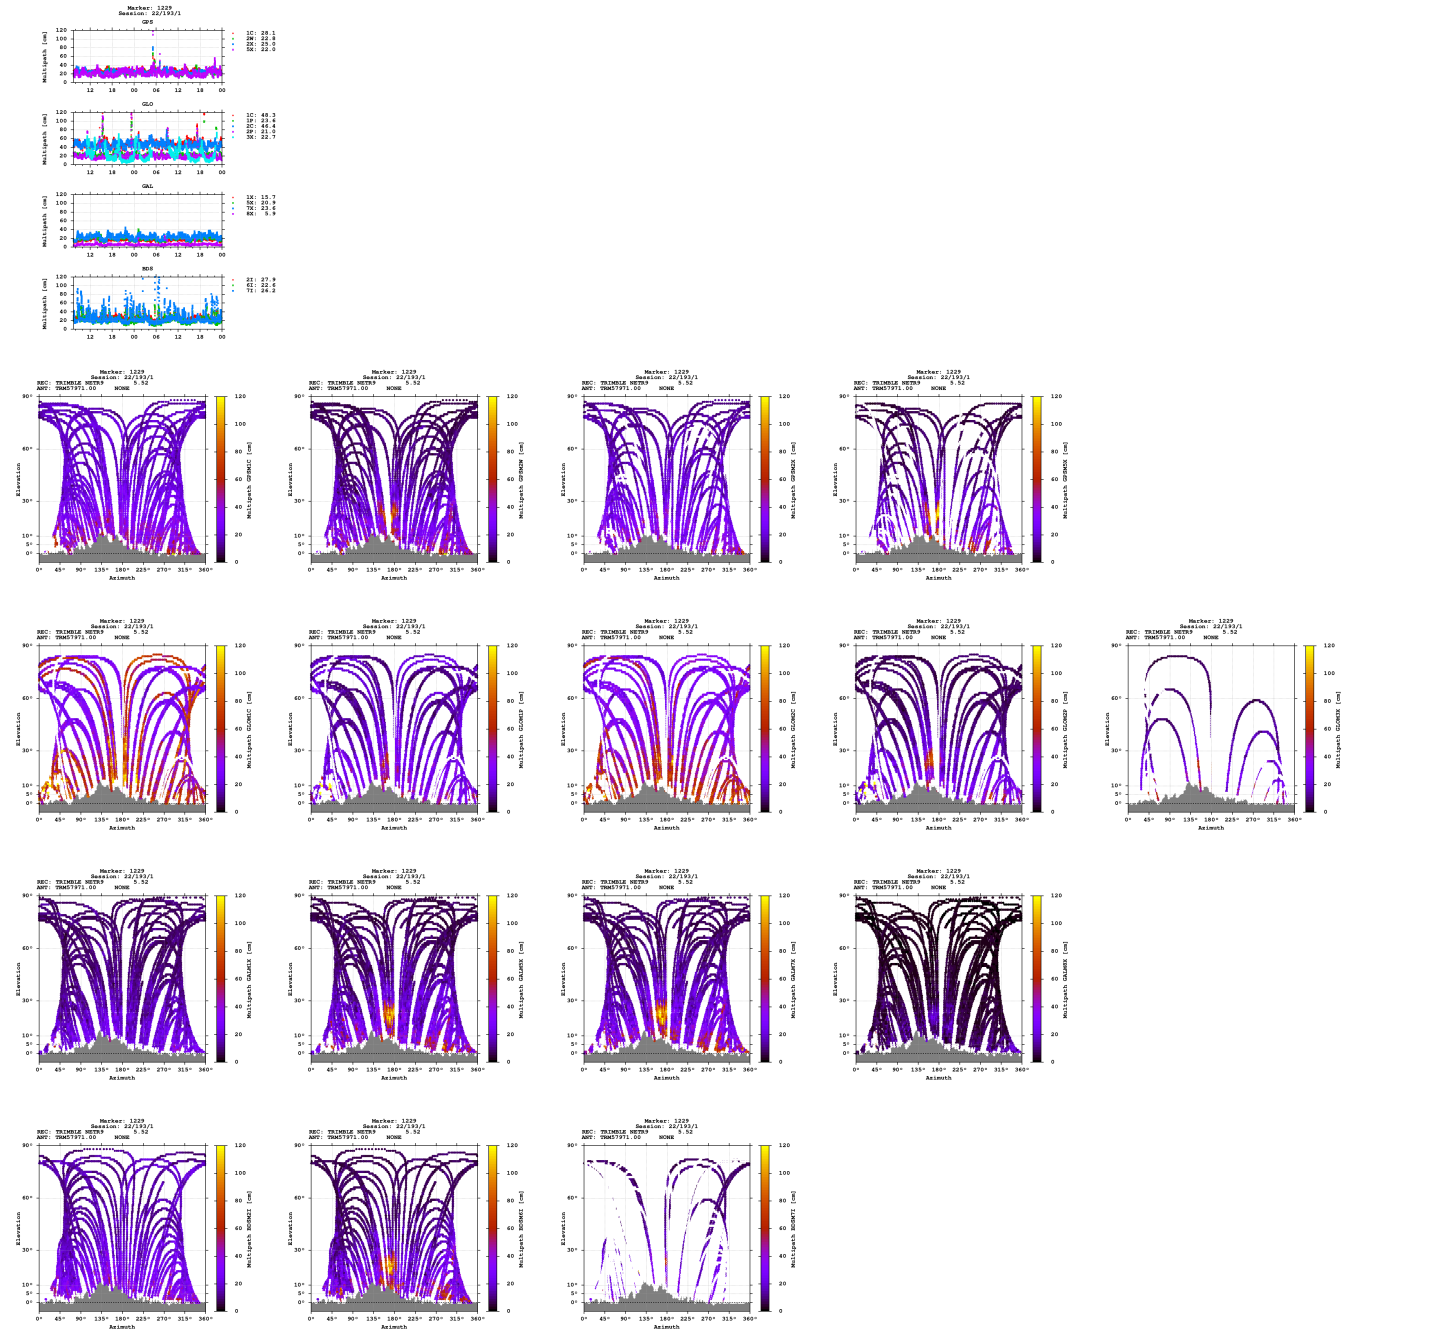

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

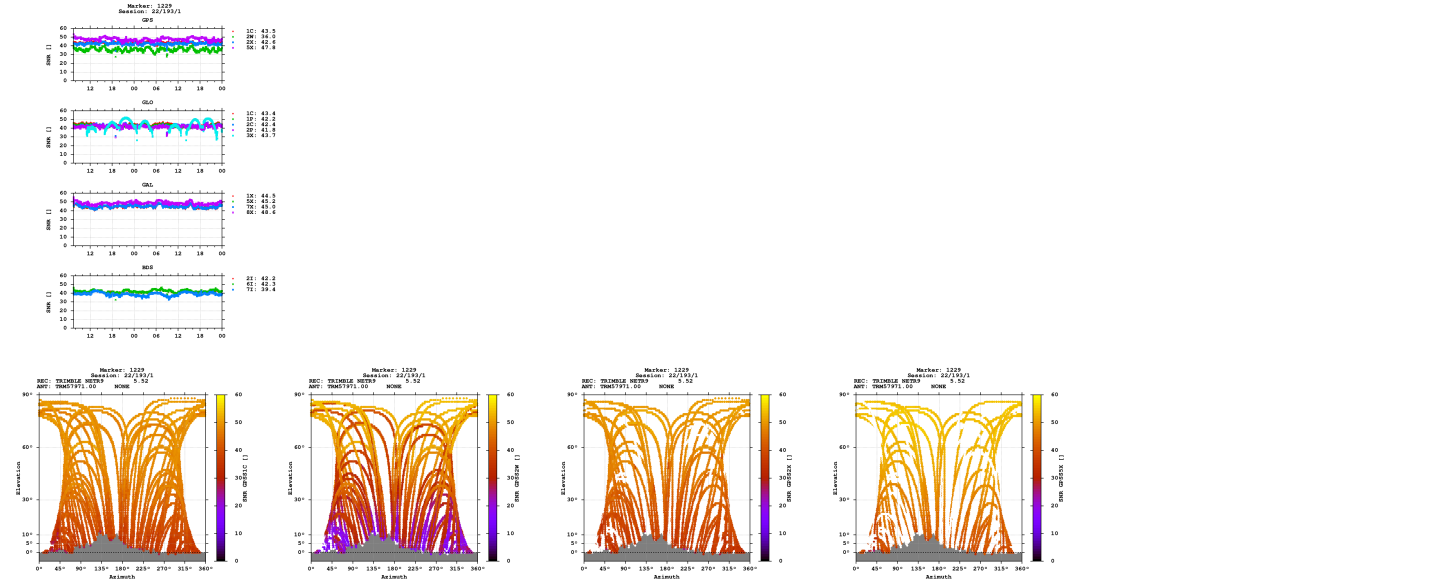

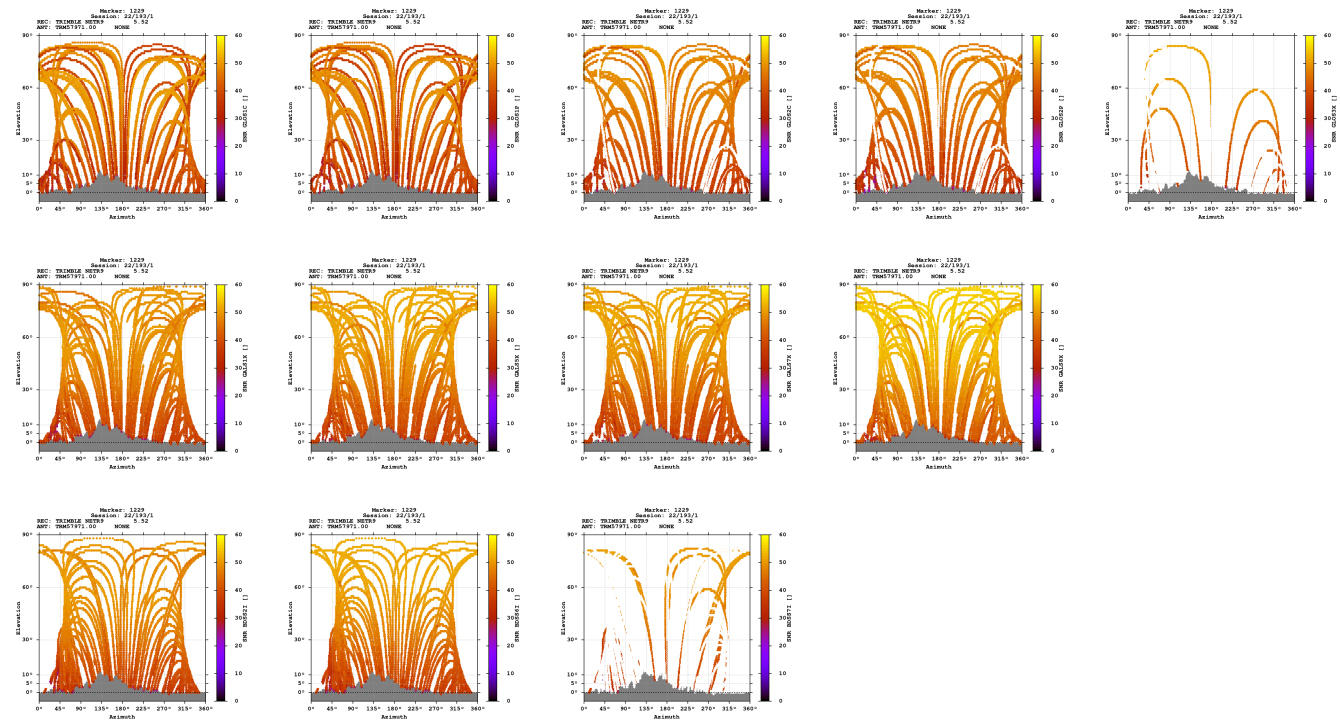

Estimates

2022-07-12 07:31:00	GPS	4348210.8663	606309.2768	4614453.9165	46.618178438	7.938071318	2394.7021
2022-07-12 07:31:00	GLO	4348210.4904	606308.6545	4614453.3244	46.618177776	7.938063952	2393.9569
2022-07-12 07:31:00	GAL	4348210.9946	606309.1981	4614453.8717	46.618177402	7.938070069	2394.7493
2022-07-12 07:31:00	BDS	4348210.0745	606308.8189	4614455.3463	46.618192808	7.938066827	2395.1591

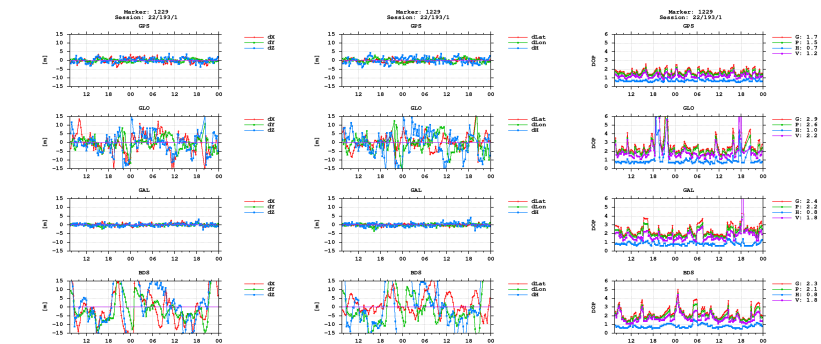

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)