


GNSS observation file monitoring for 0517


Last RINEX file: 05171941.220
RINEX version: 3.02
Marker: 1229
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

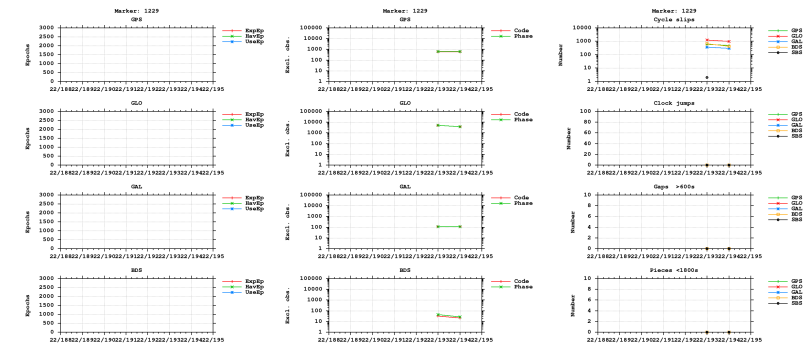



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

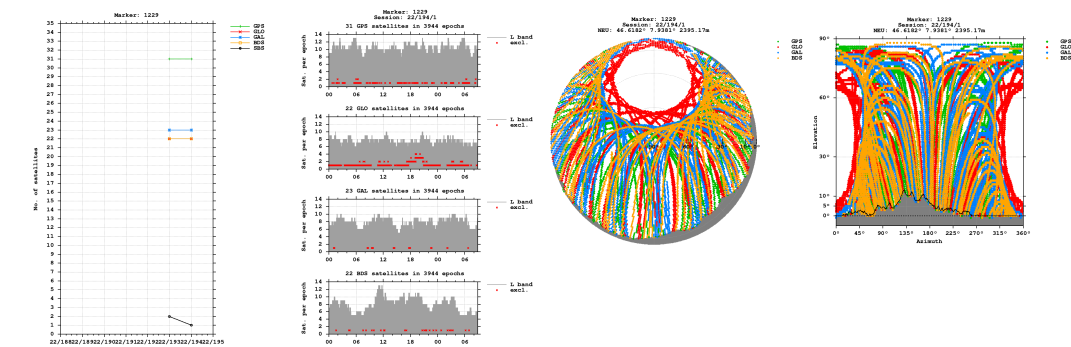


Bands

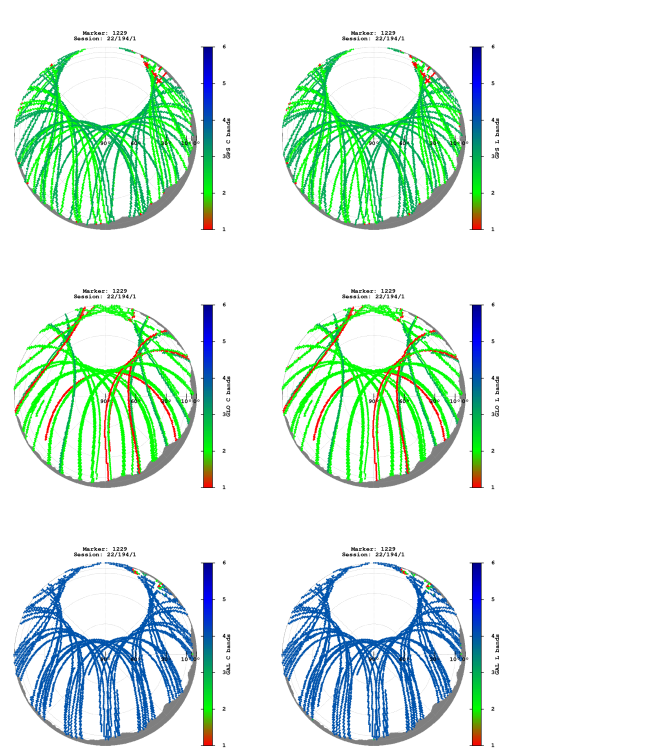


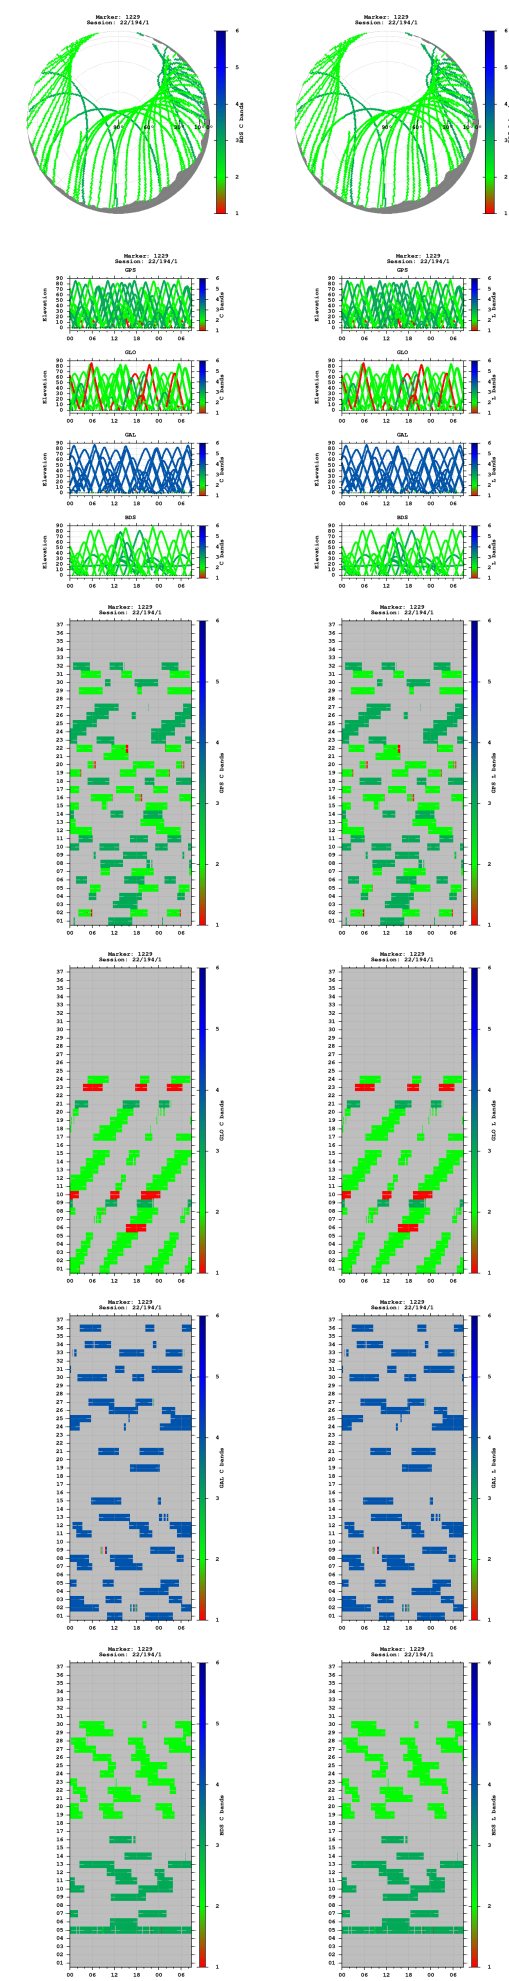


Observations

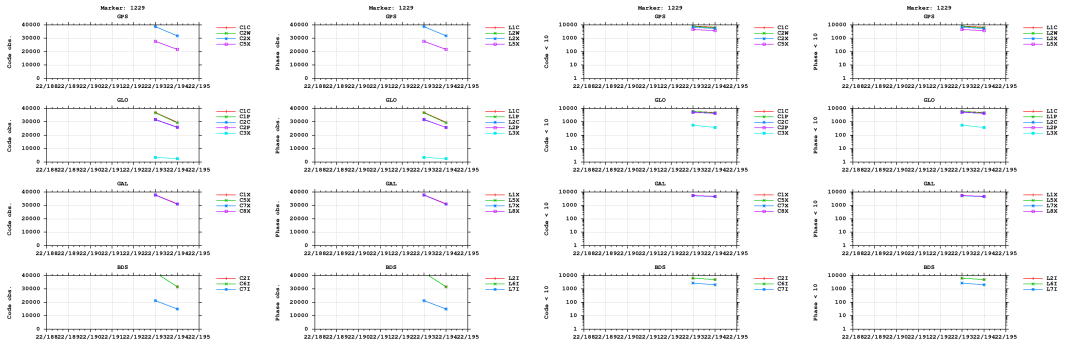



Multipath

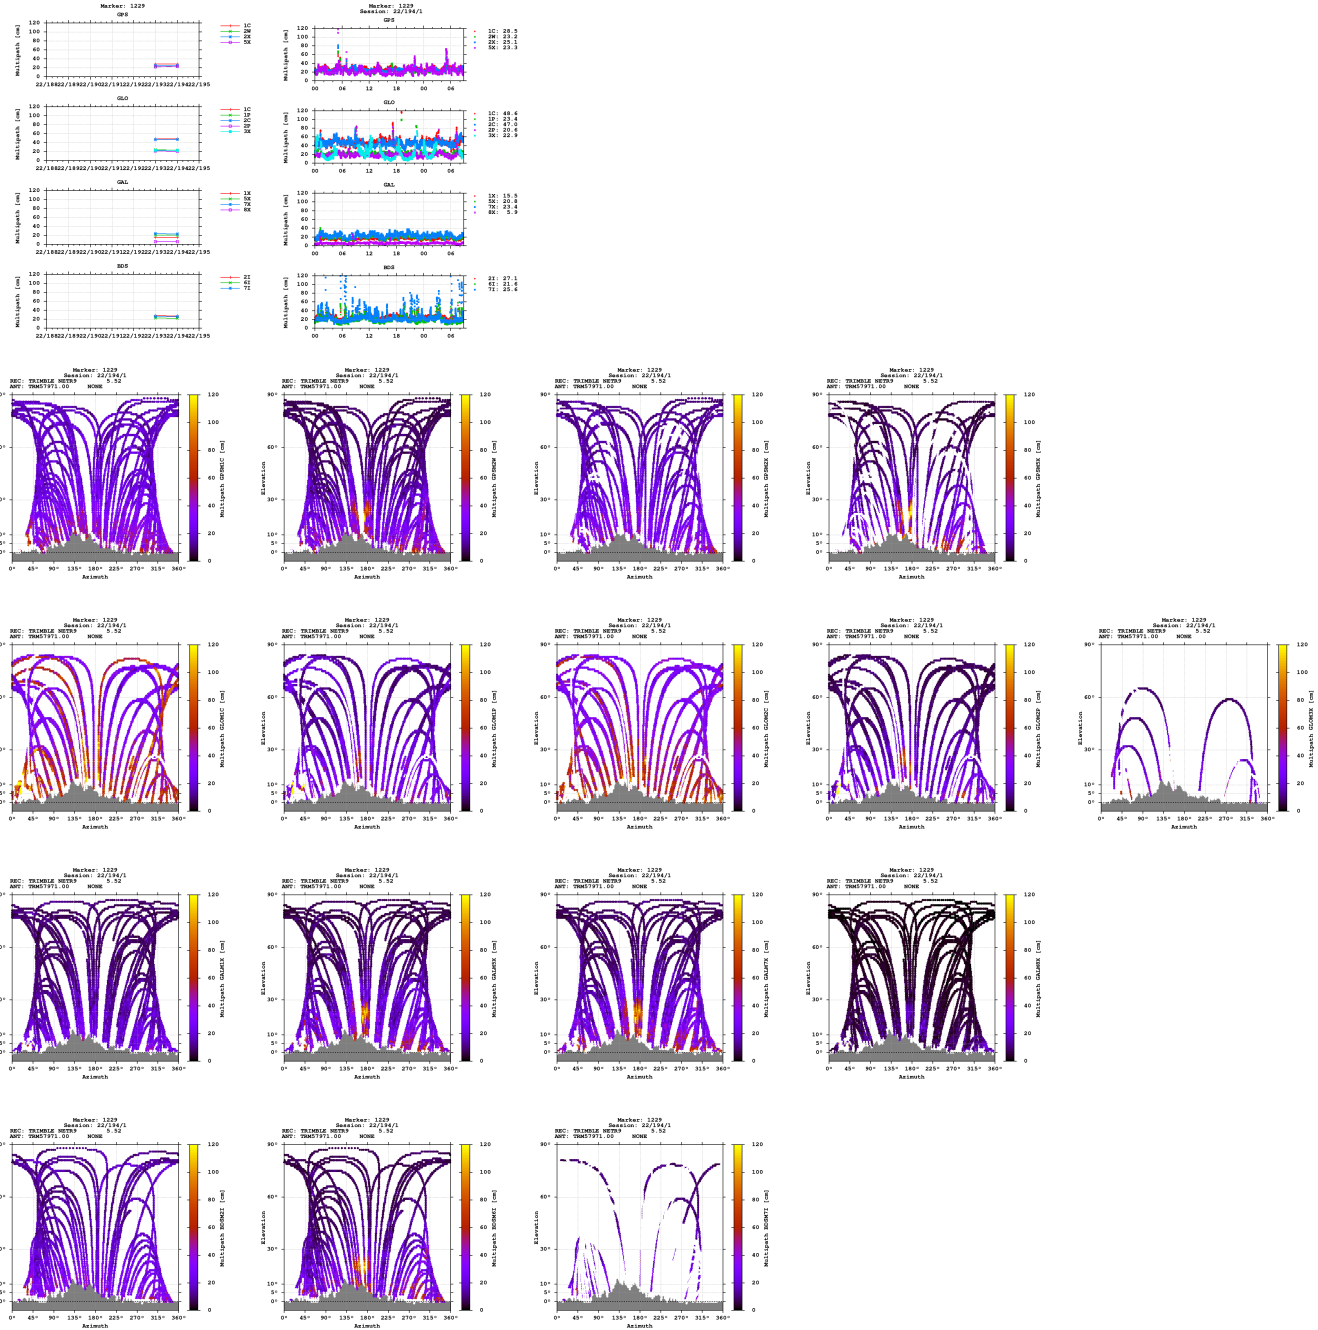

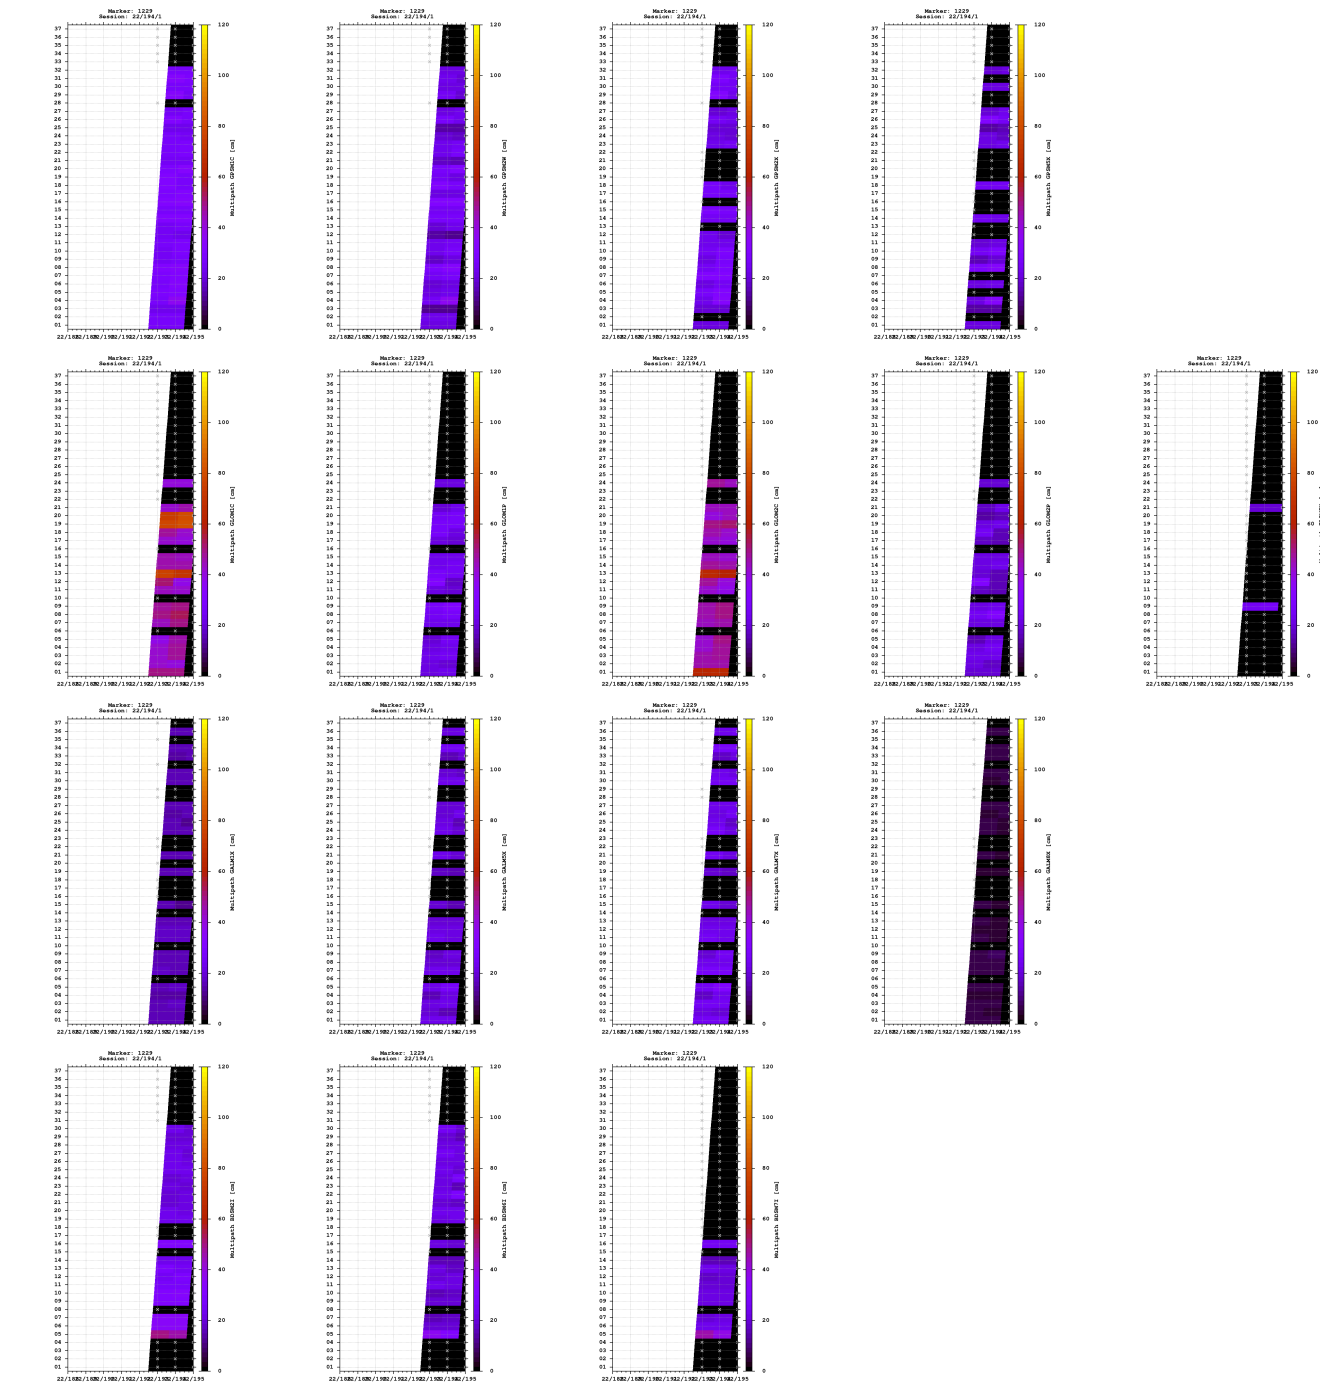


Signal-to-noise ratio

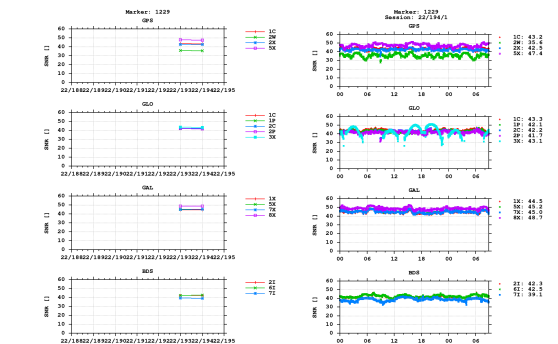

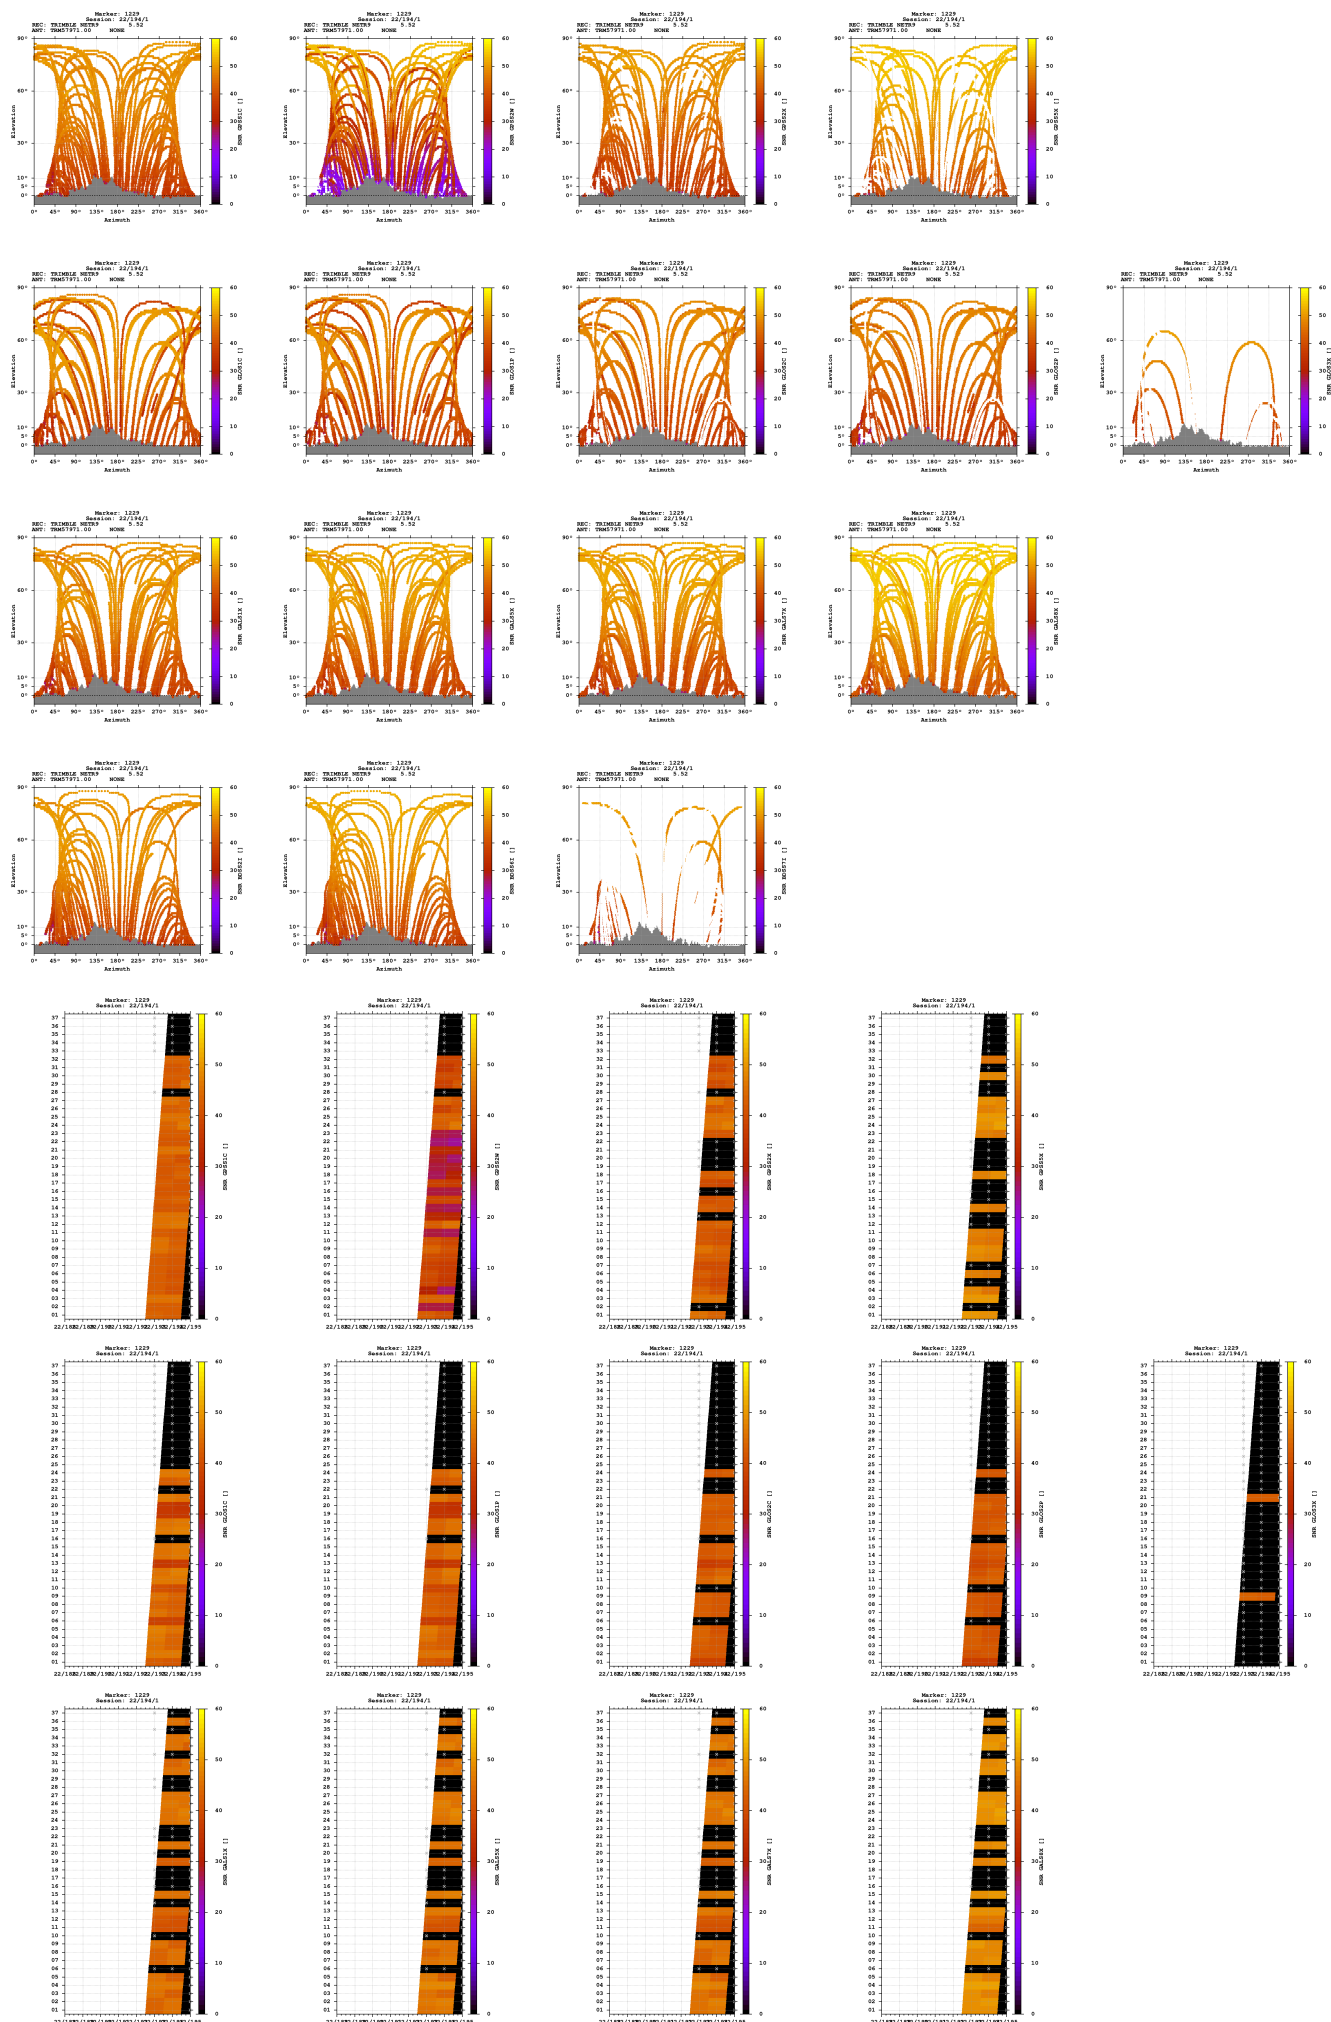





2022-07-12 07:31:00	GPS	4348211.3579	606309.1995	4614454.1064	46.618176498	7.938069433	2395.1671
2022-07-12 07:31:00	GLO	4348211.6060	606309.1501	4614454.5739	46.618177824	7.938068347	2395.6710
2022-07-12 07:31:00	GAL	4348210.9460	606309.1493	4614453.9336	46.618178143	7.938069526	2394.7565
2022-07-12 07:31:00	BDS	4348210.1282	606309.0383	4614456.0473	46.618196591	7.938069566	2395.7260

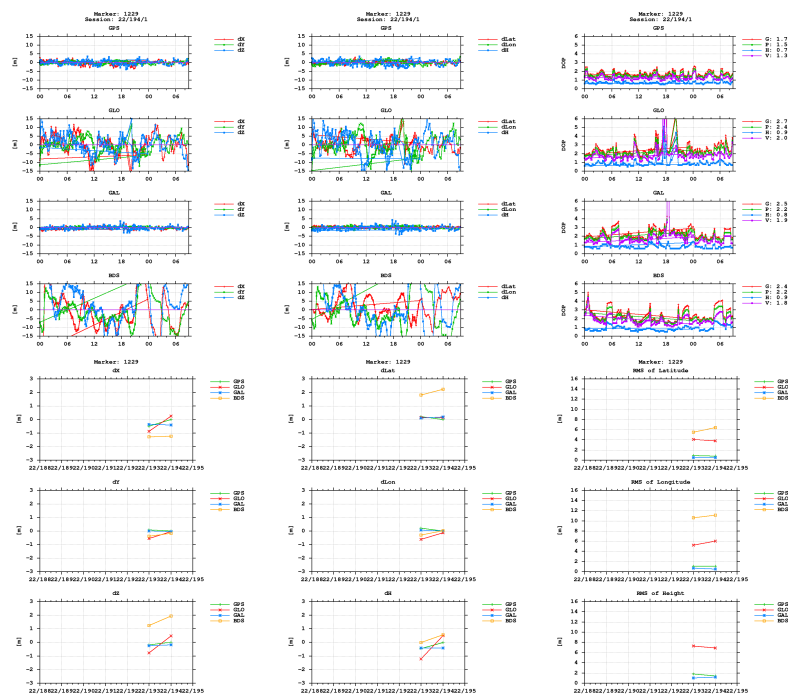

BNC

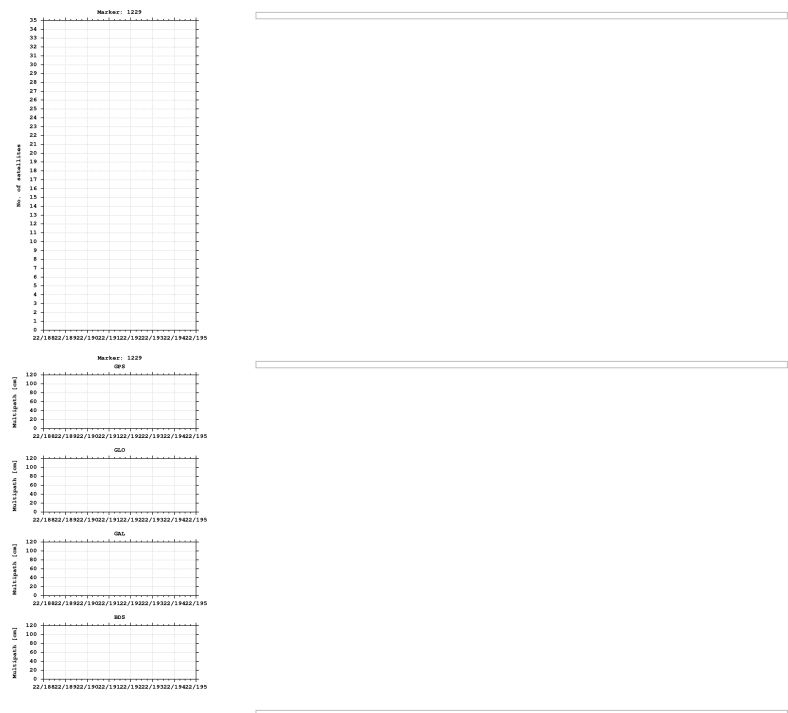

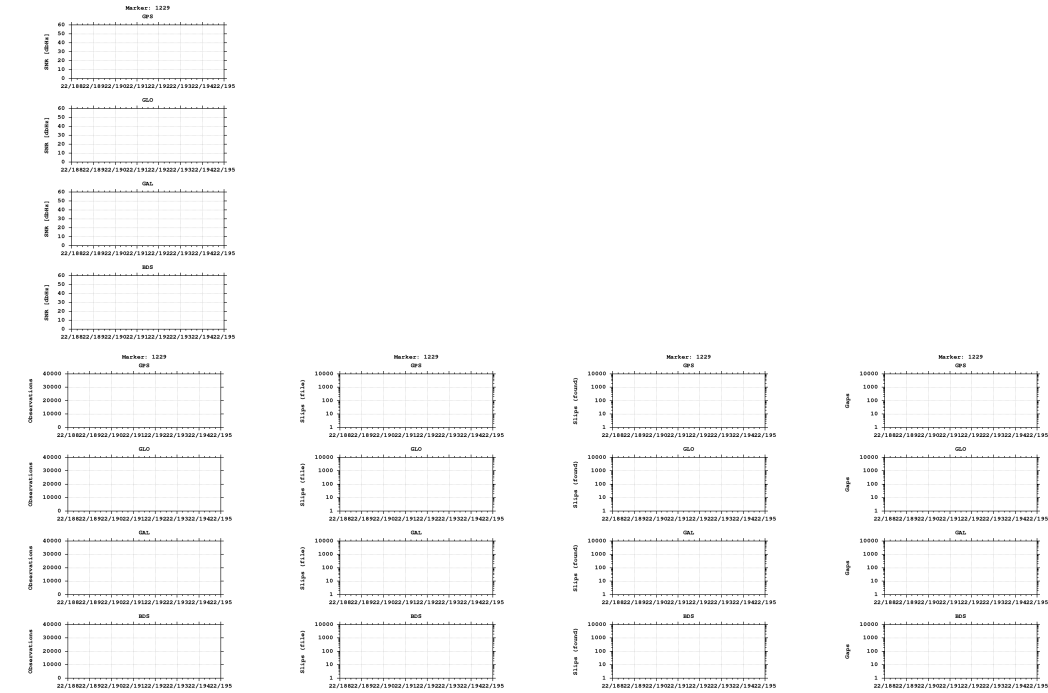

Equipment

2022-07-12 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)