


GNSS observation file monitoring for 0518


Last RINEX file: 05181921.22O
RINEX version: 3.02
Marker: 1267
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

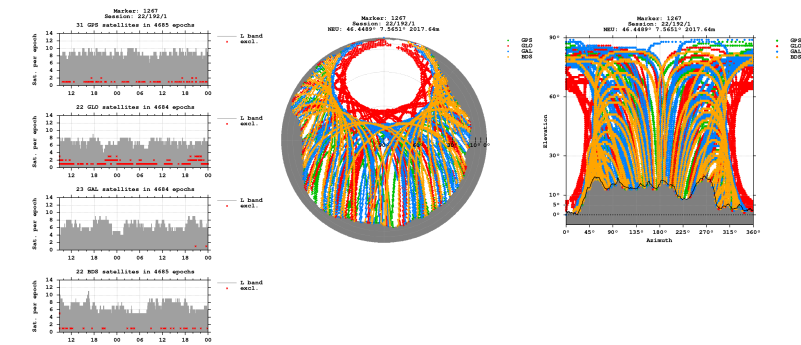


Bands

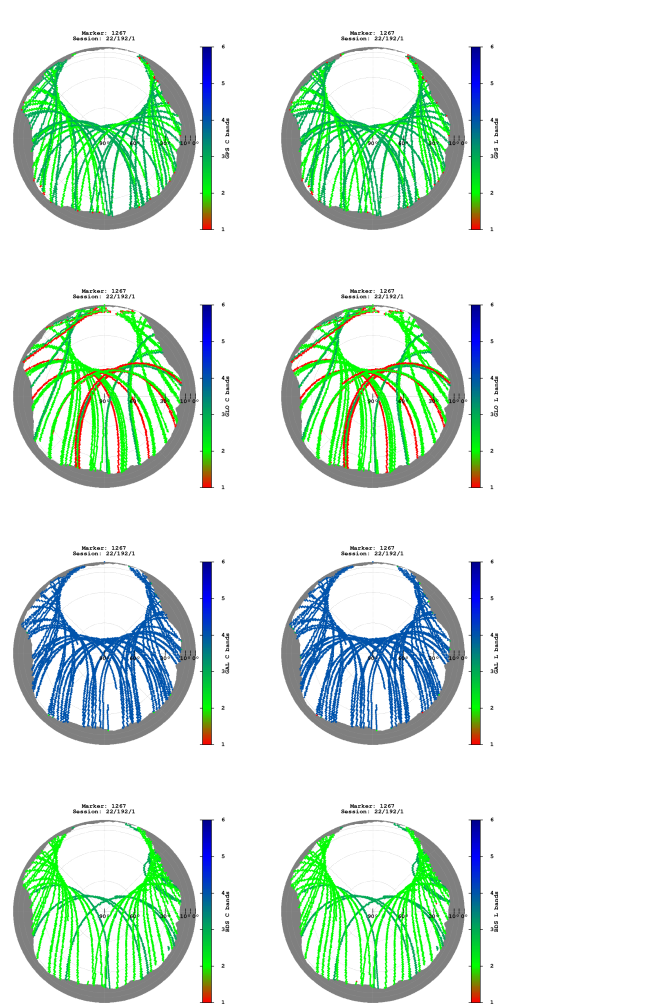

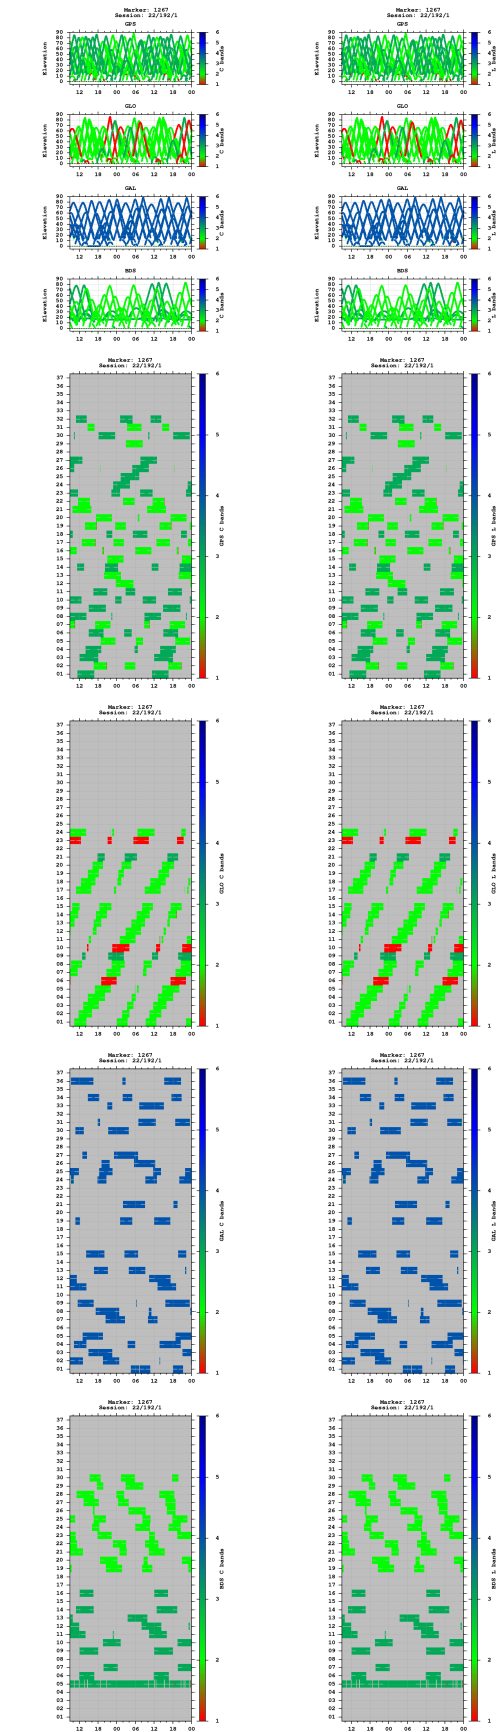



Multipath

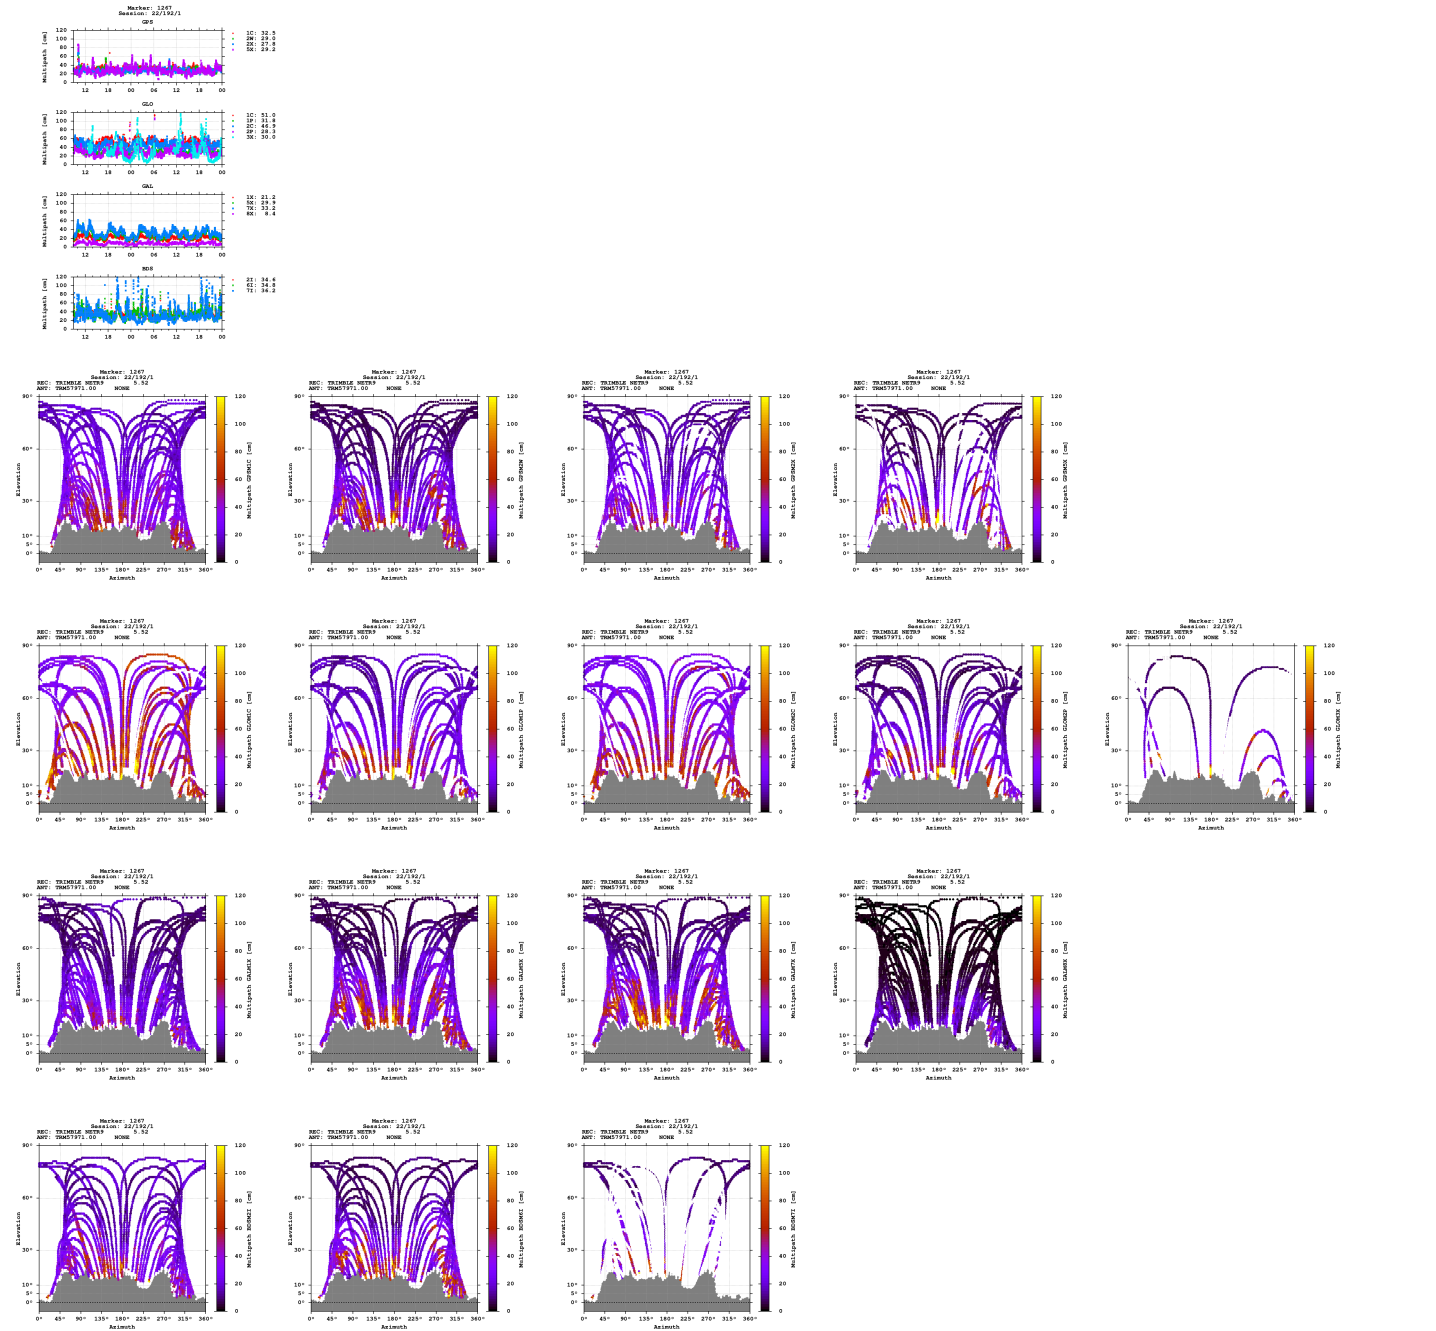

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

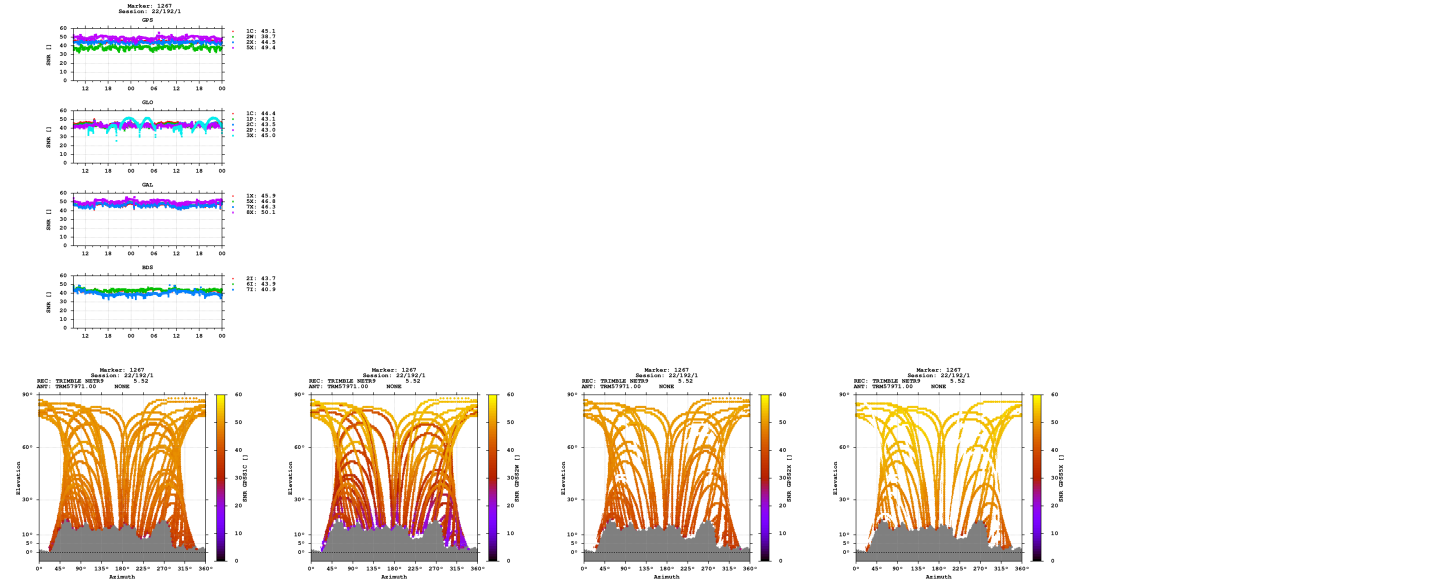

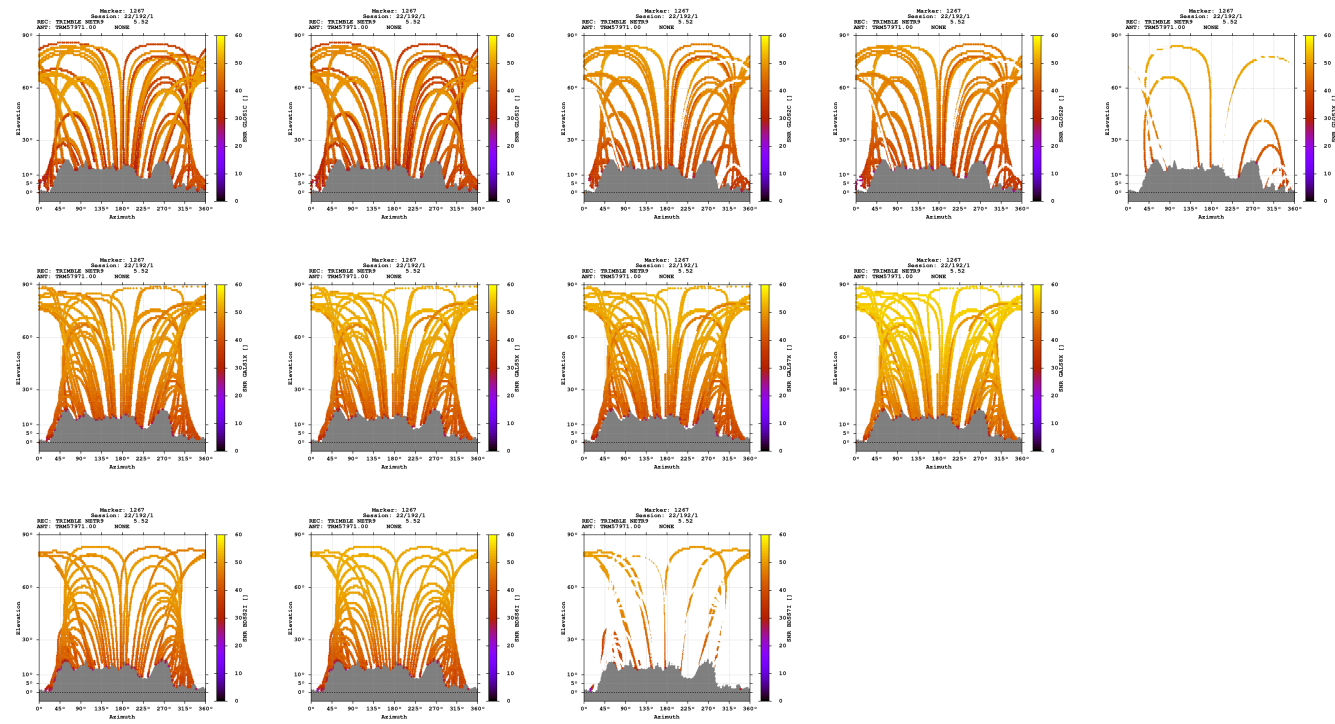

Estimates

2022-07-11 08:57:30	GPS	4365348.8857	579753.2072	4601233.5011	46.448935202	7.565067092	2017.6426
2022-07-11 08:57:30	GLO	4365348.7054	579752.0206	4601232.0293	46.448928265	7.565052097	2016.3451
2022-07-11 08:57:30	GAL	4365349.0149	579753.1664	4601233.2558	46.448932882	7.565066345	2017.5493
2022-07-11 08:57:30	BDS	4365347.5770	579751.8341	4601234.4297	46.448950589	7.565051625	2017.2972

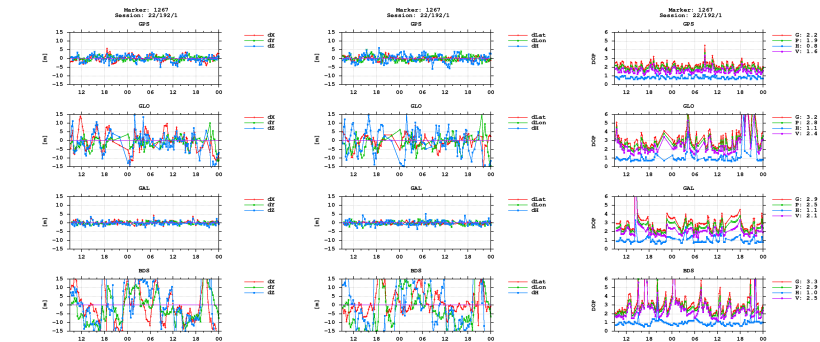

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)