


GNSS observation file monitoring for 0518


Last RINEX file: 05181931.220
RINEX version: 3.02
Marker: 1267
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

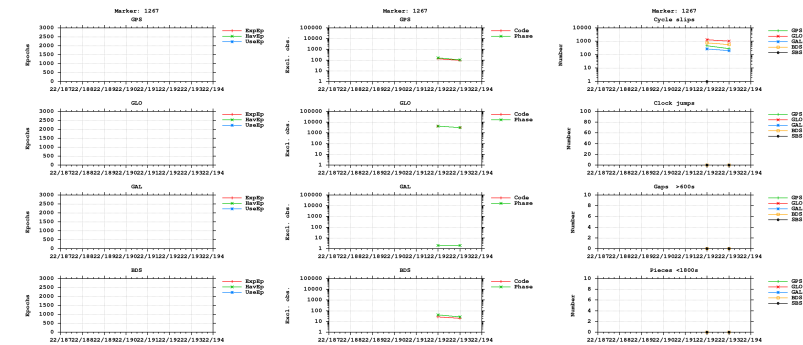



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

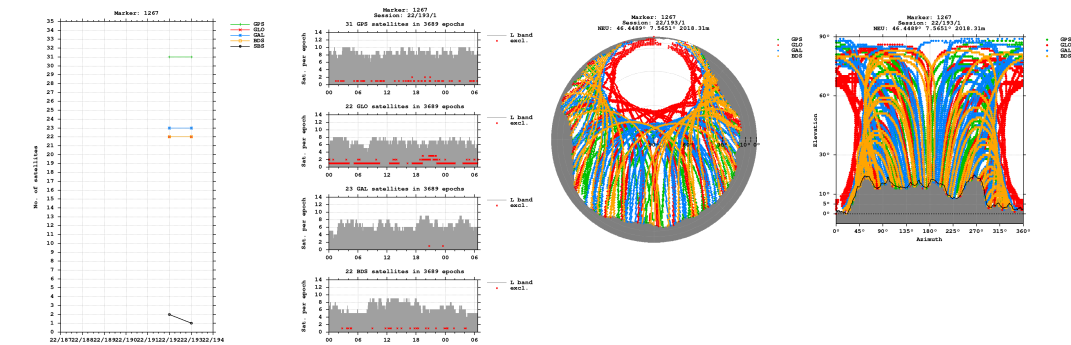


Bands

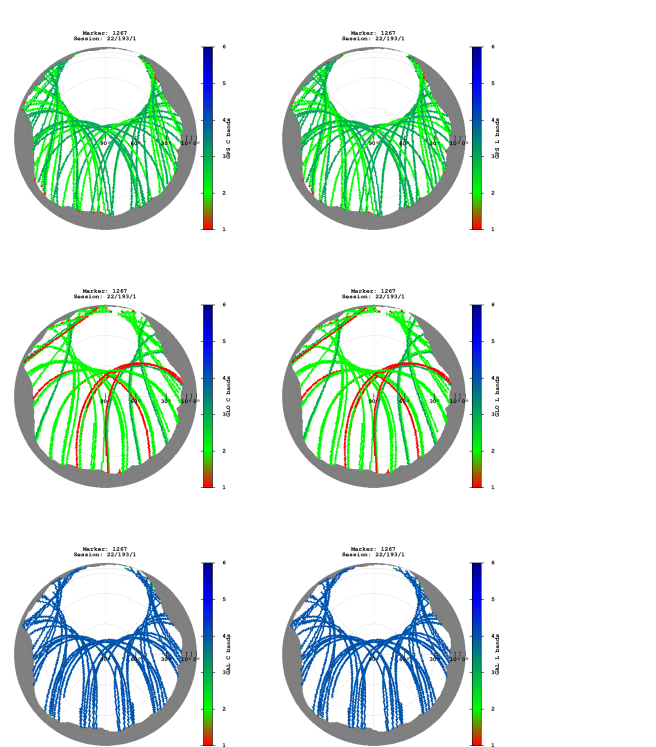


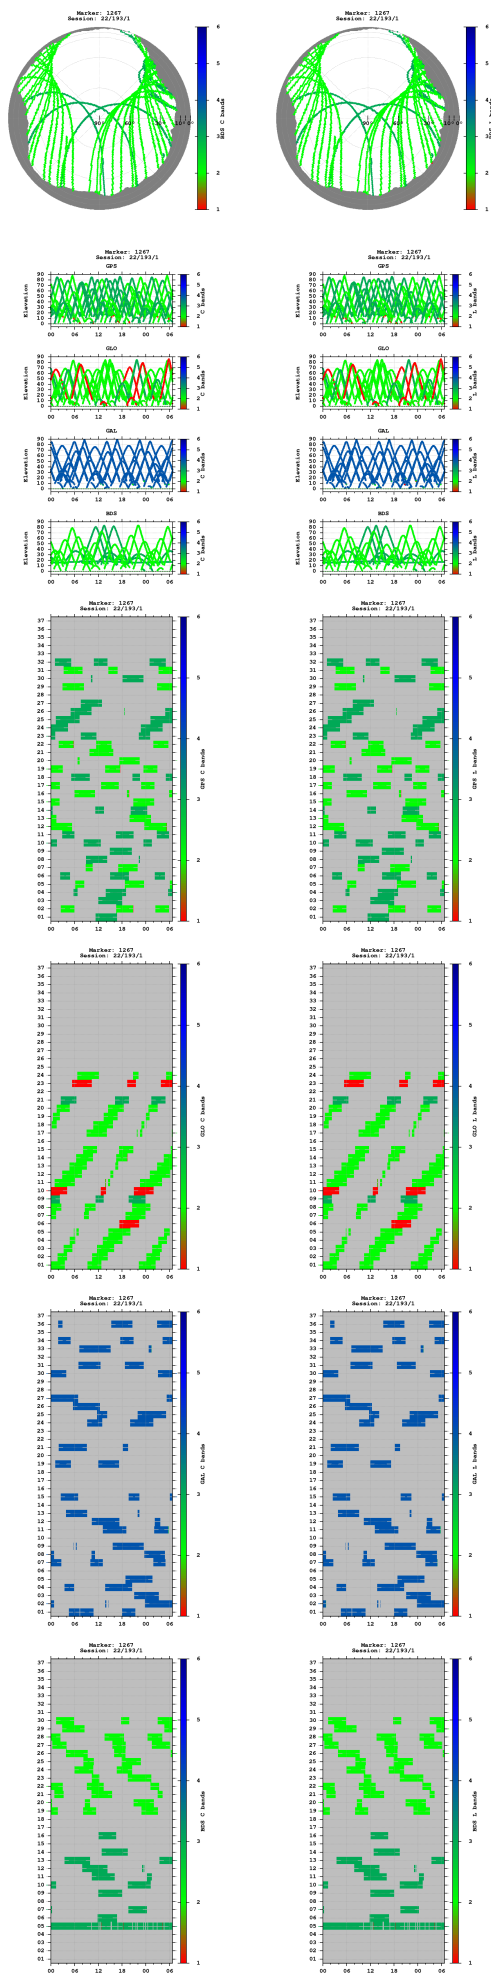


Observations

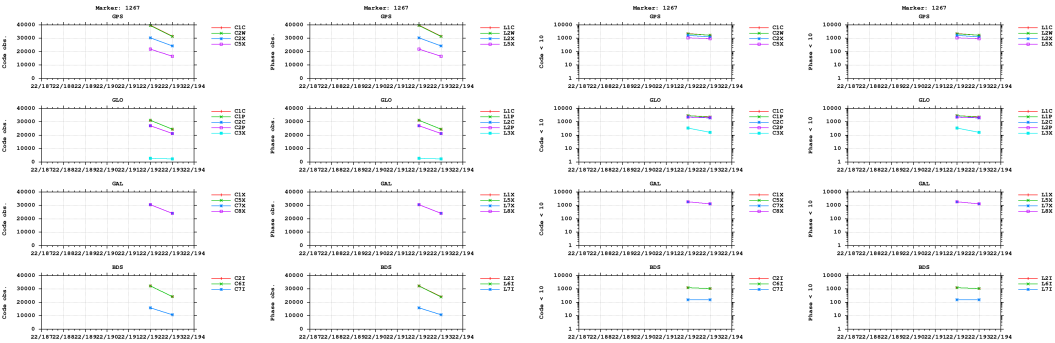


Multipath

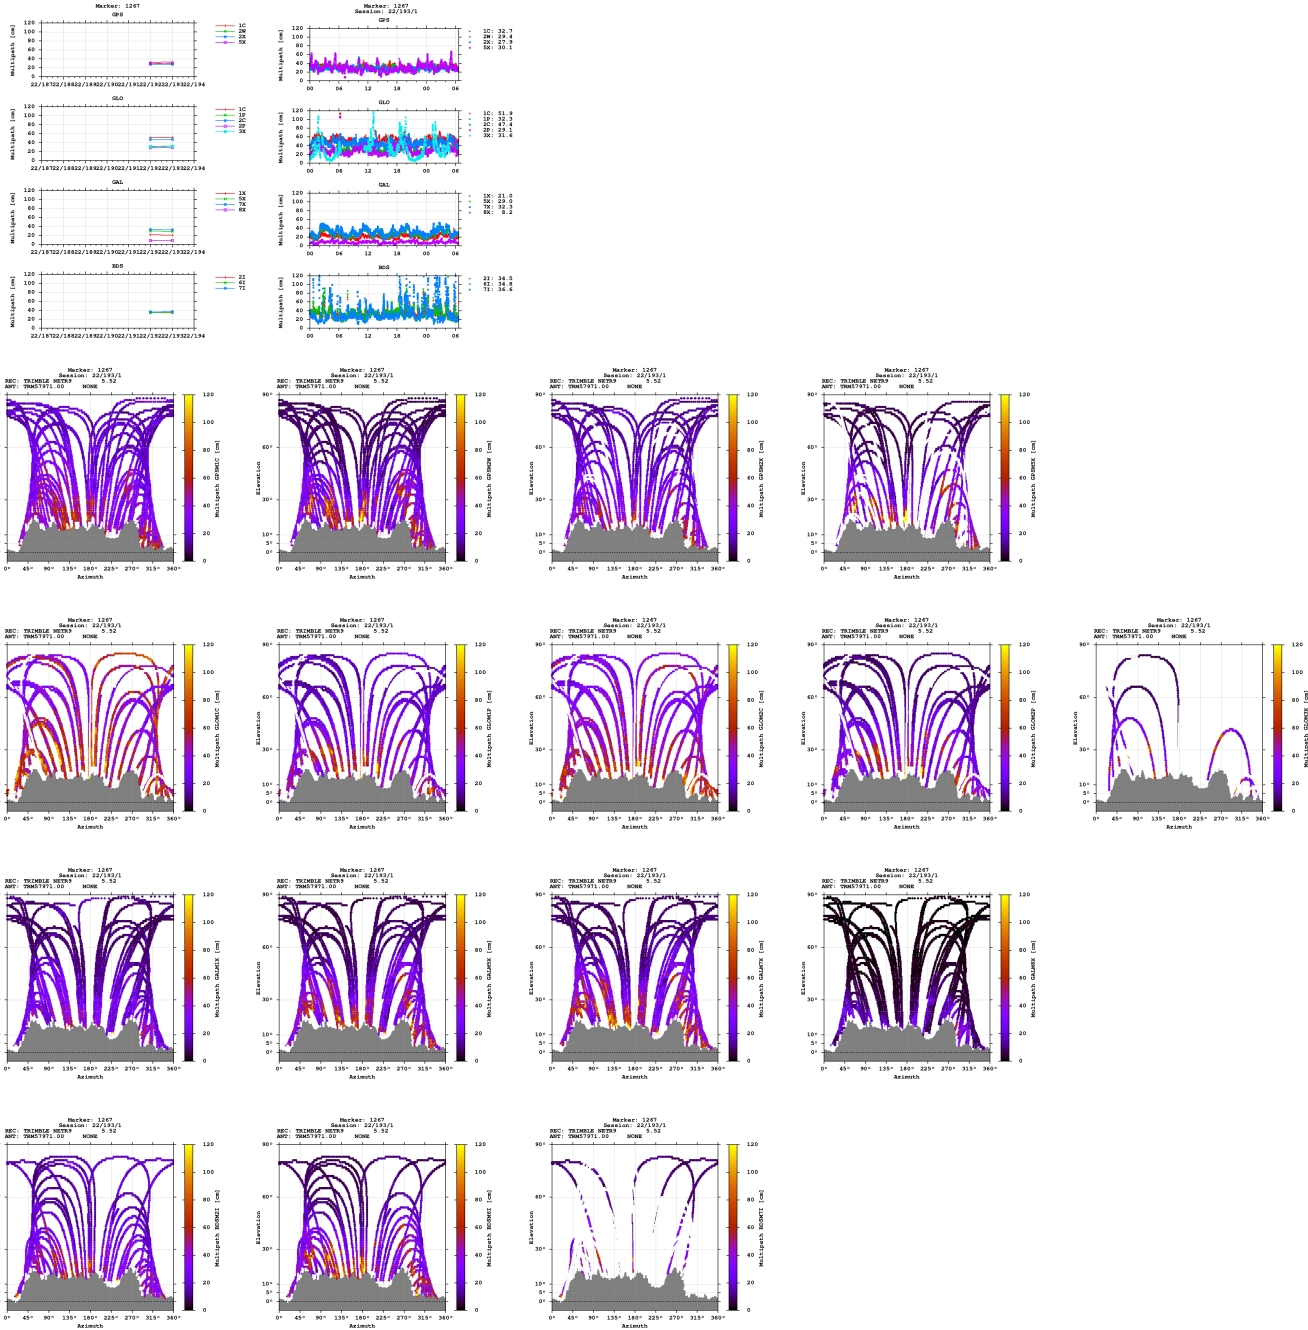


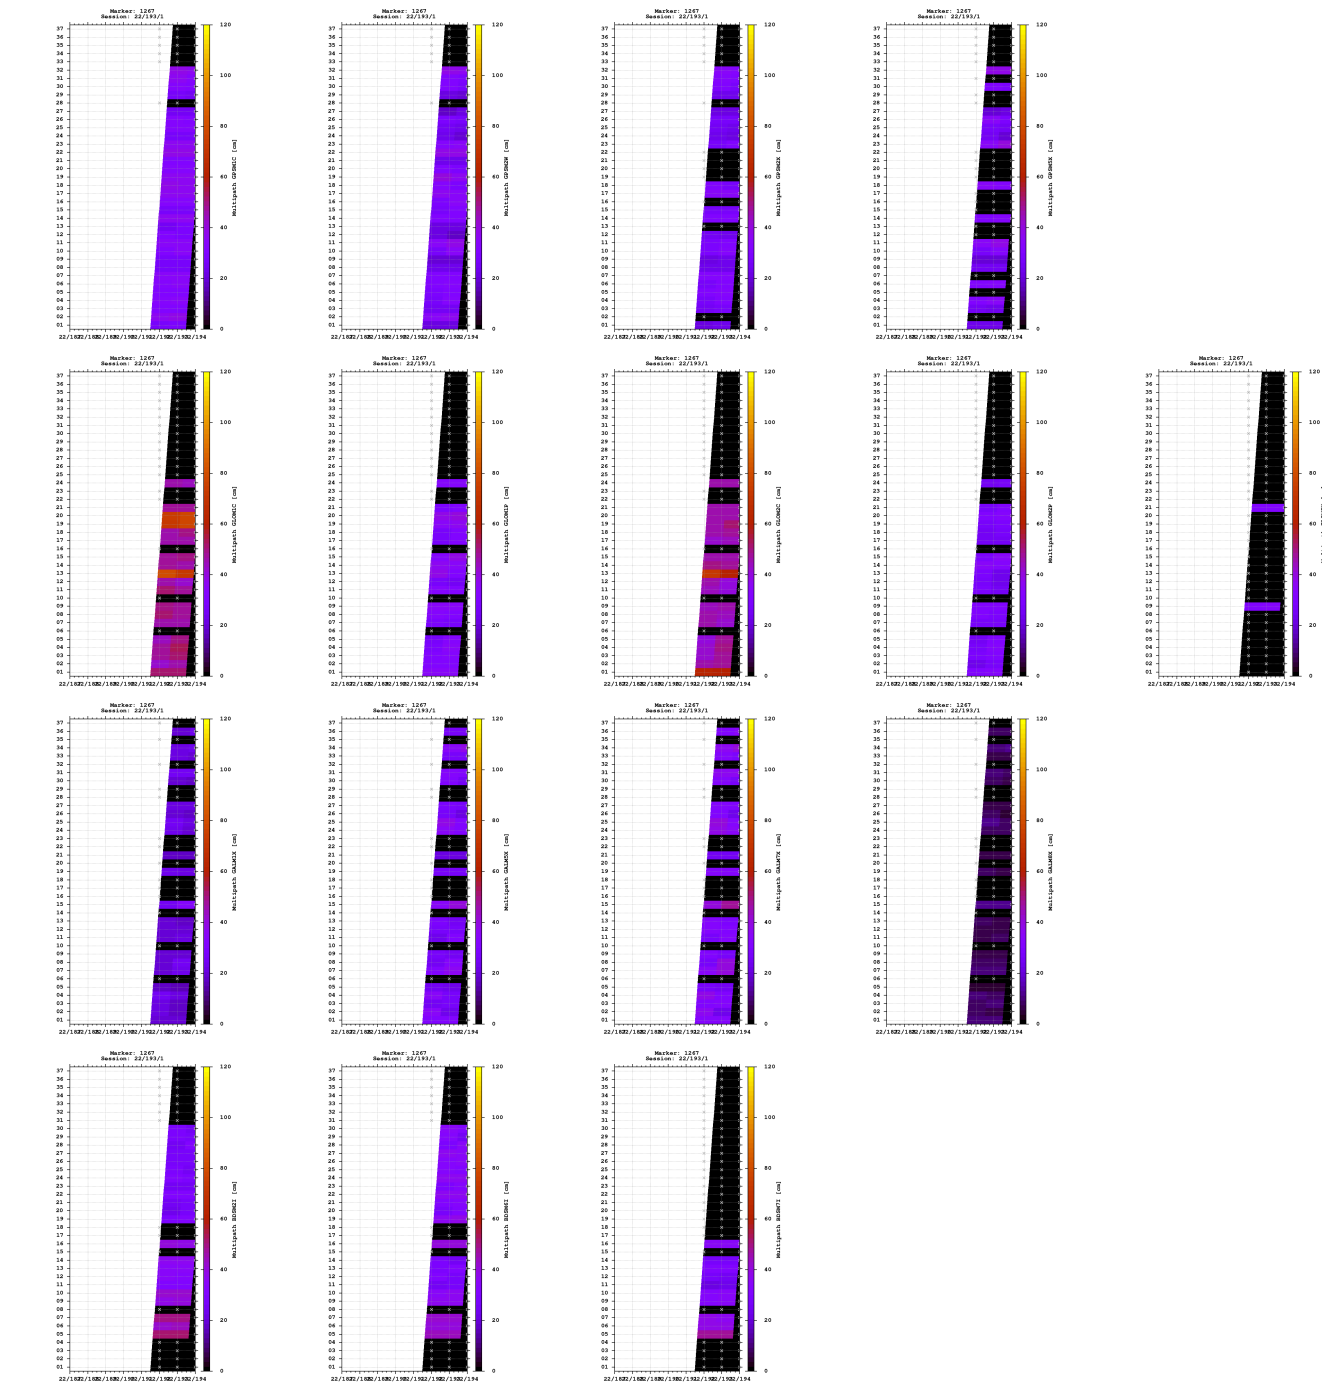


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

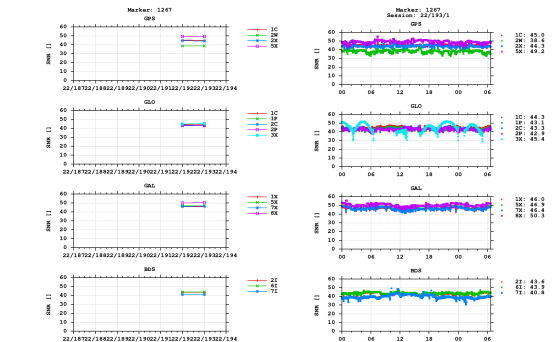


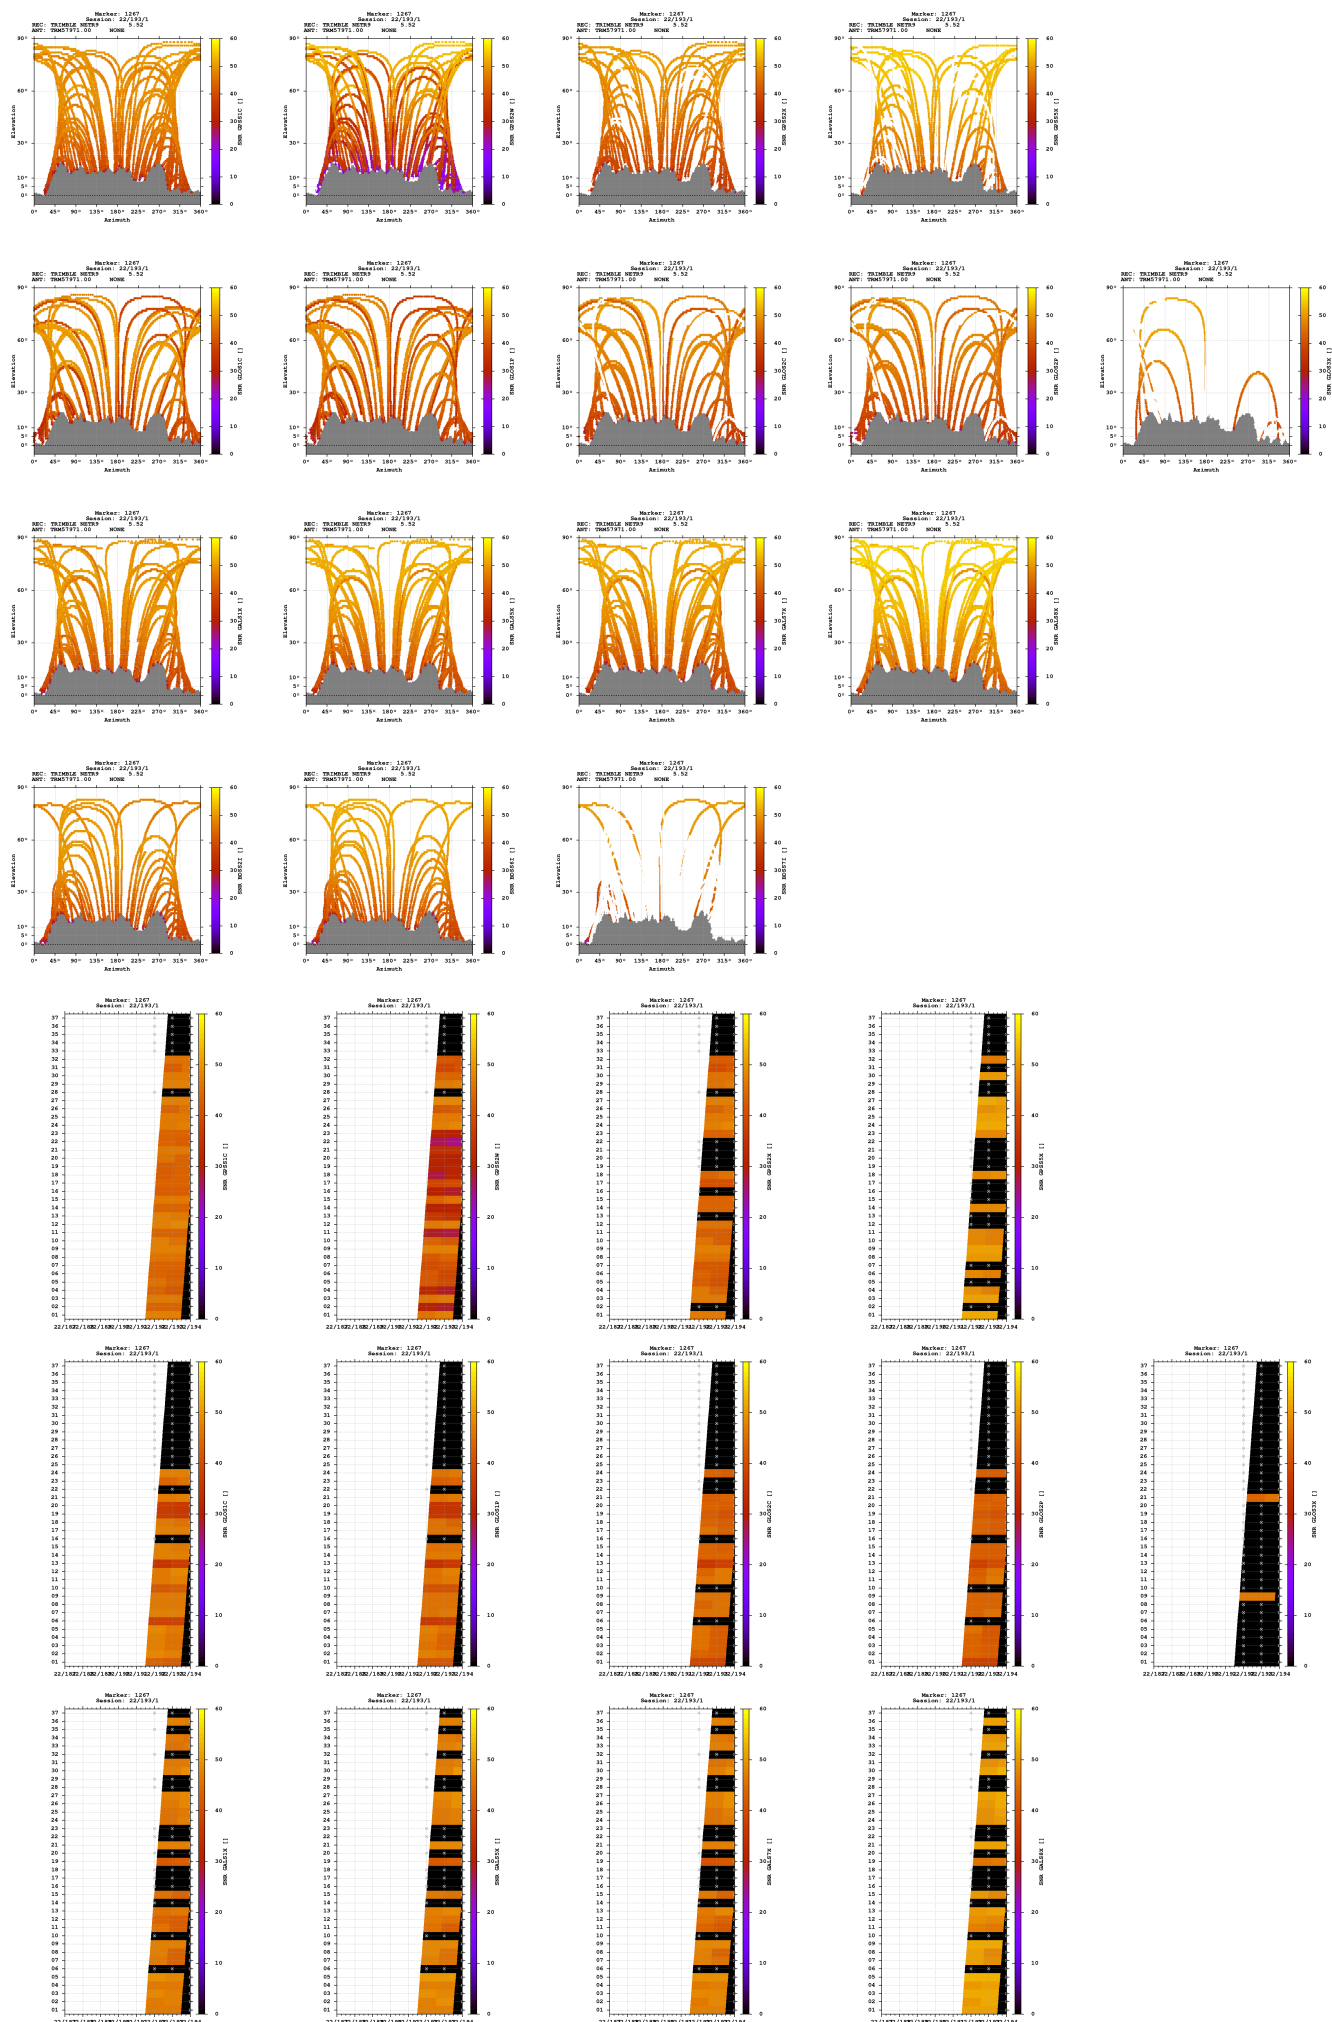

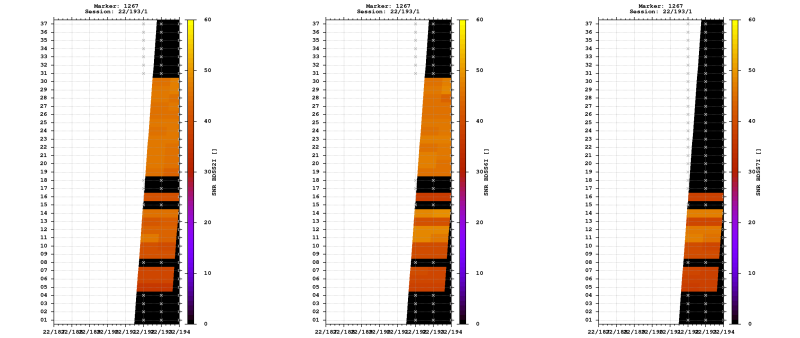


Estimates

2022-07-11 08:57:30	GPS	4365349.4680	579753.0493	4601233.8974	46.448934030	7.565064058	2018.3132
2022-07-11 08:57:30	GLO	4365349.4502	579752.2065	4601233.9175	46.448934993	7.565053219	2018.2392
2022-07-11 08:57:30	GAL	4365348.9315	579753.1038	4601233.2683	46.448933552	7.565065681	2017.4957
2022-07-11 08:57:30	BDS	4365349.4406	579754.0779	4601236.2239	46.448947740	7.565077371	2020.0739

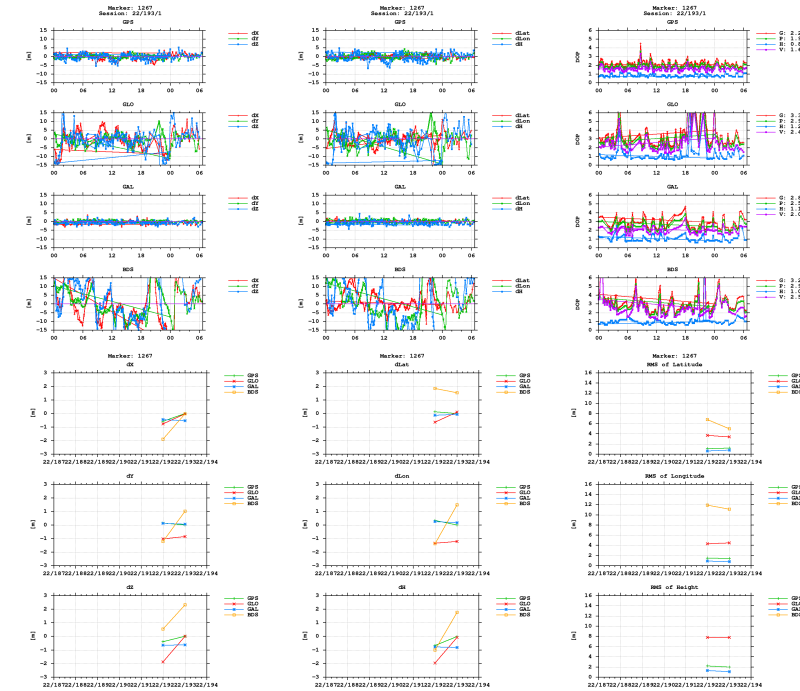

BNC



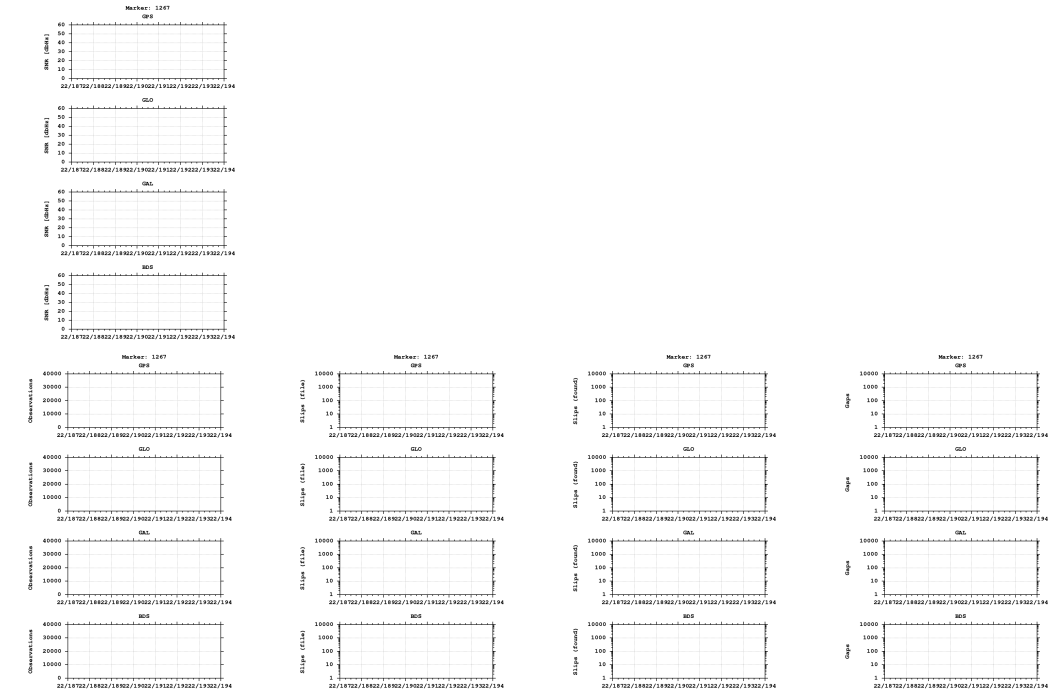

Equipment

2022-07-11 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)