


GNSS observation file monitoring for 0518


Last RINEX file: 05181941.220
RINEX version: 3.02
Marker: 1211
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

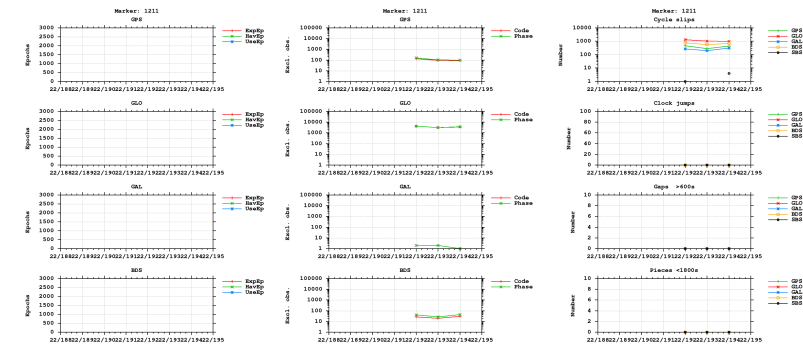



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

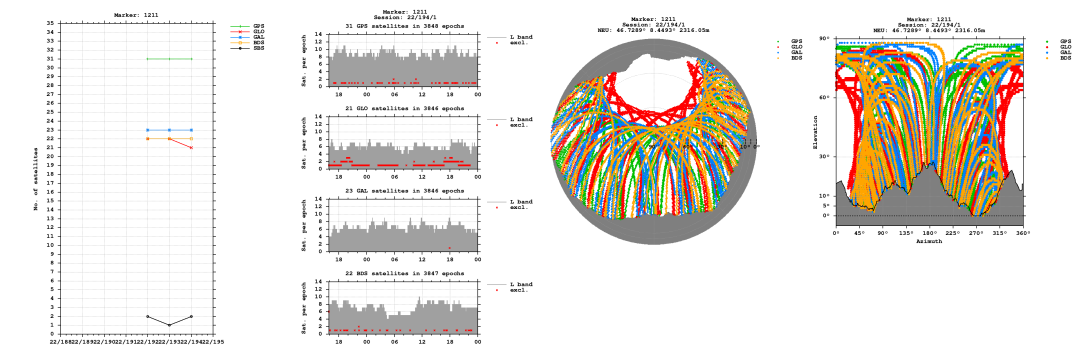


Bands

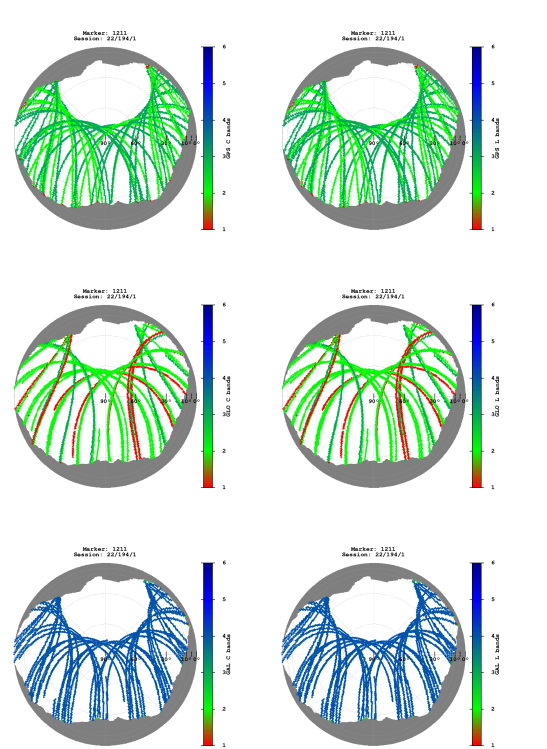


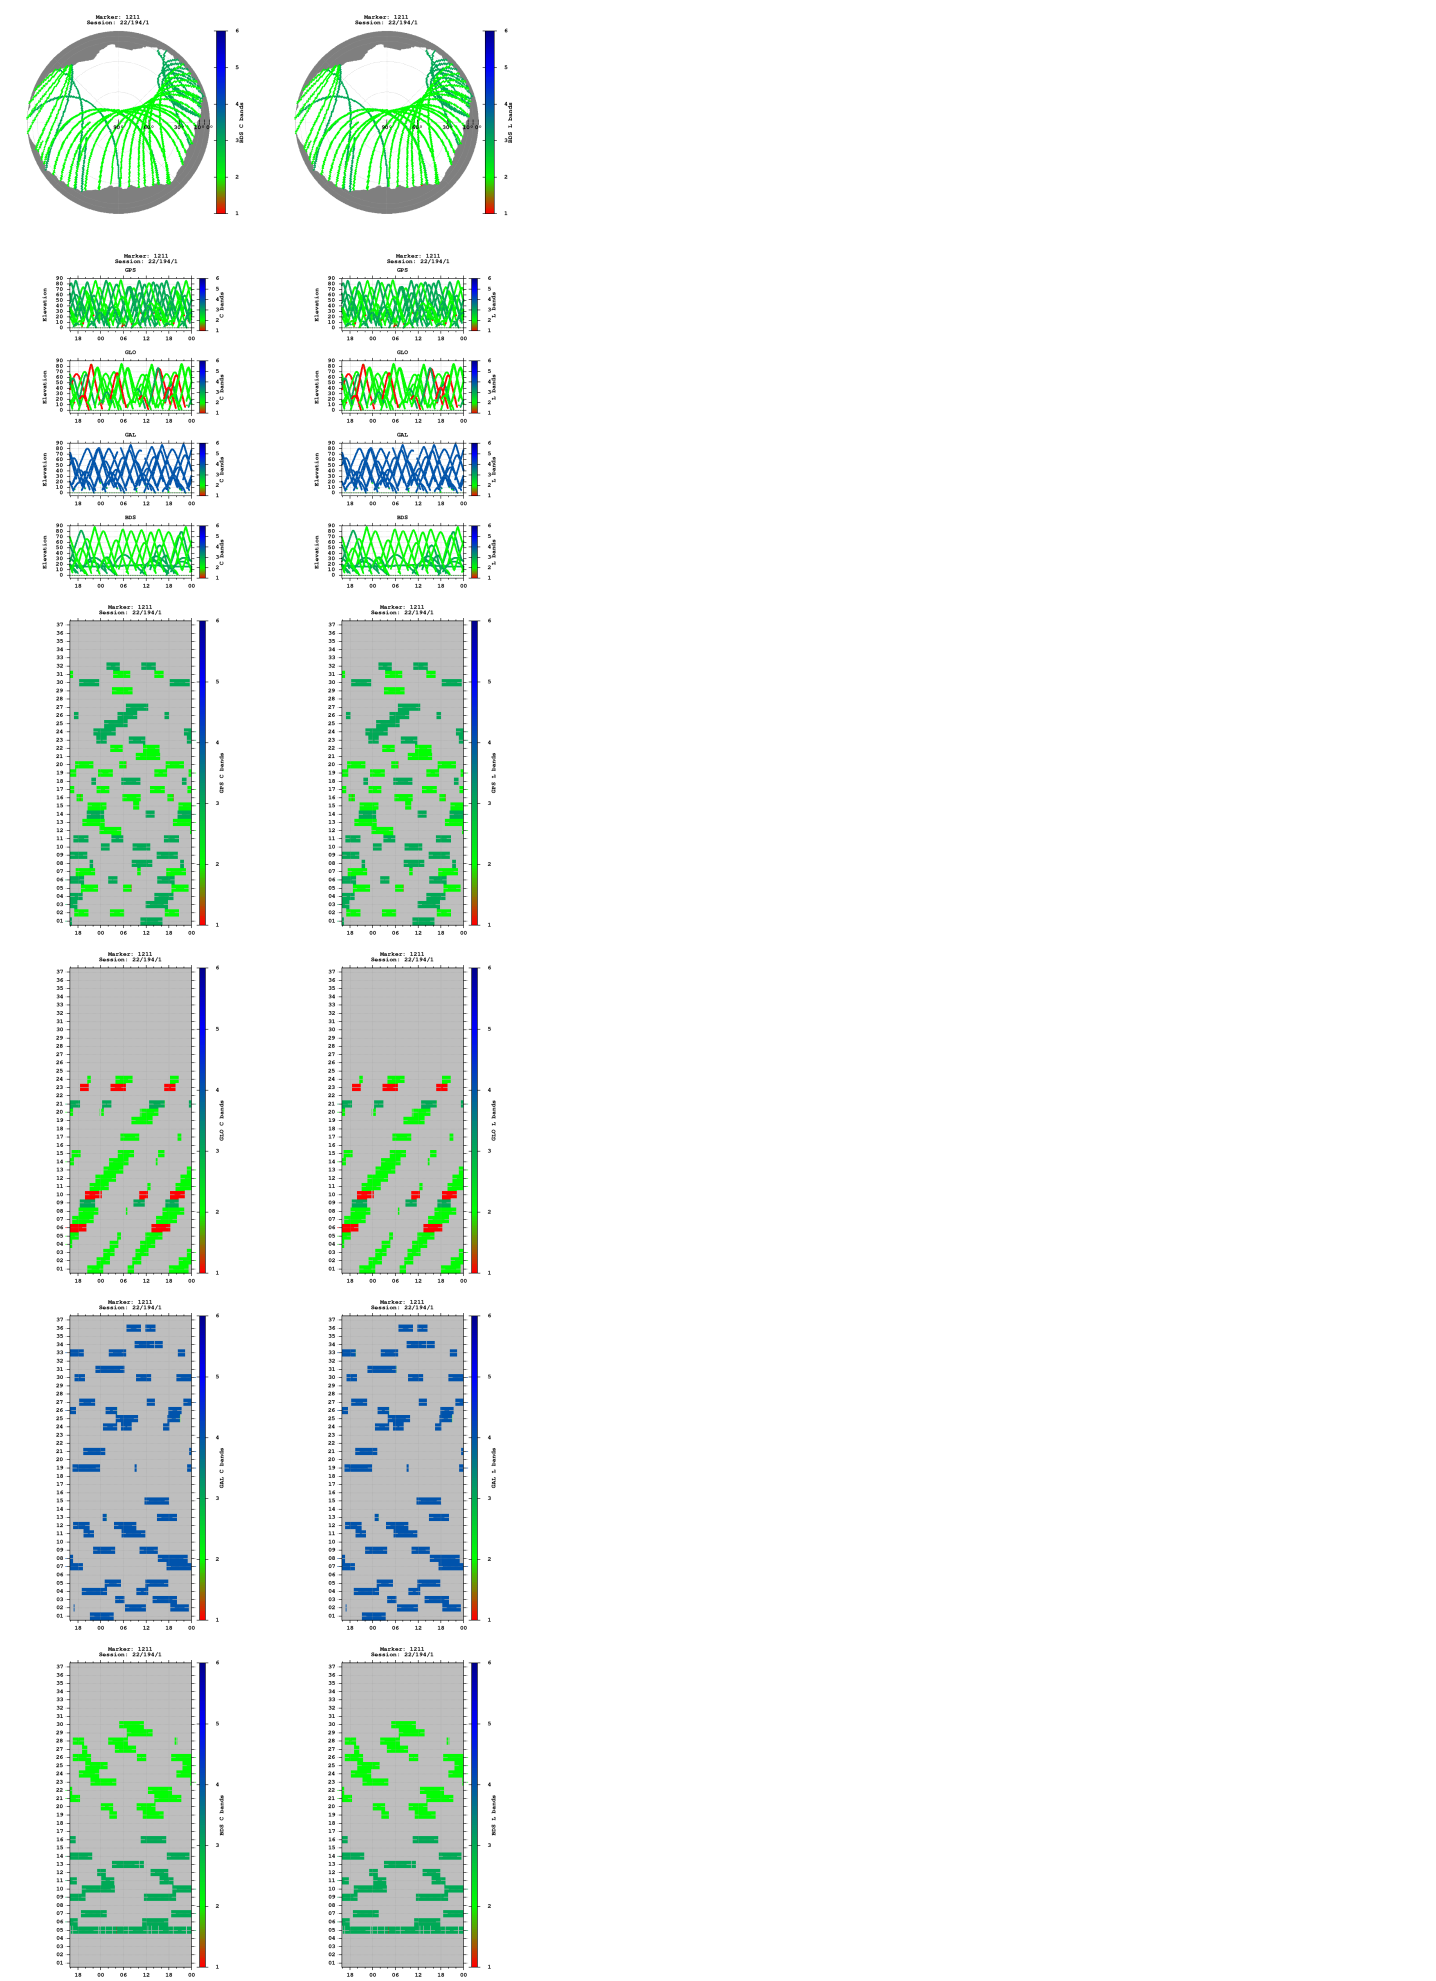

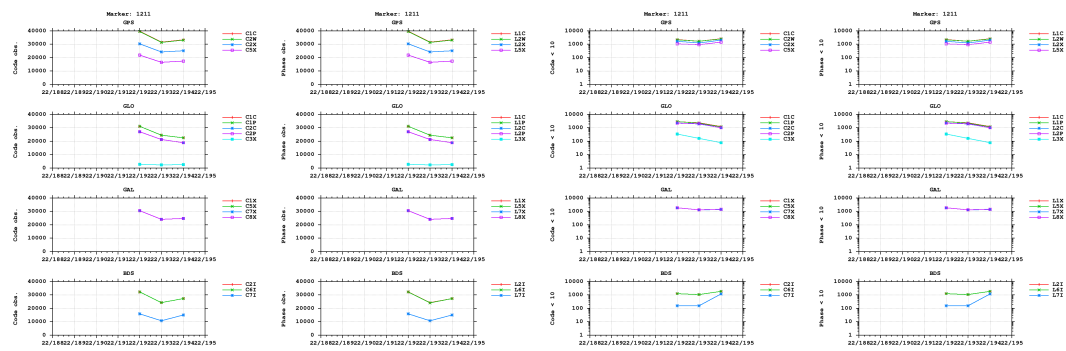


Multipath

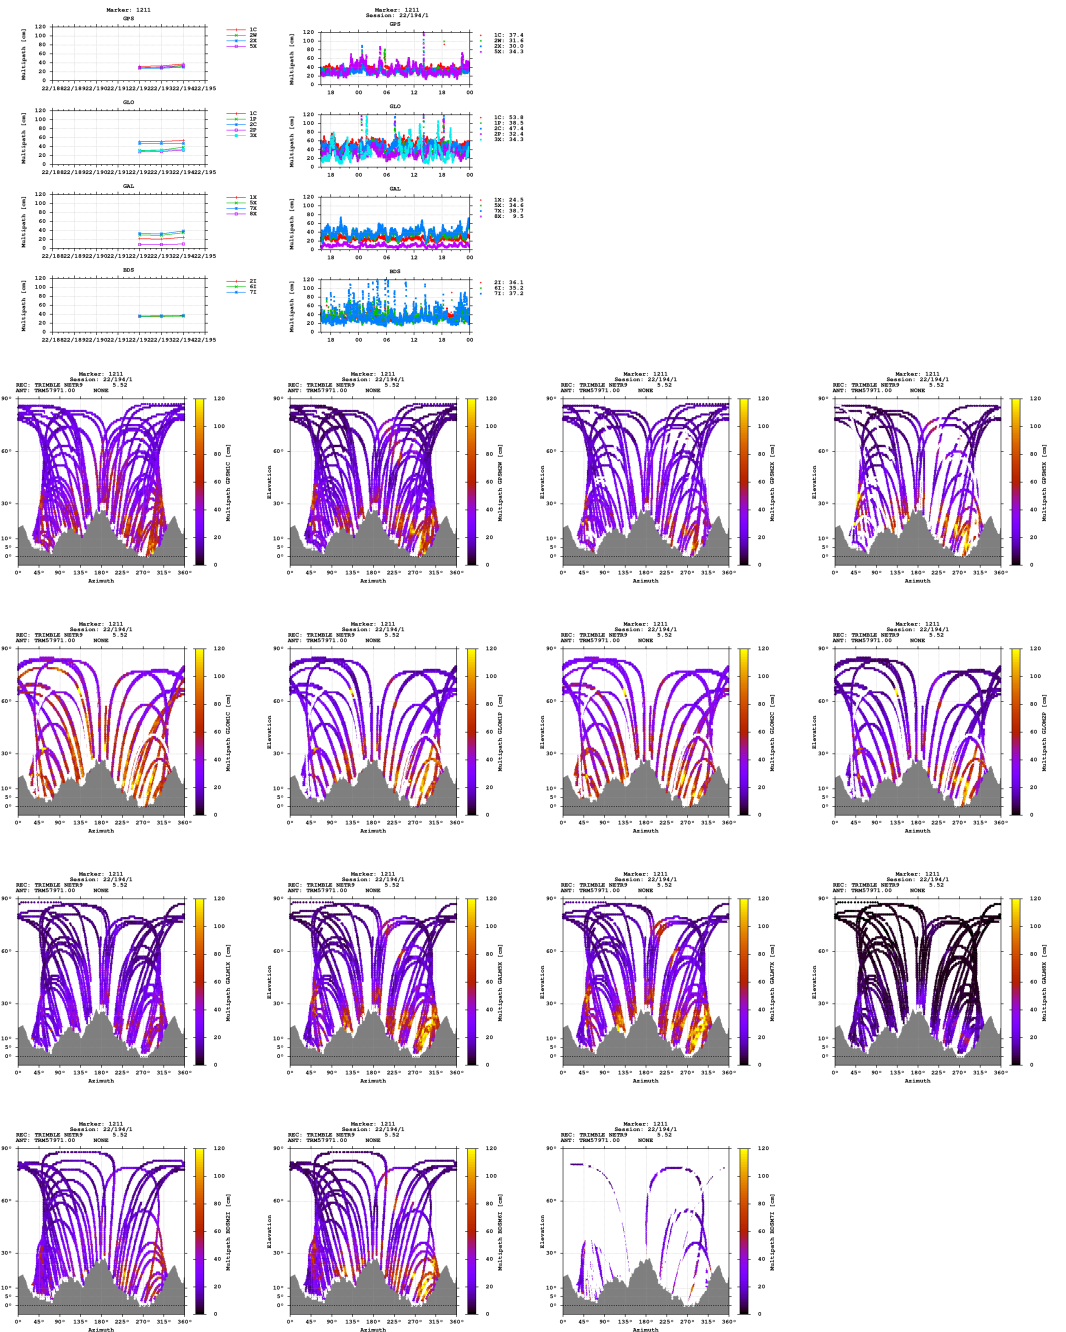


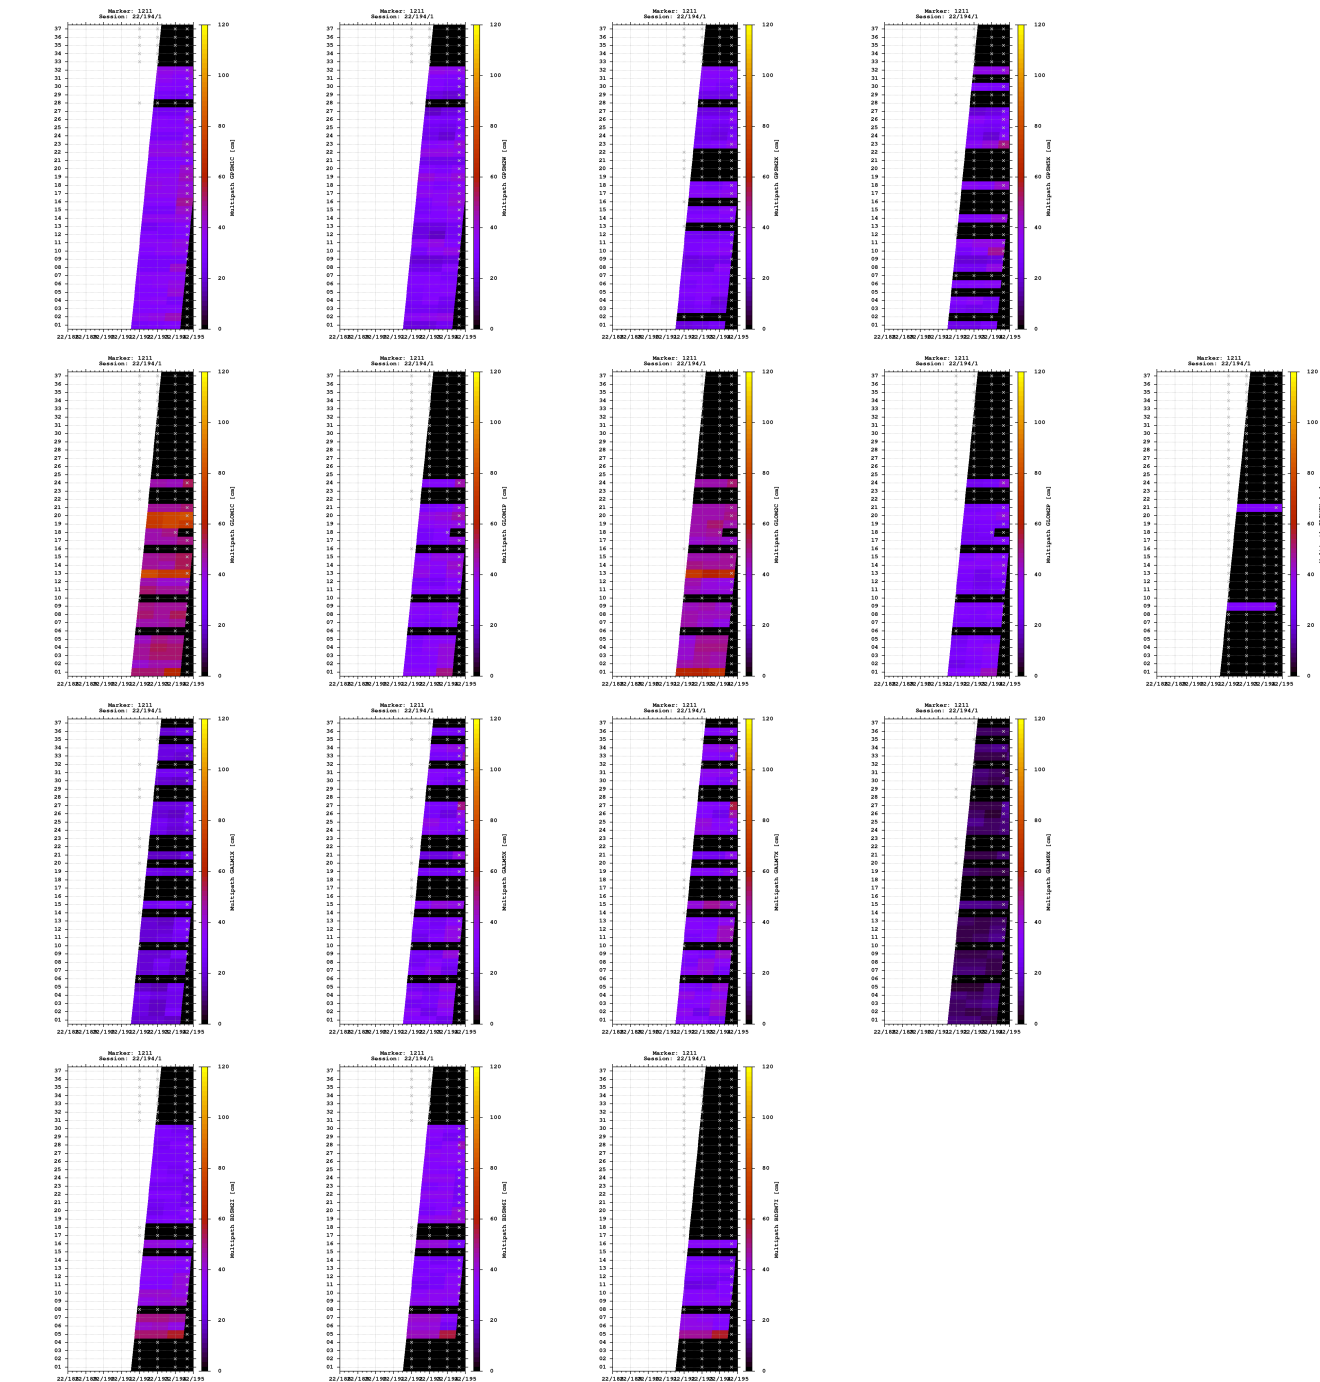


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

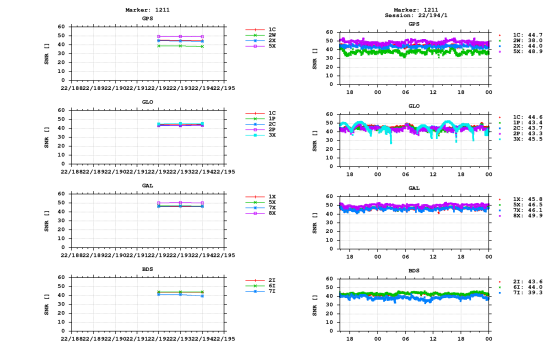


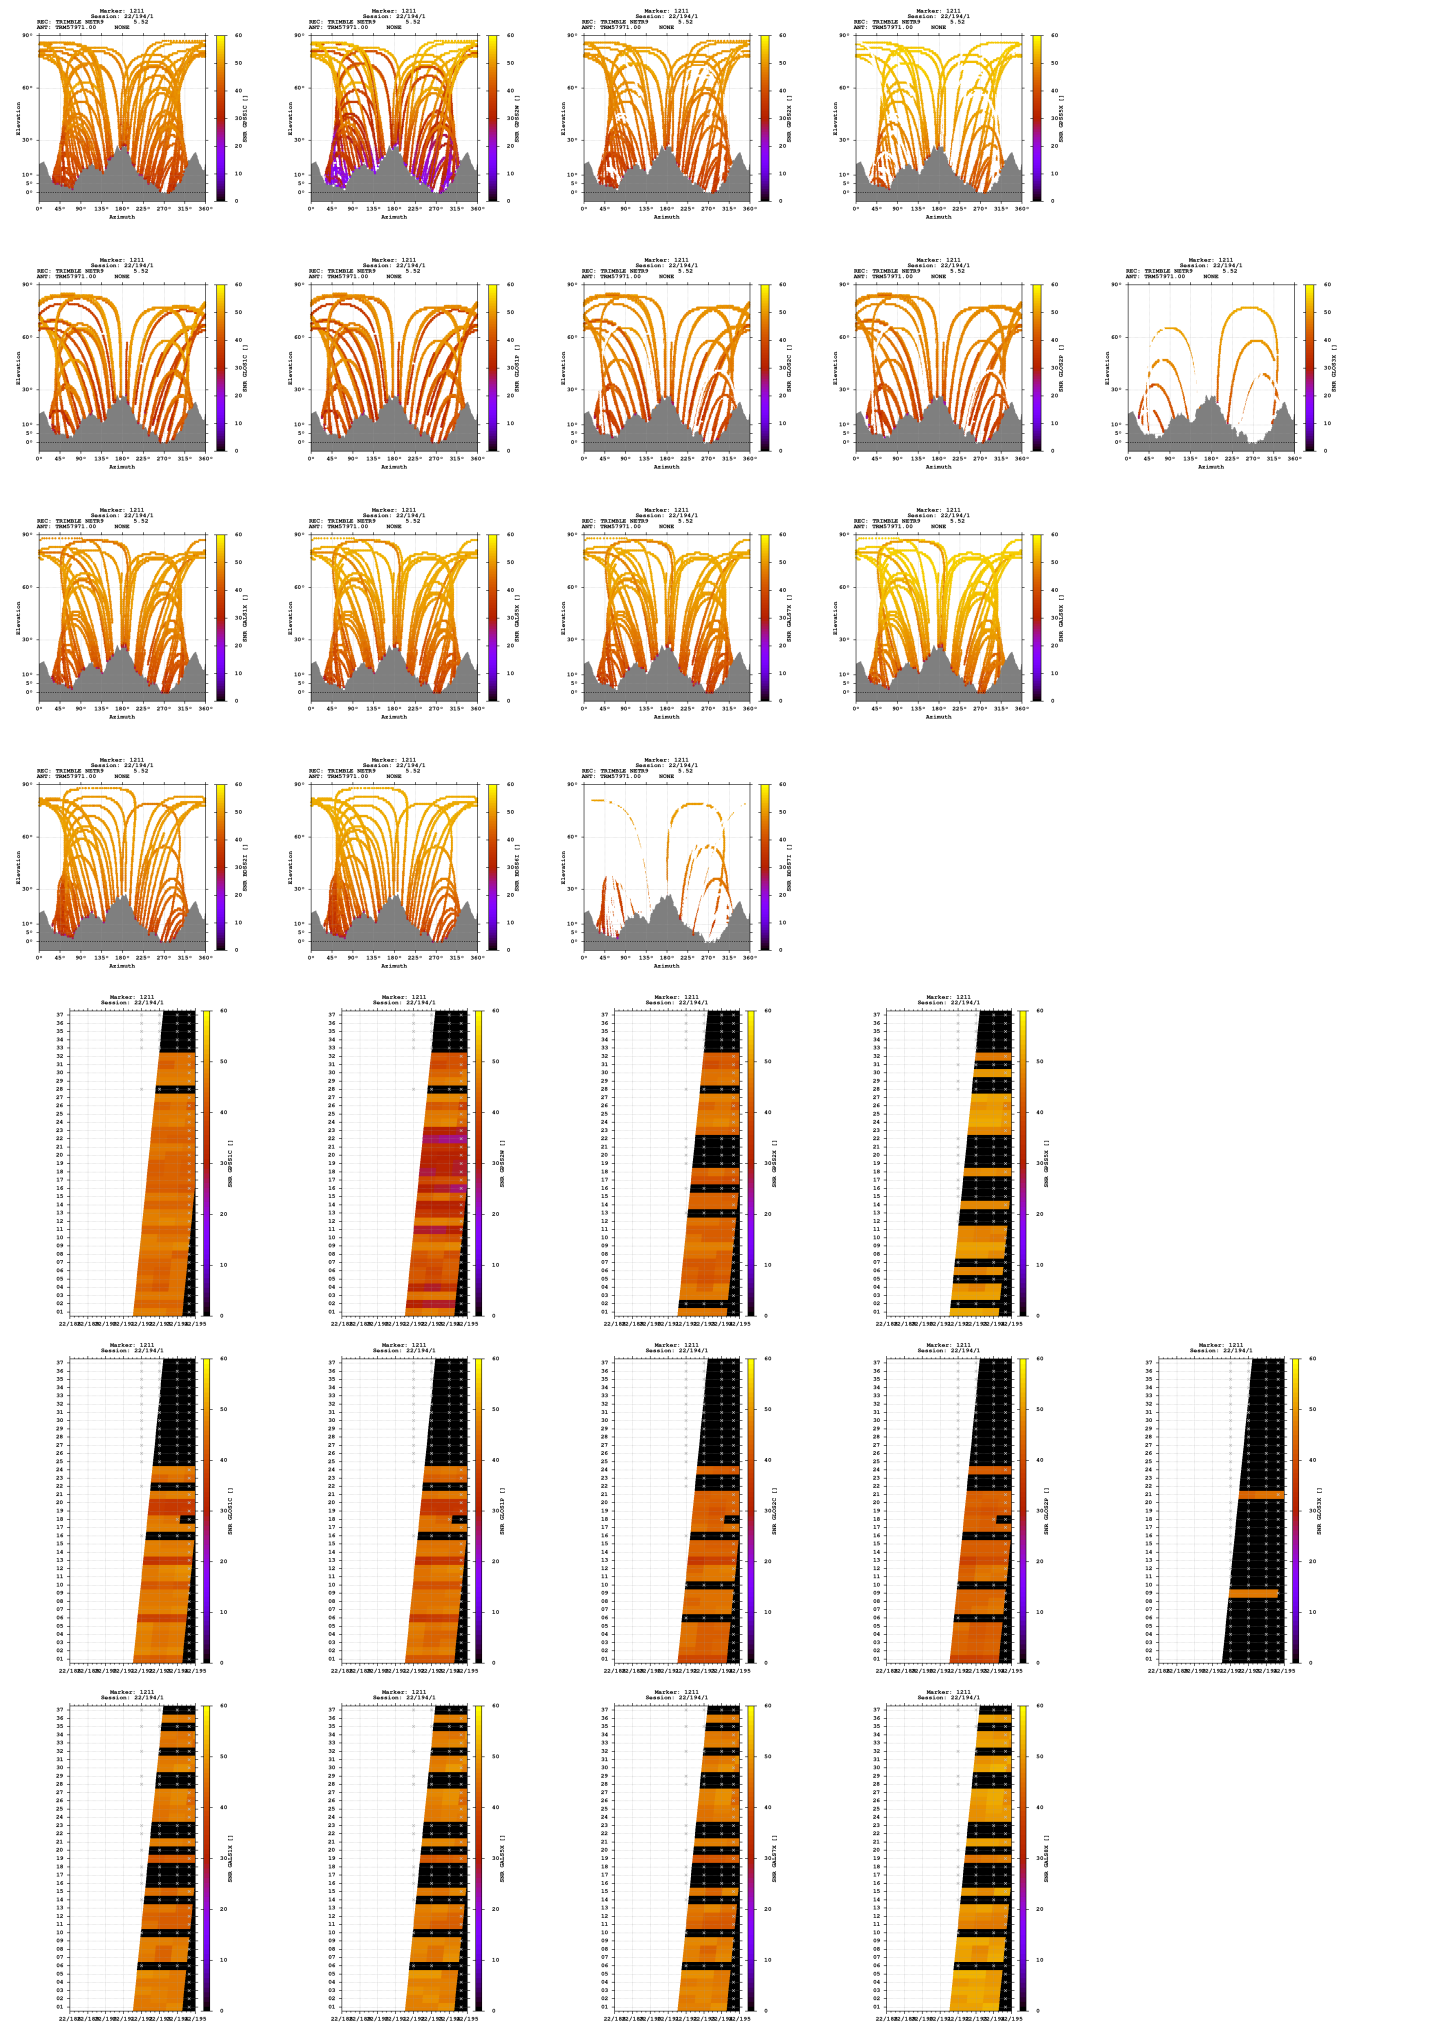

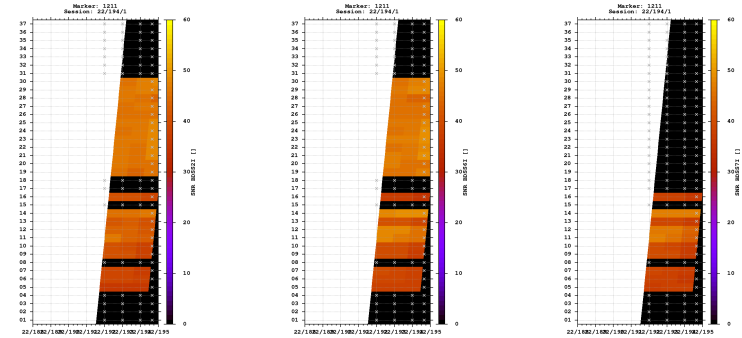



Estimates

2022-07-13 15:52:30	GPS	4333718.0650	643757.8617	4622842.1659	46.728859952	8.449291229	2316.0494
2022-07-13 15:52:30	GLO	4333719.5153	643757.8578	4622842.8292	46.728854651	8.449288392	2317.5152
2022-07-13 15:52:30	GAL	4333717.8530	643757.6952	4622841.8883	46.728859773	8.449289483	2315.6868
2022-07-13 15:52:30	BDS	4333717.5758	643758.8477	4622843.8779	46.728872723	8.449304923	2317.0635

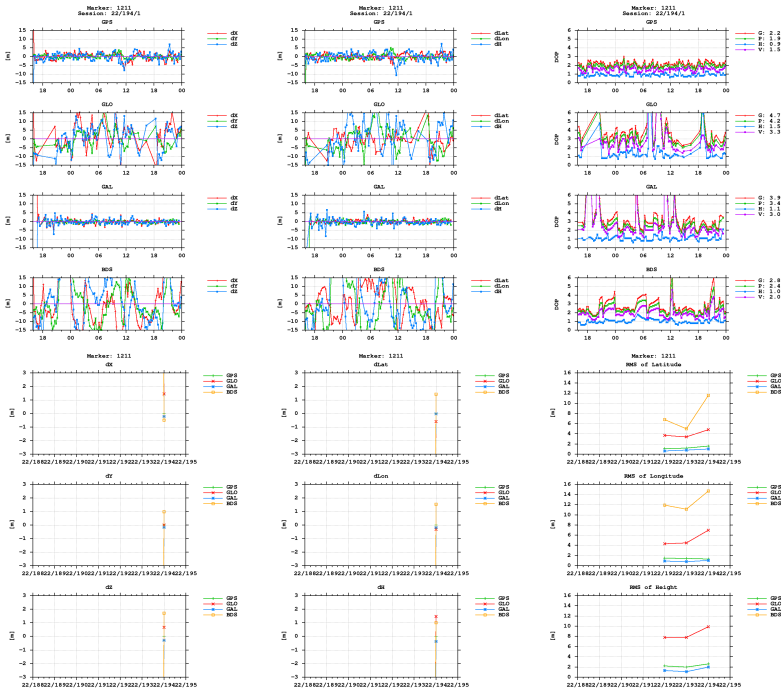

BNC

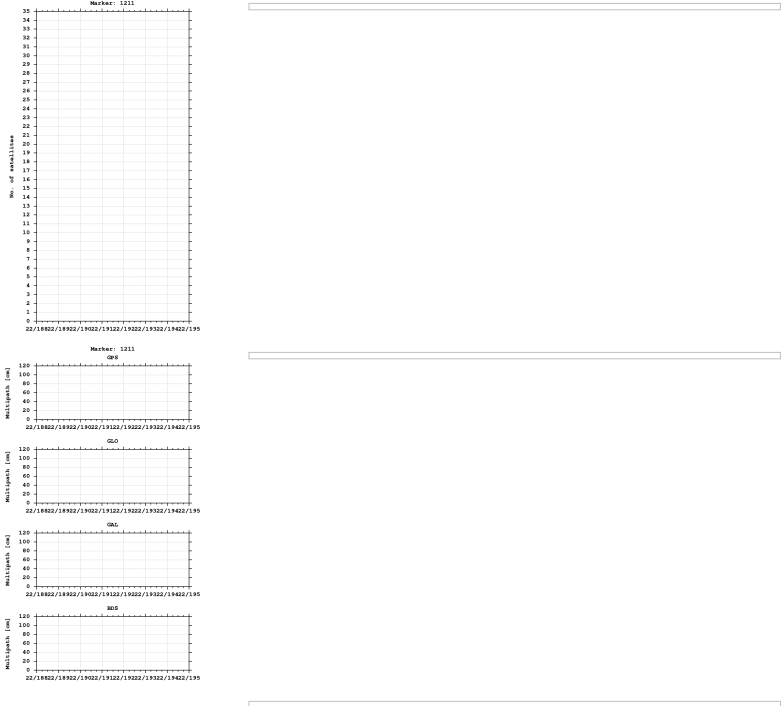

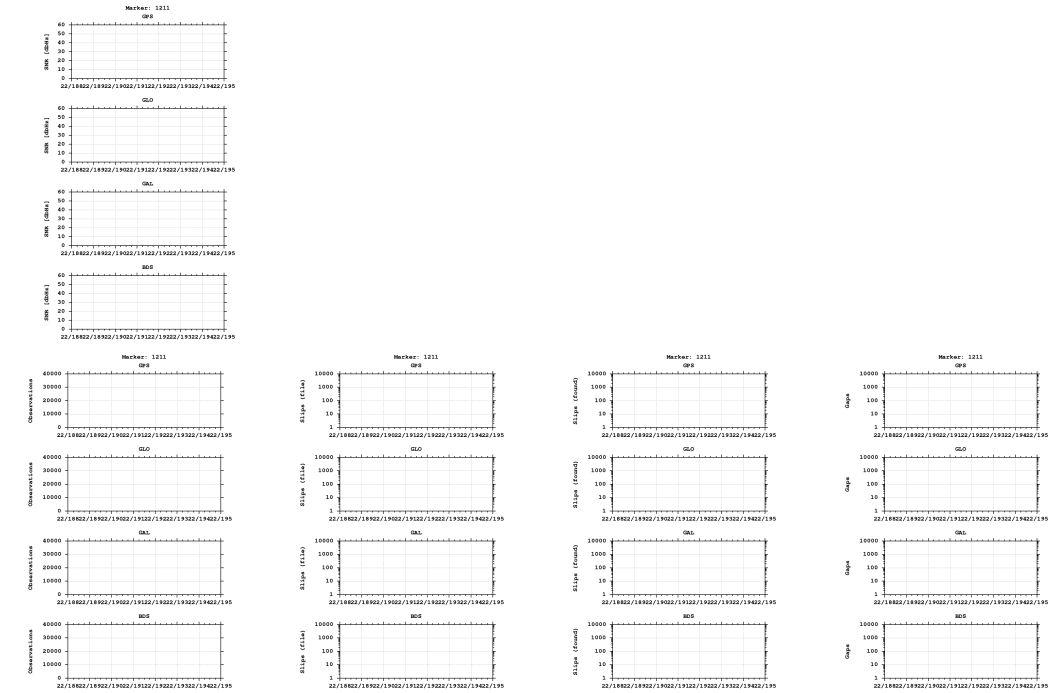

Equipment

2022-07-11 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)