


GNSS observation file monitoring for 0518


Last RINEX file: 05181951.220
RINEX version: 3.02
Marker: 1211
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

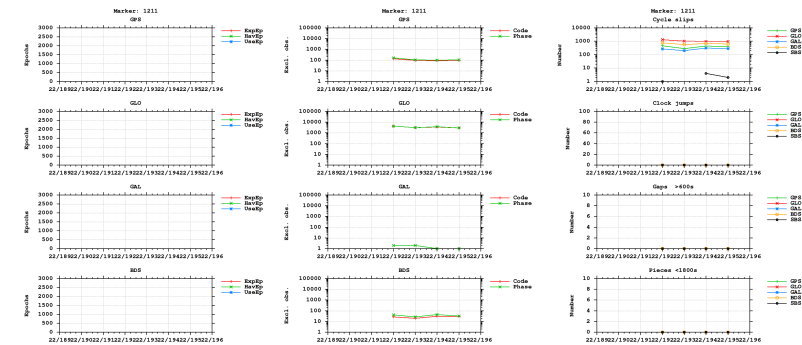



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

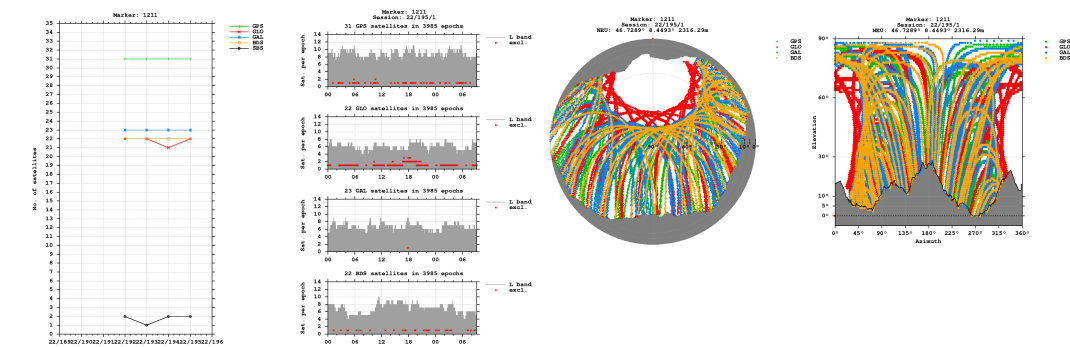


Bands

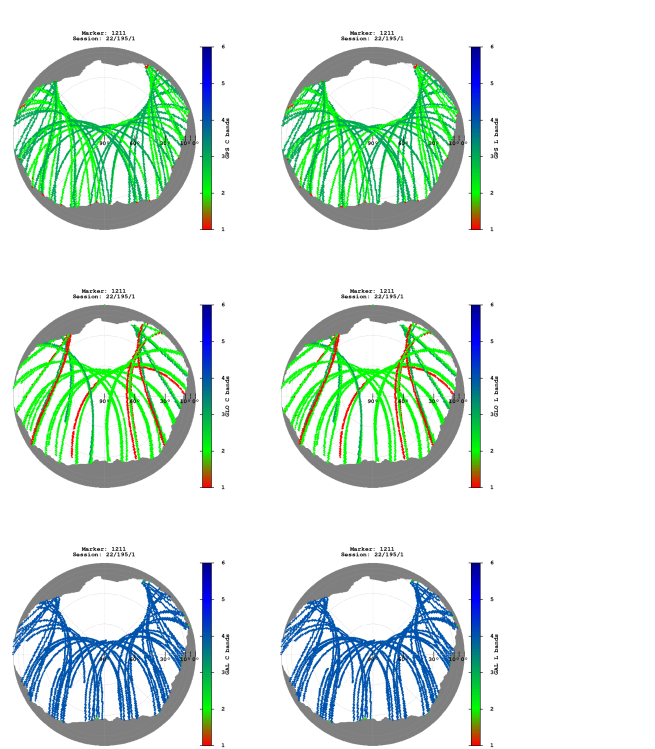


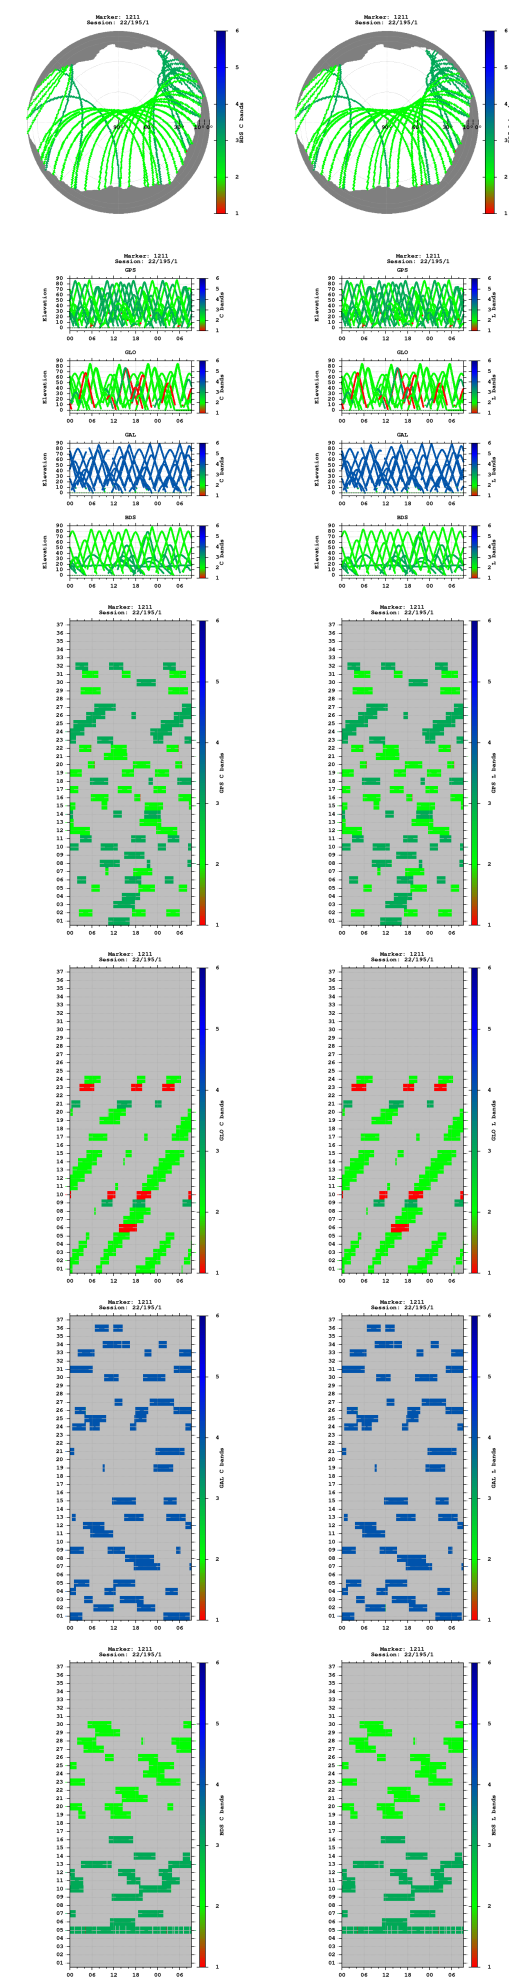


Observations

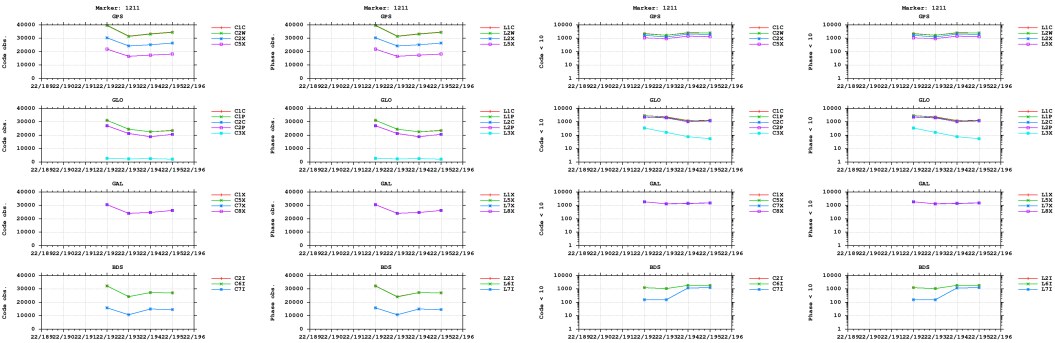


Multipath

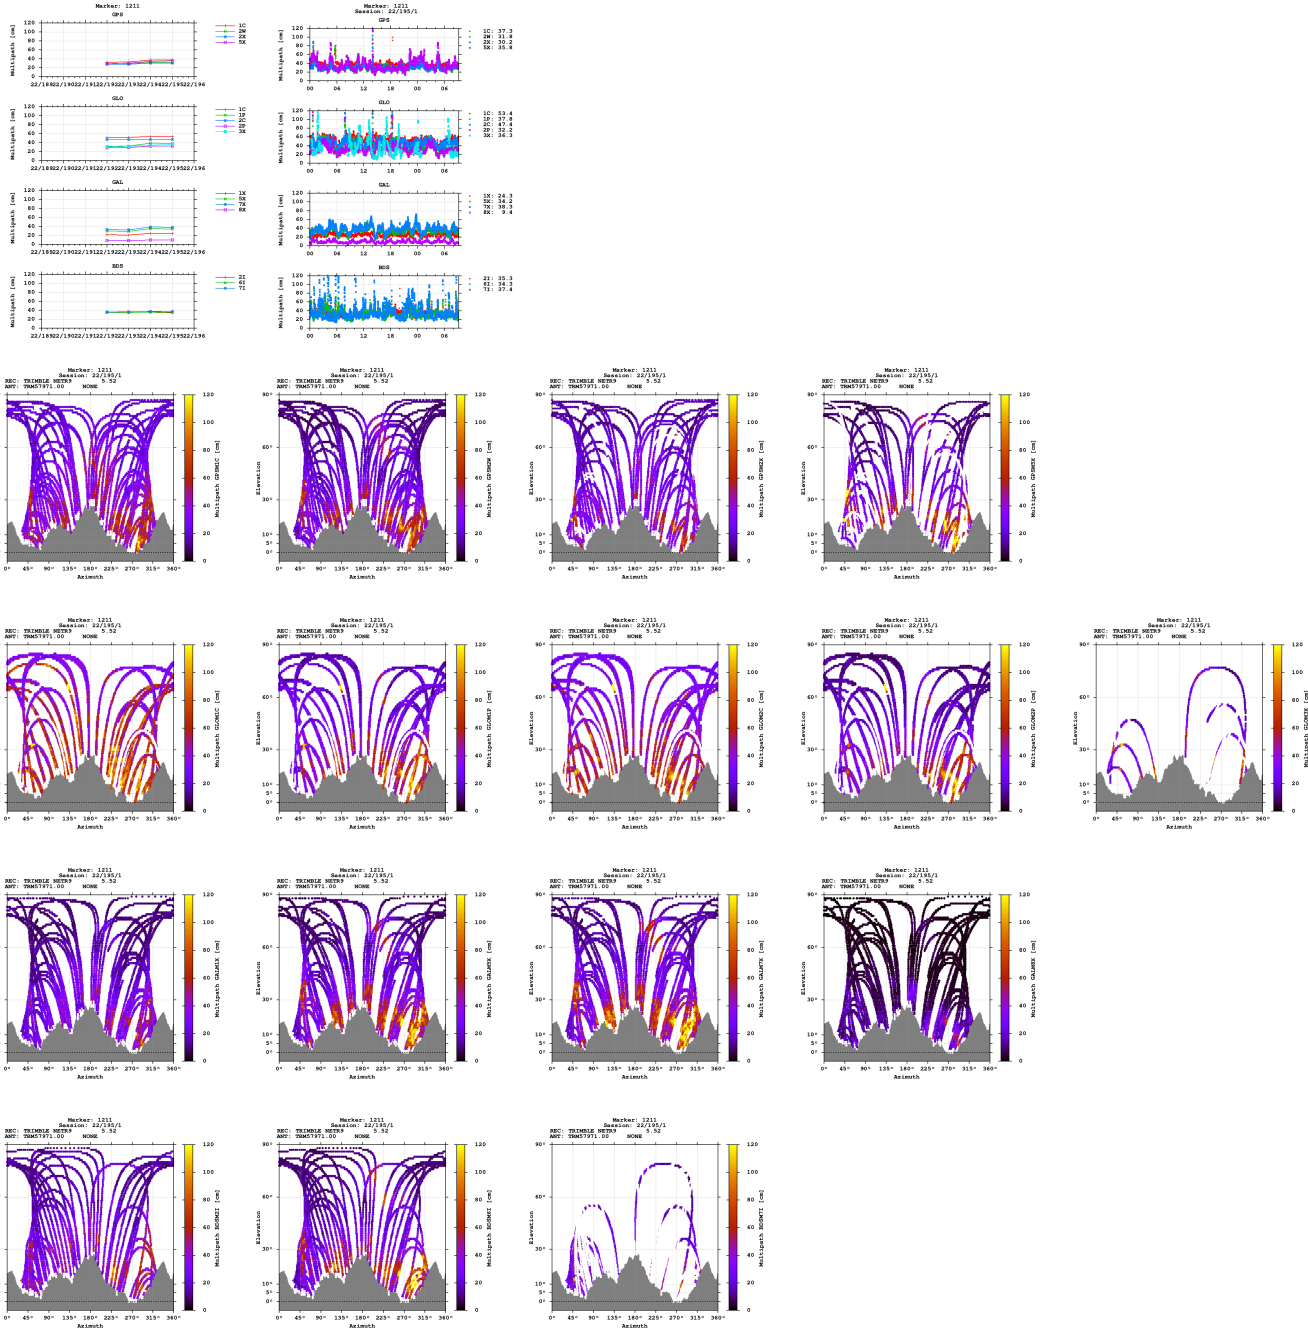


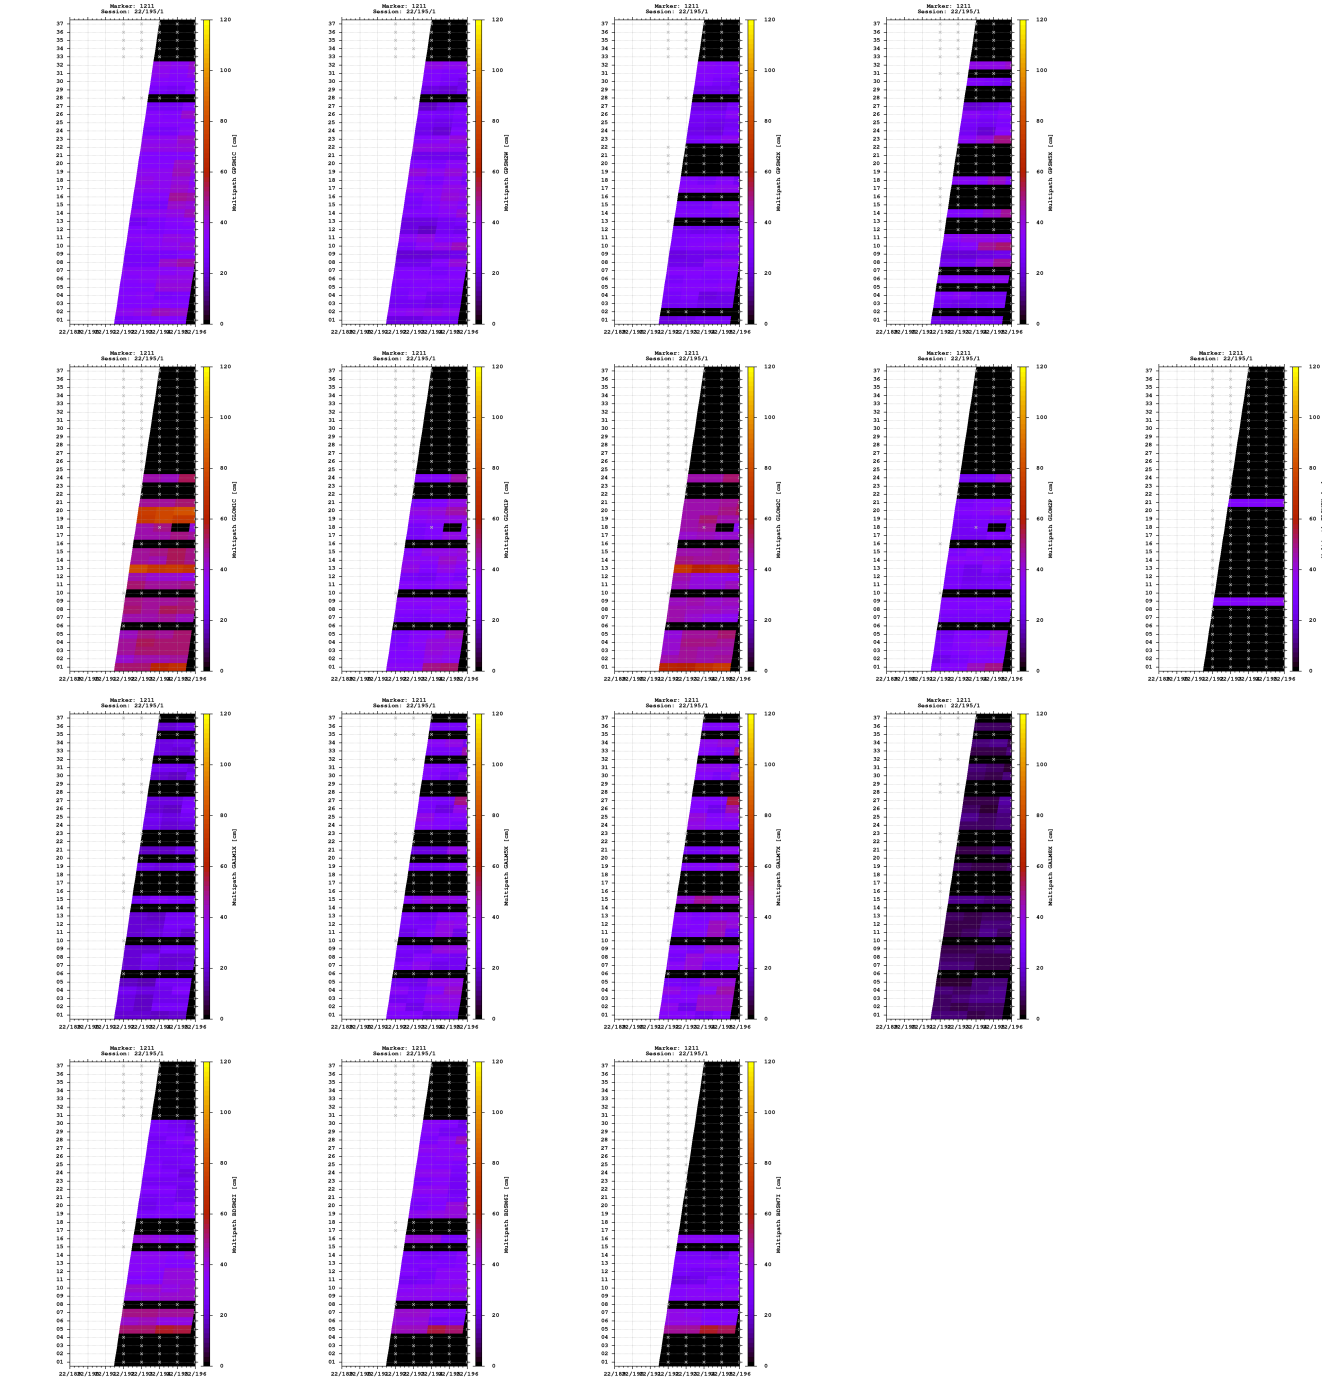


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

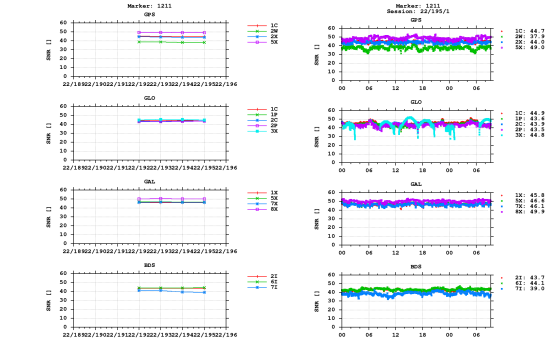


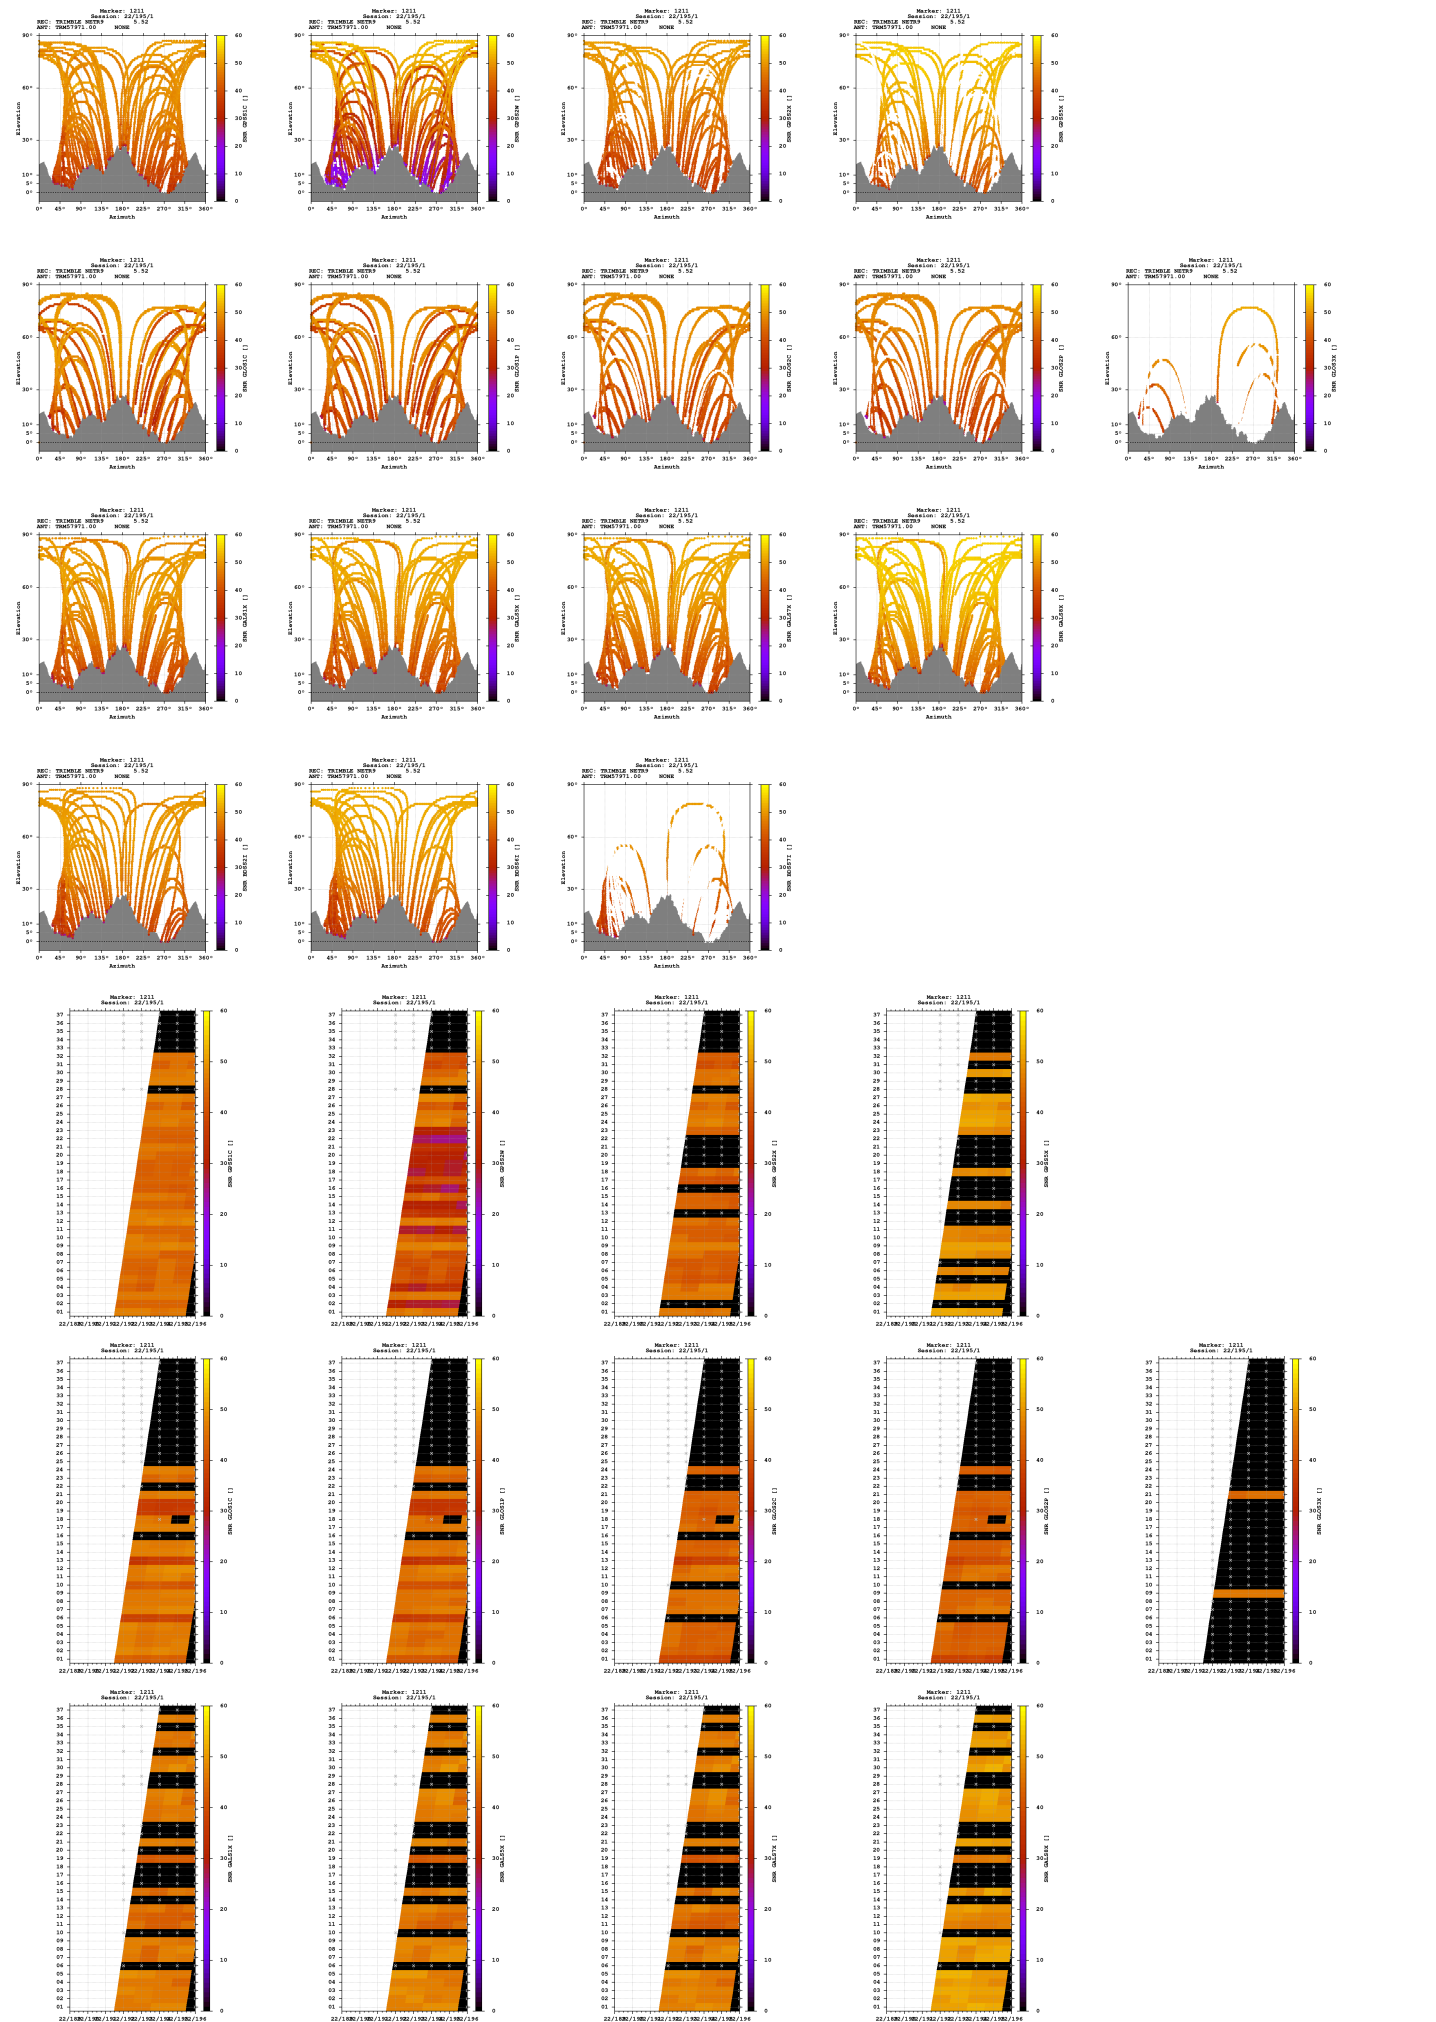

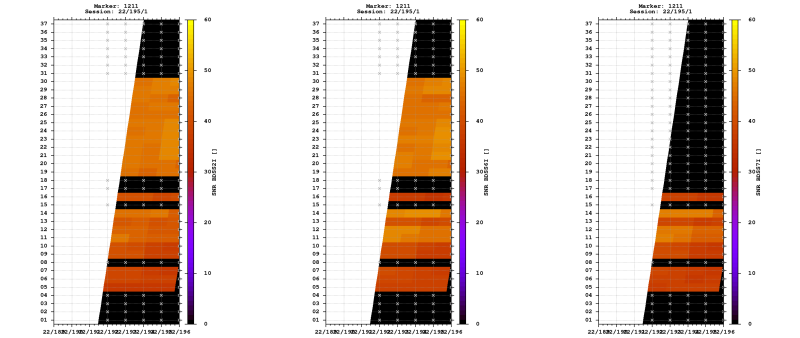


Estimates

2022-07-13 15:52:30	GPS	4333718.2298	643757.8204	4622842.3548	46.728860088	8.449290378	2316.2944
2022-07-13 15:52:30	GLO	4333718.2036	643758.4932	4622843.4684	46.728866475	8.449299132	2317.1553
2022-07-13 15:52:30	GAL	4333717.7445	643757.7143	4622841.8153	46.728860008	8.449289939	2315.5619
2022-07-13 15:52:30	BDS	4333714.9707	643757.6992	4622844.0383	46.728891689	8.449295073	2315.2983

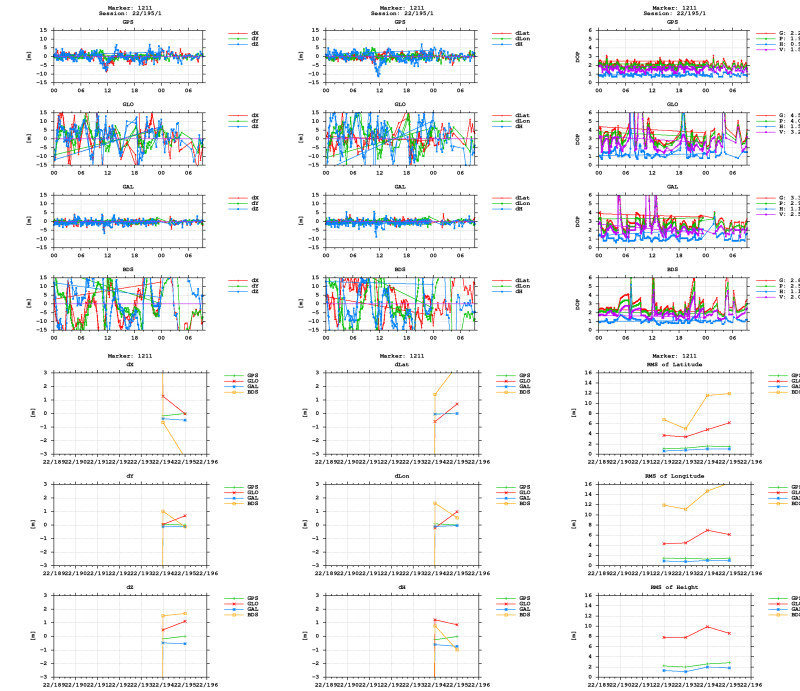

BNC



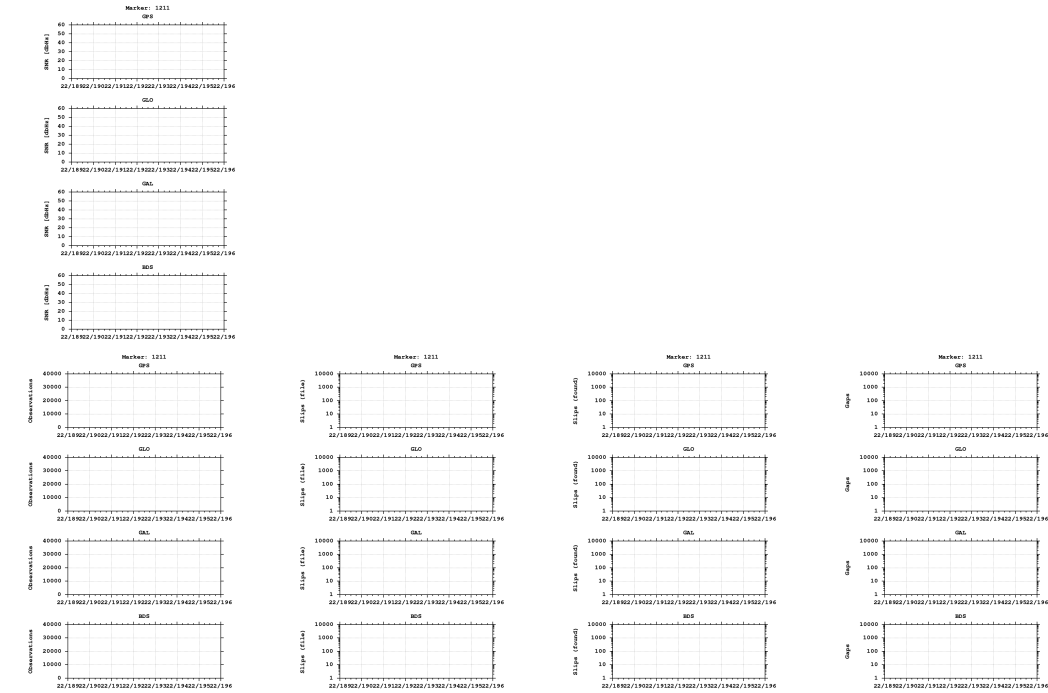

Equipment

2022-07-11 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)