


GNSS observation file monitoring for 0511


Last RINEX file: 05112071.220
RINEX version: 3.02
Marker: 1333
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

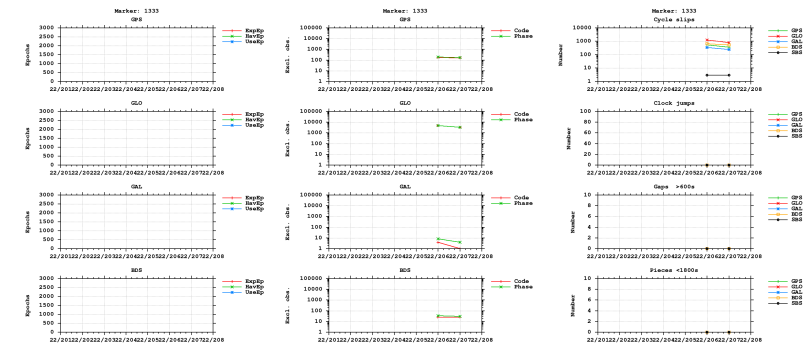



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

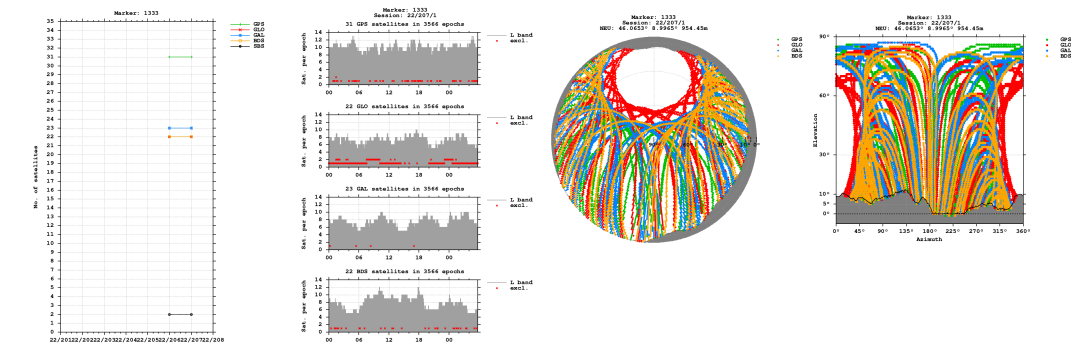


Bands

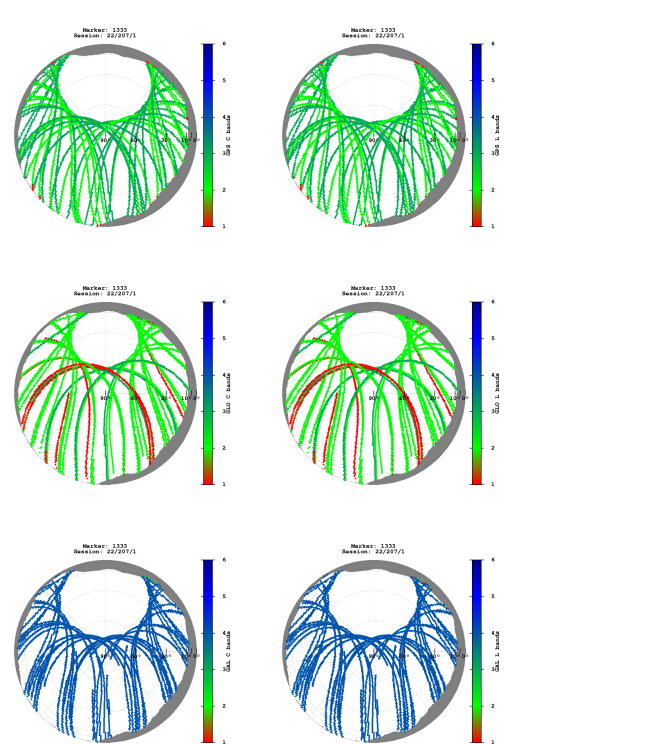


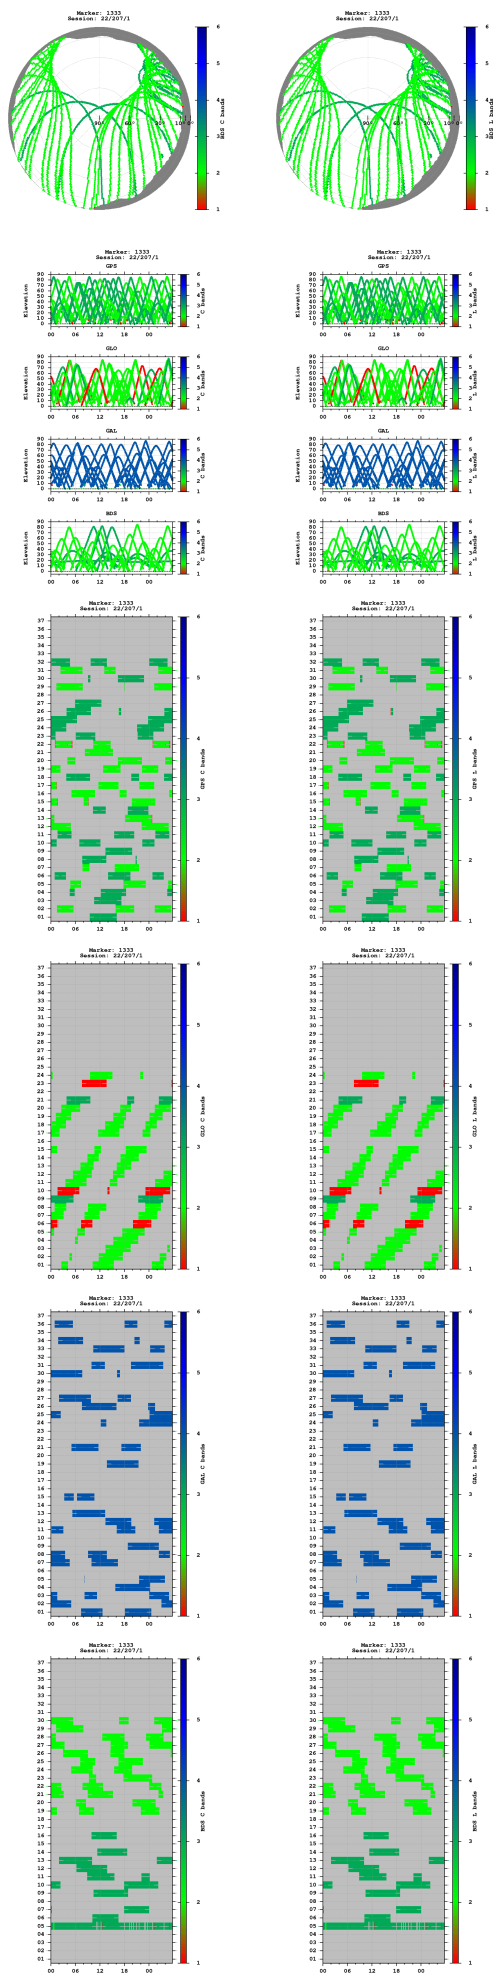


Observations

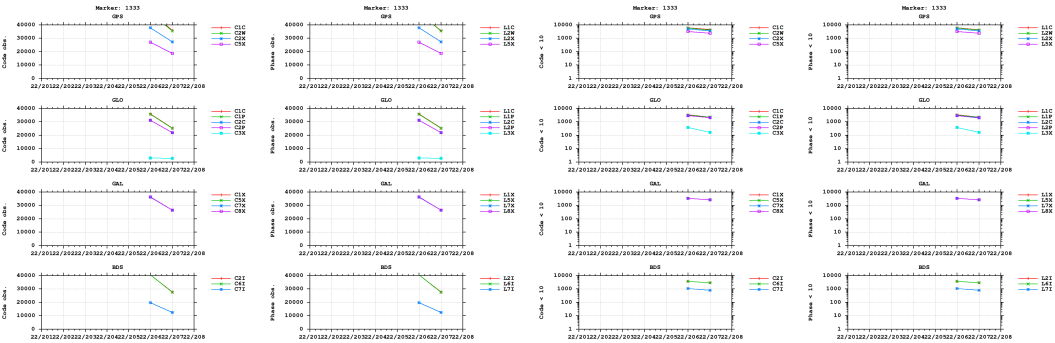


Multipath

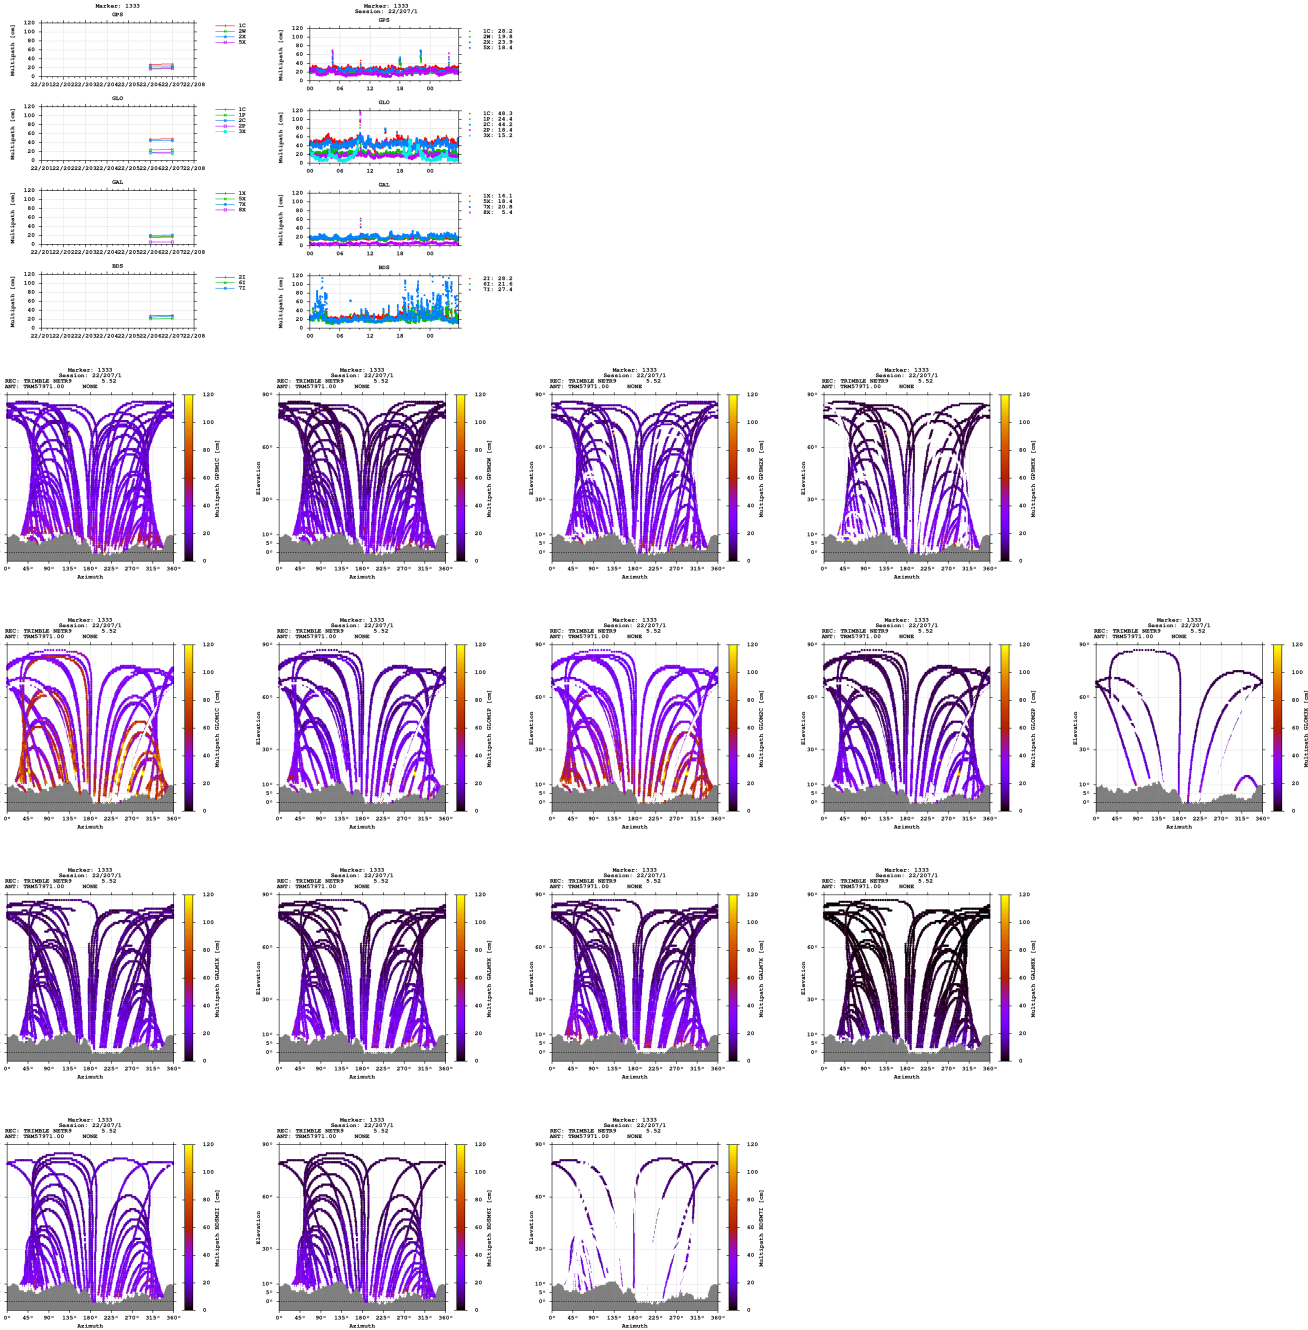


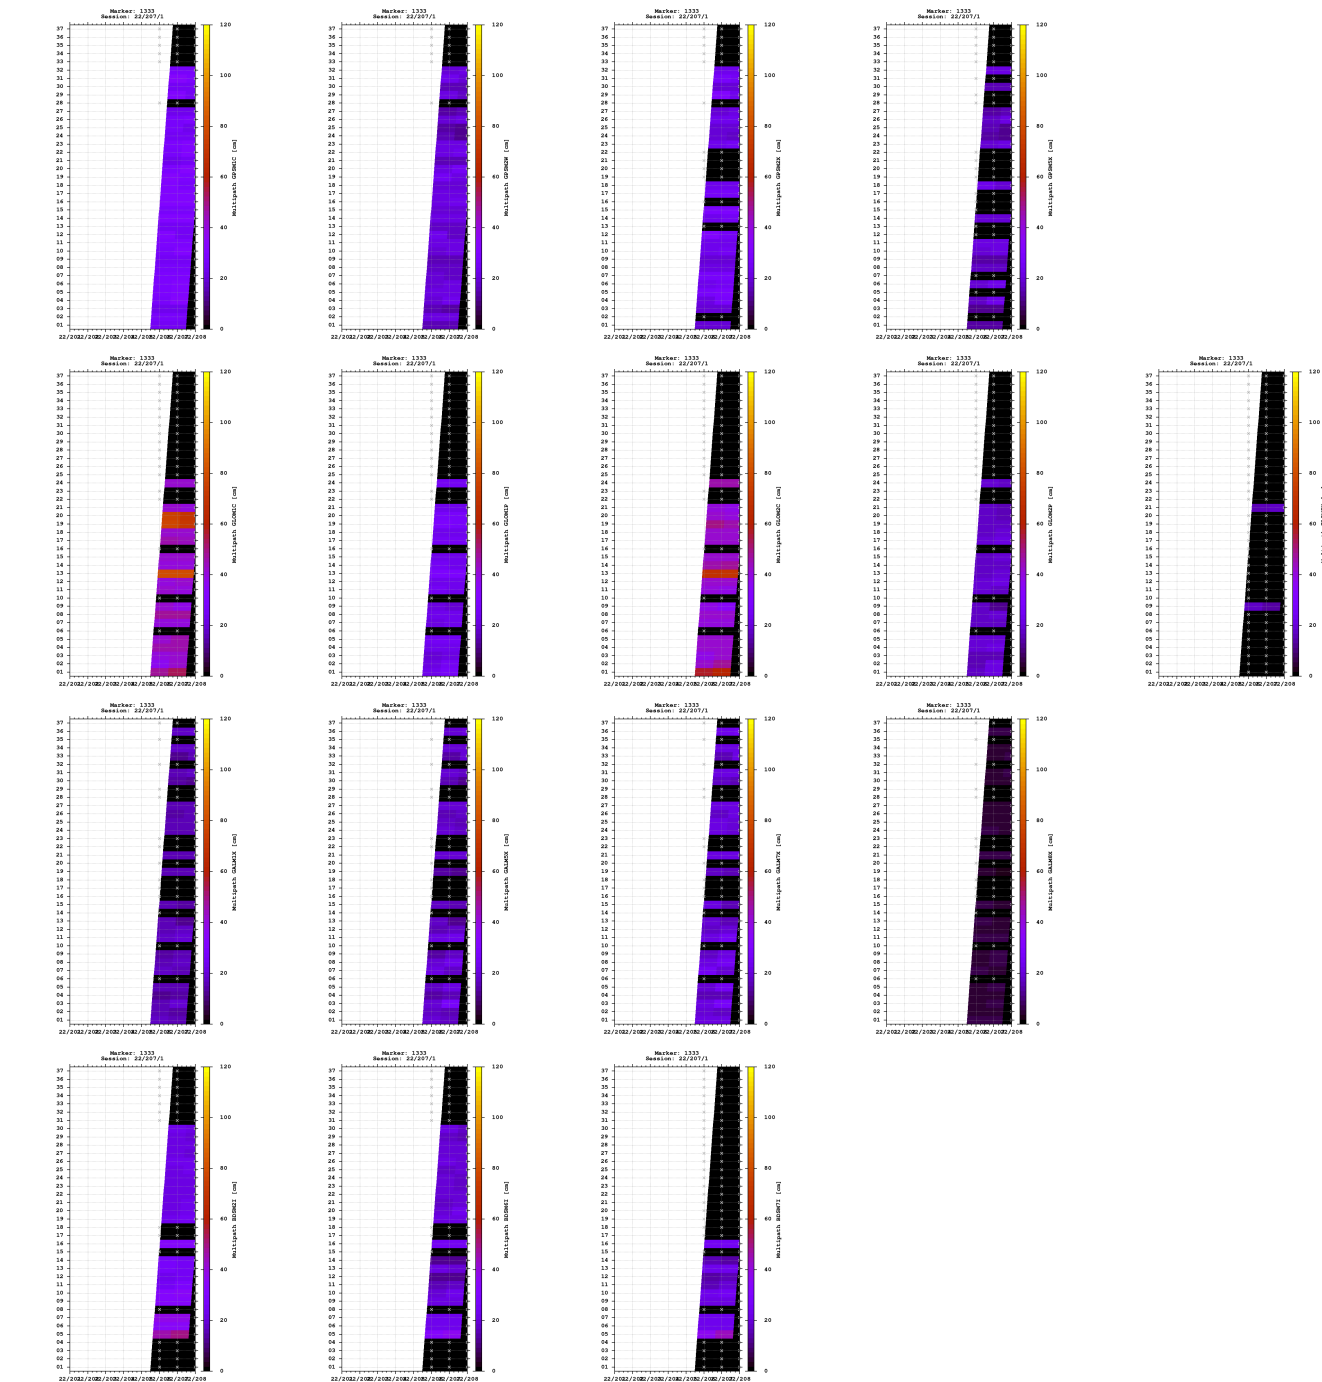


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

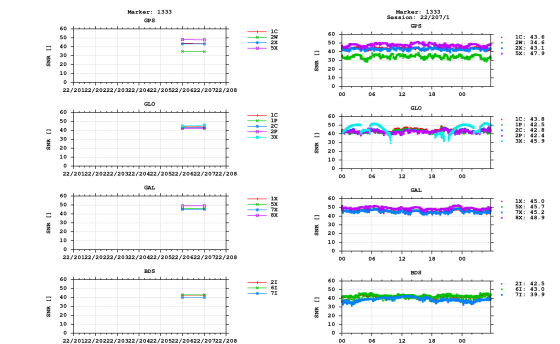


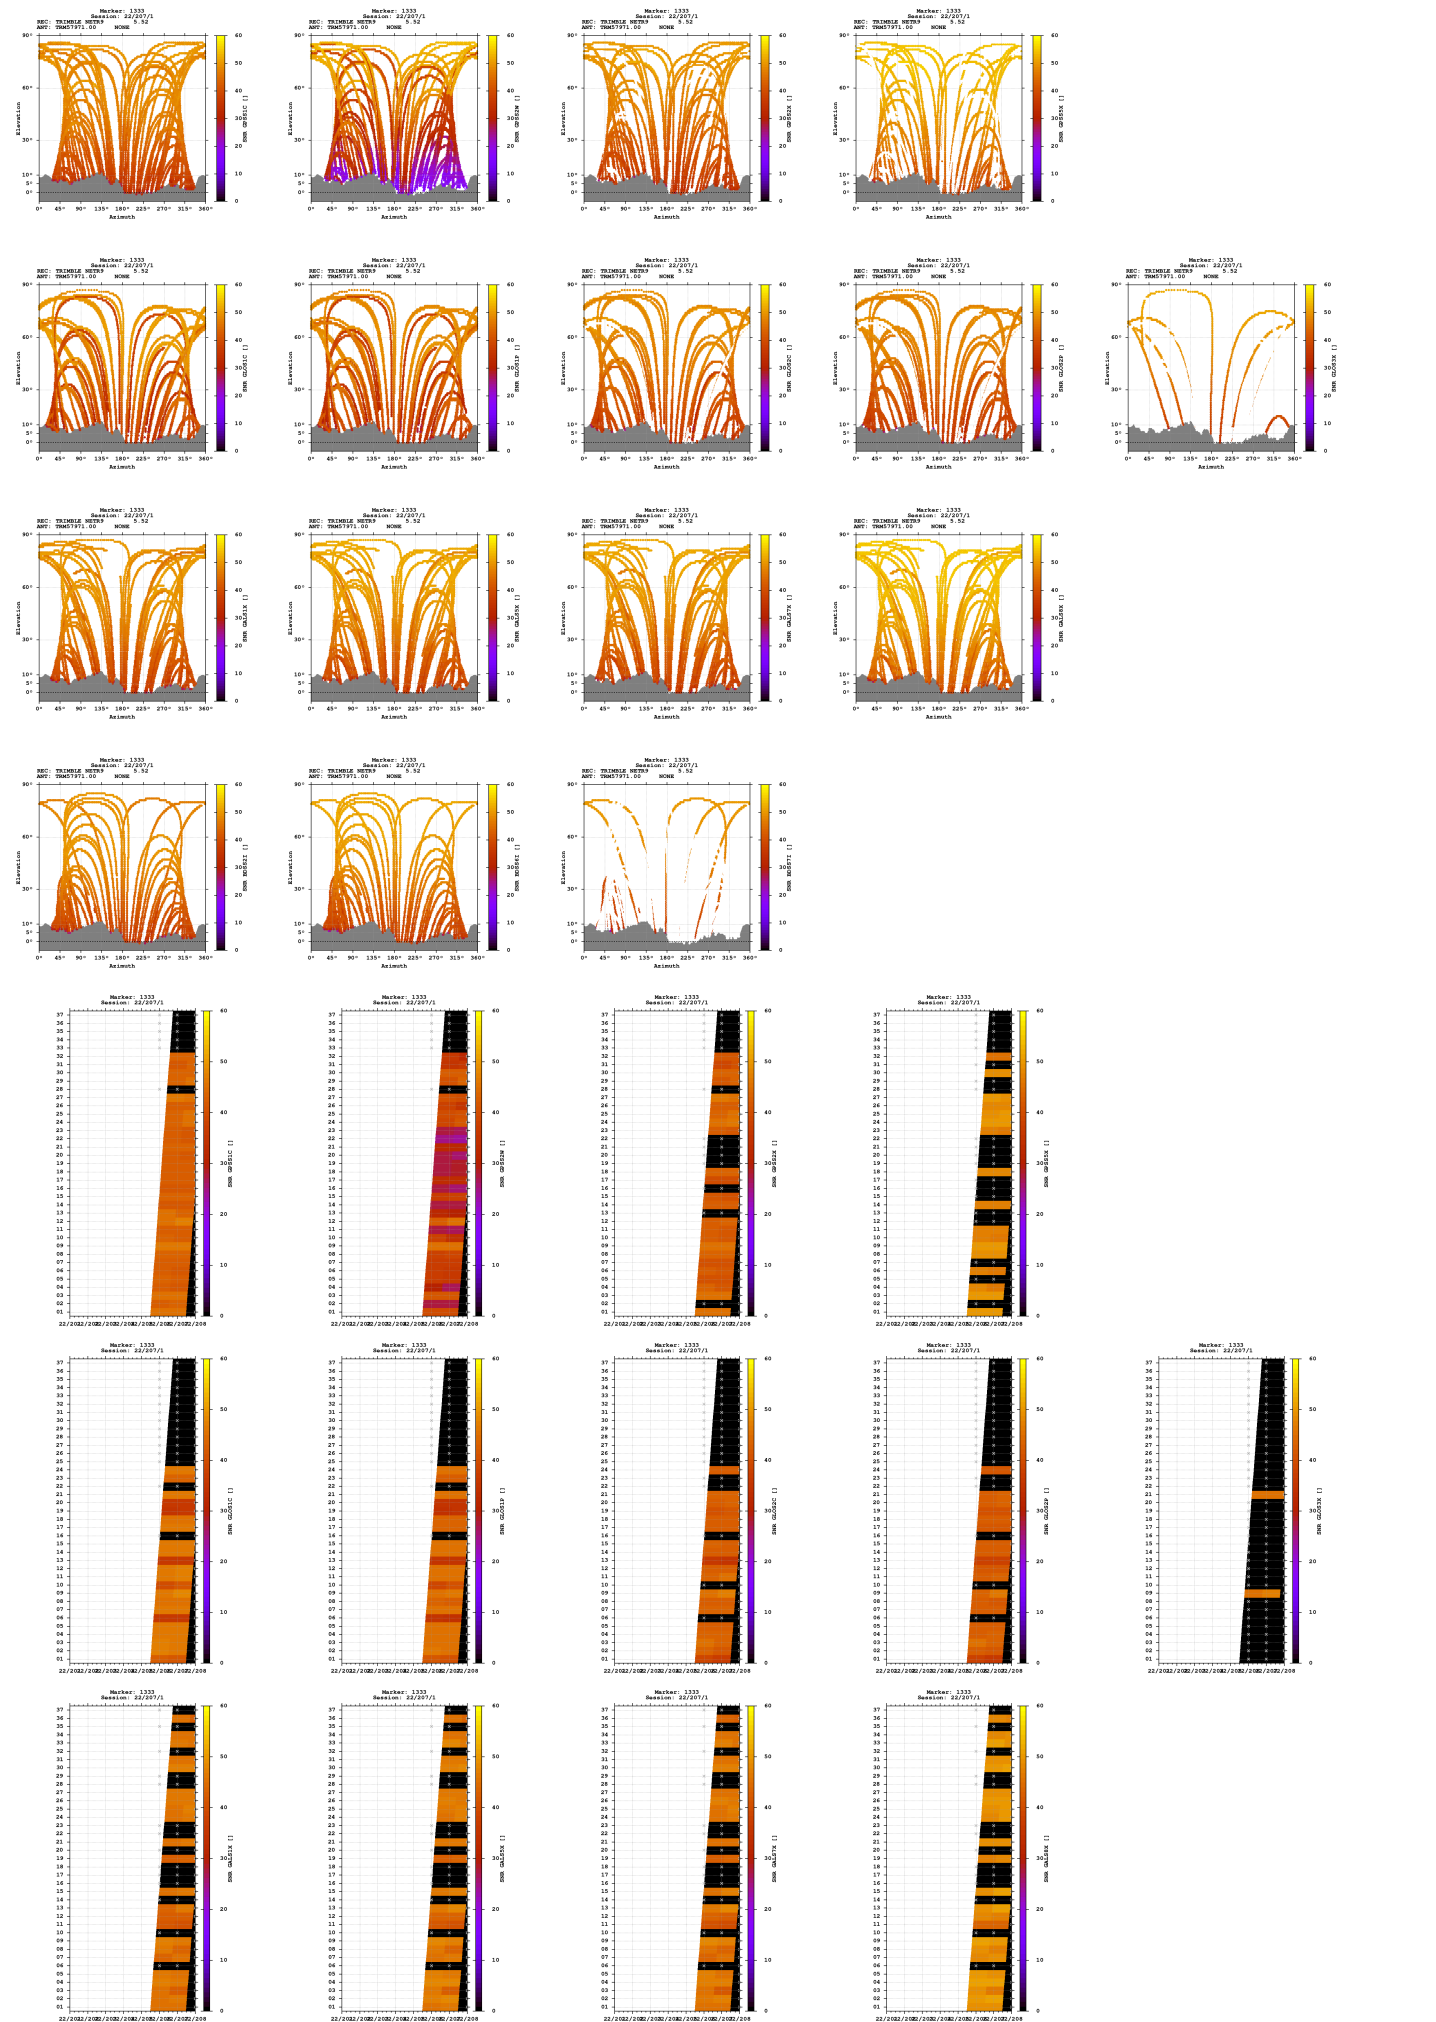

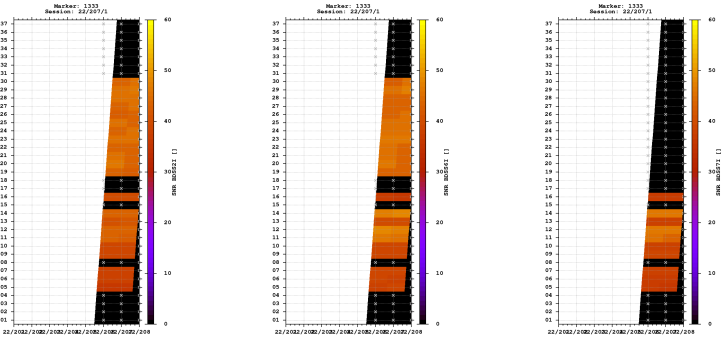



Estimates

2022-07-25 06:17:30	GPS	4379213.2312	693325.3134	4570974.3621	46.065306299	8.996503773	954.4465
2022-07-25 06:17:30	GLO	4379213.5807	693325.0096	4570973.6936	46.065300198	8.996499190	954.1716
2022-07-25 06:17:30	GAL	4379213.1756	693325.3016	4570974.0713	46.065304852	8.996503735	954.1977
2022-07-25 06:17:30	BDS	4379213.5157	693327.0251	4570975.6979	46.065311082	8.996525046	955.7892

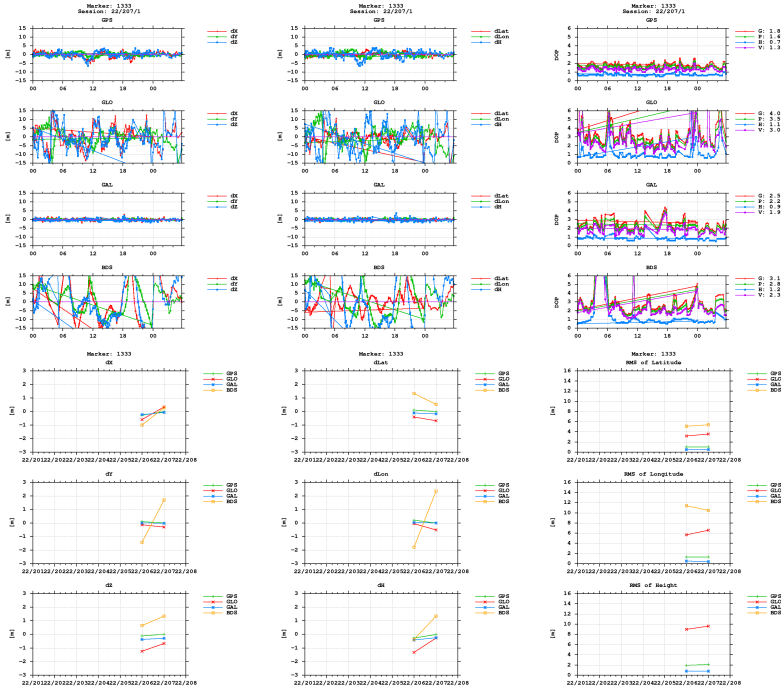

BNC

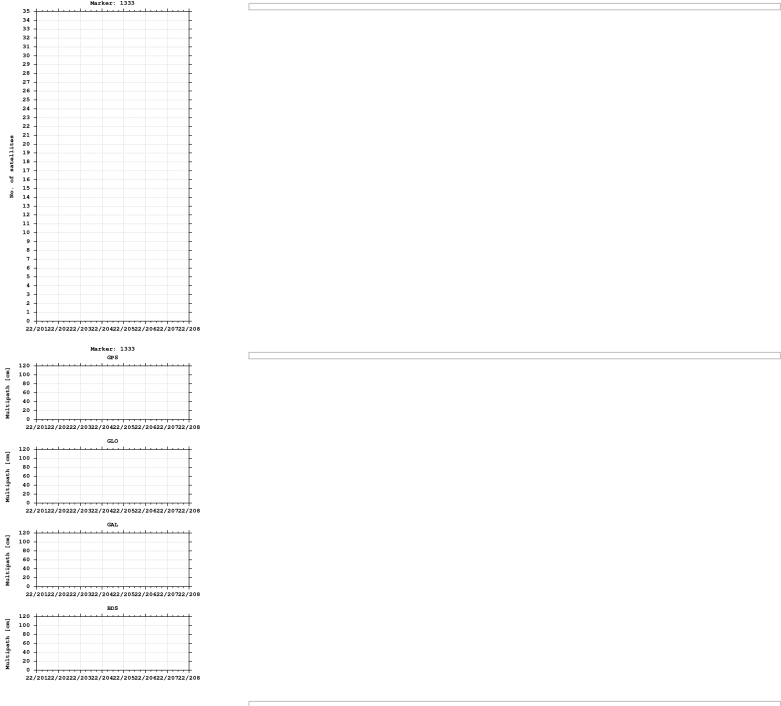

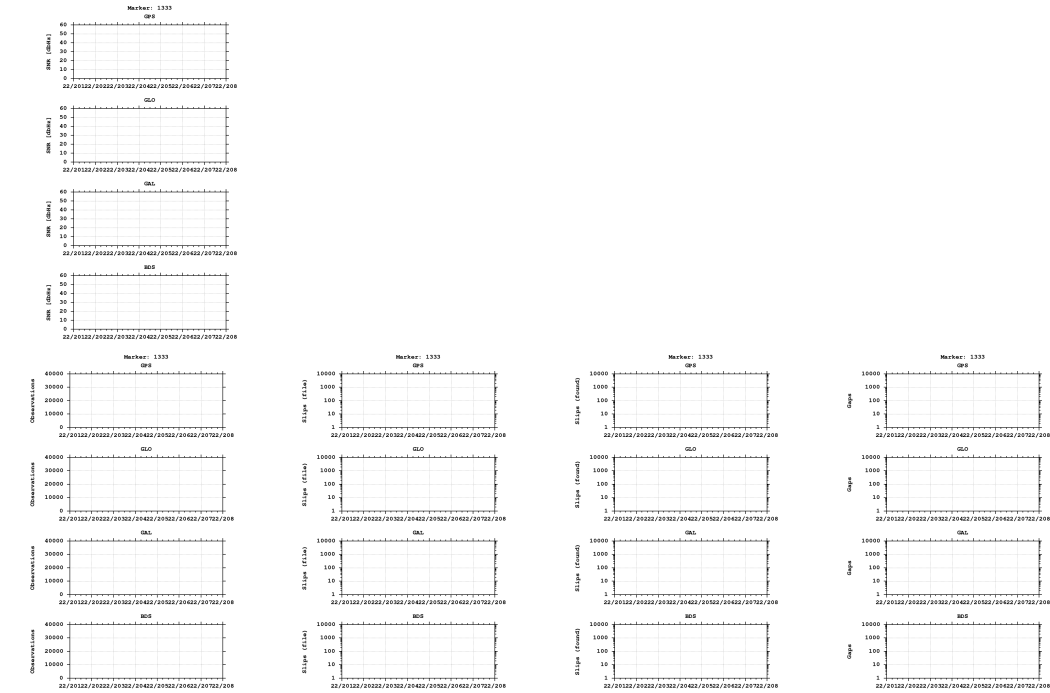

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)