


GNSS observation file monitoring for 0511


Last RINEX file: 05112091.220
RINEX version: 3.02
Marker: 1292
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

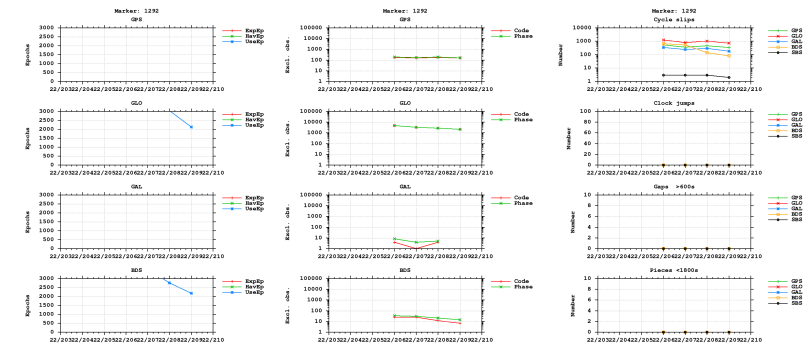



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

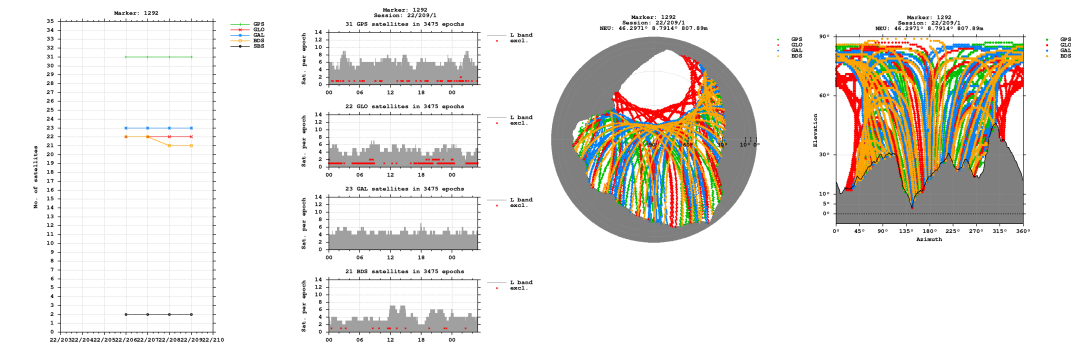


Bands

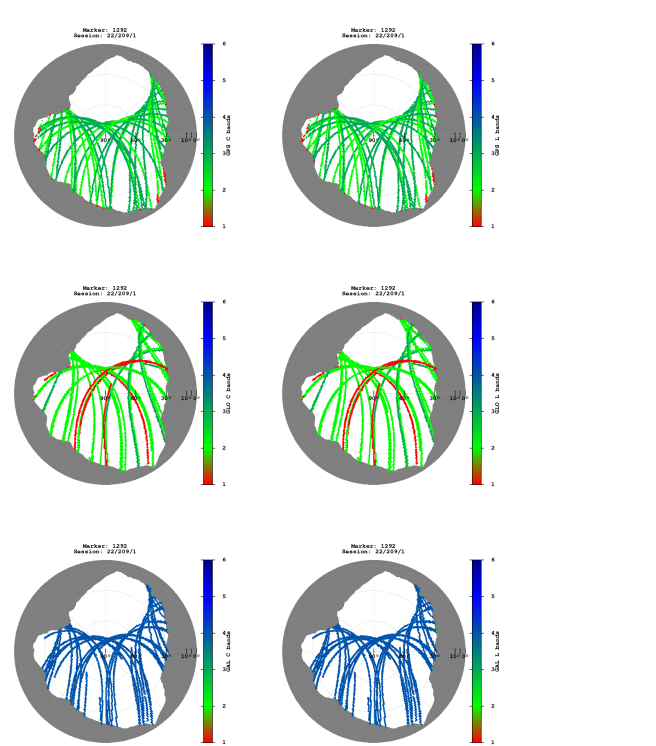


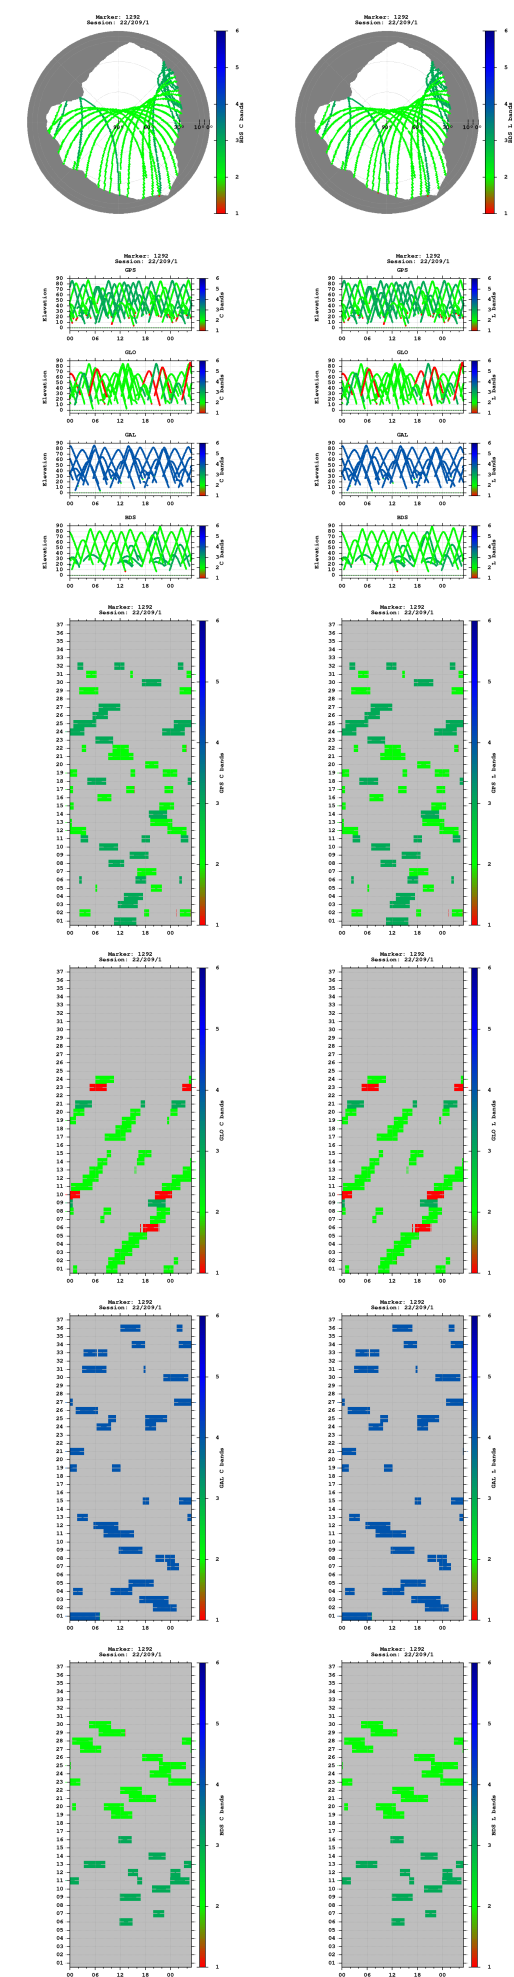


Observations

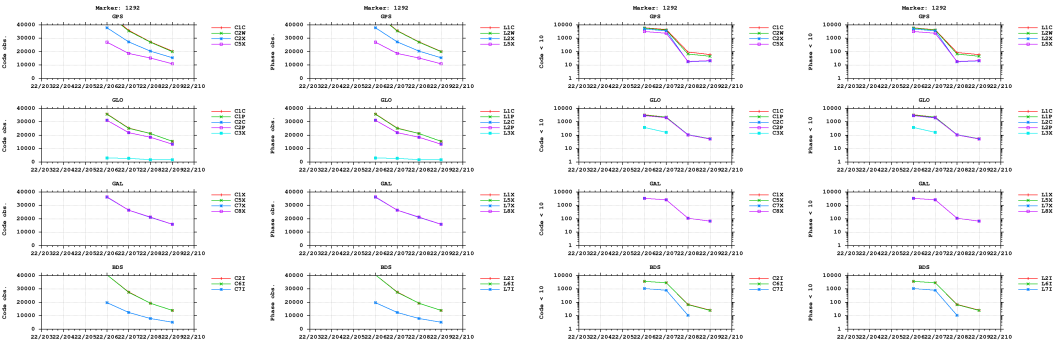


Multipath

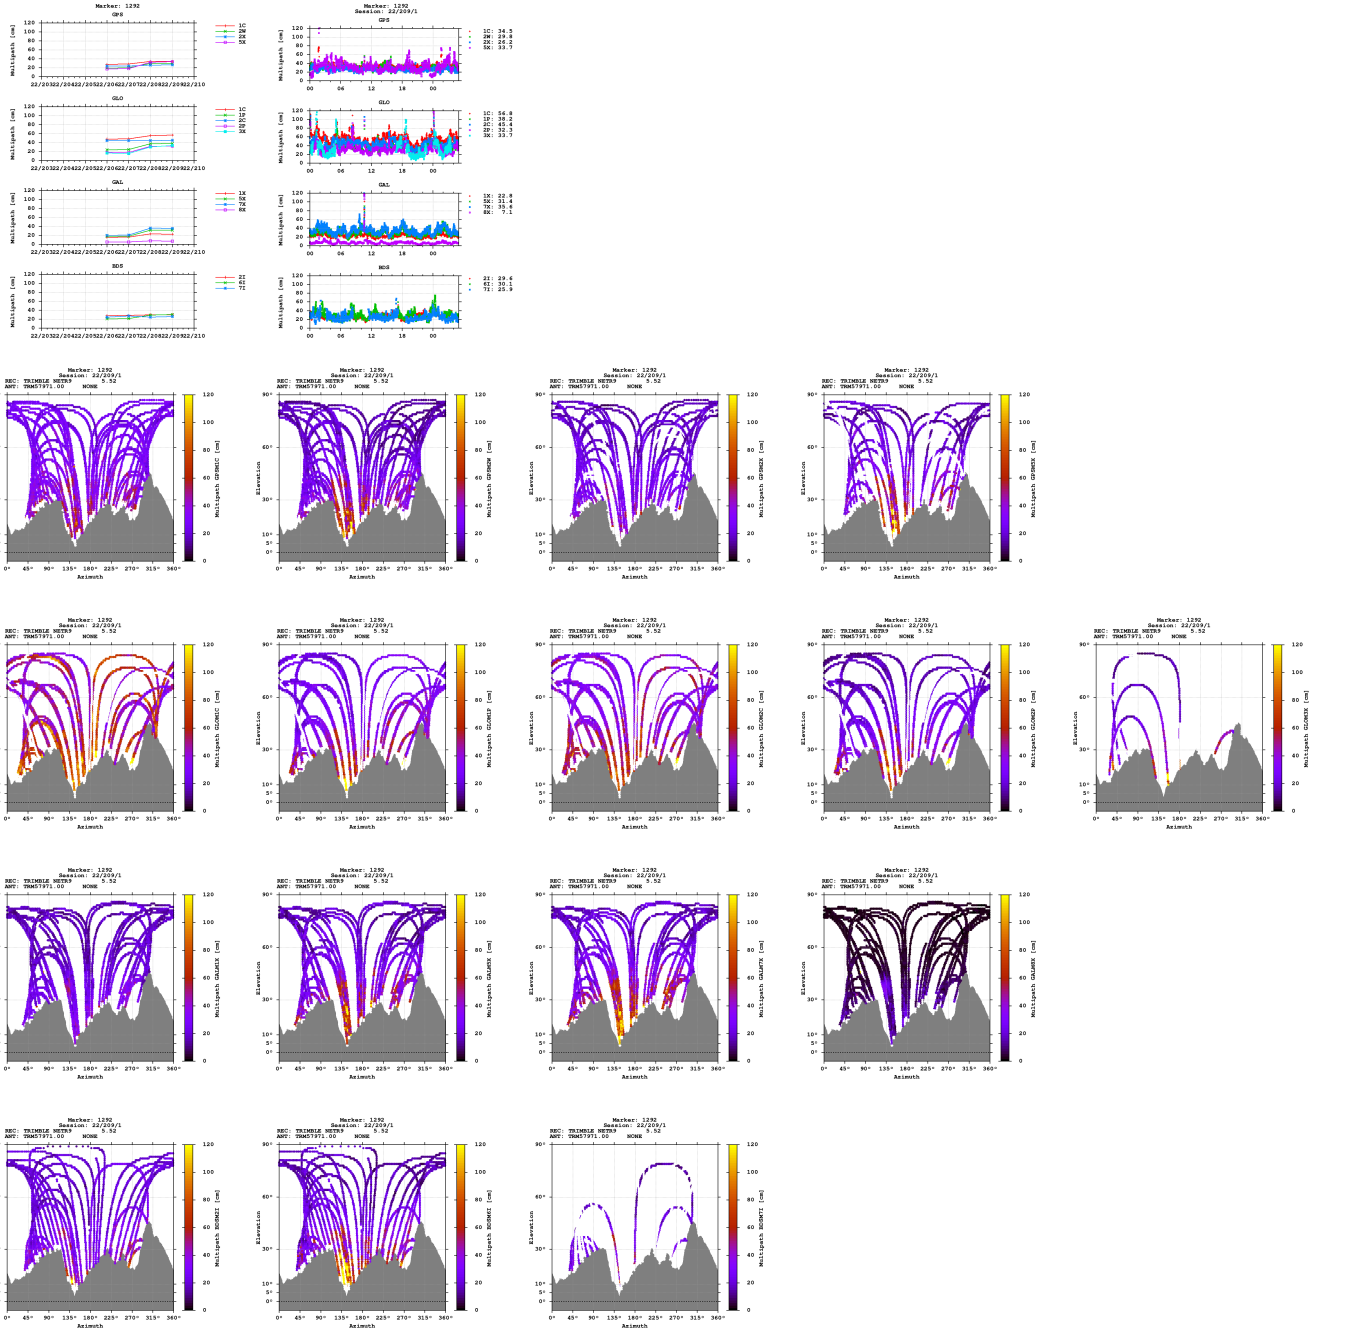


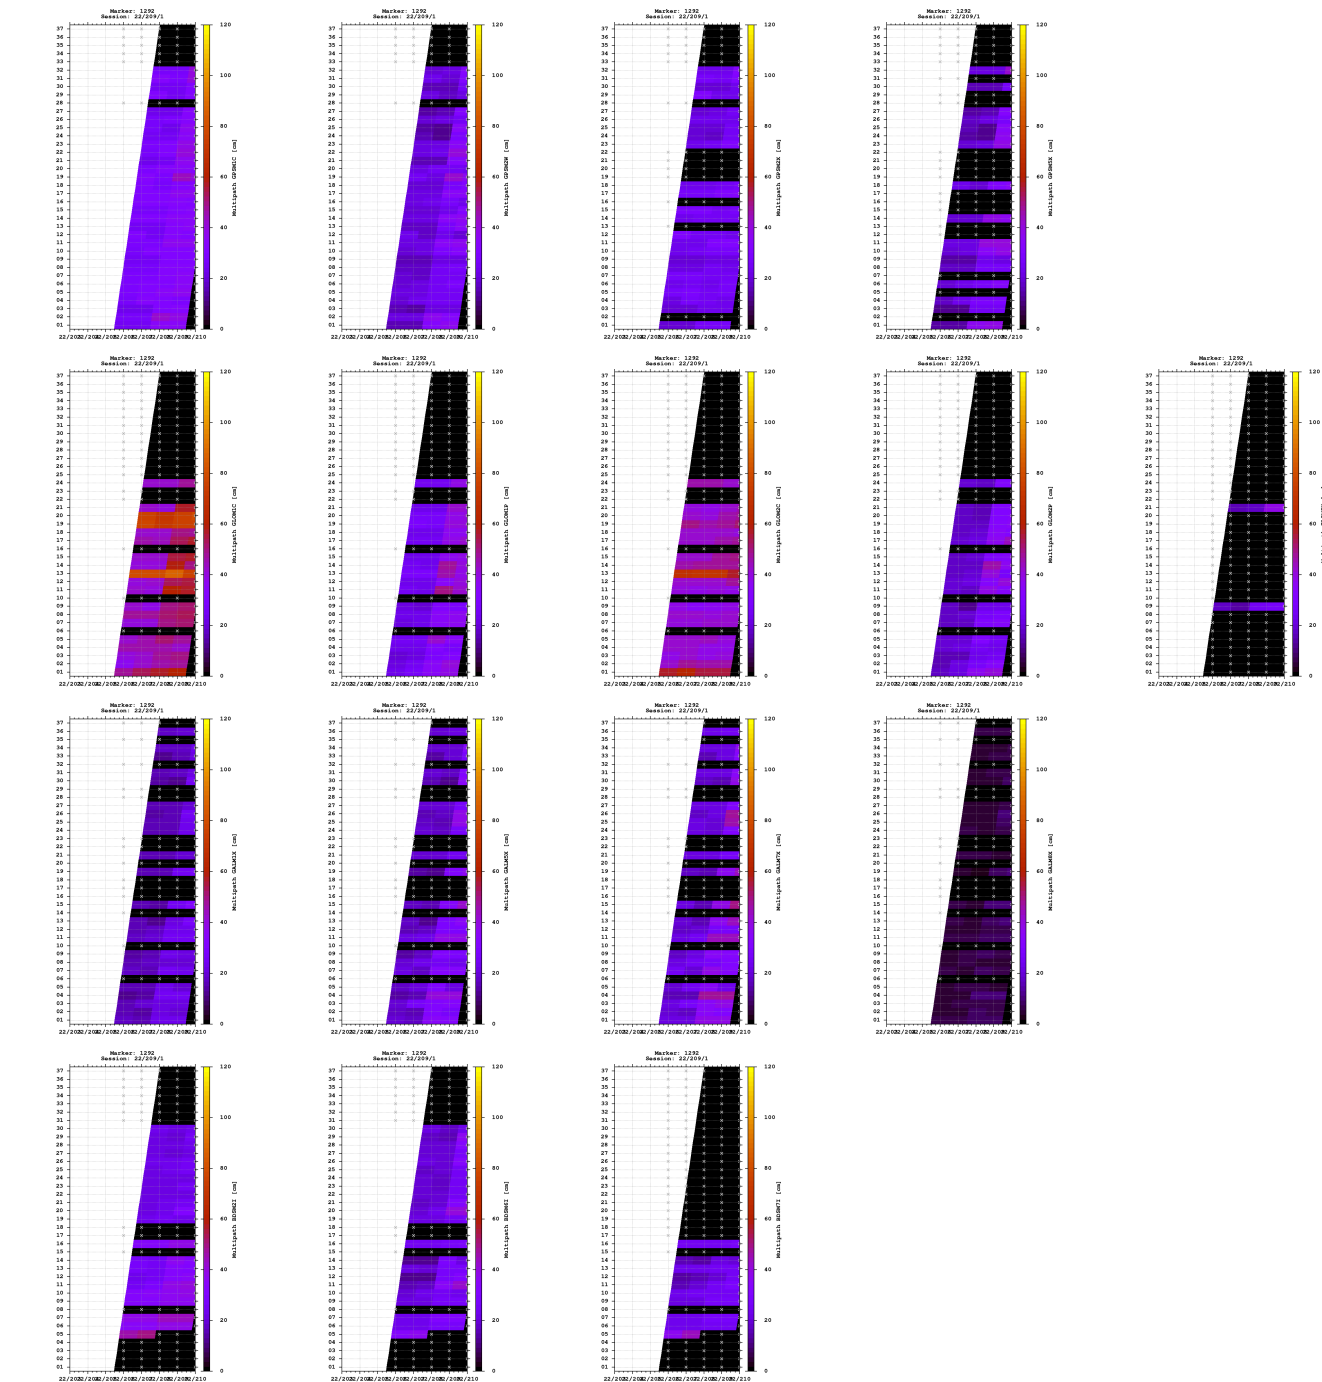


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

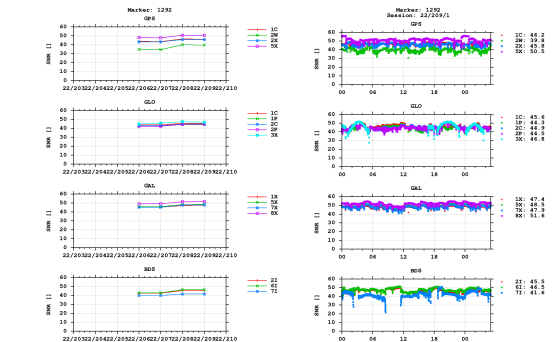


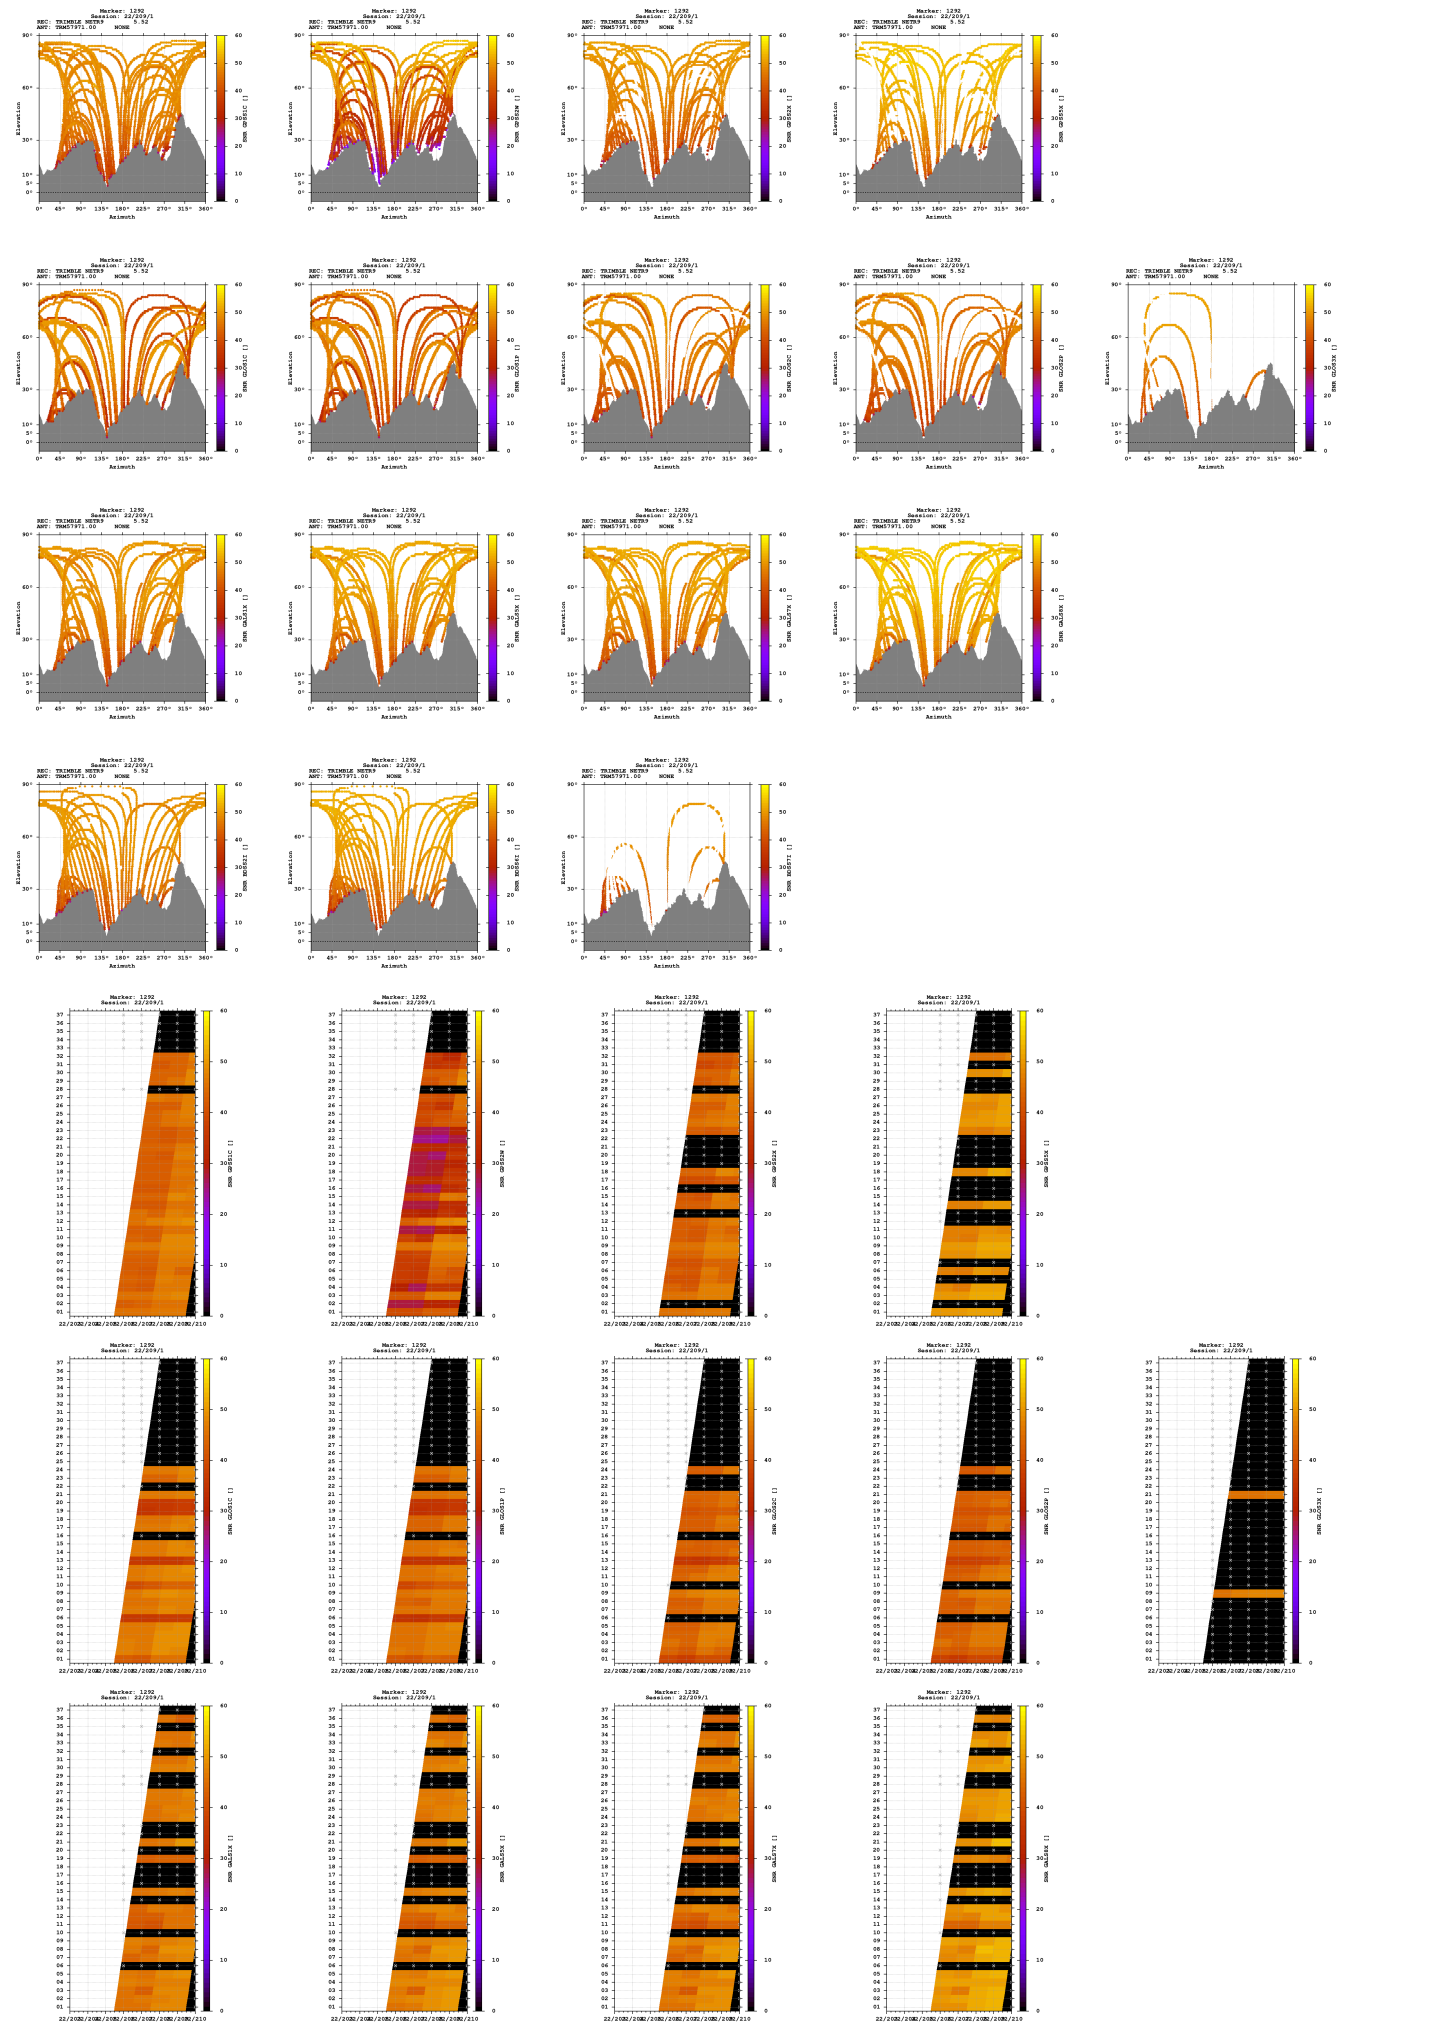

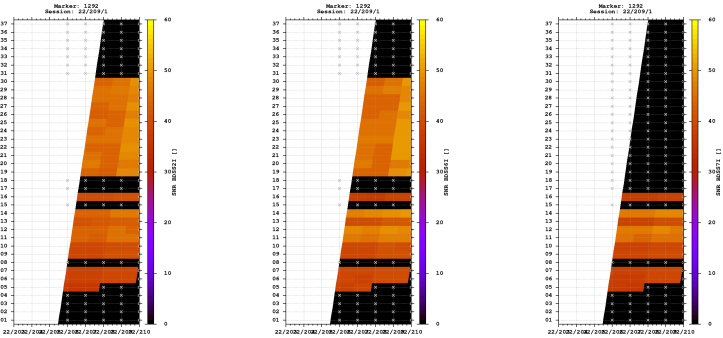



Estimates

2022-07-27 09:16:00	GPS	4363189.9944	674786.2536	4588712.6554	46.297131452	8.791391568	807.8913
2022-07-27 09:16:00	GLO	4363189.6108	674786.0571	4588711.1305	46.297124635	8.791389809	806.5063
2022-07-27 09:16:00	GAL	4363189.1743	674786.3508	4588712.3963	46.297135015	8.791394441	807.1544
2022-07-27 09:16:00	BDS	4363191.4310	674788.5275	4588716.9923	46.297146912	8.791417880	812.2478

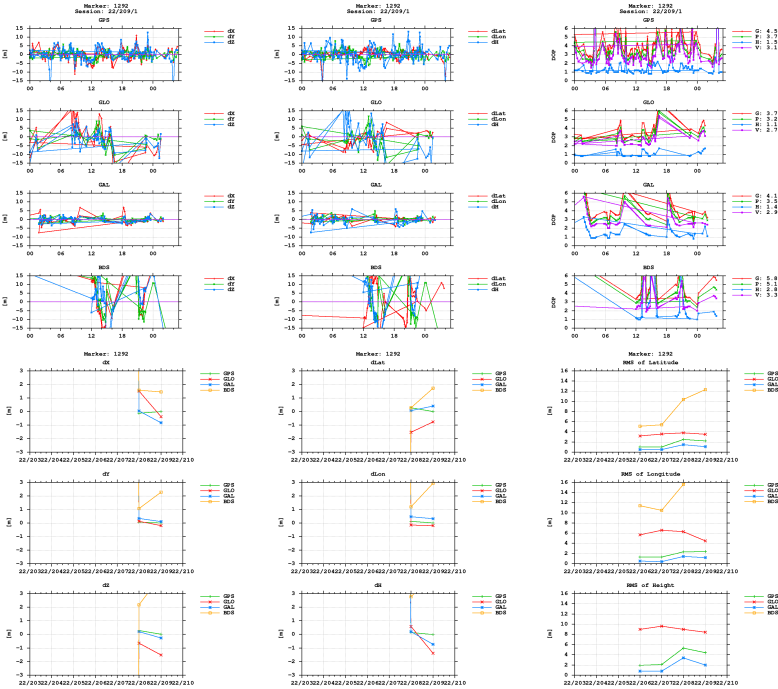

BNC

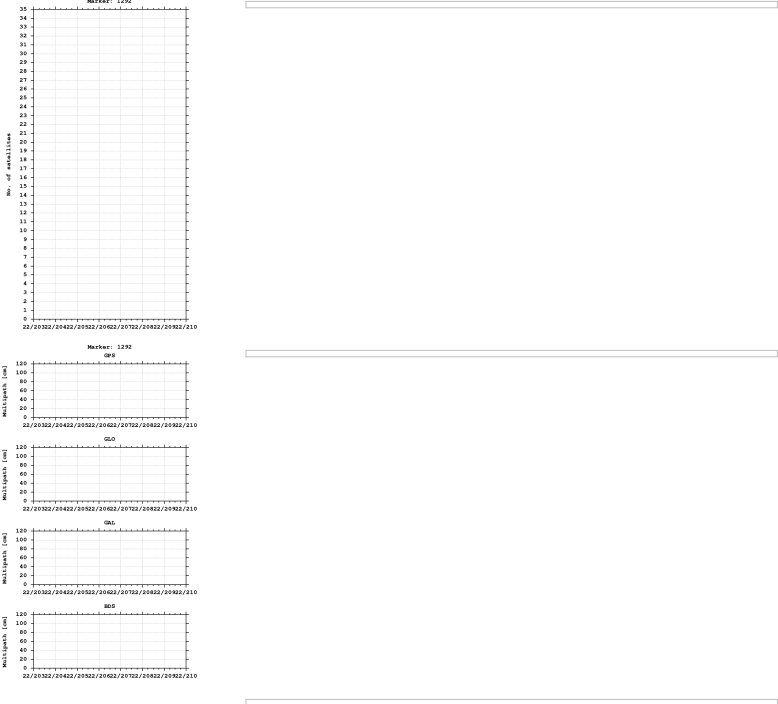

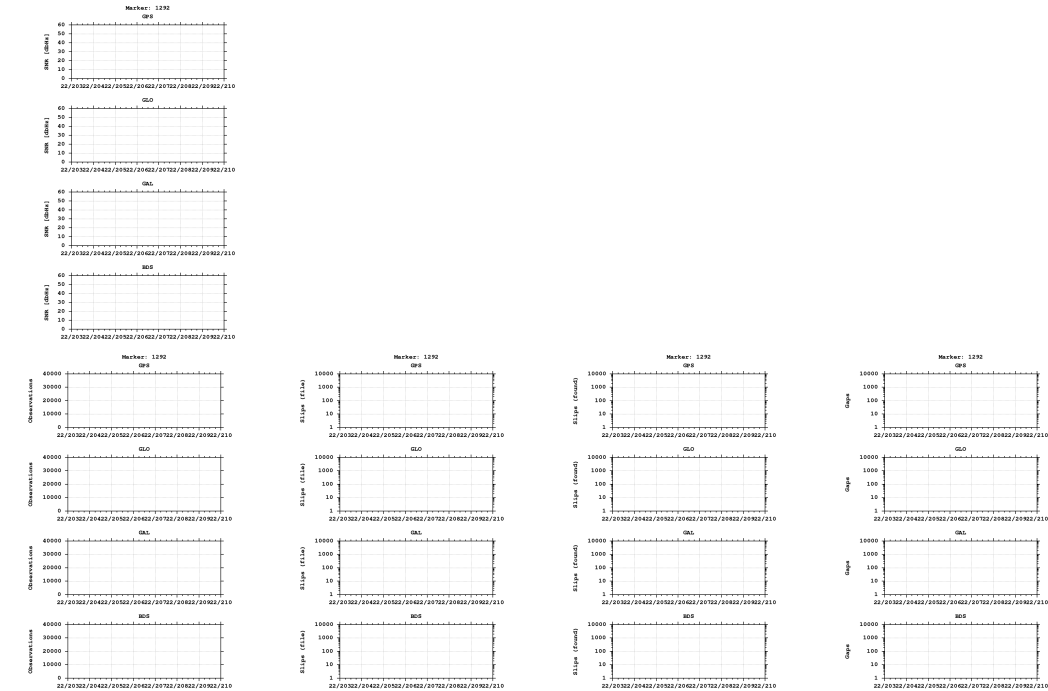

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)