


GNSS observation file monitoring for 0512


Last RINEX file: 05122061.22O
RINEX version: 3.02
Marker: 1352
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

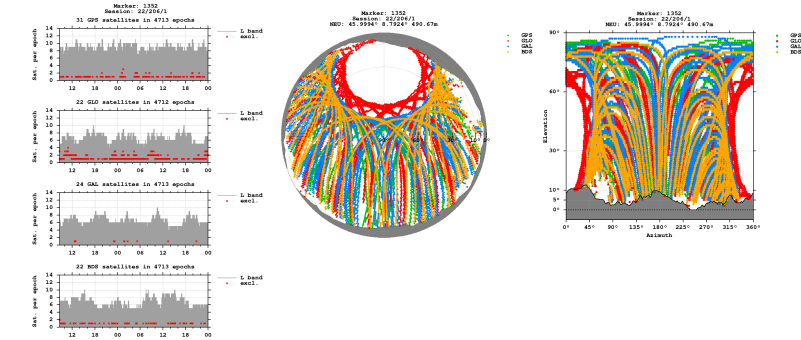


Bands

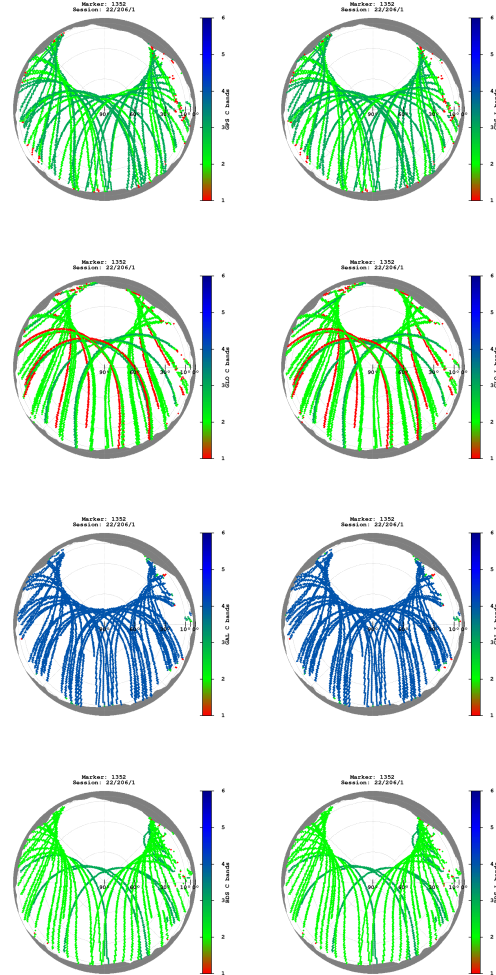


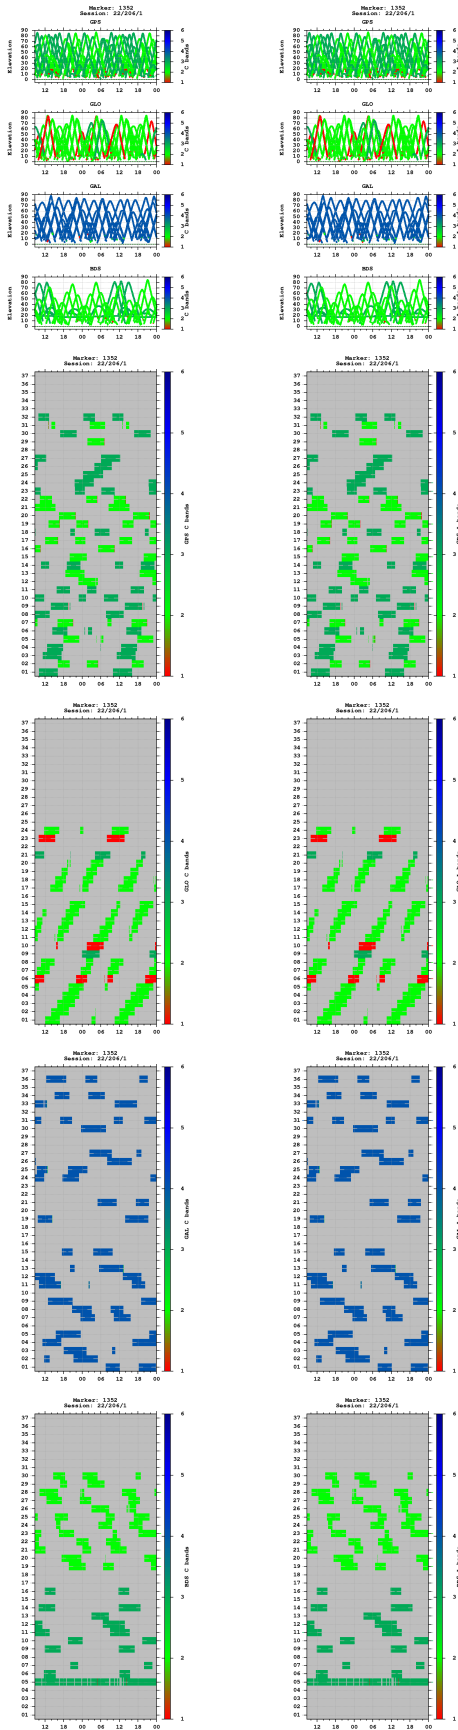


Multipath

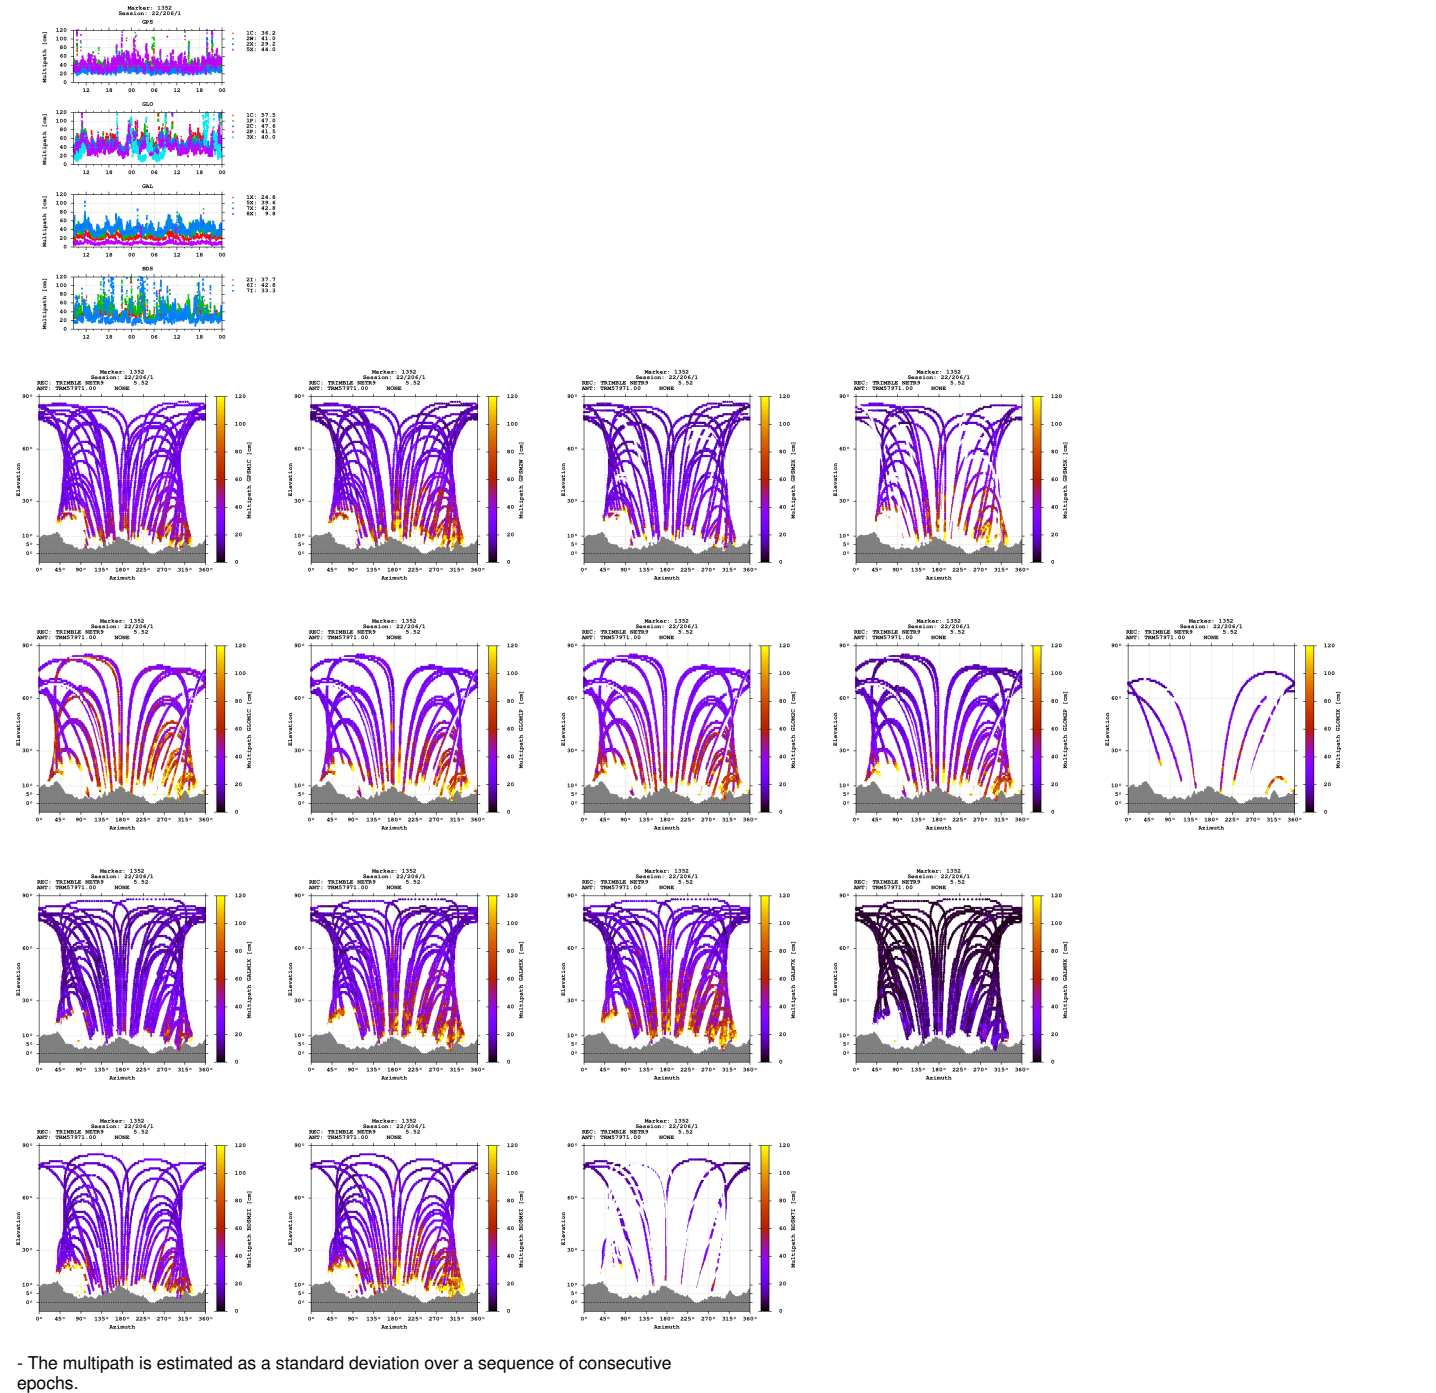


Signal-to-noise ratio

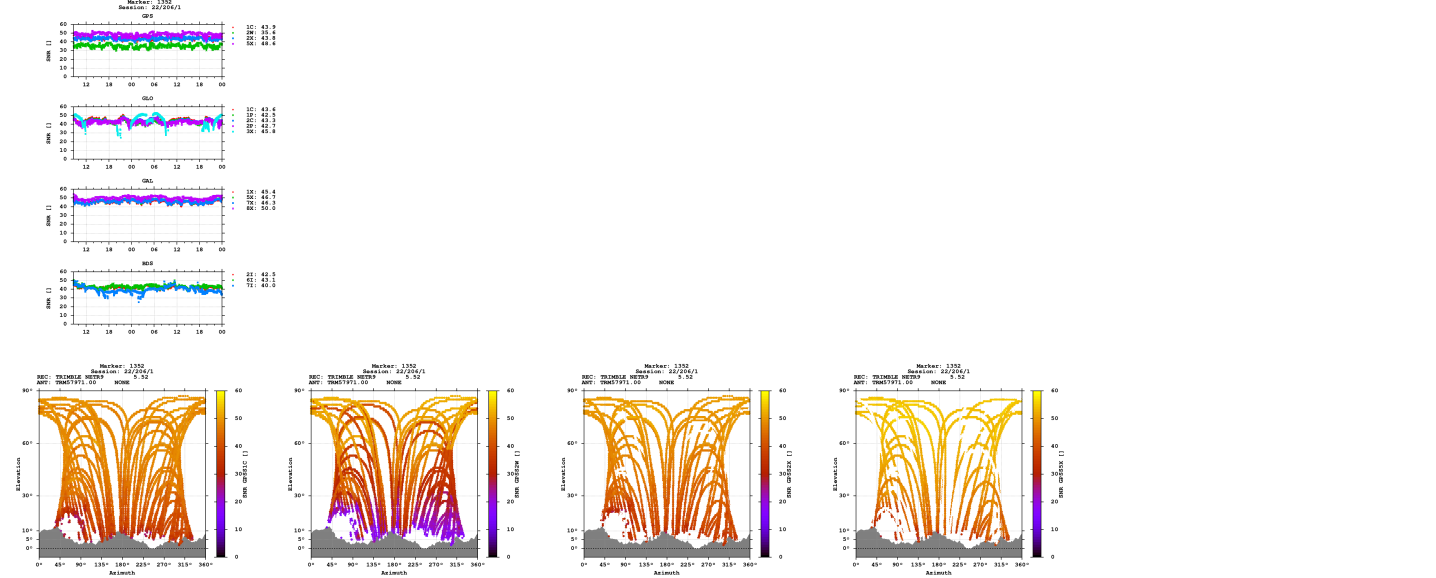

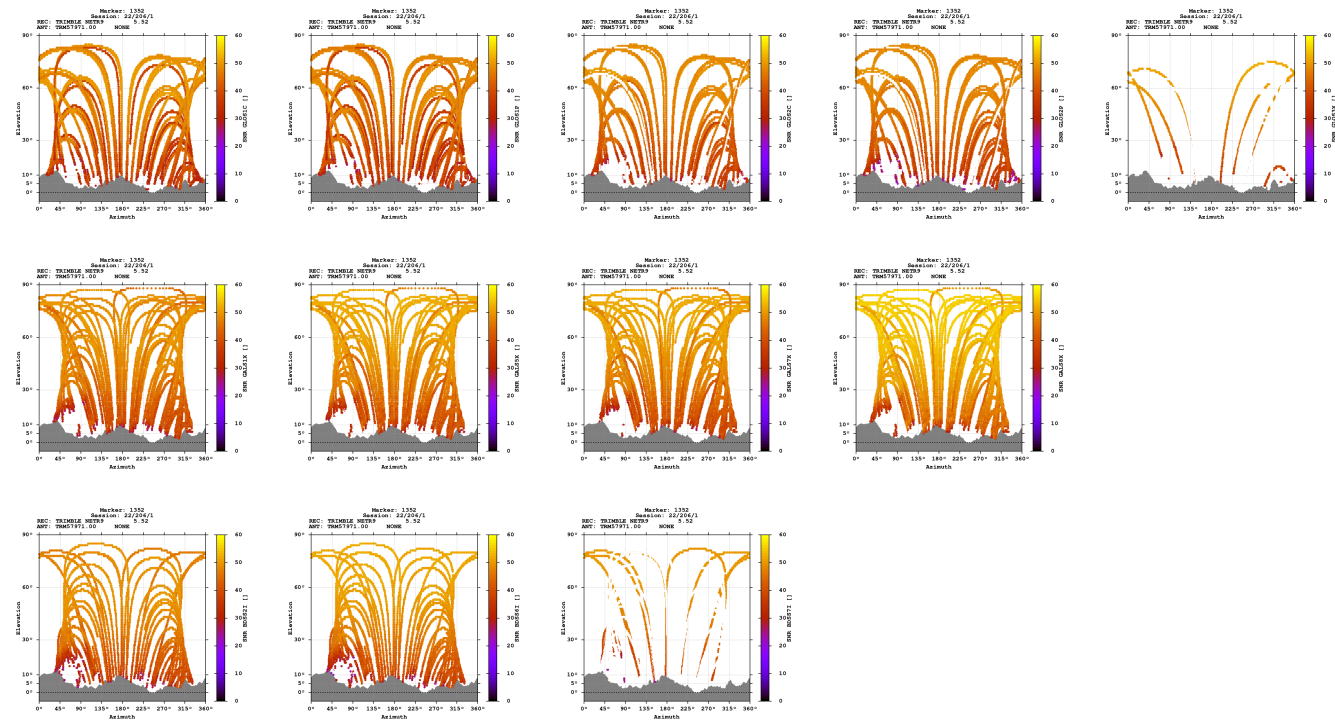

Estimates

2022-07-25 08:40:30	GPS	4386547.4028	678474.8273	4565555.3431	45.999415188	8.792364245	490.6731
2022-07-25 08:40:30	GLO	4386547.1862	678474.5572	4565553.9882	45.999408372	8.792361227	489.5210
2022-07-25 08:40:30	GAL	4386547.5590	678474.8951	4565555.0411	45.999412234	8.792364802	490.5703
2022-07-25 08:40:30	BDS	4386546.6404	678473.4077	4565554.9283	45.999418875	8.792347640	489.7005

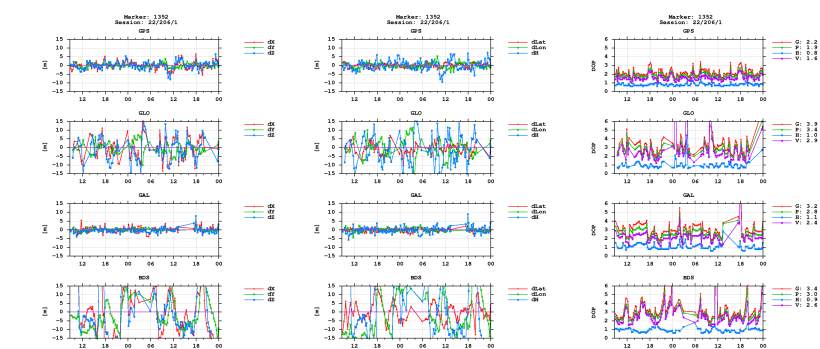

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)