


GNSS observation file monitoring for 0512


Last RINEX file: 05122071.220
RINEX version: 3.02
Marker: 1352
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE

Epochs

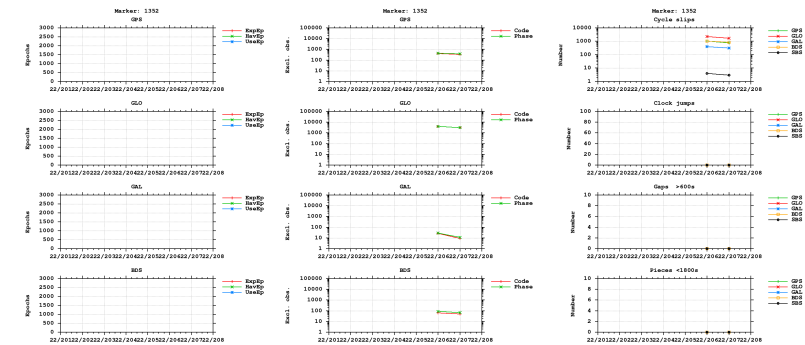



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

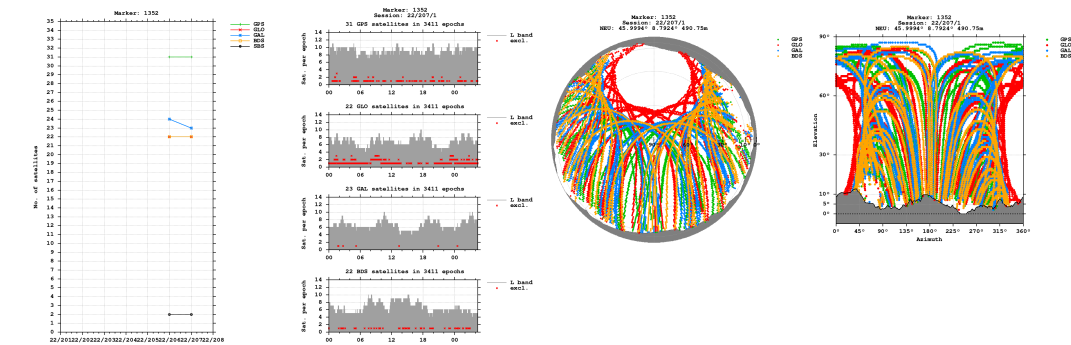


Bands

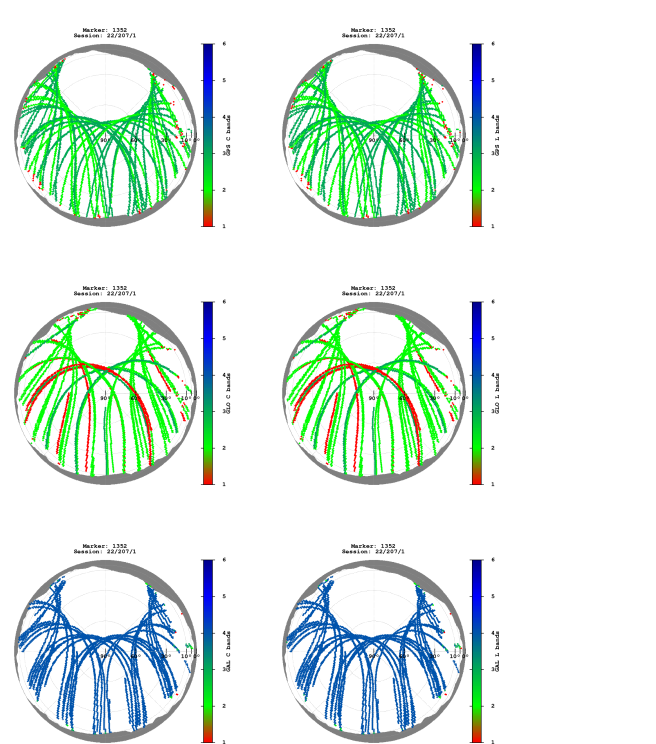


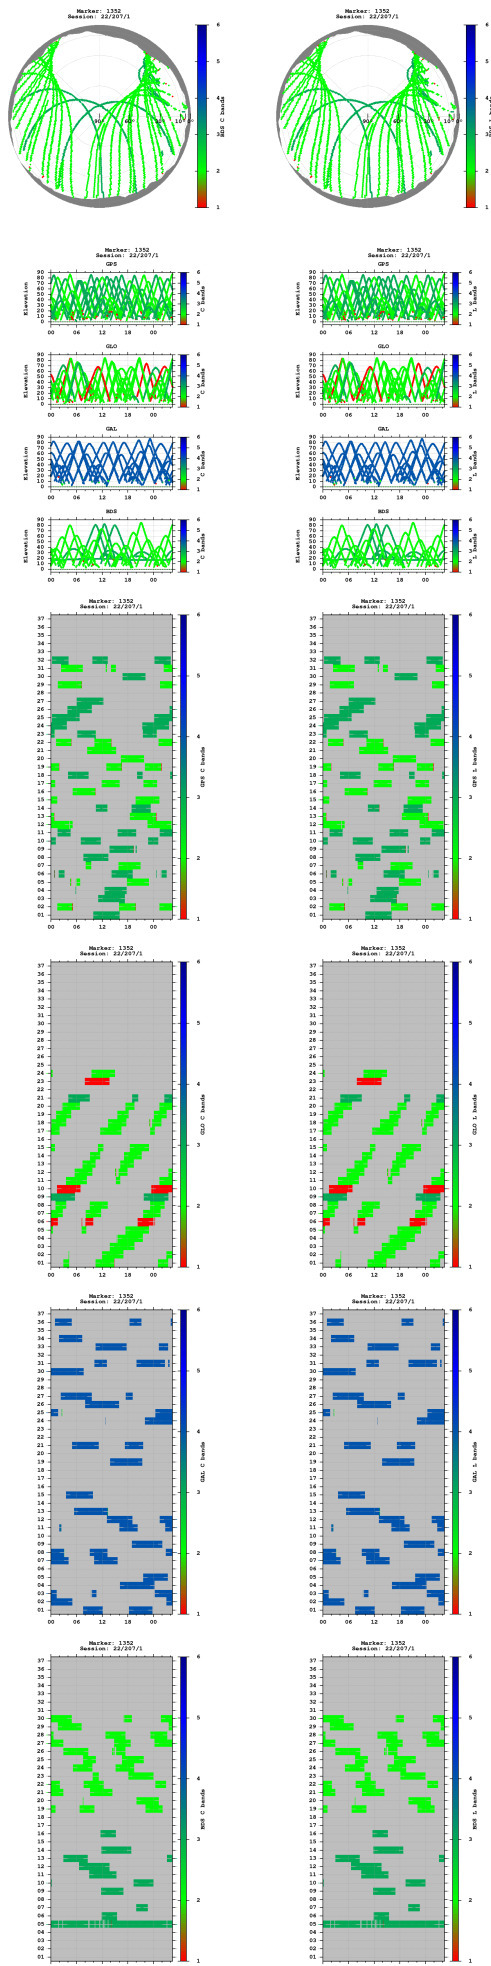


Observations

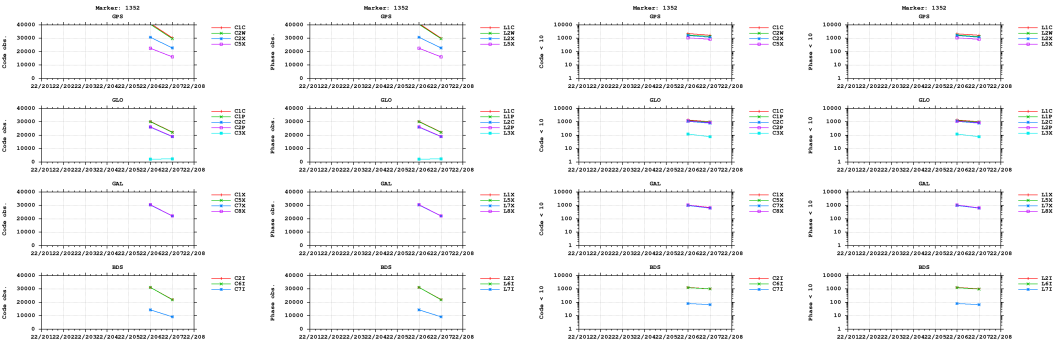


Multipath

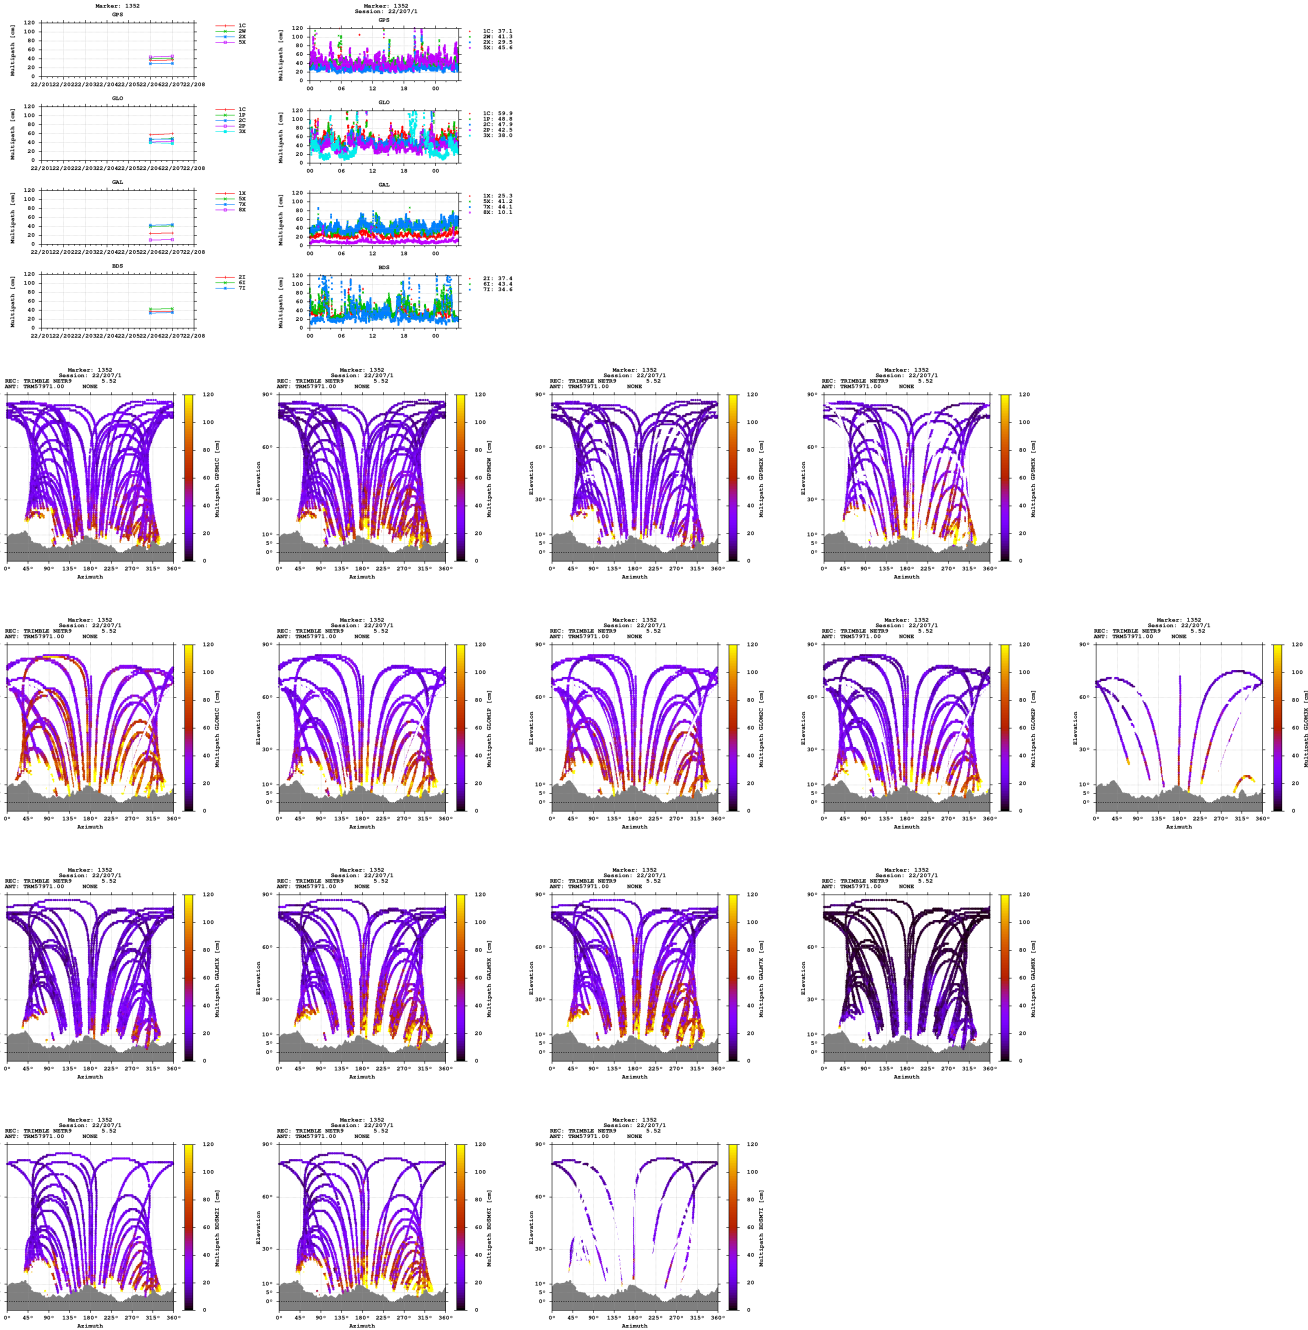


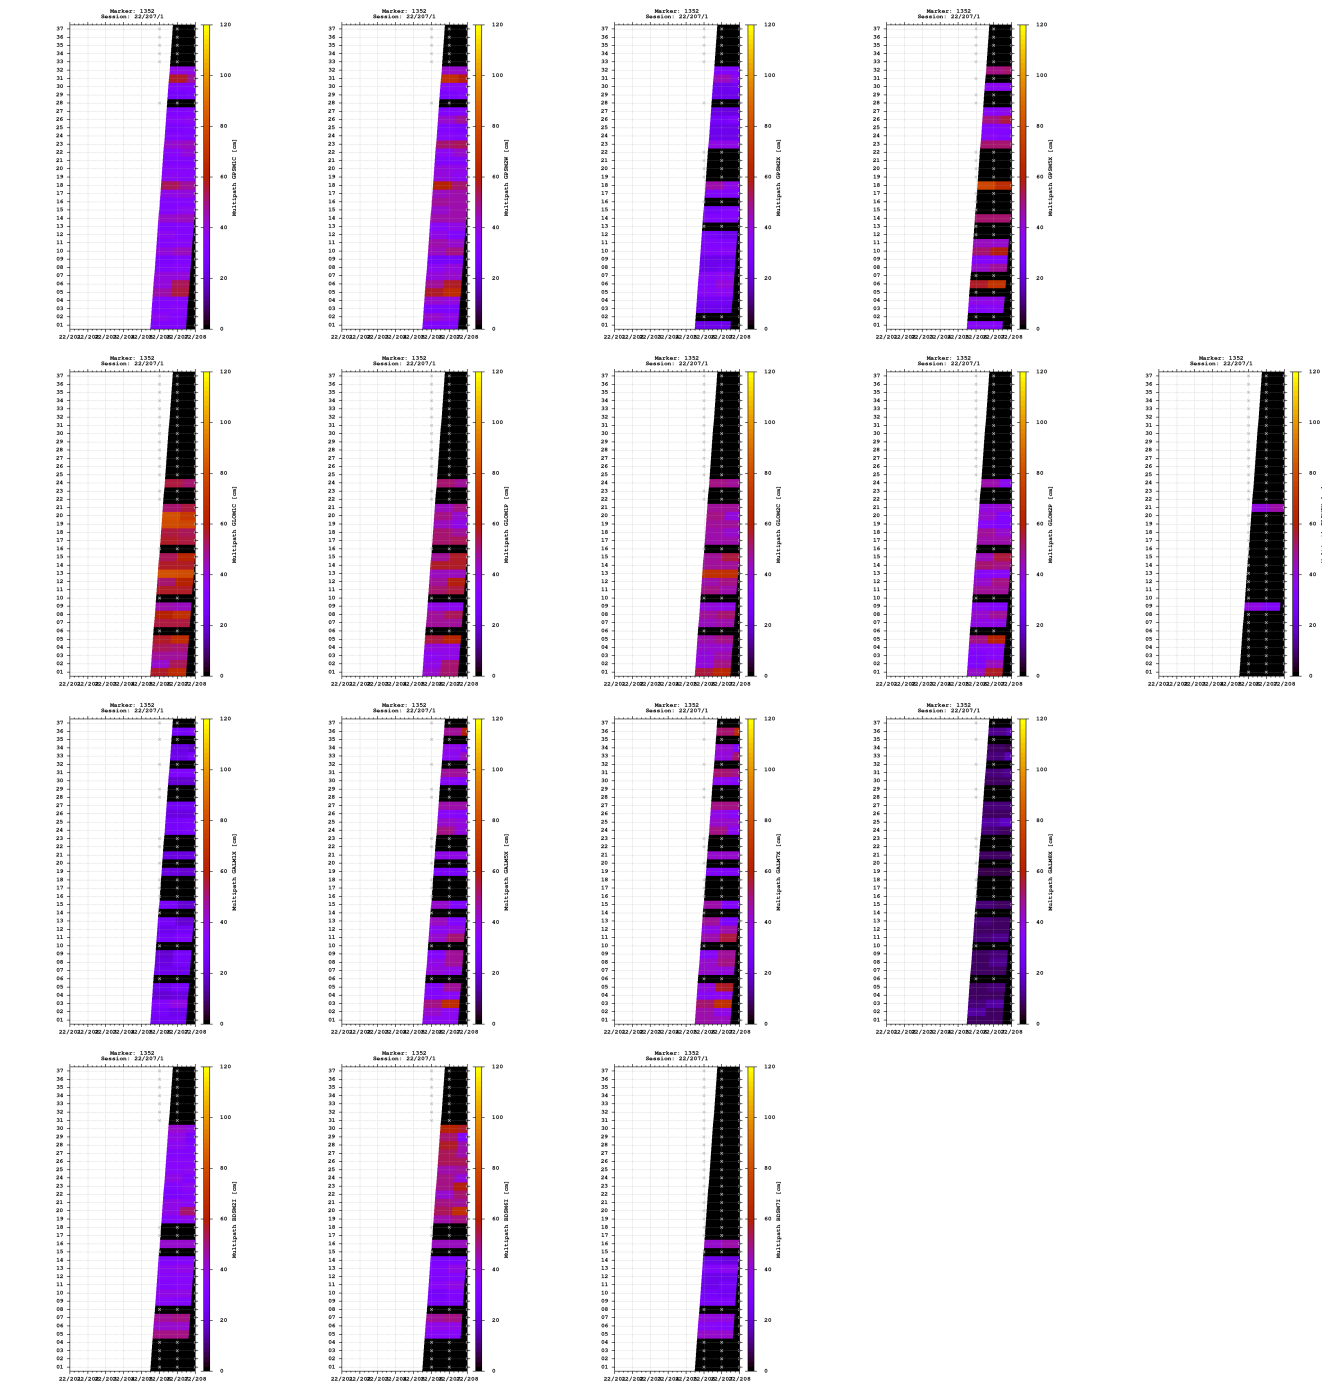


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

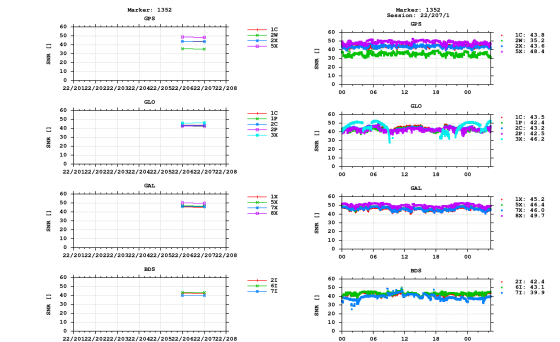


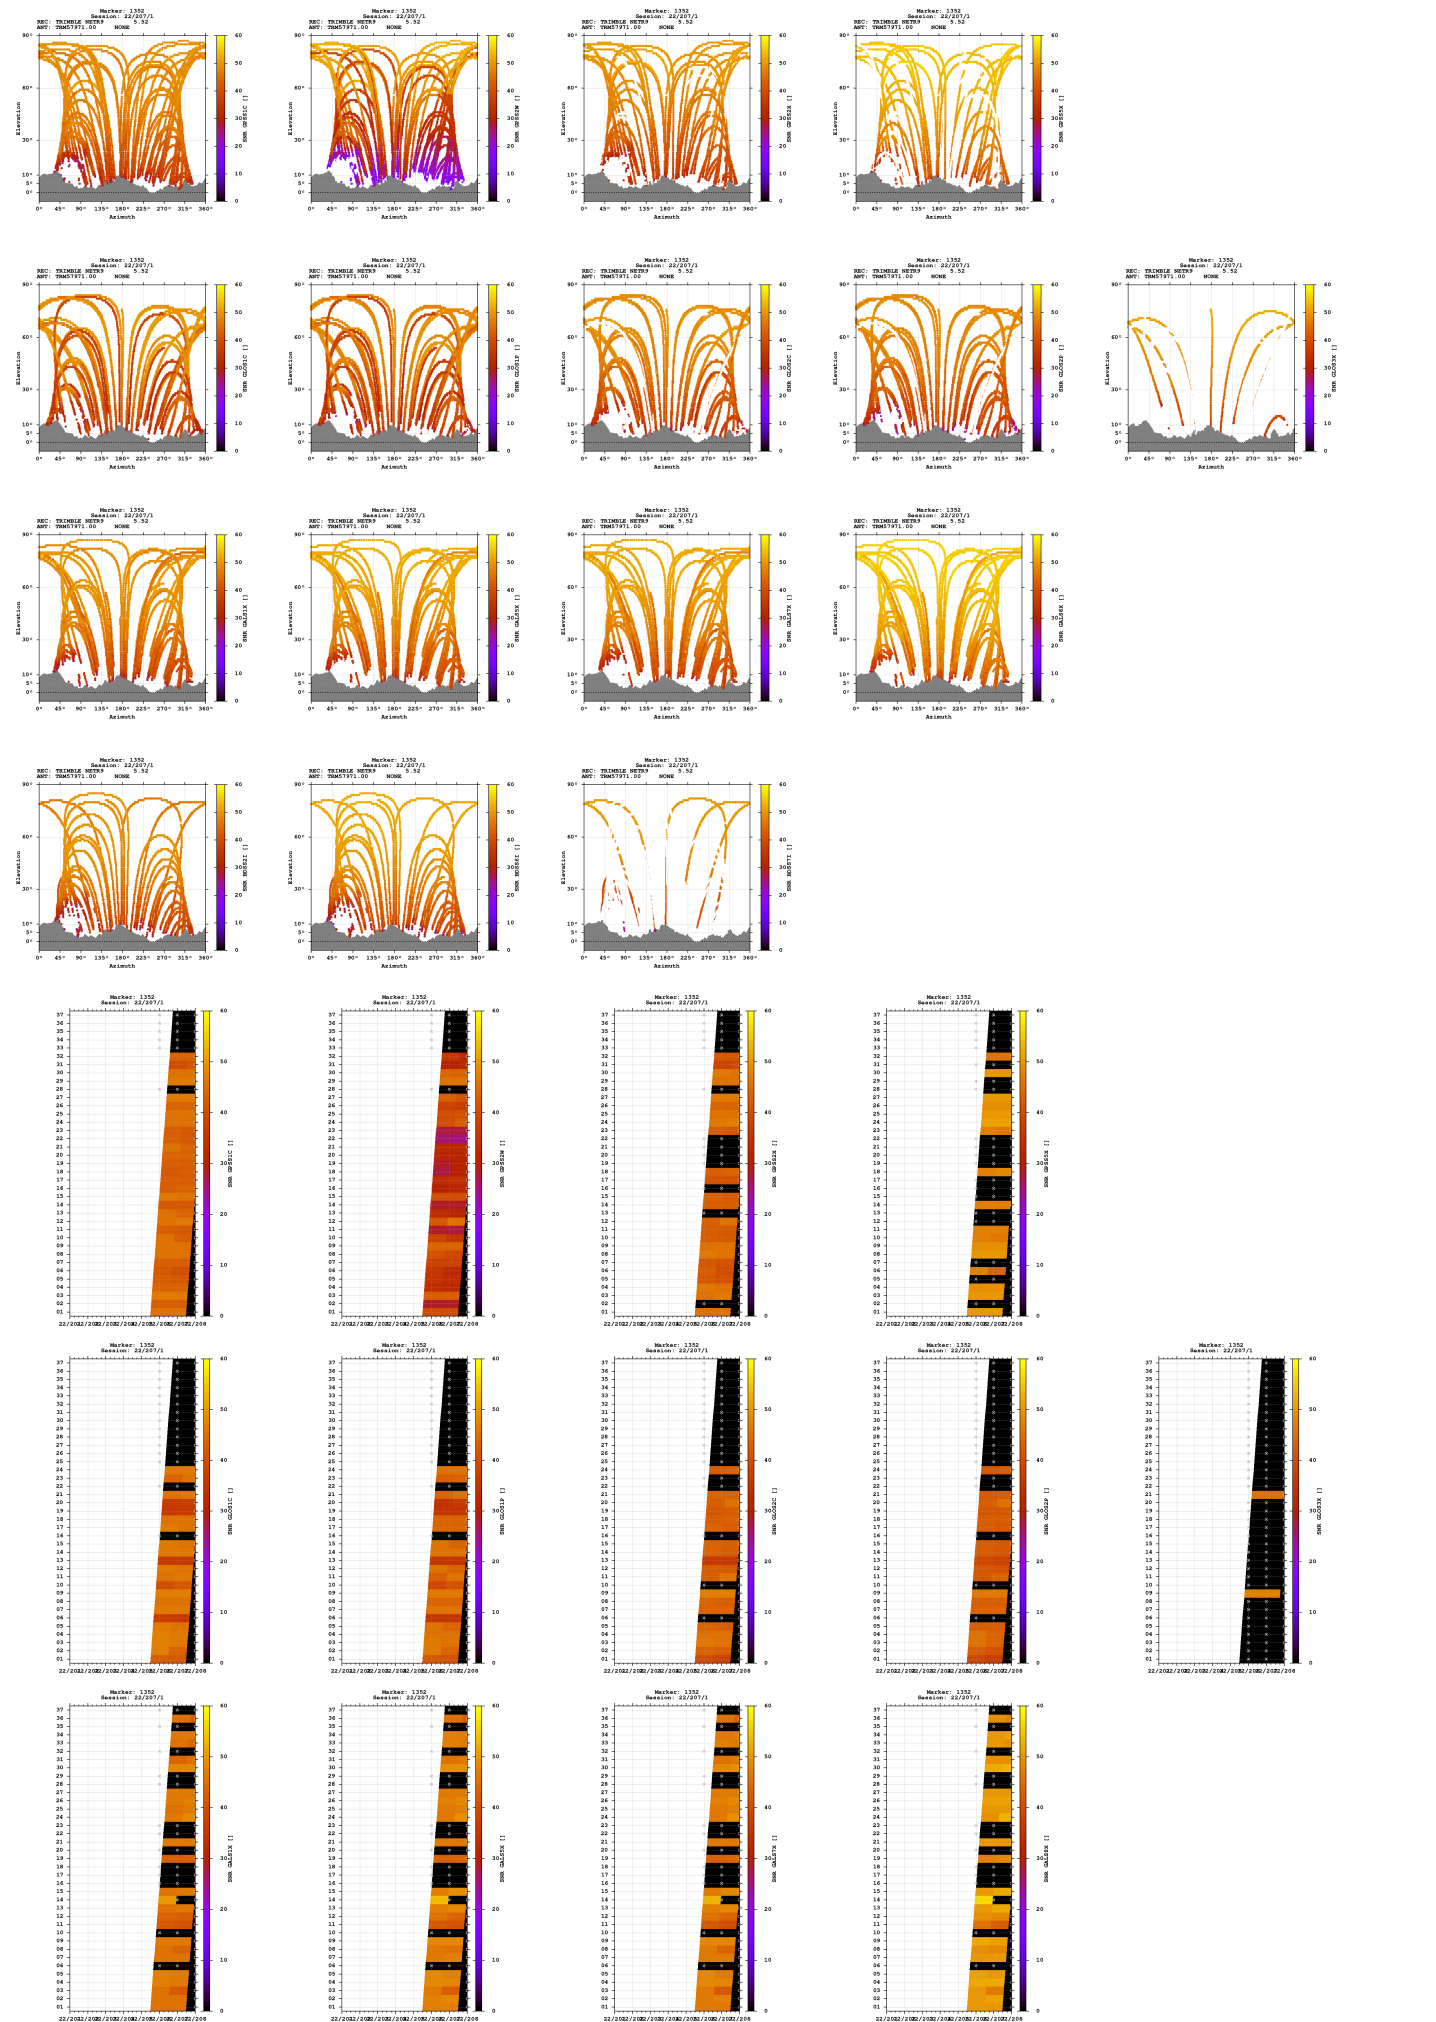

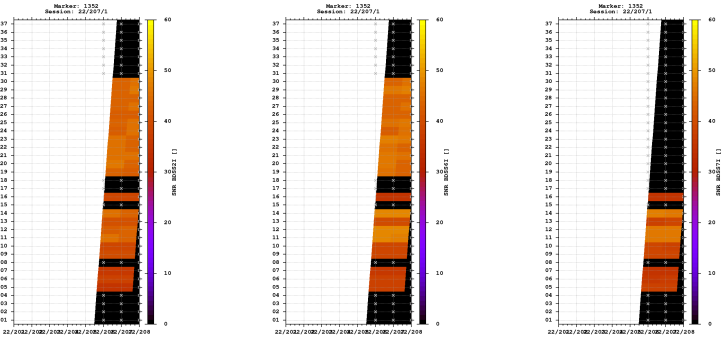


Estimates

2022-07-25 08:40:30	GPS	4386547.5940	678474.9488	4565555.2438	45.999413223	8.792365418	490.7458
2022-07-25 08:40:30	GLO	4386547.8750	678474.3808	4565555.3208	45.999412470	8.792357618	490.9337
2022-07-25 08:40:30	GAL	4386547.8381	678474.7946	4565555.1742	45.999411380	8.792362970	490.8469
2022-07-25 08:40:30	BDS	4386546.1811	678475.8480	4565554.0934	45.999414181	8.792379676	489.0438

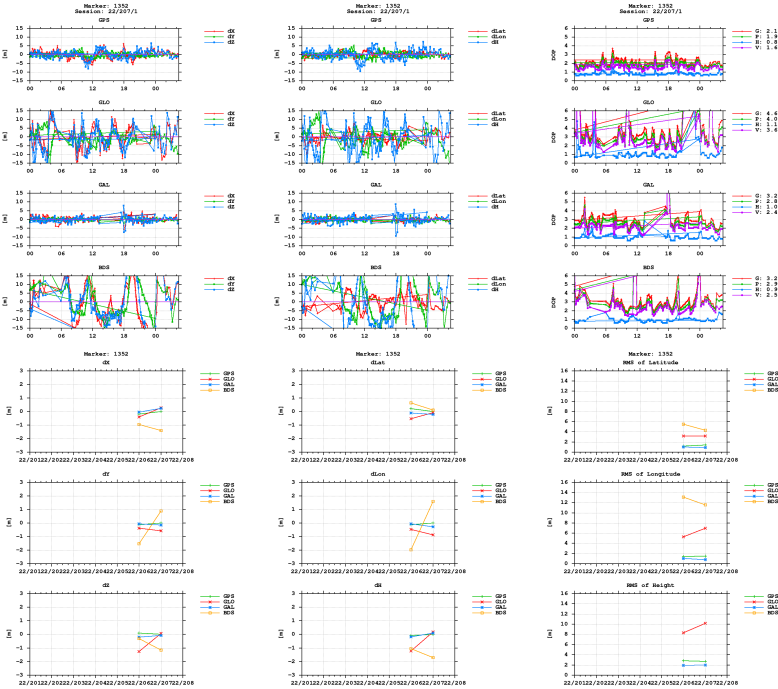

BNC



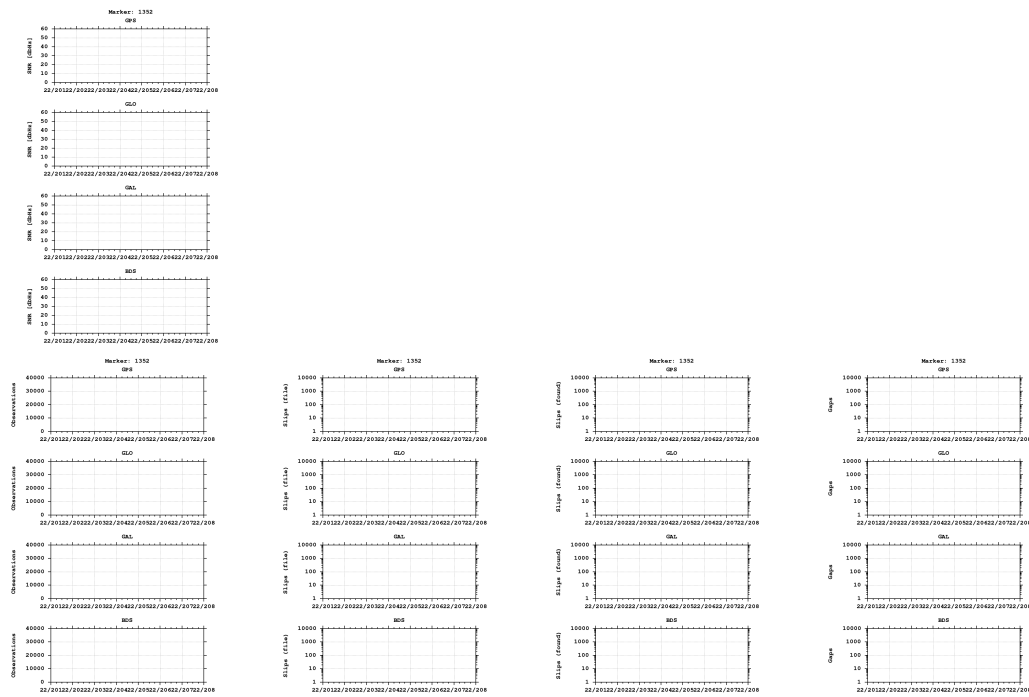

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)