

GNSS observation file monitoring for 0512

Last RINEX file: 05122081.220


RINEX version: 3.02

Marker: 1292

Receiver: 512 TRIMBLE NETR9 5.52


Antenna: 512 TRM57971.00 NONE

Epochs

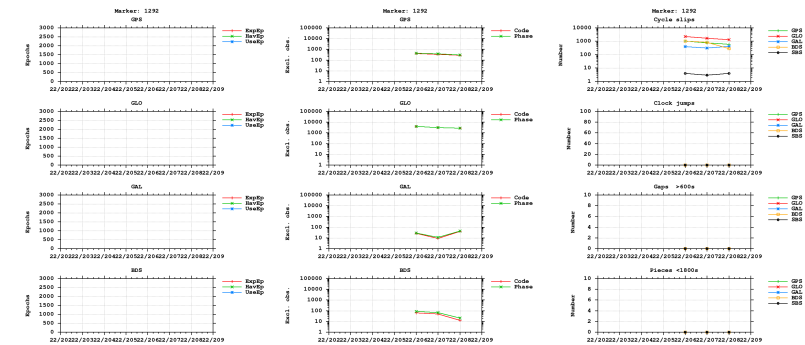



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

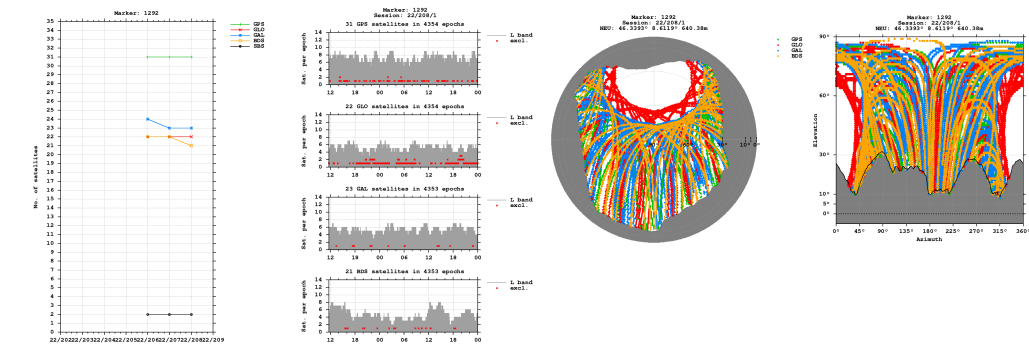


Bands

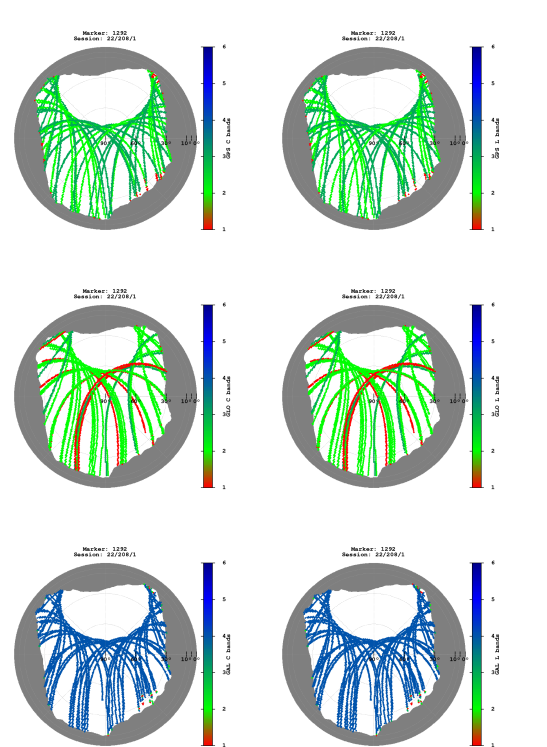


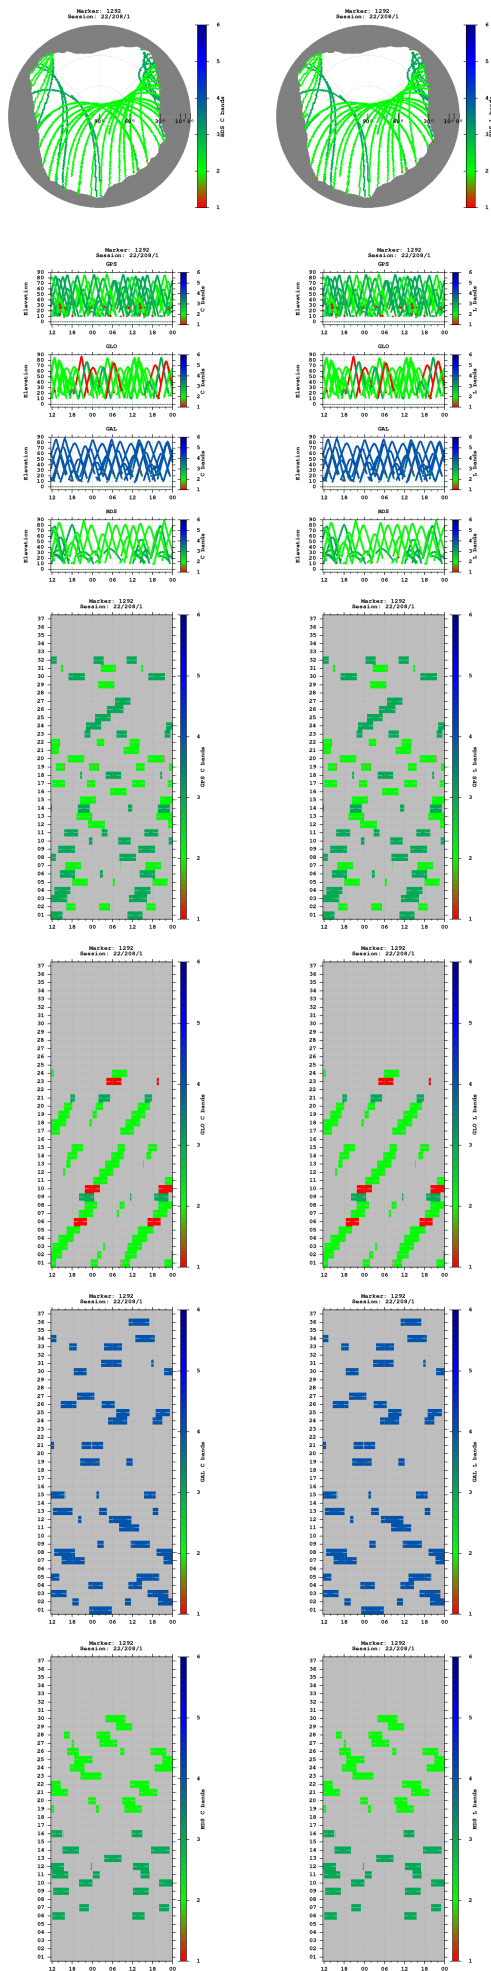


Observations

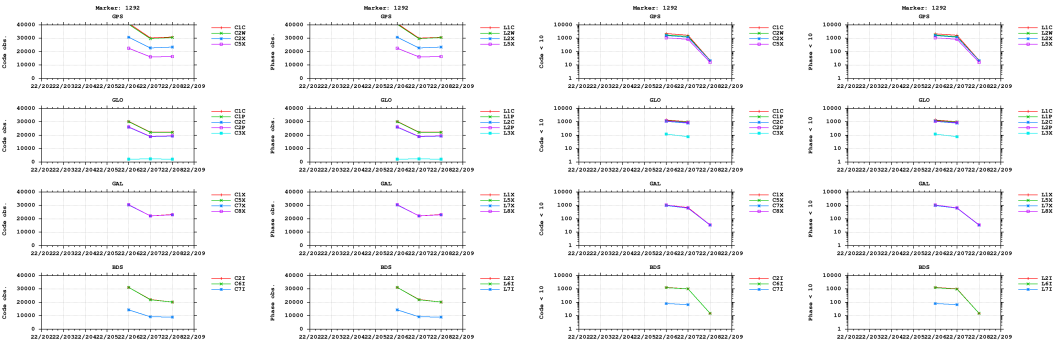


Multipath

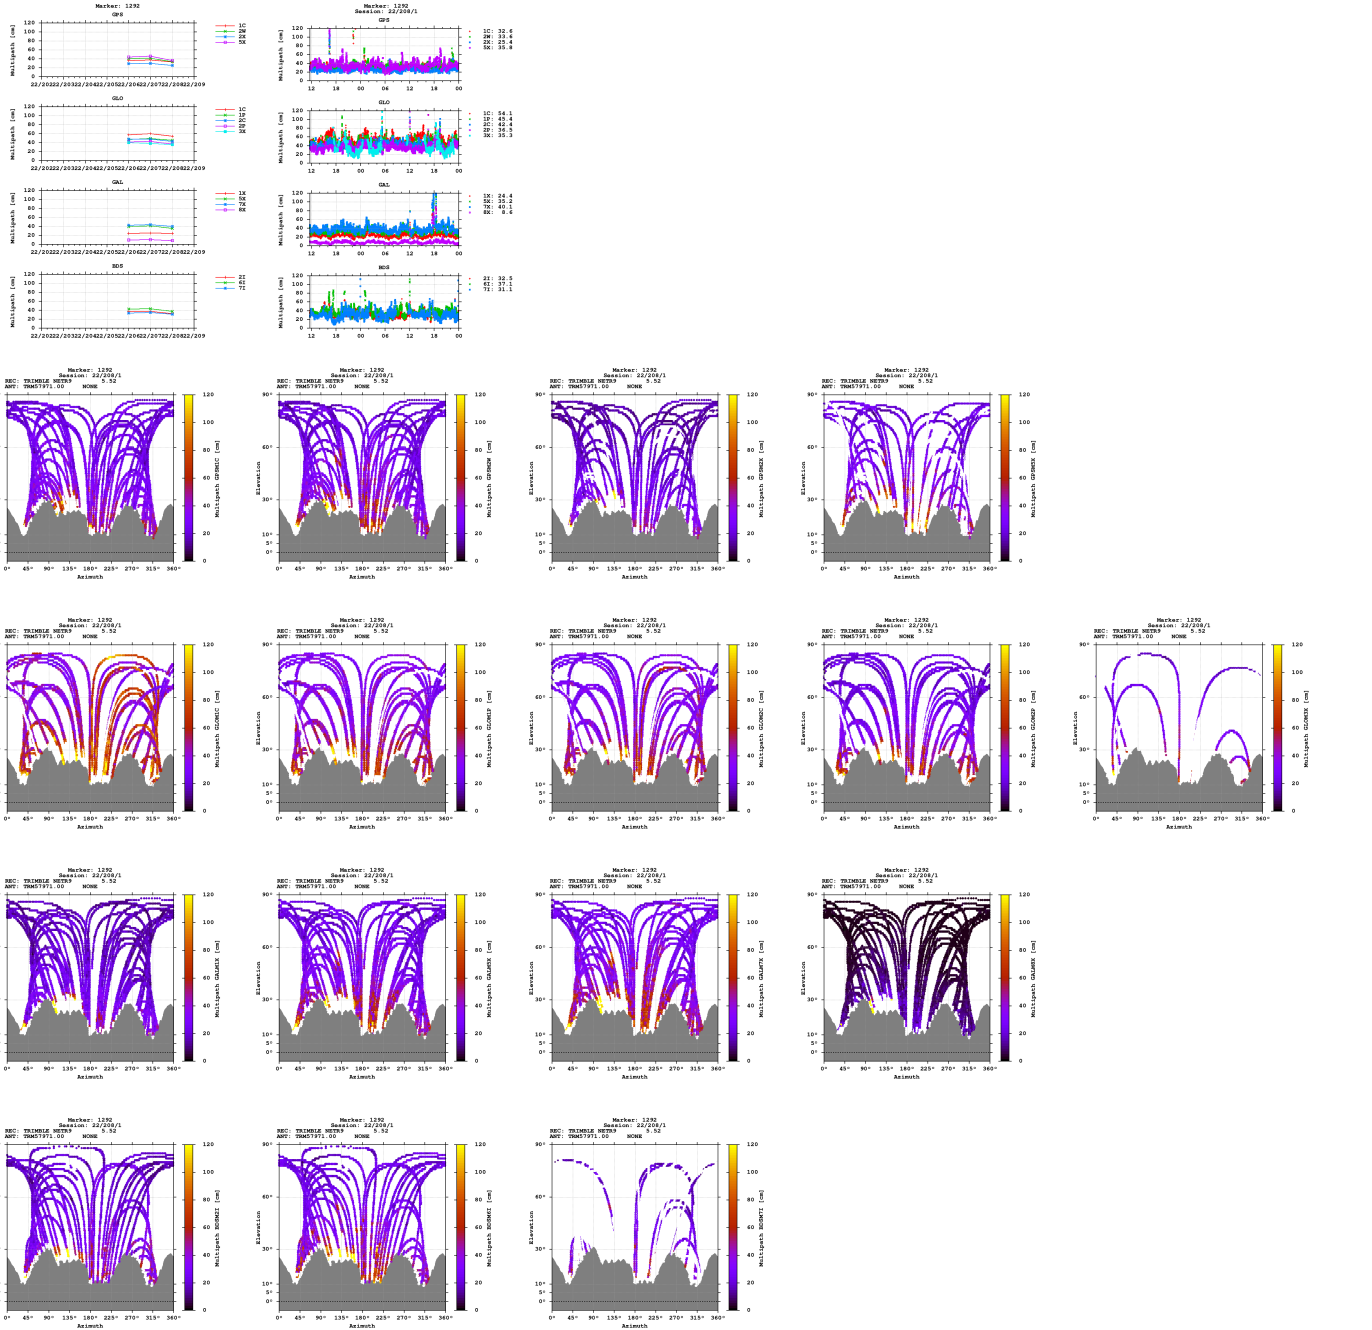


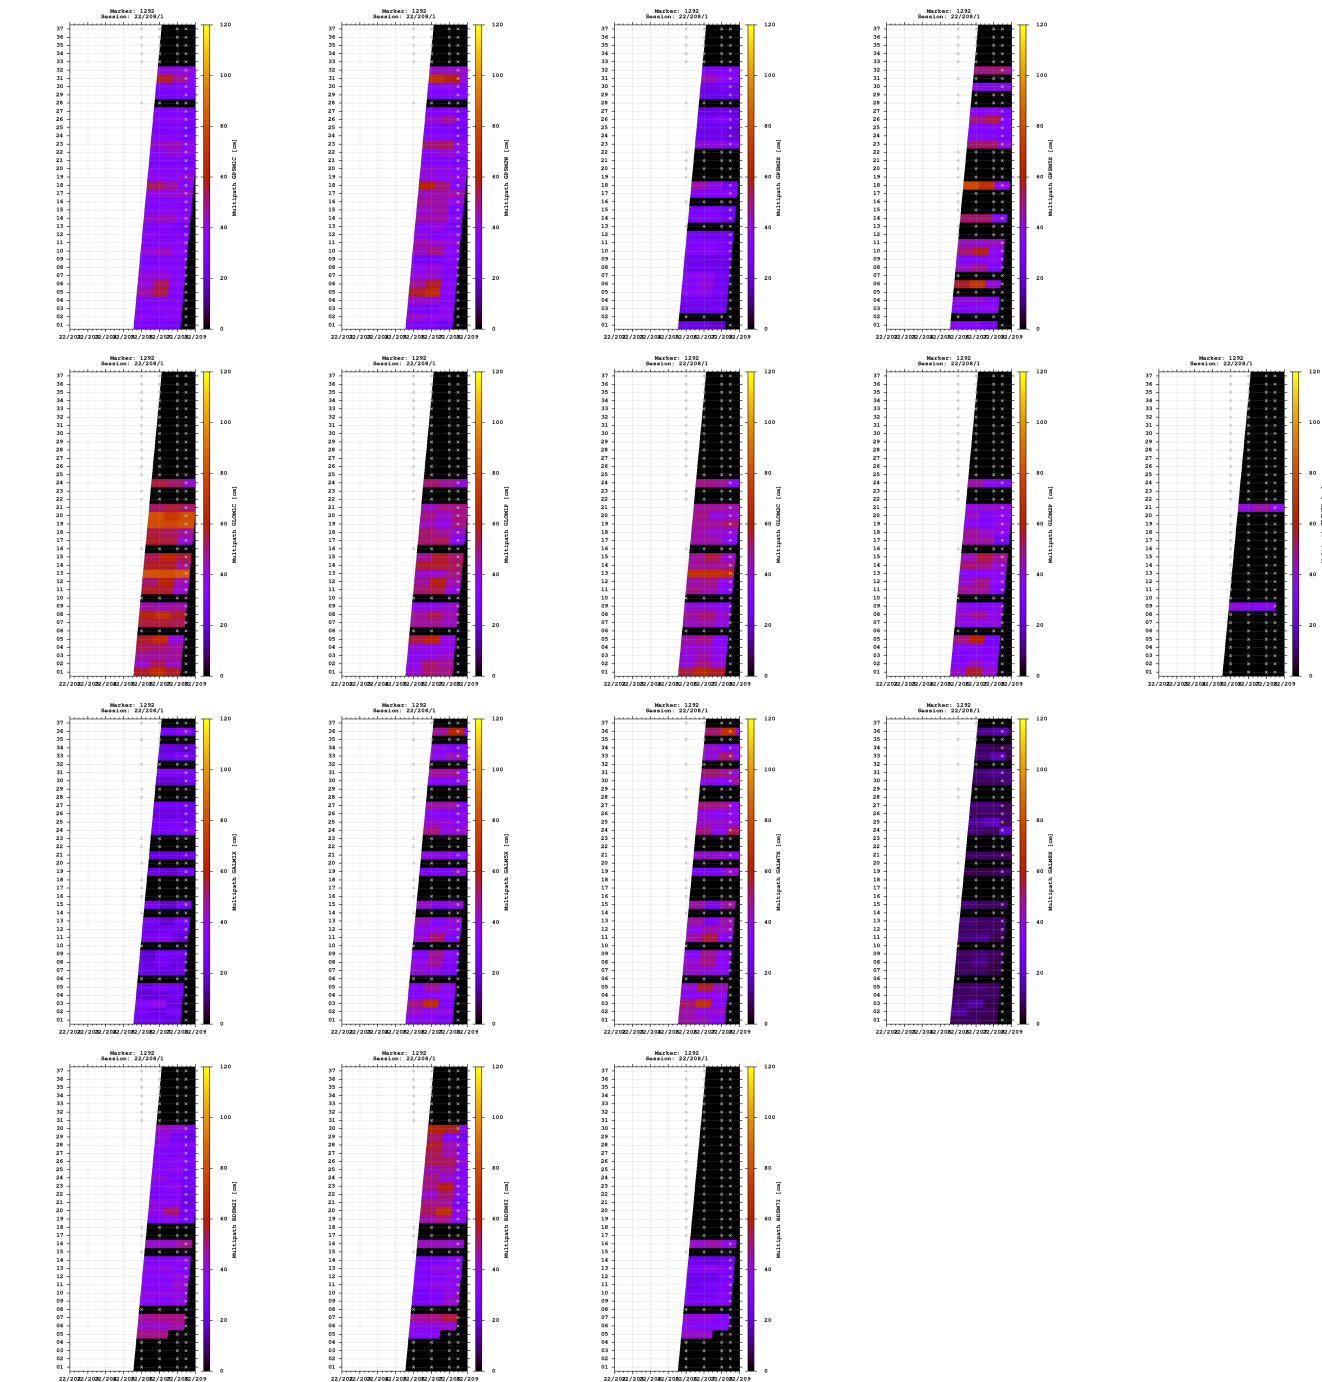


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

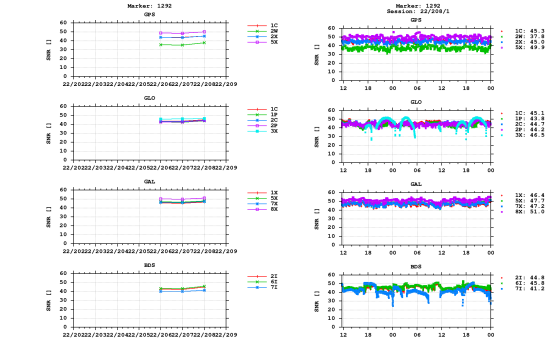


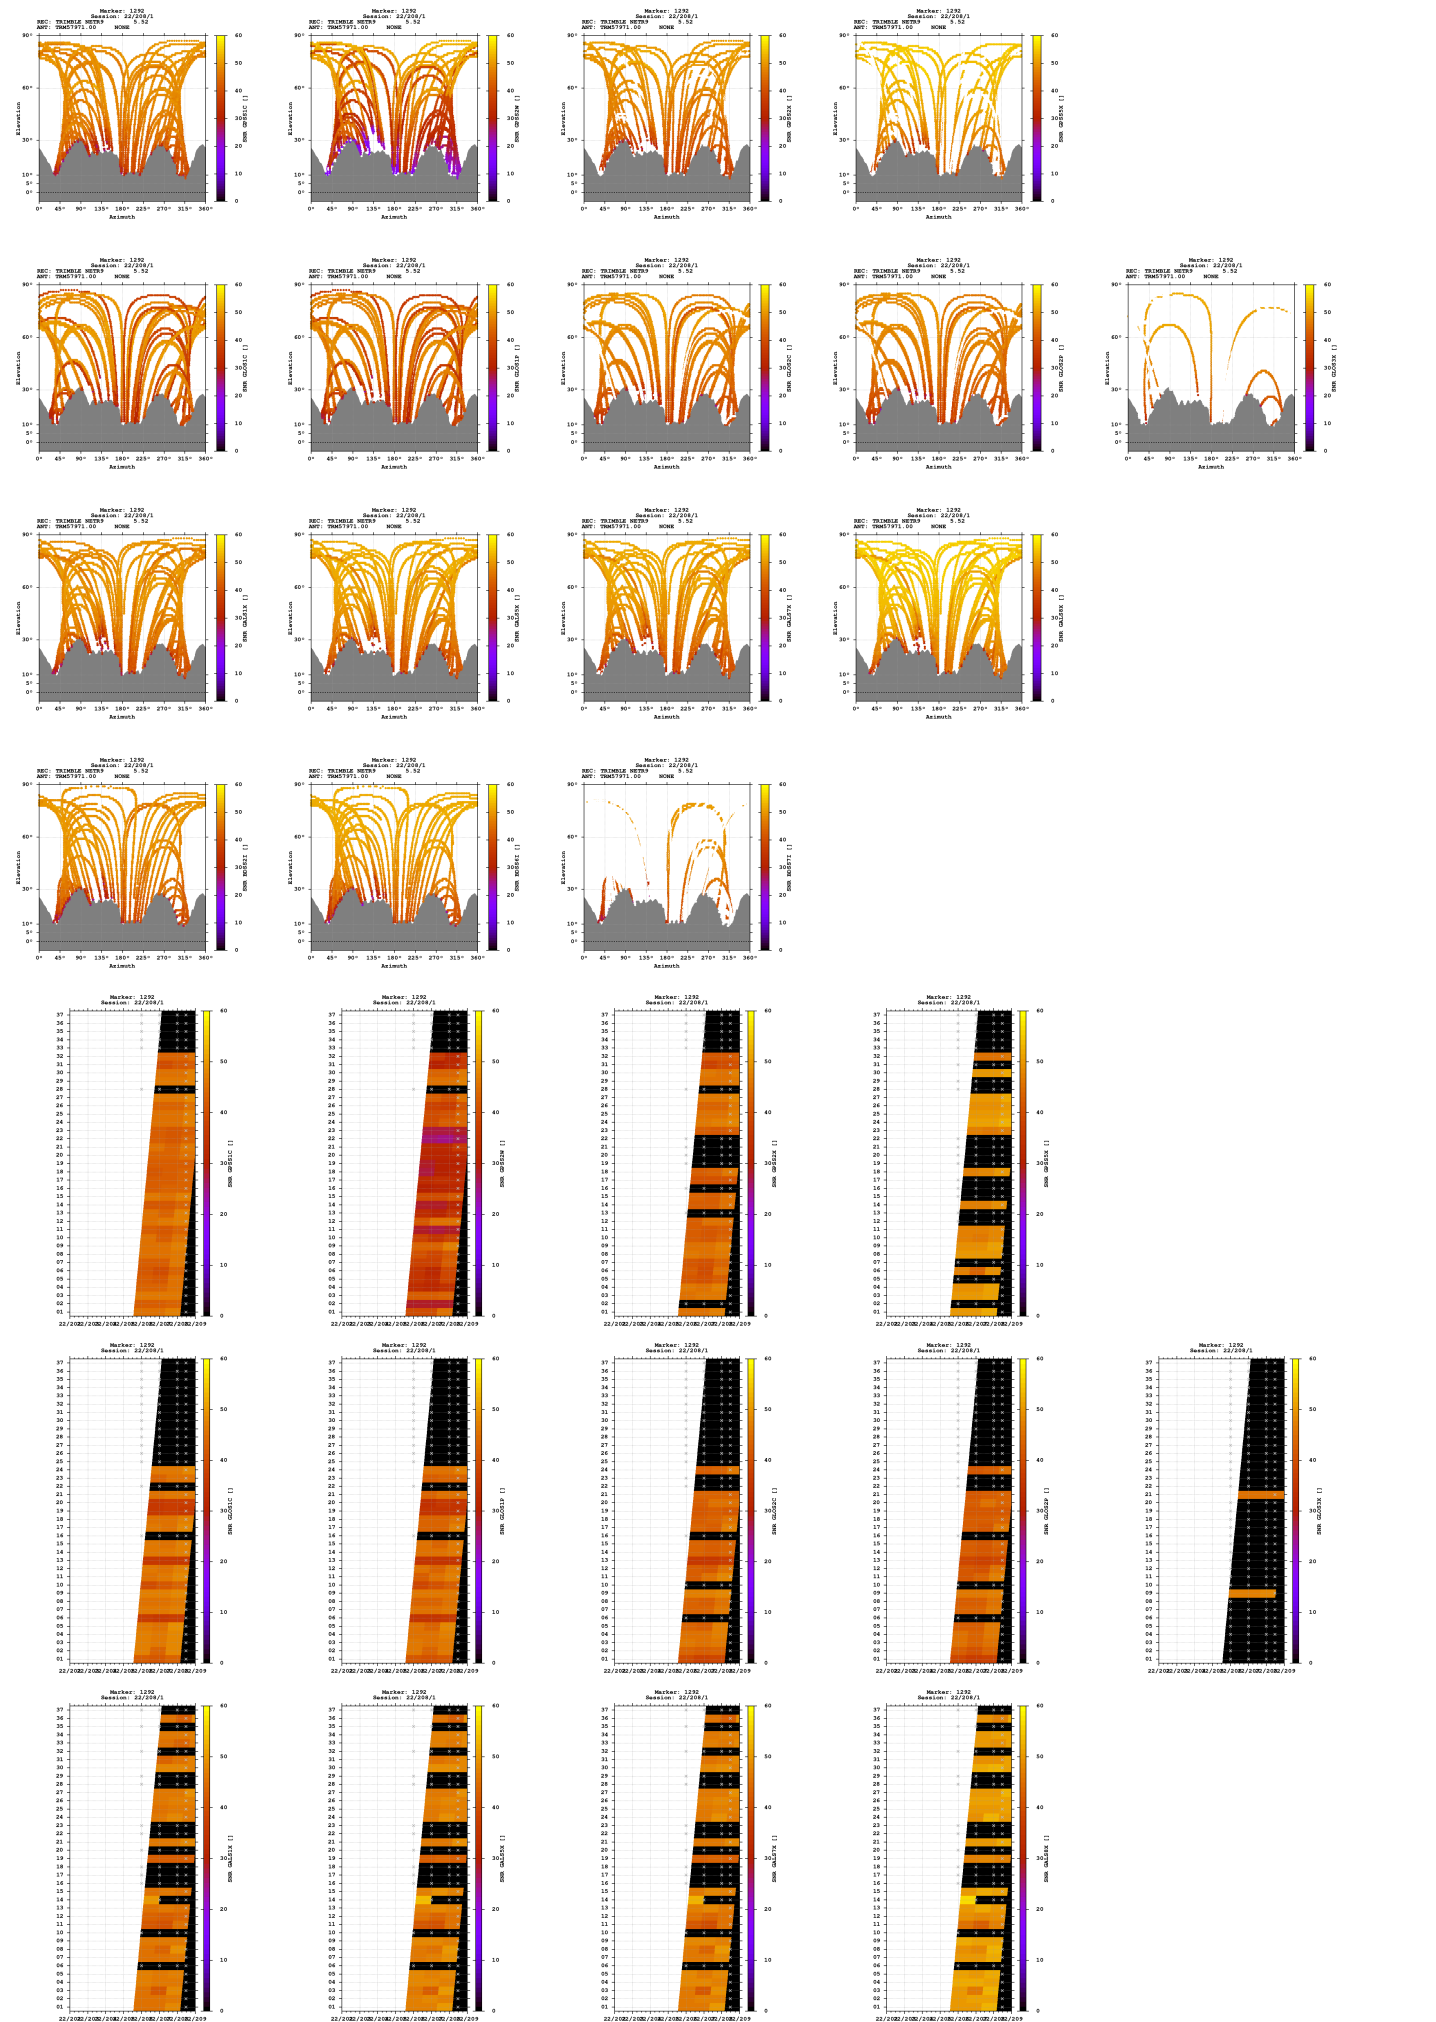

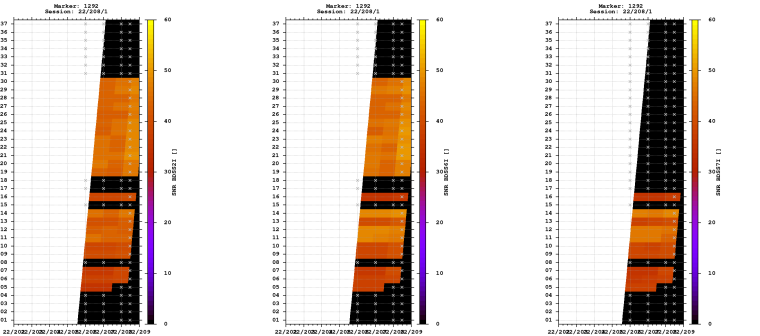



Estimates

2022-07-27 11:37:30	GPS	4361812.7196	660589.3317	4591832.4163	46.339341757	8.611906497	640.3781
2022-07-27 11:37:30	GLO	4361813.0326	660589.6284	4591830.7444	46.339329071	8.611909699	639.4128
2022-07-27 11:37:30	GAL	4361812.5021	660589.1465	4591832.2597	46.339342365	8.611904542	640.0972
2022-07-27 11:37:30	BDS	4361812.2452	660589.7135	4591832.3171	46.339343822	8.611912322	640.0220

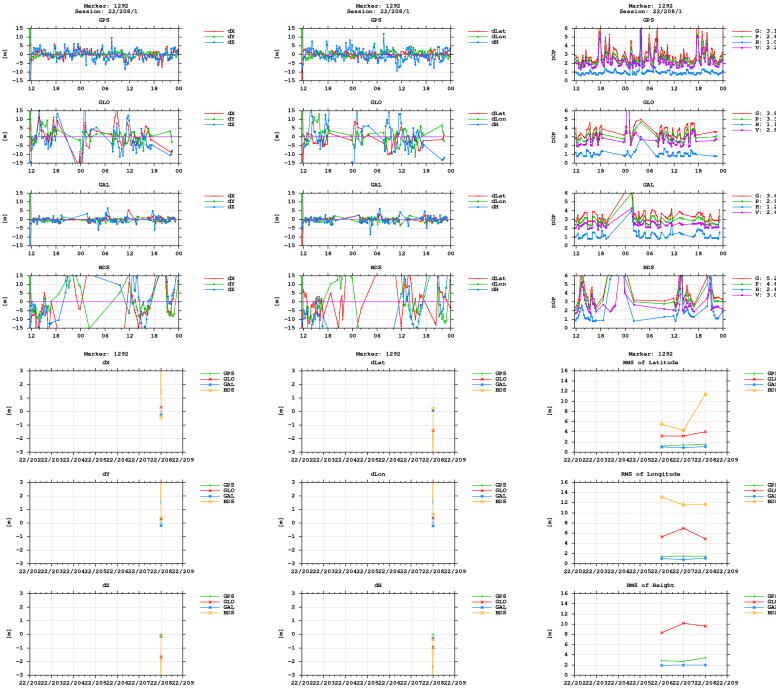

BNC

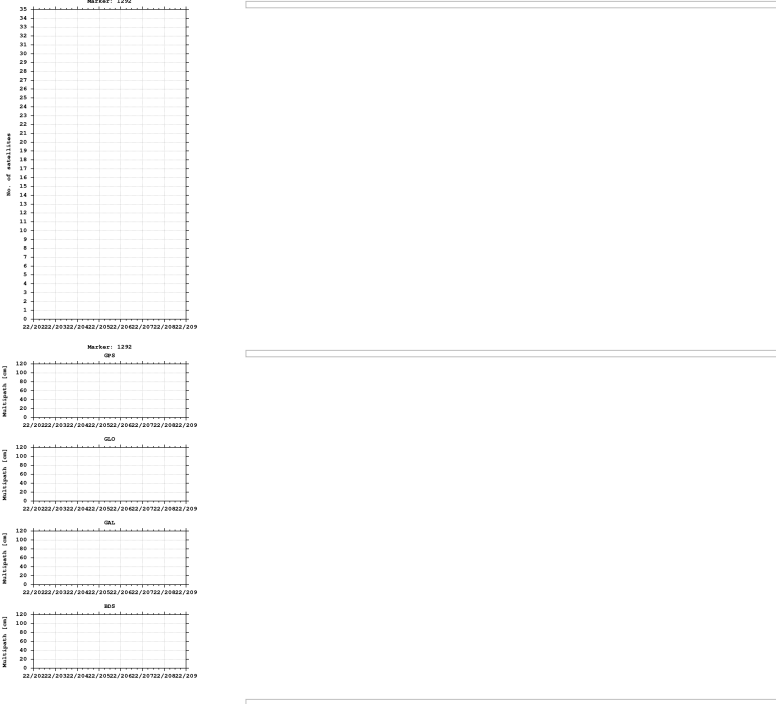

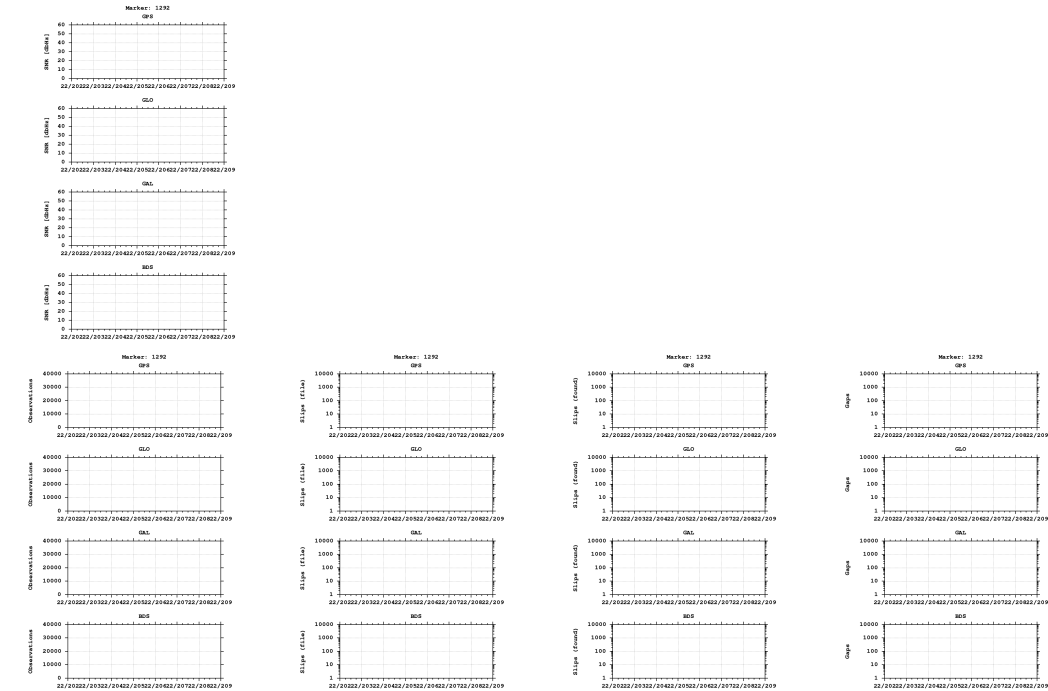

Equipment

2022-07-25 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)